

Sheet 1 of 5 Sheets

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c)
TRACTS A THROUGH D
AND THE SURVEY OF PRIOR POINT ROAD
P.L. 92-203 (85 STAT. 688,702,703)
AKHIOK-KAGUYAK, INC.
AT
AKHIOK, ALASKA
AND
THE DEPENDENT RESURVEY, RETRACEMENT
AND SUBDIVISION OF PORTIONS
OF U.S. SURVEY No. 4657

This plat contains the entire survey record.

U.S. Survey No. 4657 was surveyed by Ralph J. Ellis and Mason W. Thayer, Supervisory Cadastral Surveyors, in 1963 through 1969.

U.S. Survey No. 4926 was surveyed by Mason W. Thayer, Supervisory Cadastral Surveyor, in 1969.

U.S. Survey No. 50 was surveyed by T. J. DeWoody, U.S. Deputy Surveyor, in 1892, and amended by Clinton Gurnee, Jr., U.S. Deputy Surveyor, in 1897 and dependently resurveyed by Christopher D. Wiita, Cadastral Surveyor, in 1991.

This survey was executed by John A. Pex, Cadastral Surveyor, July 9 through July 17, 1991, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions approved June 26, 1991, the Akhiok ANCSA 14(c) Map of Boundaries approved May 15, 1992, and Assignment Instructions dated July 1, 1991.

Field assistants were:

Daniel L. Alonzo, Student Trainee (LS)
Matthew Lasley, Volunteer
Rodrick K. Wilson Jr., Volunteer

Area: 517.28 Acres

The azimuth was obtained from the retracements of U.S. Survey Nos. 4657, 4926 and 50, and refers to the true meridian.

The approximate geographic position of the witness corner to corner No. 1, Lot 7, U.S. Survey No. 4657, a meander corner as determined from the record of U.S. Survey No. 4657, is:

Latitude: 56° 56.2' North
Longitude: 154° 10.5' West
NAD 27

The mean magnetic declination was obtained from U.S. Geological Survey quadrangle map "TRINITY ISLANDS (D-1)," Alaska, 1952 edition with minor revisions in 1975.

This survey is situated on the northwesterly shore of Akhiok Bay in and around Akhiok, within Township 37 South, Range 31 West, Seward Meridian, Alaska.

The land is gently rolling tundra, with native grasses and scattered patches of alder.

The term Copperweld as used on this plat is a trade name for a copper coated steel rod, 9/16 inch diameter, with a brass cap, 2 inches diameter.


The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, sheets 1 through 5, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

Deanna Pinkerton
Deputy State Director for Cadastral Survey, Alaska
Date December 2, 1993

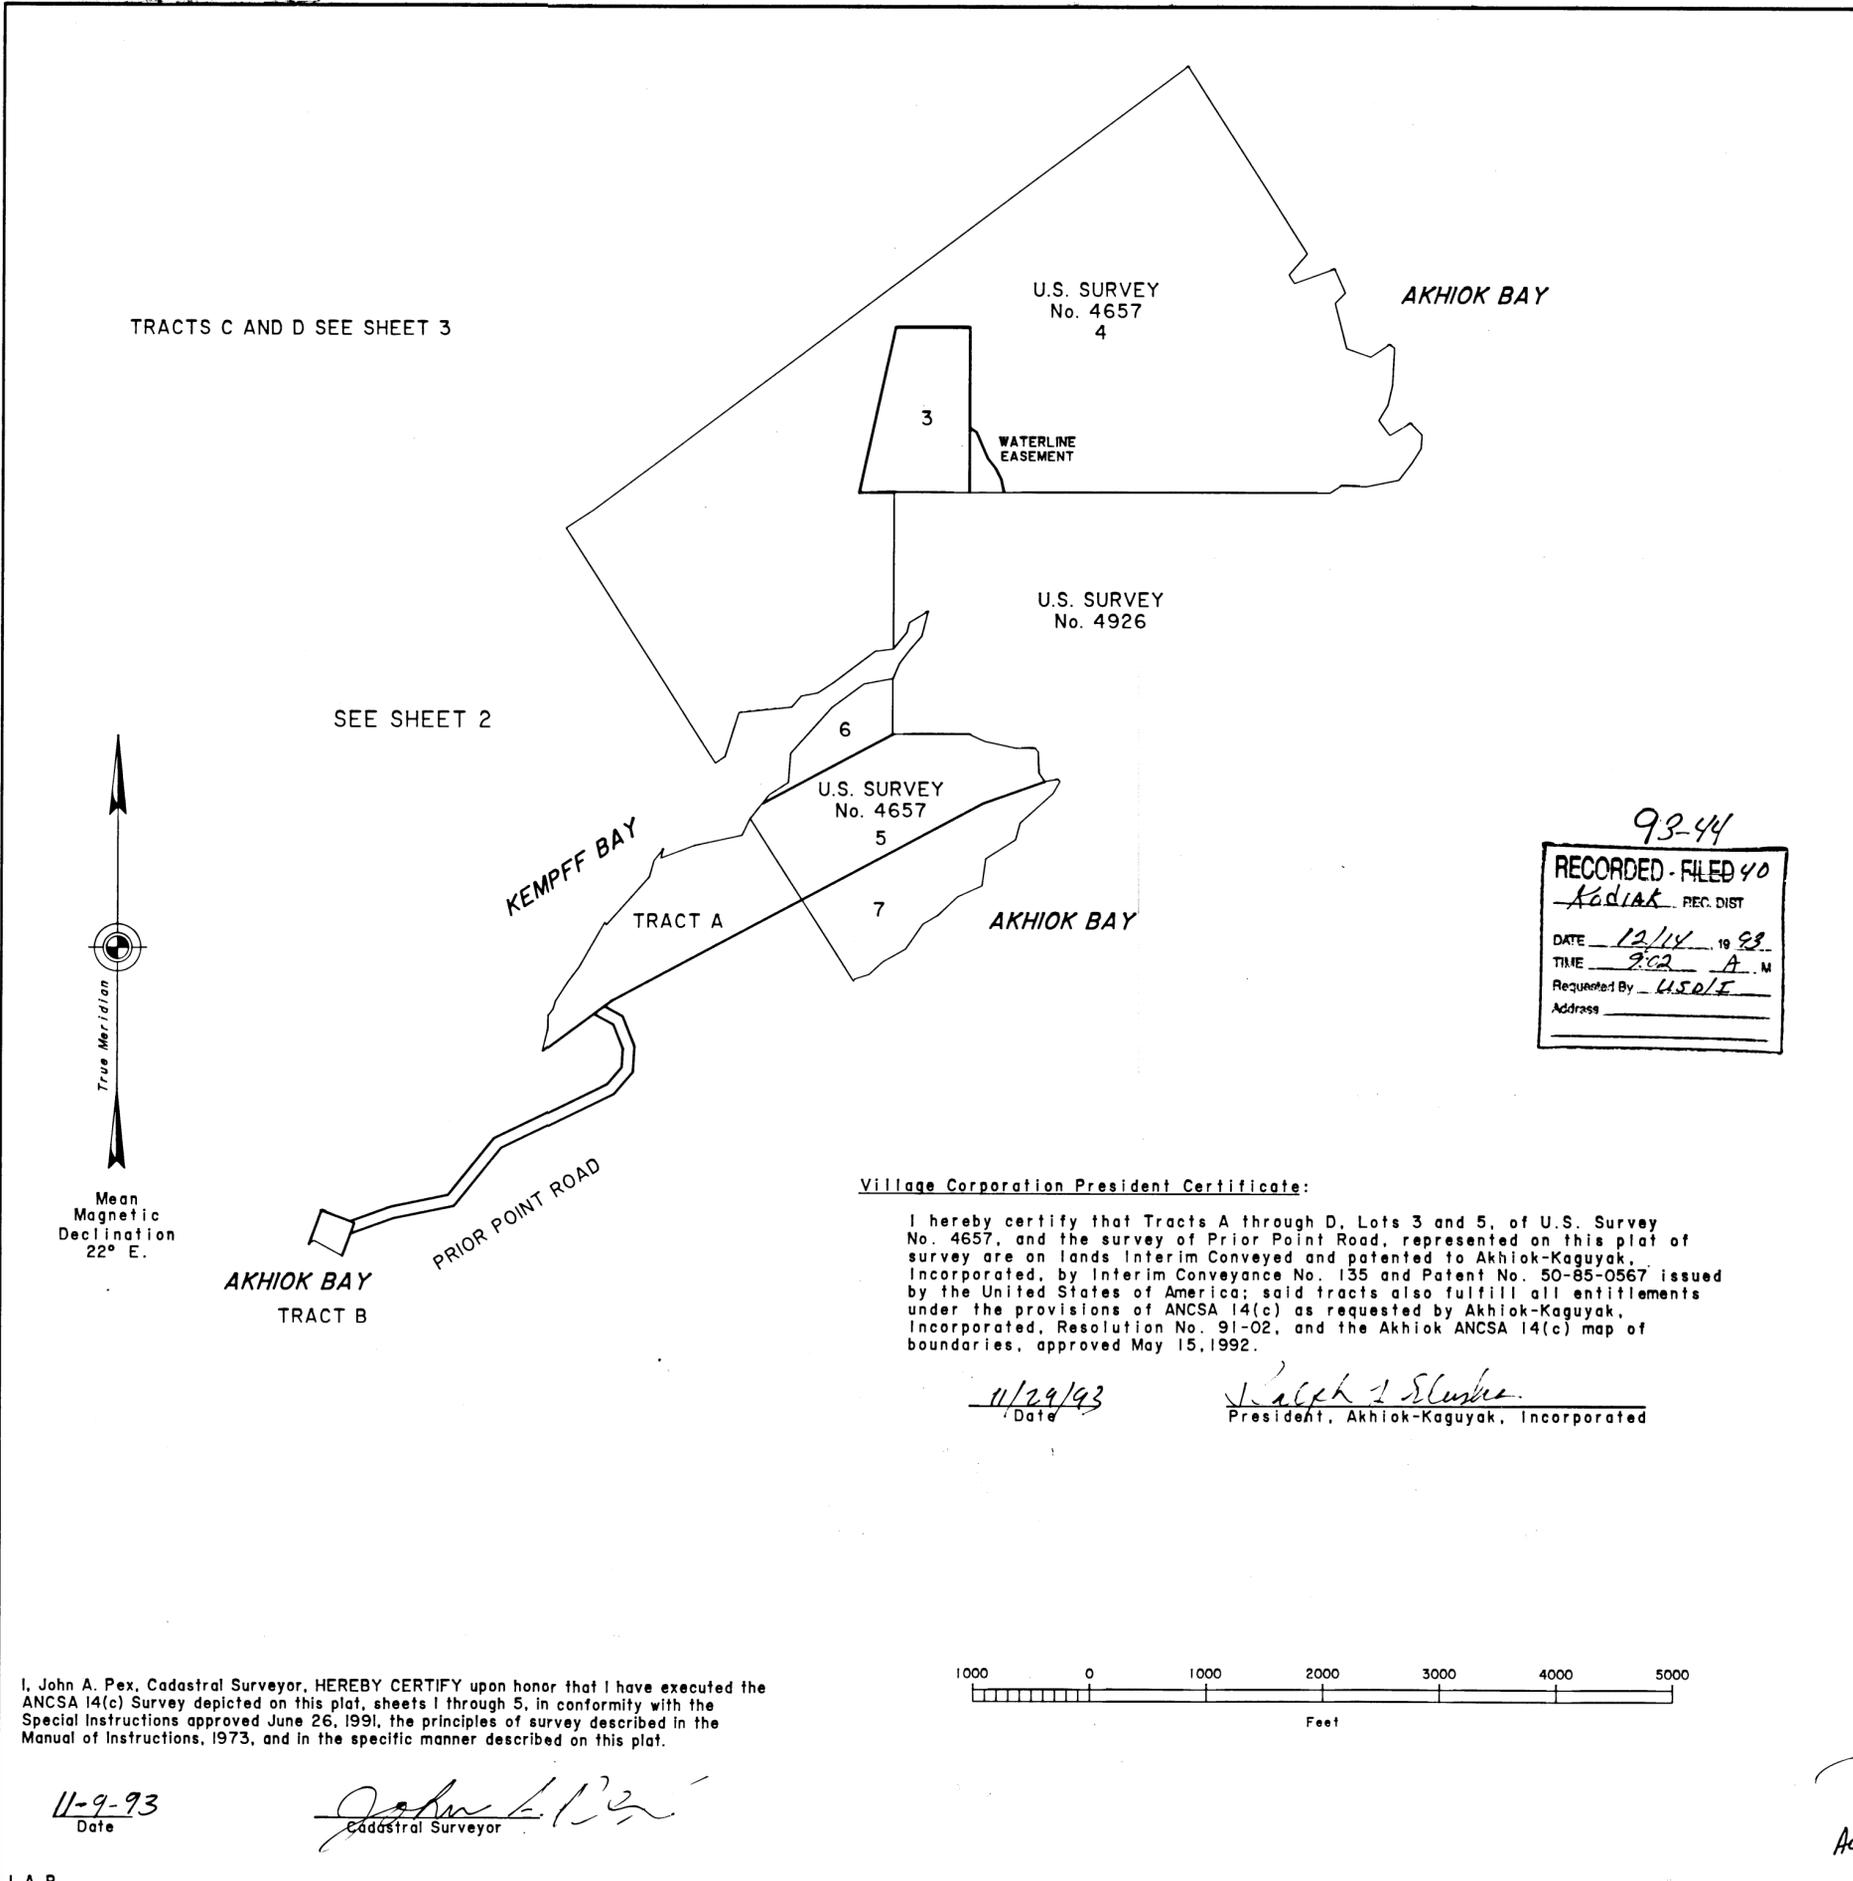

93-44
RECORDED - FILED 40
Kodiak REC. DIST.
DATE 12/14 19 93
TIME 9:02 A.M.
Requested By USDI
Address _____


Village Corporation President Certificate:

I hereby certify that Tracts A through D, Lots 3 and 5, of U.S. Survey No. 4657, and the survey of Prior Point Road, represented on this plat of survey are on lands Interim Conveyed and patented to Akhiok-Kaguyak, Incorporated, by Interim Conveyance No. 135 and Patent No. 50-85-0567 issued by the United States of America; said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Akhiok-Kaguyak, Incorporated, Resolution No. 91-02, and the Akhiok ANCSA 14(c) map of boundaries, approved May 15, 1992.

11/29/93
Date Ralph J. Sluske
President, Akhiok-Kaguyak, Incorporated

I, John A. Pex, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 through 5, in conformity with the Special Instructions approved June 26, 1991, the principles of survey described in the Manual of Instructions, 1973, and in the specific manner described on this plat.

11-9-93
Date John A. Pex
Cadastral Surveyor



ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c)
TRACTS A THROUGH D
AND THE SURVEY OF PRIOR POINT ROAD
P.L. 92-203 (85 STAT. 688,702,703)
AKHIOK-KAGUYAK, INC.
AT
AKHIOK, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

LEGEND


- SET A STAINLESS STEEL POST
2 1/2 IN. DIAM., WITH BRASS CAP
- SET A REBAR, 30 IN. LONG, 5/8 IN. DIAM.,
28 IN. IN THE GROUND WITH ALUM. CAP
APPROPRIATELY MARKED.
- FOUND AN IRON POST, 2 1/2 IN. DIAM.,
WITH BRASS CAP.
- FOUND A REBAR, 5/8 IN. DIAM.,
WITH ALUM. CAP
- FOUND A REBAR, 5/8 IN. DIAM.,
NO CAP.
- FOUND A COPPERWELD MONUMENT.

MEANDERS OF TRACT A

| | | | |
|-----|--------------|--------|-----|
| 1. | N. 14°02' E. | 191.34 | ft. |
| 2. | N. 1°23' E. | 122.10 | ft. |
| 3. | N. 37°20' E. | 70.62 | ft. |
| 4. | N. 16°09' E. | 67.98 | ft. |
| 5. | N. 33°12' E. | 195.36 | ft. |
| 6. | N. 37°30' E. | 155.76 | ft. |
| 7. | N. 29°58' E. | 438.90 | ft. |
| 8. | S. 31°31' E. | 24.42 | ft. |
| 9. | N. 41°55' E. | 551.10 | ft. |
| 10. | N. 15°35' E. | 145.20 | ft. |
| 11. | N. 39°53' E. | 123.42 | ft. |
| 12. | S. 13°31' W. | 77.88 | ft. |
| 13. | N. 69°34' E. | 308.88 | ft. |
| 14. | N. 77°59' E. | 416.46 | ft. |
| 15. | N. 25°23' E. | 158.49 | ft. |

MEANDERS OF A PORTION OF LOT 5

| | | | |
|----|--------------|--------|-----|
| 1. | S. 38°47' W. | 165.77 | ft. |
|----|--------------|--------|-----|

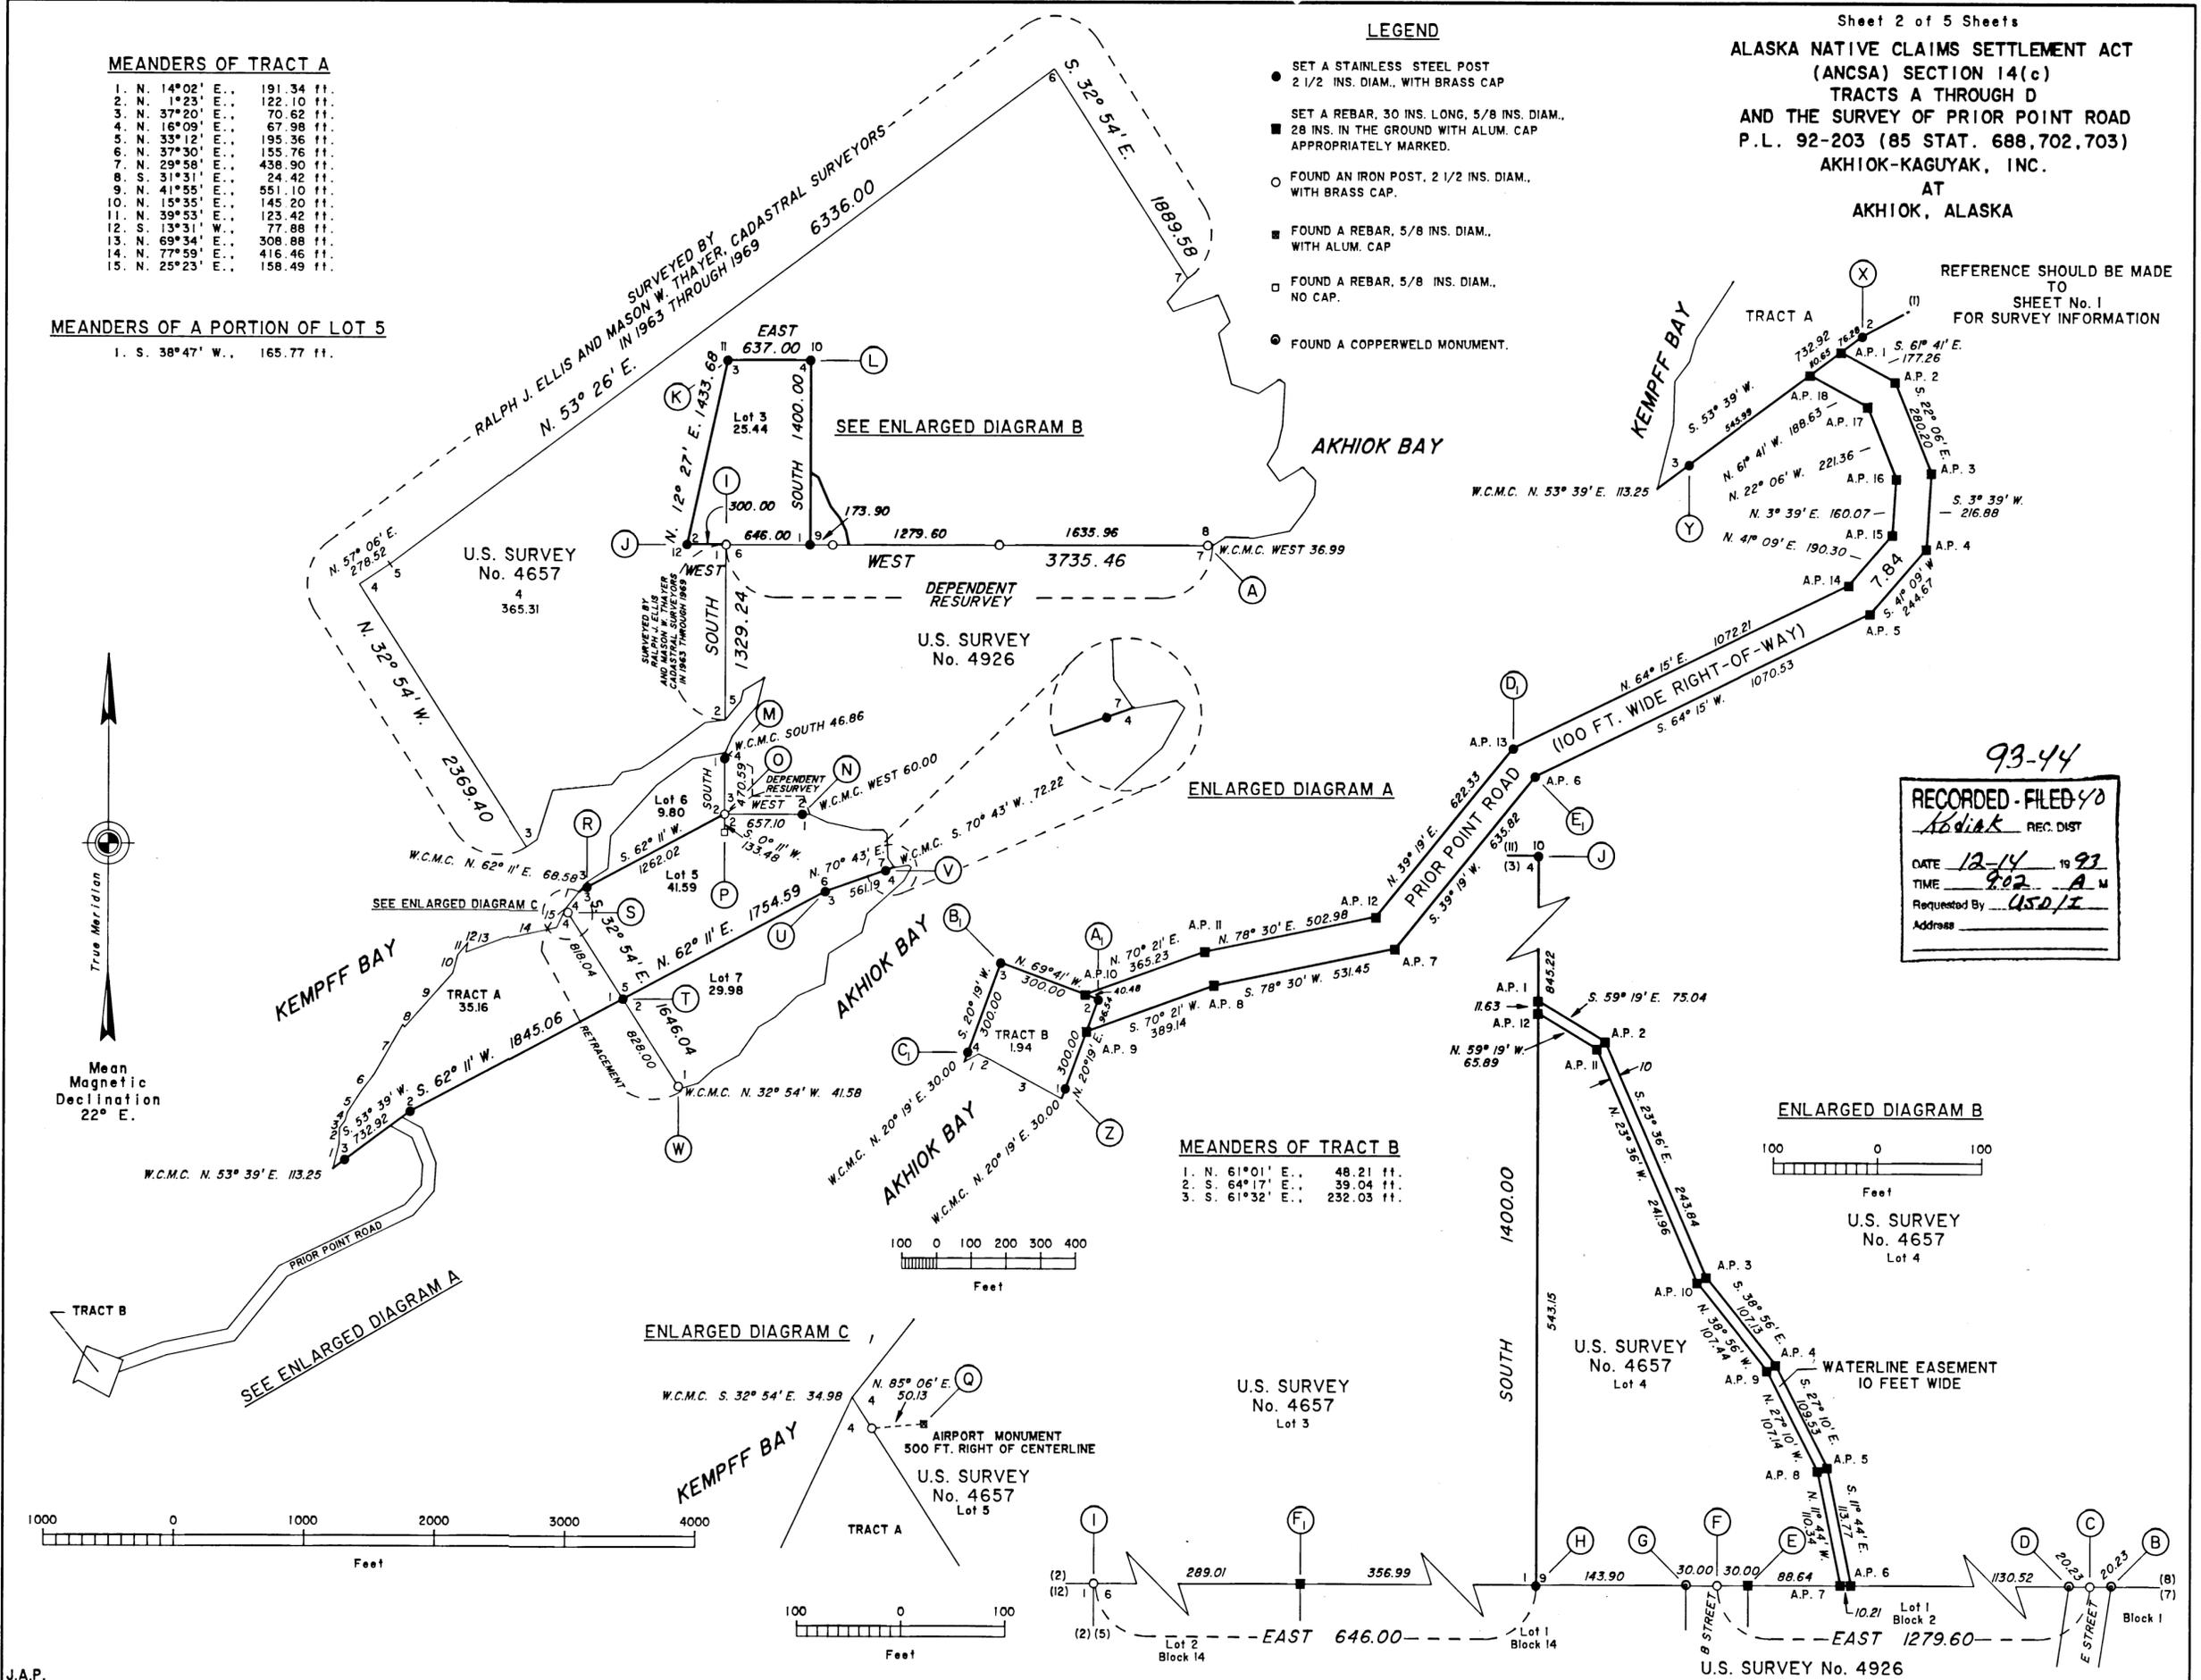

MEANDERS OF TRACT B

| | | | |
|----|--------------|--------|-----|
| 1. | N. 61°01' E. | 48.21 | ft. |
| 2. | S. 64°17' E. | 39.04 | ft. |
| 3. | S. 61°32' E. | 232.03 | ft. |

93-44

RECORDED - FILED 40

Adiak REC. DIST


DATE 12-14 19 93

TIME 9:02 A.M.




Requested By USO/IT

Address _____

ENLARGED DIAGRAM B



U.S. SURVEY
No. 4657
Lot 4




Sheet 3 of 5 Sheets
 ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c)
 TRACTS A THROUGH D
 AND THE SURVEY OF PRIOR POINT ROAD
 P.L. 92-203 (85 STAT. 688,702,703)
 AKHIOK-KAGUYAK, INC.
 AT
 AKHIOK, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

93-44

| | |
|-------------------------|------------|
| RECORDED | FILED 40 |
| <i>Kodiak</i> REC. DIST | |
| DATE | 12-14 1993 |
| TIME | 9:02 A.M. |
| Requested By | MSD/T |
| Address | |

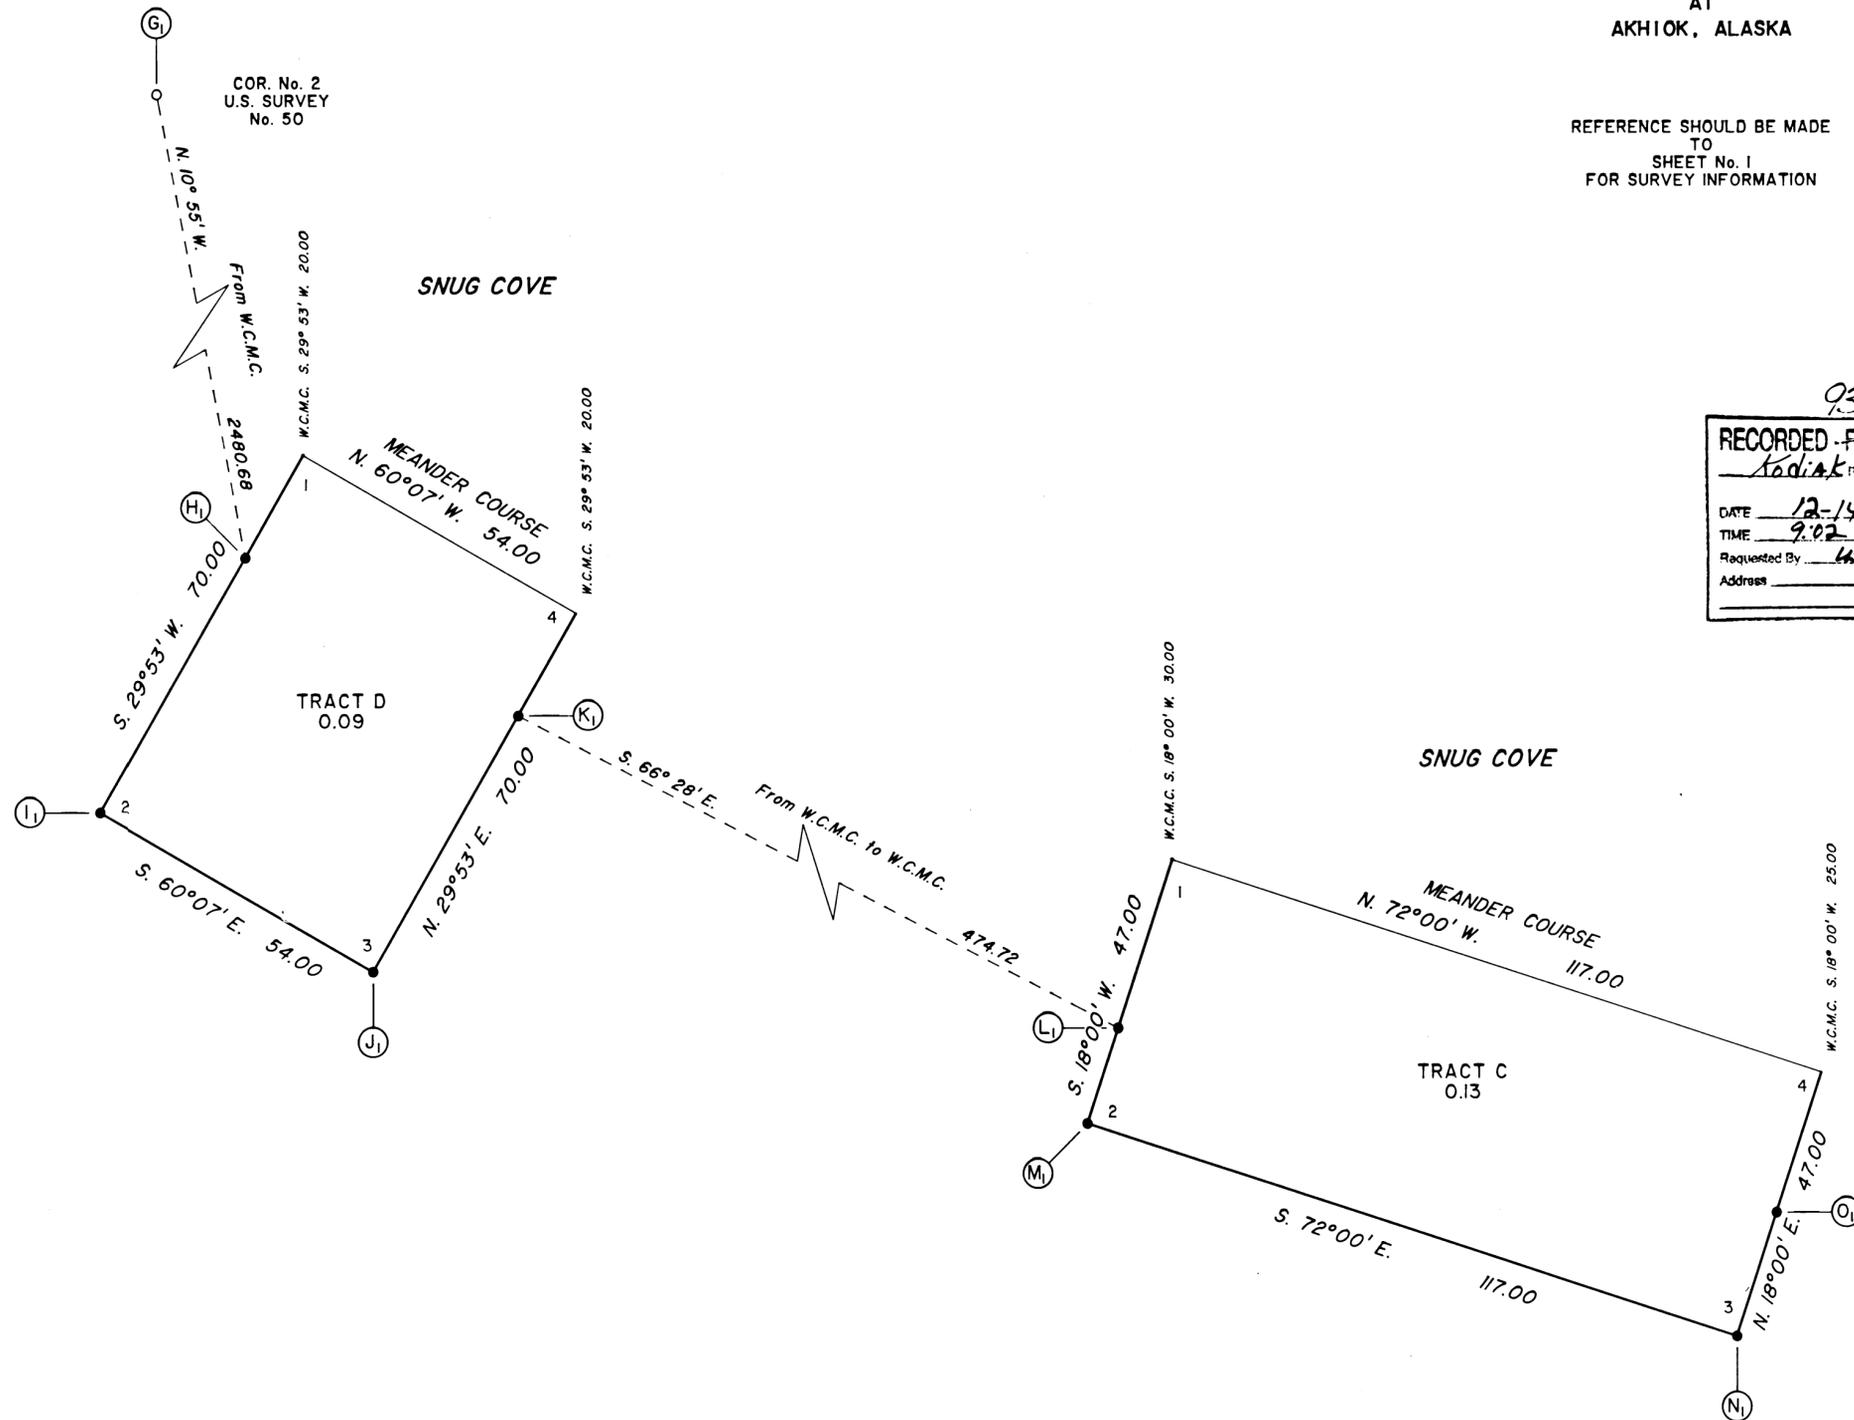

COR. No. 2
 U.S. SURVEY
 No. 50


SNUG COVE

TRACT D
 0.09

SNUG COVE


TRACT C
 0.13

True Meridian
 Mean
 Magnetic
 Declination
 22° E.




ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c)
TRACTS A THROUGH D
AND THE SURVEY OF PRIOR POINT ROAD
P.L. 92-203 (85 STAT. 688,702,703)
AKHIOK-KAGUYAK, INC.
AT
AKHIOK, ALASKA


REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.
The original mound of stone, 2 ft. base, 1 ft. high, 3 ft. W of cor.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A silver DEEP-I magnet bears N. 45° E., 5 lks. dist., 18 ins. below the ground.
An orange DEEP-I magnet bears N. 45° W., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.
The original mounds of stone, 3 ft. bases, 1 ft. high, 3 ft. N and E of cor.




Found a Copperweld monument 9/16 in. diam., firmly set, projecting 5 ins. above ground, with cap mkd. as shown.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown.
The original mounds of stone, 2 ft. bases, 1 ft. high, 3 ft. E and S of cor.




Found a rebar, 5/8 in. diam., firmly set, projecting 2 ins. above ground, with no cap.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A silver DEEP-I magnet bears N. 45° E., 5 lks. dist., 18 ins. below the ground.
An orange DEEP-I magnet bears N. 45° W., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.




Found a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown.




Found a Copperweld monument 9/16 in. diam., firmly set, projecting 8 ins. above ground, with cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A pink DEEP-I magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
A blue DEEP-I magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A pink DEEP-I magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
A blue DEEP-I magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A blue DEEP-I magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
An orange DEEP-I magnet bears N. 45° W., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.
The original mound of stone, 3 ft. base, 2 ft. high, 6 ft. NW of cor.



Point for the NW cor. of Lot 1, Block 2, U.S. Survey No. 4926, of proportionate dist.; there is no remaining evidence of the original cor.
Drive a rebar, 30 ins. long, 5/8 in. diam., 29 ins. in the ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A pink DEEP-I magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
A blue DEEP-I magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown.
The original mound of stone, 2 ft. base, 1 ft. high, 6 ft. SE of cor.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A silver DEEP-I magnet bears N. 45° E., 5 lks. dist., 18 ins. below the ground.
A pink DEEP-I magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A pink DEEP-I magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
A blue DEEP-I magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A silver DEEP-I magnet bears N. 45° E., 5 lks. dist., 18 ins. below the ground.
An orange DEEP-I magnet bears N. 45° W., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
A silver DEEP-I magnet bears N. 45° E., 5 lks. dist., 18 ins. below the ground.
A pink DEEP-I magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.




Found a Copperweld monument 9/16 in. diam., firmly set, projecting 2 ins. above ground, with cap mkd. as shown.



Point for the witness cor. to cor. No. 5, Lot 2, U.S. Survey No. 4657, identical with the witness cor. to cor. No. 2, U.S. Survey No. 4926, both meander cors., at record bearing and dist. from cor. No. 4, Lot 2, U.S. Survey No. 4657, identical with cor. No. 3, U.S. Survey No. 4926; there is no remaining evidence of the original cor.
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A blue DEEP-I magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
An orange DEEP-I magnet bears N. 45° W., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A blue DEEP-I magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
An orange DEEP-I magnet bears N. 45° W., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A silver DEEP-I magnet bears N. 45° E., 5 lks. dist., 18 ins. below the ground.
An orange DEEP-I magnet bears N. 45° W., 5 lks. dist., 18 ins. below the ground.
Bury a clear DEEP-I magnet at the base of the stainless steel post.


93-44
RECORDED - FILED 40
ADIAK REC DIST
DATE 12-14 19 92
TIME 9:02 A M
Requested By HED/E
Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c)
 TRACTS A THROUGH D
 AND THE SURVEY OF PRIOR POINT ROAD
 P.L. 92-203 (85 STAT. 688,702,703)
 AKHIOK-KAGUYAK, INC.
 AT
 AKHIOK, ALASKA


REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, and in a collar of stone, 2 ft. diam., with brass cap mkd. as shown, from which
 A pink DEEP-1 magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
 A blue DEEP-1 magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd. as shown, from which
 A pink DEEP-1 magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
 A blue DEEP-1 magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, and in a collar of stone, 2 ft. diam., with brass cap mkd. as shown, from which
 A pink DEEP-1 magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
 A blue DEEP-1 magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, and in a mound of stone, 3 ft. base, to top of brass cap mkd. as shown, from which
 A silver DEEP-1 magnet bears N. 45° E., 5 lks. dist., 18 ins. below the ground.
 A pink DEEP-1 magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
 A pink DEEP-1 magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
 A blue DEEP-1 magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
 A silver DEEP-1 magnet bears N. 45° E., 5 lks. dist., 18 ins. below the ground.
 An orange DEEP-1 magnet bears N. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, and in a collar of stone, 1 1/2 ft. diam., with brass cap mkd. as shown, from which
 A pink DEEP-1 magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
 A blue DEEP-1 magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
 A blue DEEP-1 magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
 An orange DEEP-1 magnet bears N. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, and in a collar of stone, 1 ft. diam., with brass cap mkd. as shown, from which
 A pink DEEP-1 magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
 A blue DEEP-1 magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, and in a collar of stone, 1 ft. diam., with brass cap mkd. as shown, from which
 A silver DEEP-1 magnet bears N. 45° E., 5 lks. dist., 18 ins. below the ground.
 An orange DEEP-1 magnet bears N. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd. as shown, from which
 A pink DEEP-1 magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
 A blue DEEP-1 magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Point for the NW cor. of Lot 1, Block 14, identical with the NE cor. of Lot 2, Block 14, U.S. Survey No. 4926, at proportionate dist.; there is no remaining evidence of the original cor.
 Drive a rebar, 30 ins. long, 5/8 in. diam., 29 ins. in the ground, with alum. cap mkd. as shown.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, and in a collar of stone, 2 ft. diam., with brass cap mkd. as shown, from which
 A pink DEEP-1 magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
 A blue DEEP-1 magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, and in a mound of stone, 3 ft. base, to top of brass cap, mkd. as shown
 The original mound of stone, 4 ft. base, 2 ft. high, SW of cor.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
 A pink DEEP-1 magnet bears S. 45° E., 5 lks. dist., 18 ins. below the ground.
 A blue DEEP-1 magnet bears S. 45° W., 5 lks. dist., 18 ins. below the ground.
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.

93-44

| |
|---------------------|
| RECORDED - FILED 40 |
| Kodiak REC DIST |
| DATE 12-14 1993 |
| TIME 9:02 A M |
| Requested By USD/E |
| Address |