

SHEET 1 OF 9

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH J P.L. 92-203 (85 STAT. 688, 702, 703)

**ALAKANUK NATIVE CORPORATION AT ALAKANUK, ALASKA**

AND THE RETRACEMENT AND DEPENDENT RESURVEY OF PORTIONS OF U.S. SURVEY Nos. 3794, 4405, 4092, AND 10595 AND THE SUBDIVISION OF LOT 2, U.S. SURVEY No. 4092 INTO LOTS 7 AND 8

This plat contains the entire survey record. The history of surveys in and around the Alakanuk area is listed on sheet No. 2 of this document. This survey was executed by Steven G. Schmitt, Cadastral Surveyor, August 17 through August 31, 1992, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated August 12, 1992, approved August 17, 1992, the Alakanuk ANCSA 14(c) Map of Boundaries accepted July 6, 1992, and Assignment Instructions dated August 17, 1992.

Field assistants were:  
 Michael O. Harmening, Land Surveyor  
 Douglas N. Haywood, Land Surveyor  
 Gary L. McIntyre, Student Trainee (LS)  
 Otto R. Thiele III, Student Trainee (LS)  
 James C. Davis, Surveying Technician  
 Kent W. Harder, Surveying Technician

Area: 301.01 Acres.  
 Preliminary to the resurvey the lines of the original survey were retraced and a search was made for all corners and other calls of the record. Identified corners were remonumented in their original positions; lost corners were restored and monumented at proportionate positions based on the original record.

The azimuth of Tracts A, B, C, D, E, F, G, I, and the Dump/Dock road was obtained from direct observations of the sun, using the hour angle method, and refers to the true meridian. The azimuth for Tracts H and J was obtained from the record of line 4-5, Tract A, U.S. Survey No. 4405, and refers to the true meridian. The azimuth for the Subdivision of U.S. Survey No. 4092 and Alstrom Street was obtained from the record of the line from corner No. 1, Lot 6, to corner No. 2, Lot 4, U.S. Survey No. 4092, and refers to the true meridian.

The geographic position of corner No. 2, Tract B, as determined from the record of U.S. Survey No. 3794, is:

Latitude: 62° 41' 33.51" North  
 Longitude: 164° 37' 12.23" West  
 NAD 27

The mean magnetic declination was obtained from U.S. Geological Survey quadrangle map "KWIGUK (C-6)," Alaska, 1952 edition, with minor revisions in 1988.

The land is mostly level, with dense alder and willow brush. Numerous roads and improvements fall within this survey.

The soil is sandy loam and silt underlain with permafrost.

The term Copperweld as used on this plat, is a trade name for a copper-coated steel rod, 9/16 inch diameter, 36 inches long, with a brass cap, 2 inches diameter.

The term DEEP-1 magnet refers to a magnetic marker composed of strontium enclosed in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.


UNITED STATES DEPARTMENT OF THE INTERIOR  
 BUREAU OF LAND MANAGEMENT  
 Anchorage, Alaska

The survey represented by this plat, sheets 1-9, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

*George D. Schmitt* 19 July 1993  
 Date

Deputy State Director for Cadastral Survey, Alaska

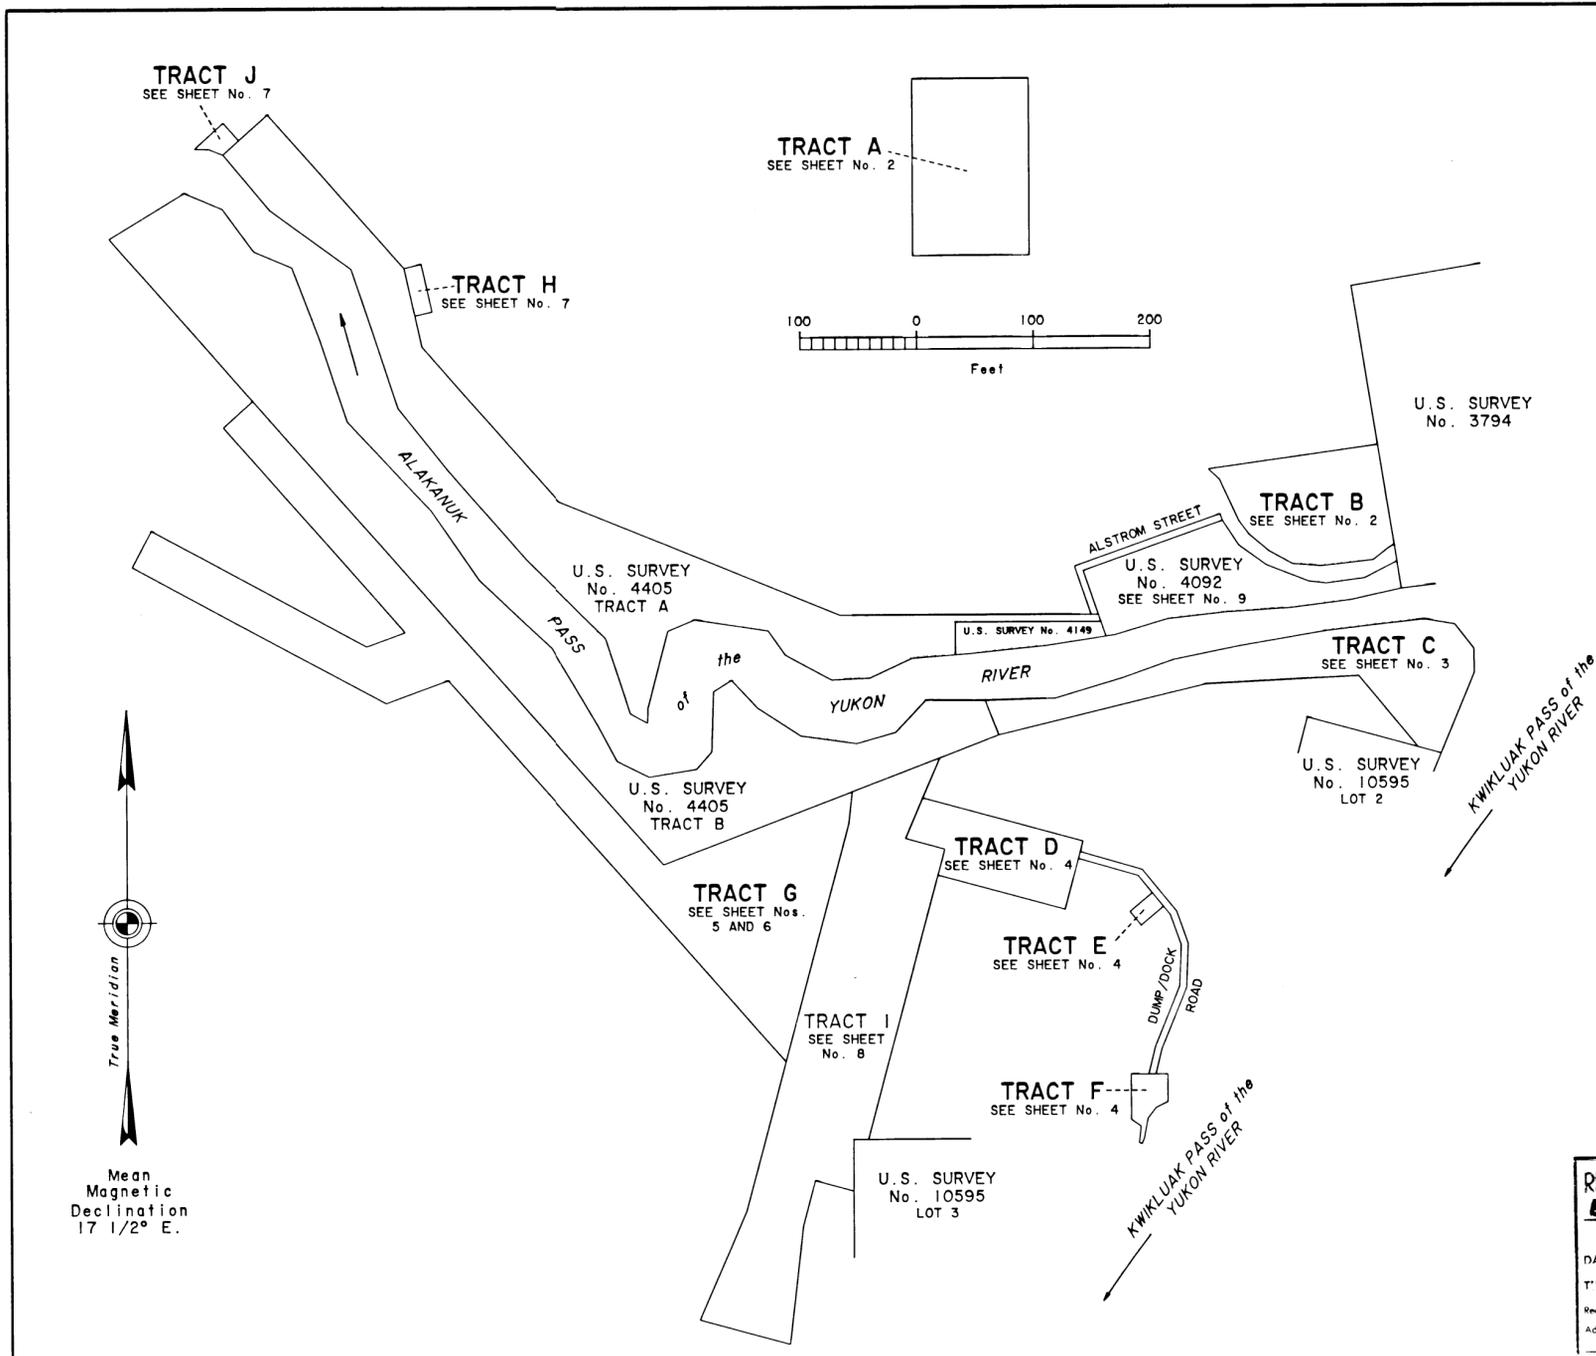


93-25  
 RECORDED - FILED 20-  
 BOTHAL  
 DATE 8-9 '93  
 TIME 8:47 A.M.  
 Requested by USA/BLM  
 Address

I, hereby certify that Tracts A through J, Alstrom Street, and the Dump/Dock Road represented on this plat of survey, sheets 1-9, are on lands interim conveyed to the Alakanuk Native Corporation by Interim Conveyance No. 294 and Patent No. 50-80-0062 issued by the United States of America; said lots and roads also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Alakanuk Native Corporation Resolution Agreement No. 90-01, and the Alakanuk ANCSA 14(c) Map of Boundaries accepted July 6, 1992.

8 June 93 *Dave M. Pille*  
 Date President, Alakanuk Native Corporation

I, Steven G. Schmitt, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) survey depicted on this plat, sheets 1-9, in conformity with the Special Instructions approved August 17, 1992, the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.


7 July 93 *Steven G. Schmitt*  
 Date Cadastral Surveyor






ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH J  
P.L. 92-203 (85 STAT. 688, 702, 703)  
**ALAKANUK NATIVE CORPORATION**  
AT  
**ALAKANUK, ALASKA**  
AND THE DEPENDENT RESURVEY OF A  
PORTION OF U.S. SURVEY No. 3794

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

U.S. Survey No. 3794 was surveyed by Edward A. Taylor, Cadastral Surveyor, in 1961.  
U.S. Survey No. 4092, was surveyed by Kenneth C. Pettingill, Supervisory Cadastral Surveyor, in 1962.  
Lot 1 of U.S. Survey No. 4092, was subdivided by Steven G. Schmitt, Cadastral Surveyor, in 1991. The plat has not been accepted as of this date.  
U.S. Survey No. 4149, was surveyed by Edward A. Taylor, Supervisory Cadastral Surveyor, in 1965.  
U.S. Survey No. 4405, Tracts A and B, Alakanuk Townsite, was surveyed by Edward A. Taylor, Supervisory Cadastral Surveyor, from 1965 through 1966.  
Portions of U.S. Survey No. 4405, Tracts A and B, Alakanuk Townsite, were subdivided by Jon L. Kehler, Cadastral Surveyor, in 1991.  
U.S. Survey No. 10498, was surveyed by Michael H. Schoder, Alaska Registered Land Surveyor, in 1992. The plat has not been accepted as of this date.  
U.S. Survey No. 10595, was surveyed by Steven G. Schmitt, Cadastral Surveyor, in 1992.

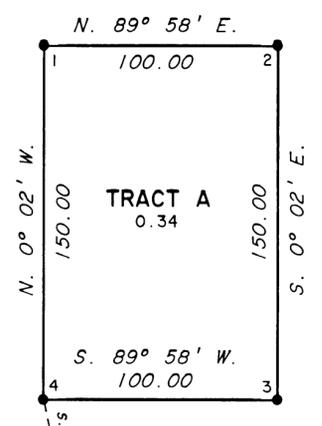

The geographic position of corner No. 4, Tract A, as determined from a tie to the witness corner to corner No. 3, U.S. Survey No. 10498, is:  
Latitude: 62° 28' 56.55" North NAD 27  
Longitude: 164° 32' 20.31" West

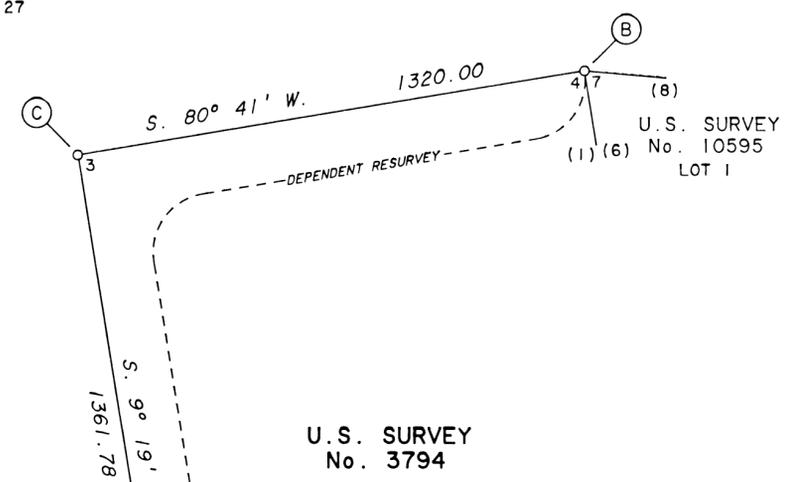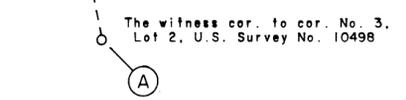

U.S. SURVEY  
No. 3794

**TRACT B MEANDERS**

Along a well-defined bank, 4 to 8 ft. high, at the line of mean high tide.

1. S. 47°27' E., 129.04 ft.
2. S. 24°57' E., 390.59 ft.
3. S. 36°55' E., 142.38 ft.
4. S. 49°52' E., 227.30 ft.
5. S. 61°34' E., 226.53 ft.
6. S. 85°14' E., 243.68 ft.
7. N. 83°45' E., 450.77 ft.
8. N. 51°18' E., 166.28 ft.
9. N. 60°20' E., 57.98 ft.

**NOTE A**

Due to erosion, the fresh water slough which traversed U.S. Survey No. 3794 is now tidally influenced, and was meandered to the extent of tidal influence. There was no flow noted on this slough.

The witness corner to corner No. 2, a meander corner, U.S. Survey No. 3794 is lost. There is no remaining evidence of the original corner. The corner was not remonumented. Line 2-3, U.S. Survey No. 3794 was reestablished using the record angle from line 3-4, U.S. Survey No. 3794.




**LEGEND**

- Bureau of Land Management monument recovered this survey.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 26 to 28 ins. in the ground, with brass cap mkd. ANC ANCSA 14C 1992 and with the appropriate cor. Nos., tract letter, block Nos., tract lines, and U.S. Survey Nos. Witness cor. meander cors. have additional marks WC MC and an arrow pointing to the true cor. Refer to the accessory table for accessories established at each cor. Bury a clear DEEP-1 magnet at the base of the stainless steel posts for Tract B. Bury a pink DEEP-1 magnet at the base of the stainless steel posts for Tract A.
- Rebar, 5/8 in. diam., 36 ins. long, set 34 ins. in the ground, with alum. cap, 1 1/2 ins. diam., mkd. ANC ANCSA 14C 1992 and with the appropriate tract letter, block Nos., tract lines, and U.S. Survey Nos.


**ACCESSORIES**

Steel fence posts, 6 ft. long, driven 3 ft. in the ground, on the survey lines.


| Corner No.           | Direction | Distance |
|----------------------|-----------|----------|
| Cor. No. 1, Tract A  | South     | 3 ft.    |
| Cor. No. 2, Tract A  | S. 30° W. | 3 ft.    |
| Cor. No. 3, Tract A  | North     | 3 ft.    |
| Cor. No. 4, Tract A  | North     | 3 ft.    |
| WC MC No. 1, Tract B | Northwest | 3 ft.    |
| Cor. No. 2, Tract B  | Southwest | 3 ft.    |
| WC MC No. 3, Tract B | Northeast | 3 ft.    |

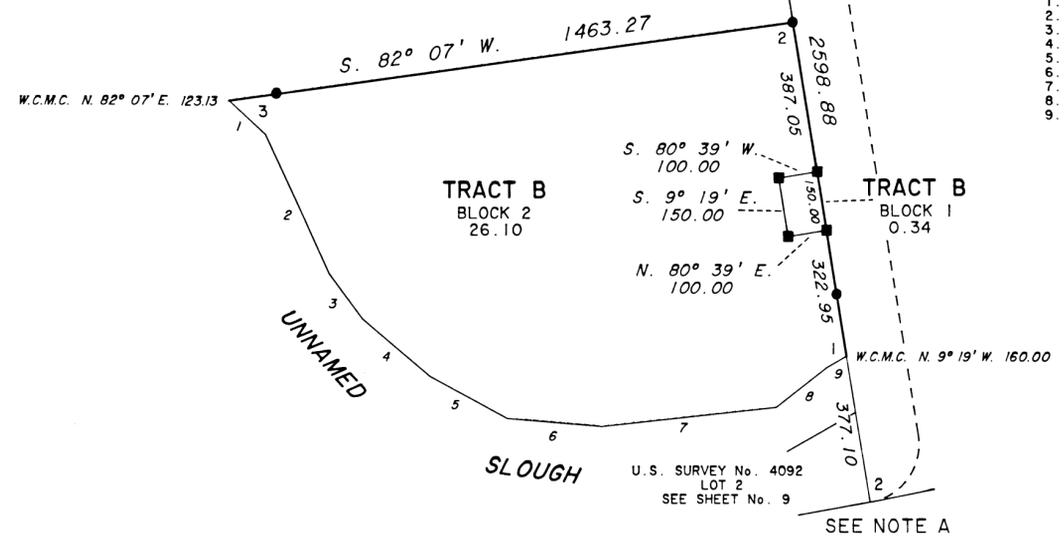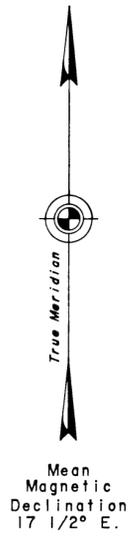


Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown  
The original magnet accessories were not searched for.



Recovered an iron post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown  
The original pits, 18 x 18 x 12 ins., SE and SW of the iron post, 3 ft. dist.  
The original steel fence post, firmly set, projecting 3 ft. above the ground, bears SE, 3 ft. dist.



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as shown  
The original pits, 18 x 18 x 12 ins., NE and SE of the iron post, 3 ft. dist.




93-25  
RECORDED - FILED 20  
BETHEL  
DATE 8-9 1993  
TIME 8:47 AM  
Requested by USA/BLM  
Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH J  
P.L. 92-203 (85 STAT. 688, 702, 703)


ALAKANUK NATIVE CORPORATION  
AT  
ALAKANUK, ALASKA

AND THE DEPENDENT RESURVEY AND  
RETRACEMENT OF PORTIONS OF  
U.S. SURVEY NOS. 4405 AND 10595

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

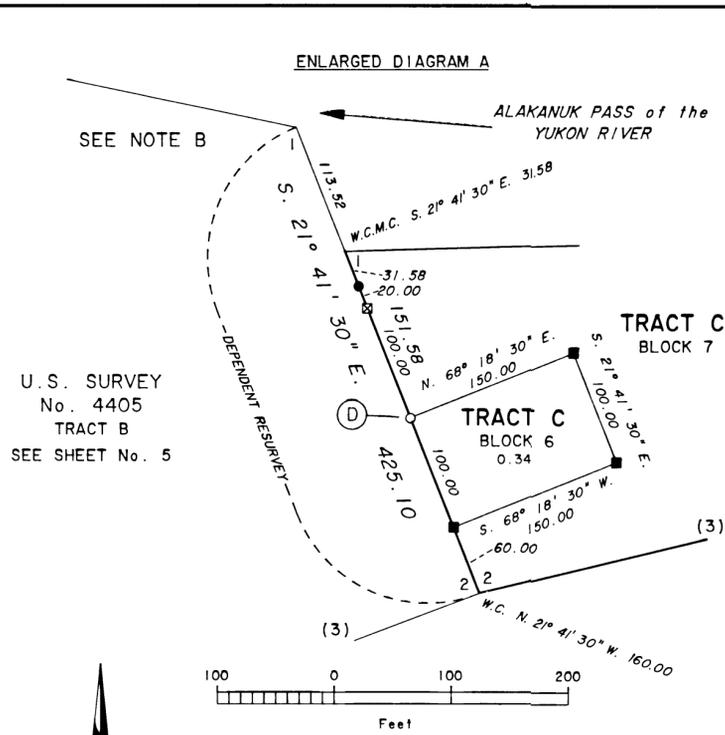


U.S. SURVEY  
No. 4405  
TRACT B  
SEE SHEET No. 5



Recovered on iron post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown

The original pits, 18 x 18 x 12 ins., SE and NW of the iron post, 3 ft. dist.

This point is now also designated as the witness cor. to cor. No. 2, Tract C; no marks were added to the brass cap. This position also marks the northwesterly cor. of Tract C, Block 6.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as shown, from which

A steel fence post, firmly set, projecting 3 ft. above the ground, bears NW, 3 ft. dist.


This point is now designated as the witness cor. to cor. No. 6, Tract C, a meander cor.; no marks were added to the brass cap.

Recovered on alum. rod, 3/4 ins. diam., firmly set, projecting 6 ins. above the ground, with alum. cap mkd. as shown, from which

A steel fence post, firmly set, projecting 3 ft. above the ground, bears SE, 3 ft. dist.




ENLARGED DIAGRAM C

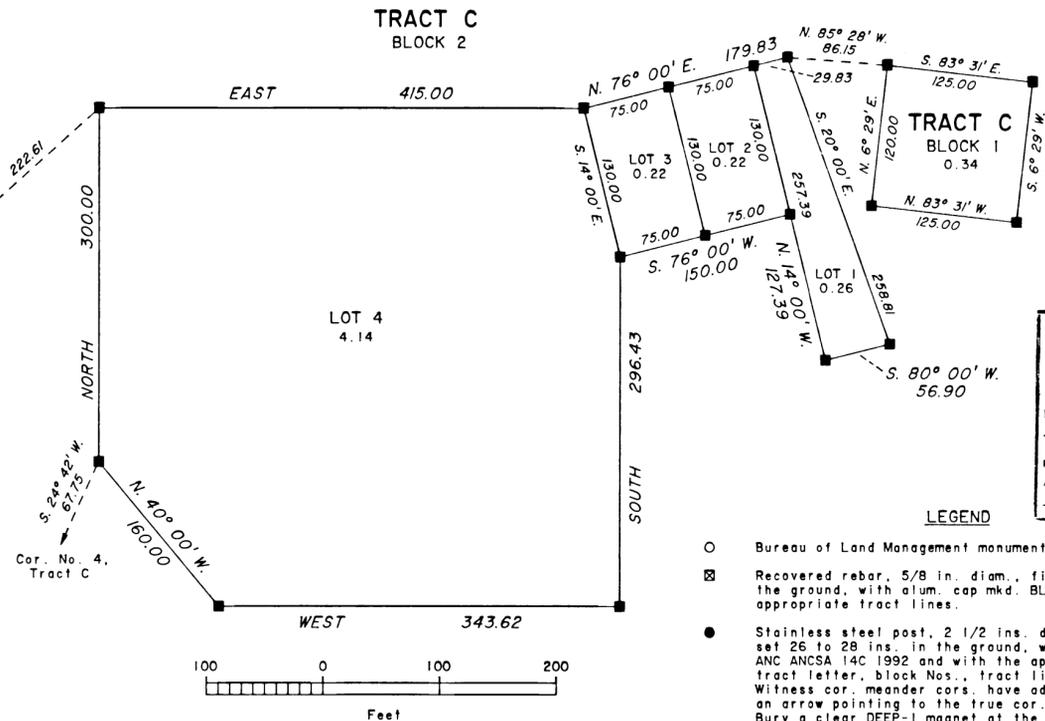

93-25  
RECORDED FILE 20-  
BETHOL  
DATE 8-9-93  
TIME 8:47 AM  
Retrieved by USA/BLM  
Address

LEGEND

- Bureau of Land Management monument recovered this survey.
- ⊠ Recovered rebar, 5/8 in. diam., firmly set, 2 ins. below the ground, with alum. cap mkd. BLM L1 L2 B1 and with the appropriate tract lines.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 26 to 28 ins. in the ground, with brass cap mkd. ANC ANCSA 14C 1992 and with the appropriate cor. Nos., tract letter, block Nos., tract lines, and U.S. Survey Nos. Witness cor., meander cors., have additional marks WC MC and an arrow pointing to the true cor. No accessories were taken. Bury a clear DEEP-1 magnet at the base of the stainless steel posts.
- Rebar, 5/8 in. diam., 36 ins. long, set 34 ins. in the ground, with alum. cap, 1 1/2 ins. diam., mkd. ANC ANCSA 14C 1992 and with the appropriate tract letter, block Nos., tract lines, and U.S. Survey Nos.

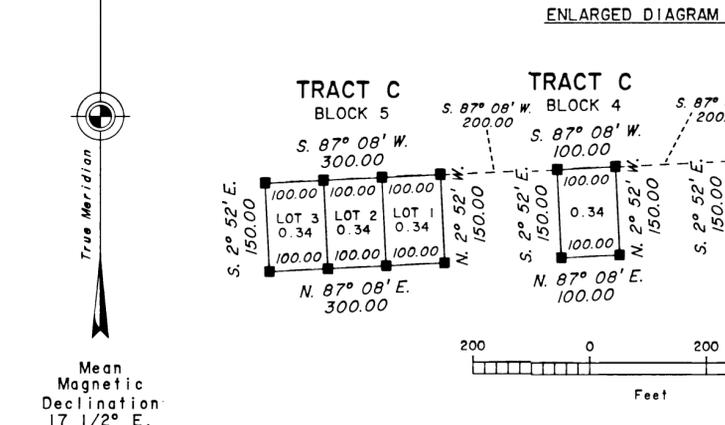

Mean Magnetic Declination 17 1/2° E.

NOTE B

The witness corner to corner No. 1, Tract B, a meander corner, U.S. Survey No. 4405 is lost. There is no remaining evidence of the original corner. The lost corner was not reestablished. Line 1-2 Tract B, U.S. Survey No. 4405 was reestablished using the recovered witness cor. to cor. No. 2, Tract B, U.S. Survey No. 4405 and the northerly cor. of Lot 2, Block 1, Tract B, U.S. Survey No. 4405.

TRACT C BLOCK 7 MEANDERS


Along a well-defined bank, 4 to 8 ft. high, of the line of mean high tide.

1. N. 22° 52' E., 739.64 ft.
2. N. 0° 47' W., 202.49 ft.
3. N. 38° 10' W., 262.73 ft.
4. N. 80° 30' W., 264.80 ft.
5. S. 83° 53' W., 426.26 ft.
6. S. 83° 23' W., 431.70 ft.
7. S. 80° 22' W., 737.15 ft.
8. S. 78° 27' W., 580.98 ft.
9. S. 70° 44' W., 460.72 ft.
10. S. 73° 31' W., 607.94 ft.
11. S. 88° 21' W., 598.22 ft.

At end of course, confluence of the Kwikluak Pass with the Alakanuk Pass of the Yukon River; thence downstream on the left bank of the Alakanuk Pass of the Yukon River.

U.S. SURVEY  
No. 4405  
TRACT B  
SEE ENLARGED  
DIAGRAM A  
SEE SHEET No. 5

ALAKANUK PASS of the  
YUKON RIVER

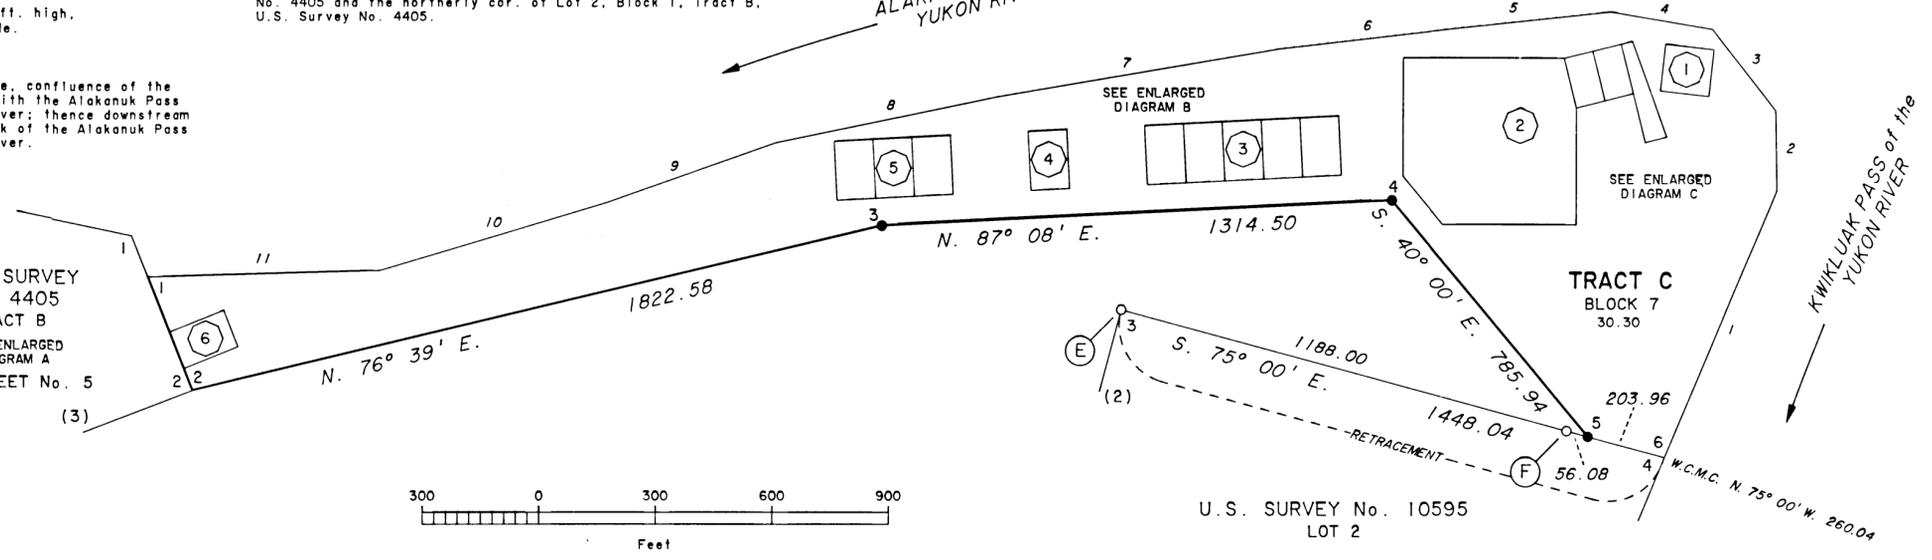

U.S. SURVEY No. 10595  
LOT 2


ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH J  
P.L. 92-203 (85 STAT. 688, 702, 703)

ALAKANUK NATIVE CORPORATION  
AT  
ALAKANUK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

THE DUMP/DOCK ROAD, 60 FT. WIDE  
RIGHT-OF-WAY, ENCOMPASSES 3.33 ACRES.


ENLARGED DIAGRAM D

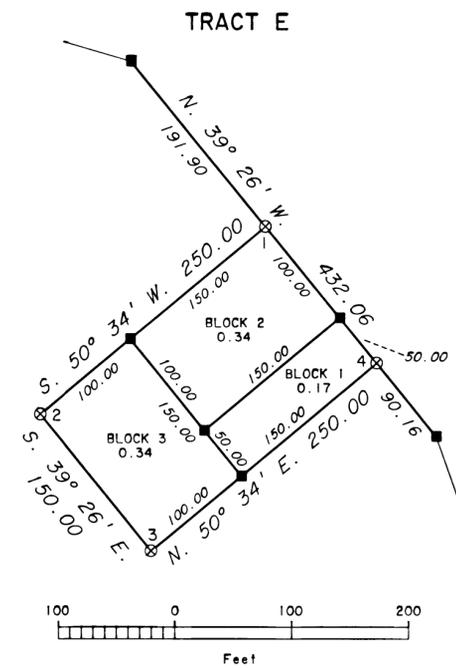

TRACT F MEANDERS

Along a well-defined bank, 4 to 8 ft. high,  
at the line of mean high tide.

1. S. 56°30' E., 100.48 ft.
2. S. 7°19' W., 139.96 ft.
3. S. 68°53' E., 25.98 ft.
4. N. 24°26' E., 50.23 ft.
5. N. 11°07' E., 170.79 ft.
6. N. 37°52' E., 113.67 ft.
7. N. 64°13' E., 112.55 ft.

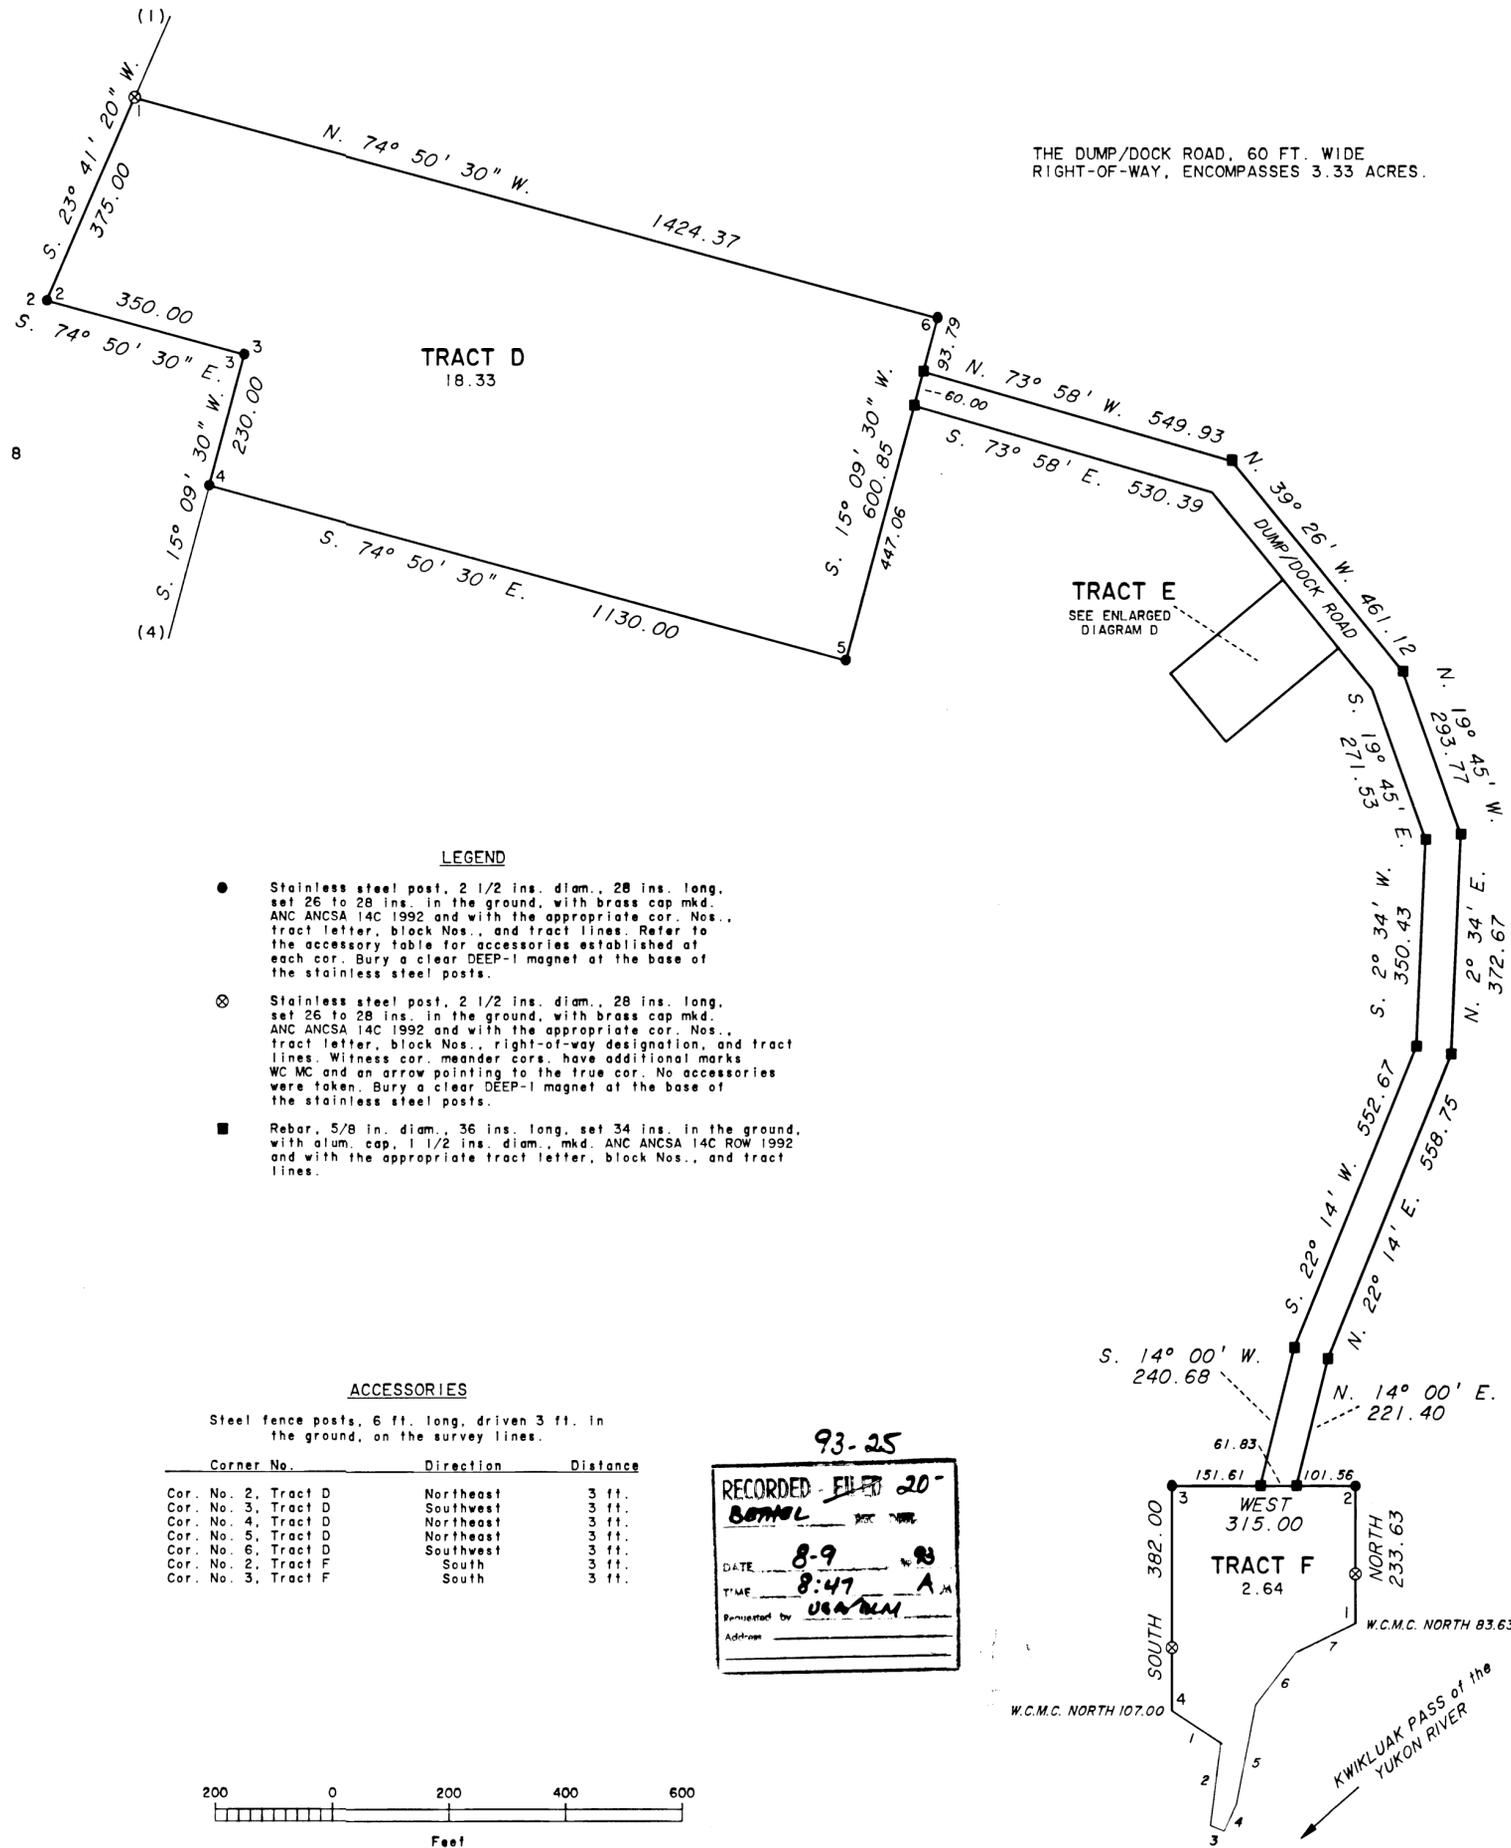

LEGEND


- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 26 to 28 ins. in the ground, with brass cap mkd. ANC ANCSA 14C 1992 and with the appropriate cor. Nos., tract letter, block Nos., and tract lines. Refer to the accessory table for accessories established at each cor. Bury a clear DEEP-1 magnet at the base of the stainless steel posts.
- ⊗ Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 26 to 28 ins. in the ground, with brass cap mkd. ANC ANCSA 14C 1992 and with the appropriate cor. Nos., tract letter, block Nos., right-of-way designation, and tract lines. Witness cor. meander cors. have additional marks WC MC and an arrow pointing to the true cor. No accessories were taken. Bury a clear DEEP-1 magnet at the base of the stainless steel posts.
- Rebar, 5/8 in. diam., 36 ins. long, set 34 ins. in the ground, with alum. cap, 1 1/2 ins. diam., mkd. ANC ANCSA 14C ROW 1992 and with the appropriate tract letter, block Nos., and tract lines.

ACCESSORIES

Steel fence posts, 6 ft. long, driven 3 ft. in the ground, on the survey lines.

| Corner No.          | Direction | Distance |
|---------------------|-----------|----------|
| Cor. No. 2, Tract D | Northeast | 3 ft.    |
| Cor. No. 3, Tract D | Southwest | 3 ft.    |
| Cor. No. 4, Tract D | Northeast | 3 ft.    |
| Cor. No. 5, Tract D | Northeast | 3 ft.    |
| Cor. No. 6, Tract D | Southwest | 3 ft.    |
| Cor. No. 2, Tract F | South     | 3 ft.    |
| Cor. No. 3, Tract F | South     | 3 ft.    |

93-25  
RECORDED - FILED 20-  
BOTHAL  
DATE 8-9-89  
TIME 8:47 A.M.  
Requested by UGA/BLM  
Address



TRACT I  
SEE SHEET No. 8





ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH J  
P.L. 92-203 (85 STAT. 688, 702, 703)


ALAKANUK NATIVE CORPORATION  
AT  
ALAKANUK, ALASKA

AND THE DEPENDENT RESURVEY OF  
OF A PORTION OF  
TRACT B, U.S. SURVEY NO. 4405

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

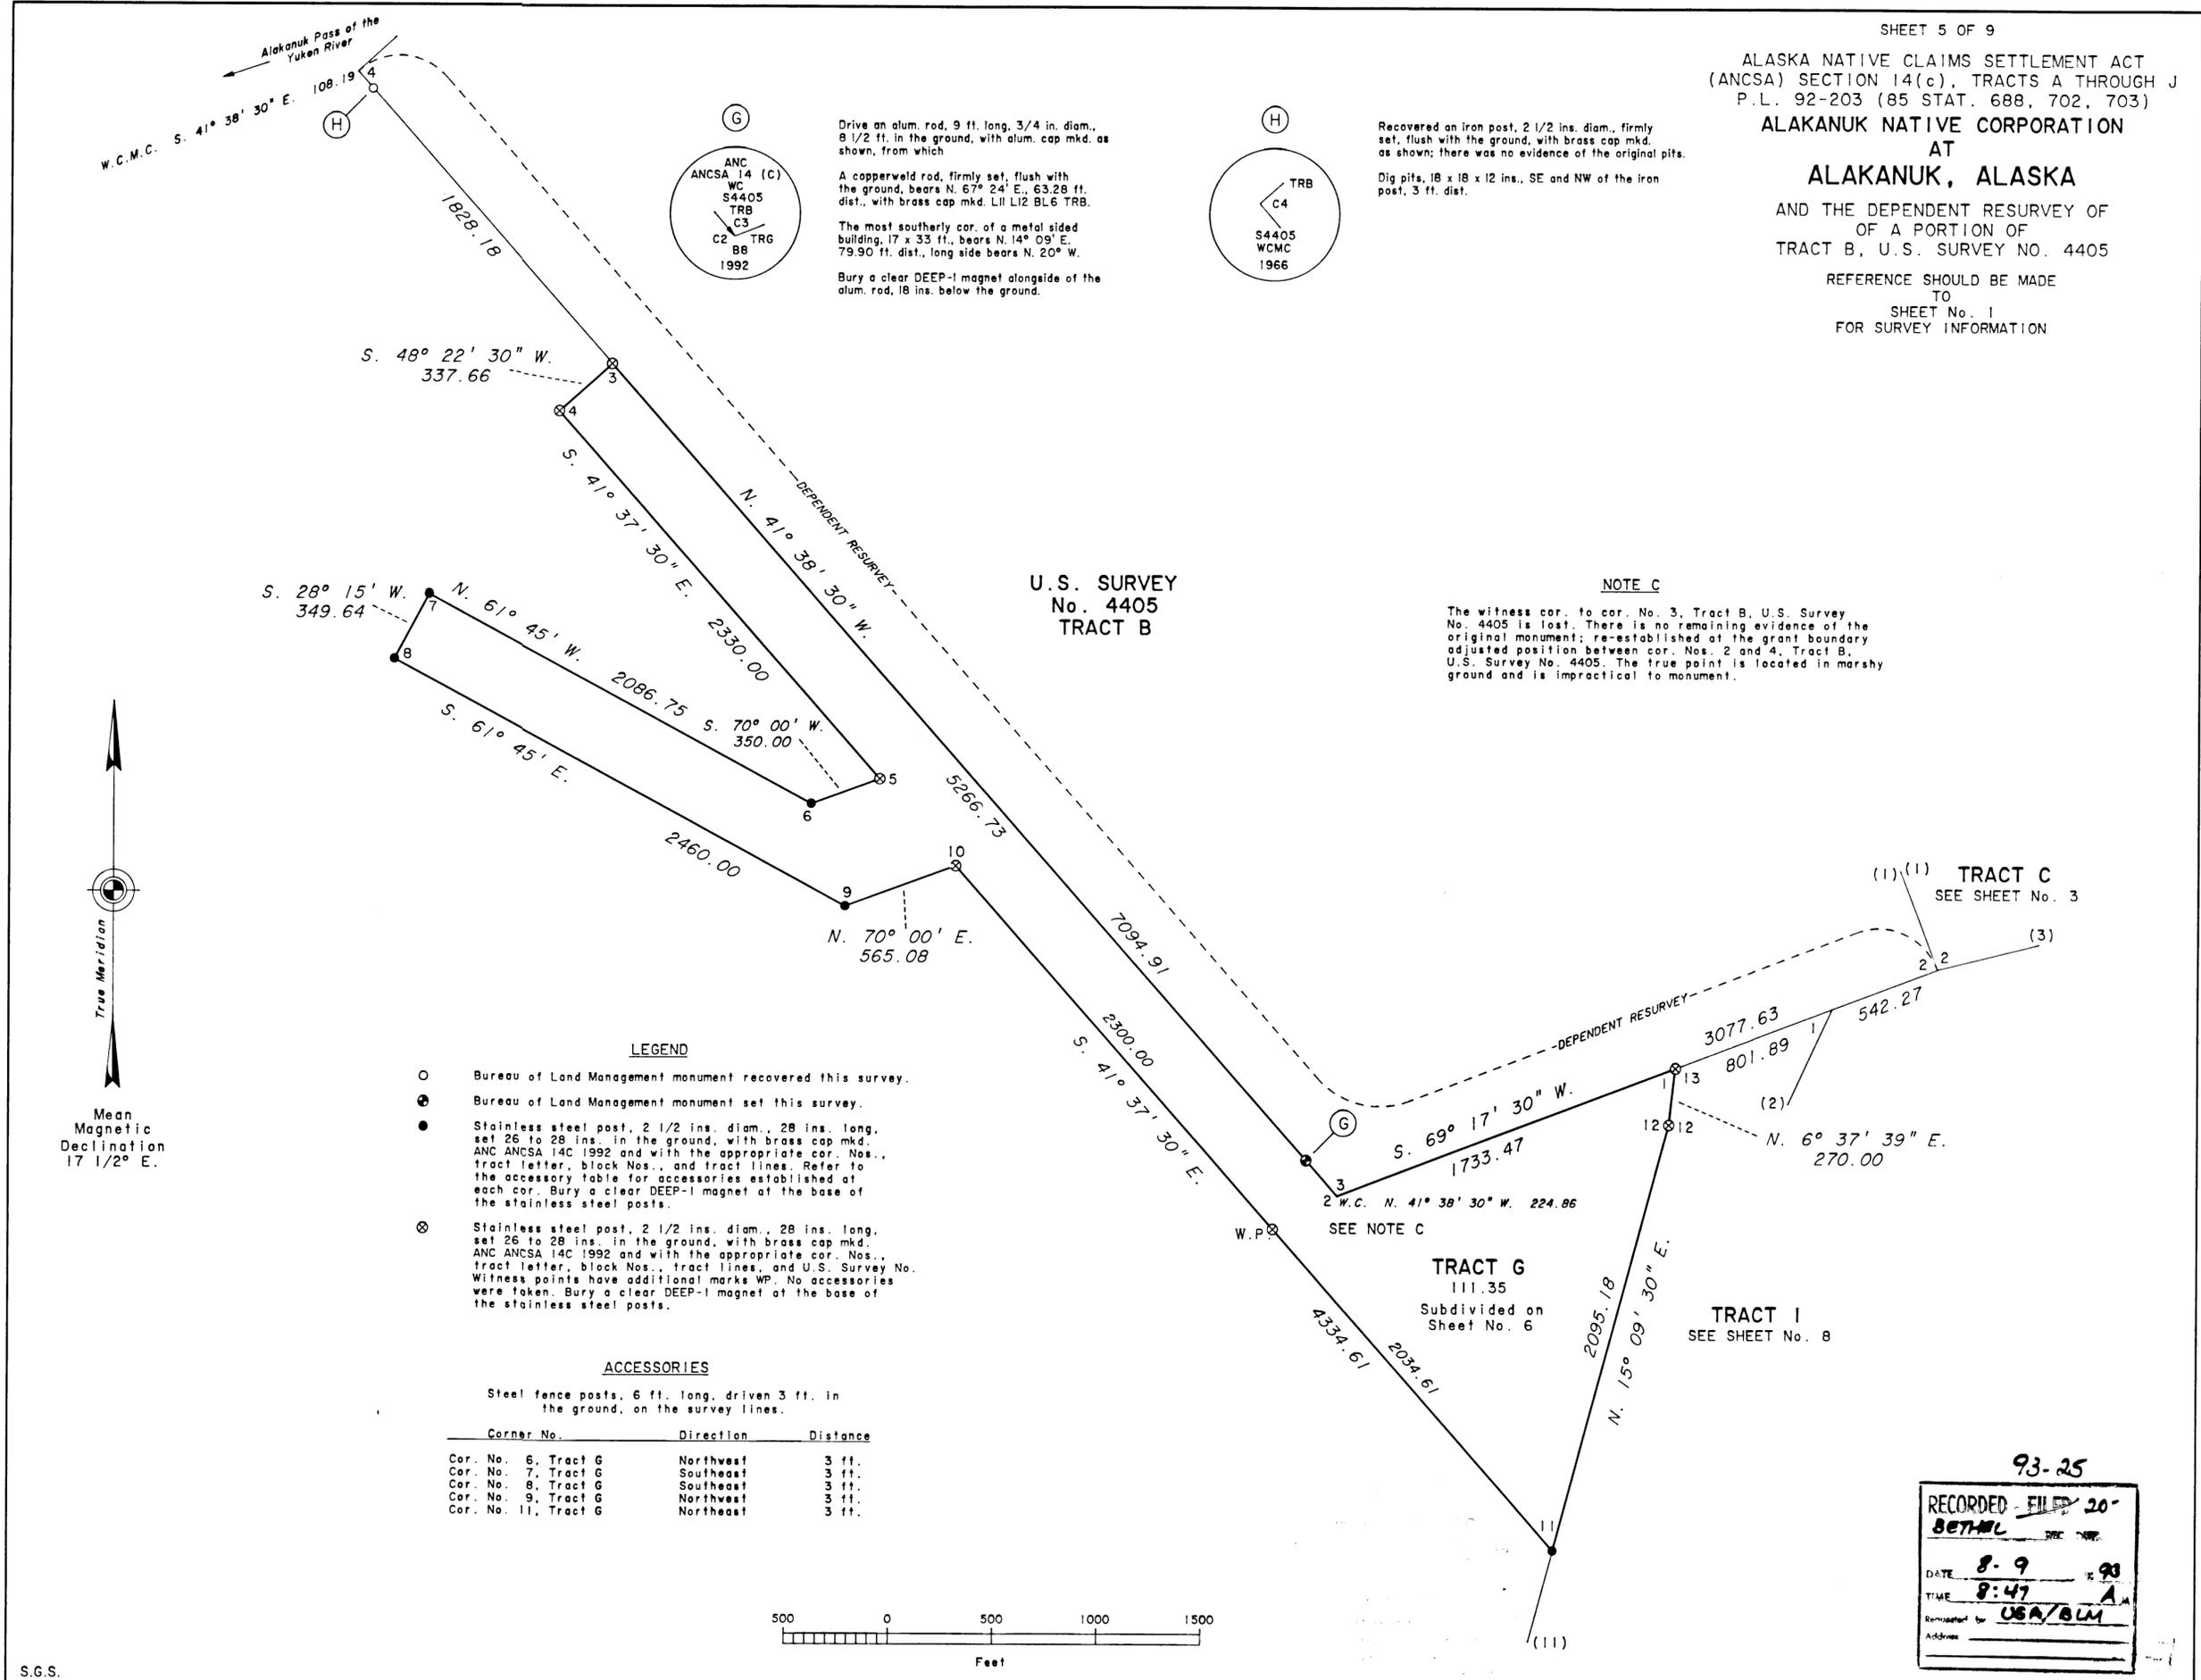

Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8 1/2 ft. in the ground, with alum. cap mkd. as shown, from which  
A copperweld rod, firmly set, flush with the ground, bears N. 67° 24' E., 63.28 ft. dist., with brass cap mkd. L11 L12 BL6 TRB.  
The most southerly cor. of a metal sided building, 17 x 33 ft., bears N. 14° 09' E., 79.90 ft. dist., long side bears N. 20° W.  
Bury a clear DEEP-1 magnet alongside of the alum. rod, 18 ins. below the ground.



Recovered an iron post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown; there was no evidence of the original pits.  
Dig pits, 18 x 18 x 12 ins., SE and NW of the iron post, 3 ft. dist.

U.S. SURVEY  
No. 4405  
TRACT B

NOTE C

The witness cor. to cor. No. 3, Tract B, U.S. Survey No. 4405 is lost. There is no remaining evidence of the original monument; re-established at the grant boundary adjusted position between cor. Nos. 2 and 4, Tract B, U.S. Survey No. 4405. The true point is located in marshy ground and is impractical to monument.


LEGEND

- Bureau of Land Management monument recovered this survey.
- ⊙ Bureau of Land Management monument set this survey.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 26 to 28 ins. in the ground, with brass cap mkd. ANC ANCSA 14C 1992 and with the appropriate cor. Nos., tract letter, block Nos., and tract lines. Refer to the accessory table for accessories established at each cor. Bury a clear DEEP-1 magnet at the base of the stainless steel posts.
- ⊗ Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 26 to 28 ins. in the ground, with brass cap mkd. ANC ANCSA 14C 1992 and with the appropriate cor. Nos., tract letter, block Nos., tract lines, and U.S. Survey No. Witness points have additional marks WP. No accessories were taken. Bury a clear DEEP-1 magnet at the base of the stainless steel posts.

ACCESSORIES

Steel fence posts, 6 ft. long, driven 3 ft. in the ground, on the survey lines.

| Corner No.           | Direction | Distance |
|----------------------|-----------|----------|
| Cor. No. 6, Tract G  | Northwest | 3 ft.    |
| Cor. No. 7, Tract G  | Southeast | 3 ft.    |
| Cor. No. 8, Tract G  | Southeast | 3 ft.    |
| Cor. No. 9, Tract G  | Northwest | 3 ft.    |
| Cor. No. 11, Tract G | Northeast | 3 ft.    |



Mean Magnetic Declination 17 1/2° E.

93-25

RECORDED - FILED 20  
BETHEL


DATE 8-9 X 93  
TIME 8:47 A.M.  
Requested by USA/BLM  
Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH J P.L. 92-203 (85 STAT. 688, 702, 703)


ALAKANUK NATIVE CORPORATION AT ALAKANUK, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION


LEGEND Rebar, 5/8 in. diam., 36 ins. long, set 34 ins. in the ground, with alum. cap, 1 1/2 ins. diam., mkd. ANC ANCSA 14C 1992 and with the appropriate tract letter, block Nos., tract lines, and U.S. Survey No.

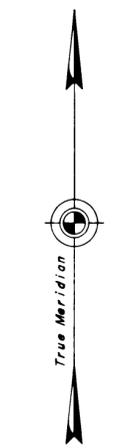


ENLARGED DIAGRAM F

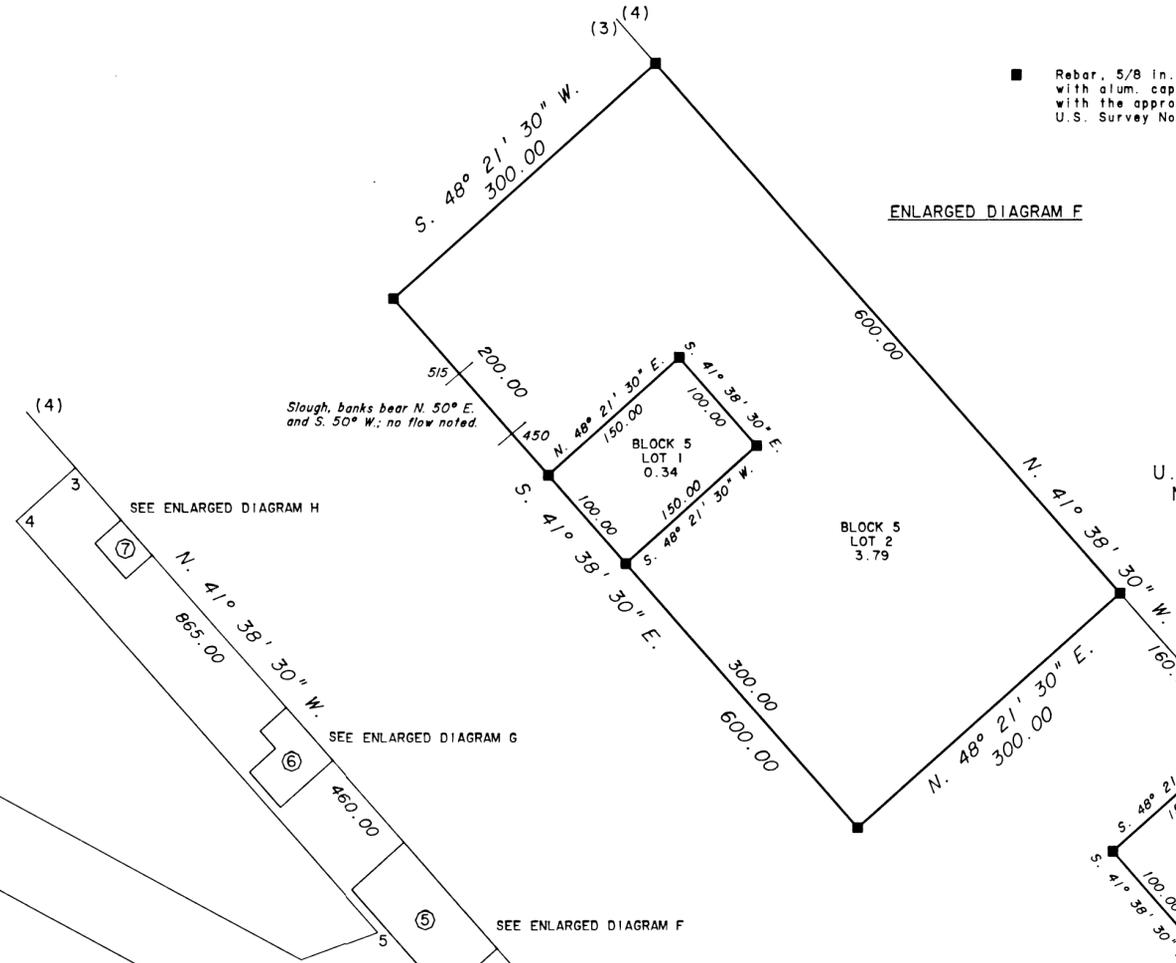







ENLARGED DIAGRAM G

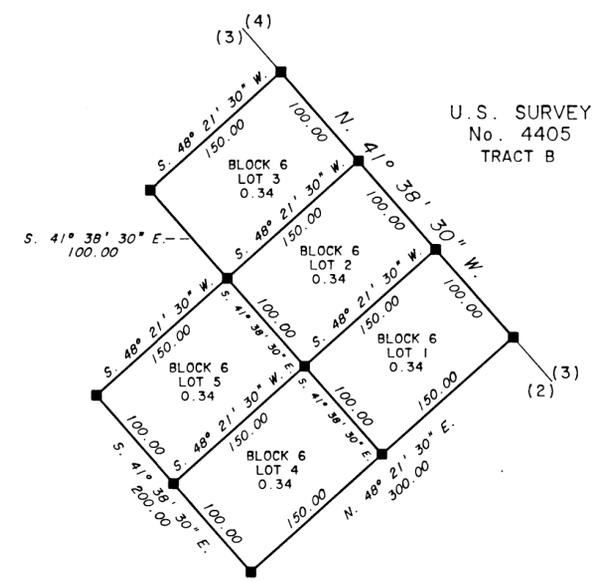

ENLARGED DIAGRAM H

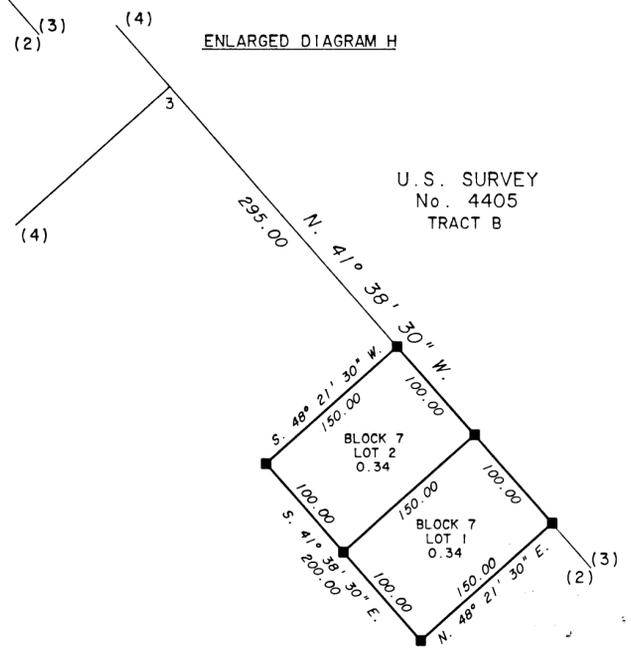

ENLARGED DIAGRAM E

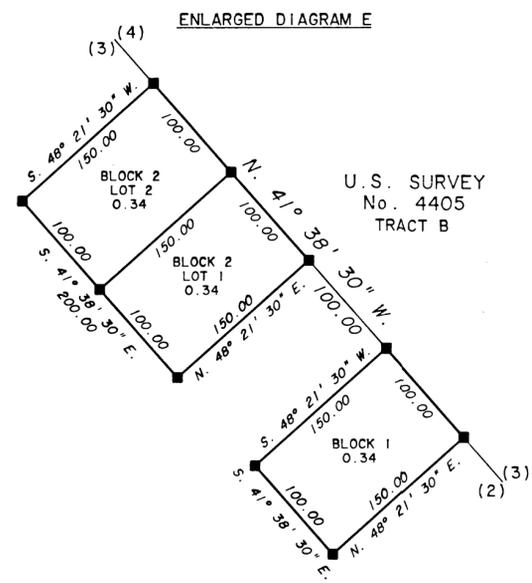

TRACT G BLOCK 8 103.14

TRACT I SEE SHEET No. 8



93-25  
RECORDED - FILED 20-  
BETHEL  
DATE 8-9 1993  
TIME 8:47 AM  
Requested by USA/BLM  
Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH J  
P.L. 92-203 (85 STAT. 688, 702, 703)


**ALAKANUK NATIVE CORPORATION  
AT  
ALAKANUK, ALASKA**

AND THE DEPENDENT RESURVEY  
OF A PORTION OF  
TRACT A, U.S. SURVEY NO. 4405


REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

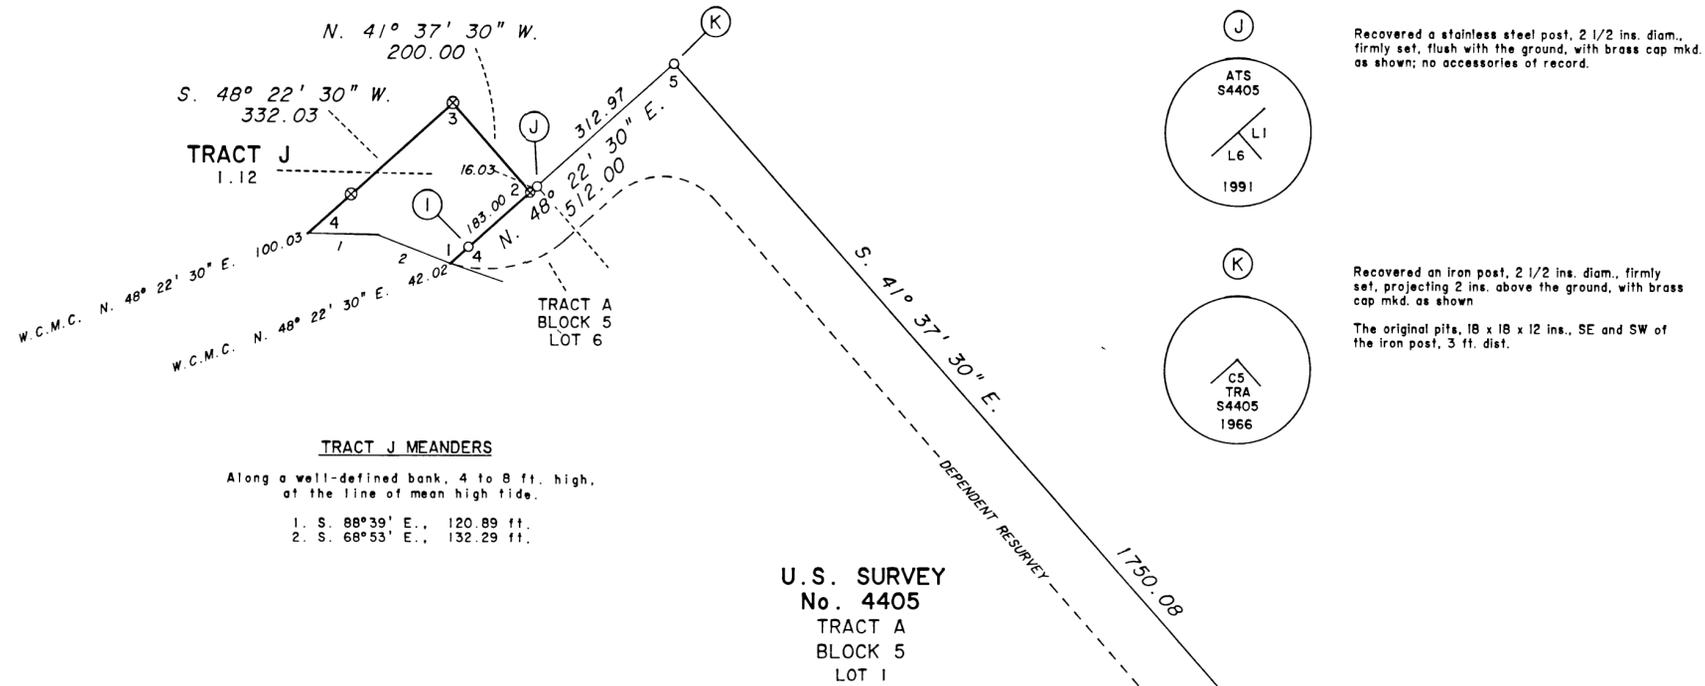


Recovered an iron post, 2 1/2 ins. diam., firmly set, 2 ins. below the ground, with brass cap mkd. as shown; there is no evidence of the original pits.



Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown; no accessories of record.



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as shown.  
The original pits, 18 x 18 x 12 ins., SE and SW of the iron post, 3 ft. dist.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap erroneously mkd. as shown.  
The original pits, 18 x 18 x 12 ins., NE and SW of the iron post, 3 ft. dist.

**TRACT J MEANDERS**

Along a well-defined bank, 4 to 8 ft. high, at the line of mean high tide.

1. S. 88°39' E., 120.89 ft.
2. S. 68°53' E., 132.29 ft.

**U.S. SURVEY  
No. 4405  
TRACT A  
BLOCK 5  
LOT 1**

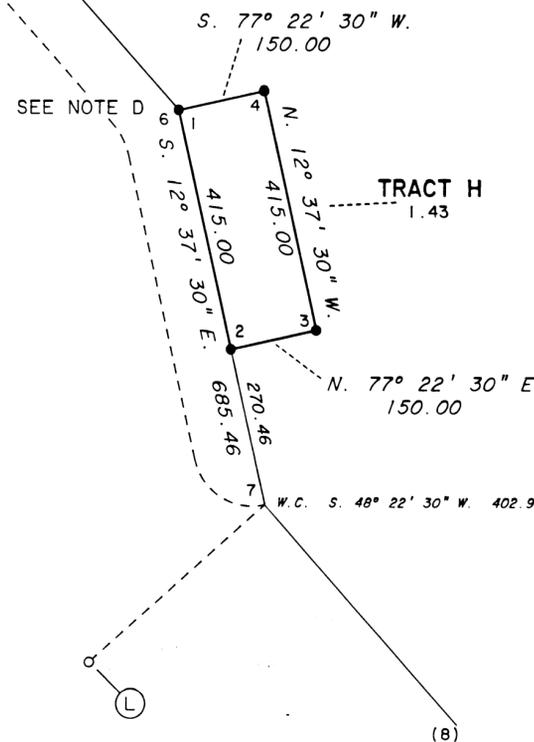

**NOTE D**

Cor. No. 6, Tract A, U.S. Survey No. 4405 was not monumented during the execution of the original survey. This cor. was established at the grant boundary adjusted position between cor. Nos. 5 and 7, Tract A, U.S. Survey No. 4405. This cor. is identical with cor. No. 1, Tract H, of the ANCSA 14(c) survey.


**LEGEND**

- Bureau of Land Management recovered this survey.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 26 to 28 ins. in the ground, with brass cap mkd. ANC ANCSA 14C 1992 and with the appropriate cor. Nos., tract letter, block Nos., tract lines and U.S. Survey No. Refer to the accessory table for accessories established at each cor. Bury a clear DEEP-1 magnet at the base of the stainless steel posts.
- ⊗ Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 26 to 28 ins. in the ground, with brass cap mkd. ANC ANCSA 14C 1992 and with the appropriate cor. Nos., tract letter, block Nos., tract lines, and U.S. Survey No. Witness cor., meander cors., have additional marks WC MC and an arrow pointing to the true cor. No accessories were taken. Bury a clear DEEP-1 magnet at the base of the stainless steel posts.

**ACCESSORIES**

Steel fence posts, 6 ft. long, driven 3 ft. in the ground, on the survey lines.

| Corner No.          | Direction | Distance |
|---------------------|-----------|----------|
| Cor. No. 1, Tract H | Southeast | 3 ft.    |
| Cor. No. 2, Tract H | Northwest | 3 ft.    |
| Cor. No. 3, Tract H | Northwest | 3 ft.    |
| Cor. No. 4, Tract H | Southeast | 3 ft.    |

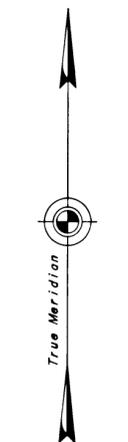

Mean Magnetic Declination 17 1/2° E.

93-25






|              |           |
|--------------|-----------|
| RECORDED     | FILED 20- |
| BETHL        |           |
| DATE         | 8-9 93    |
| TIME         | 8:47 A    |
| Requested by | USA/BLM   |
| Address      |           |

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH J  
P.L. 92-203 (85 STAT. 688, 702, 703)

**ALAKANUK NATIVE CORPORATION  
AT  
ALAKANUK, ALASKA**

AND THE DEPENDENT RESURVEY AND  
RETRACEMENT OF PORTIONS OF  
U.S. SURVEY NOS. 4405 AND 10595

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

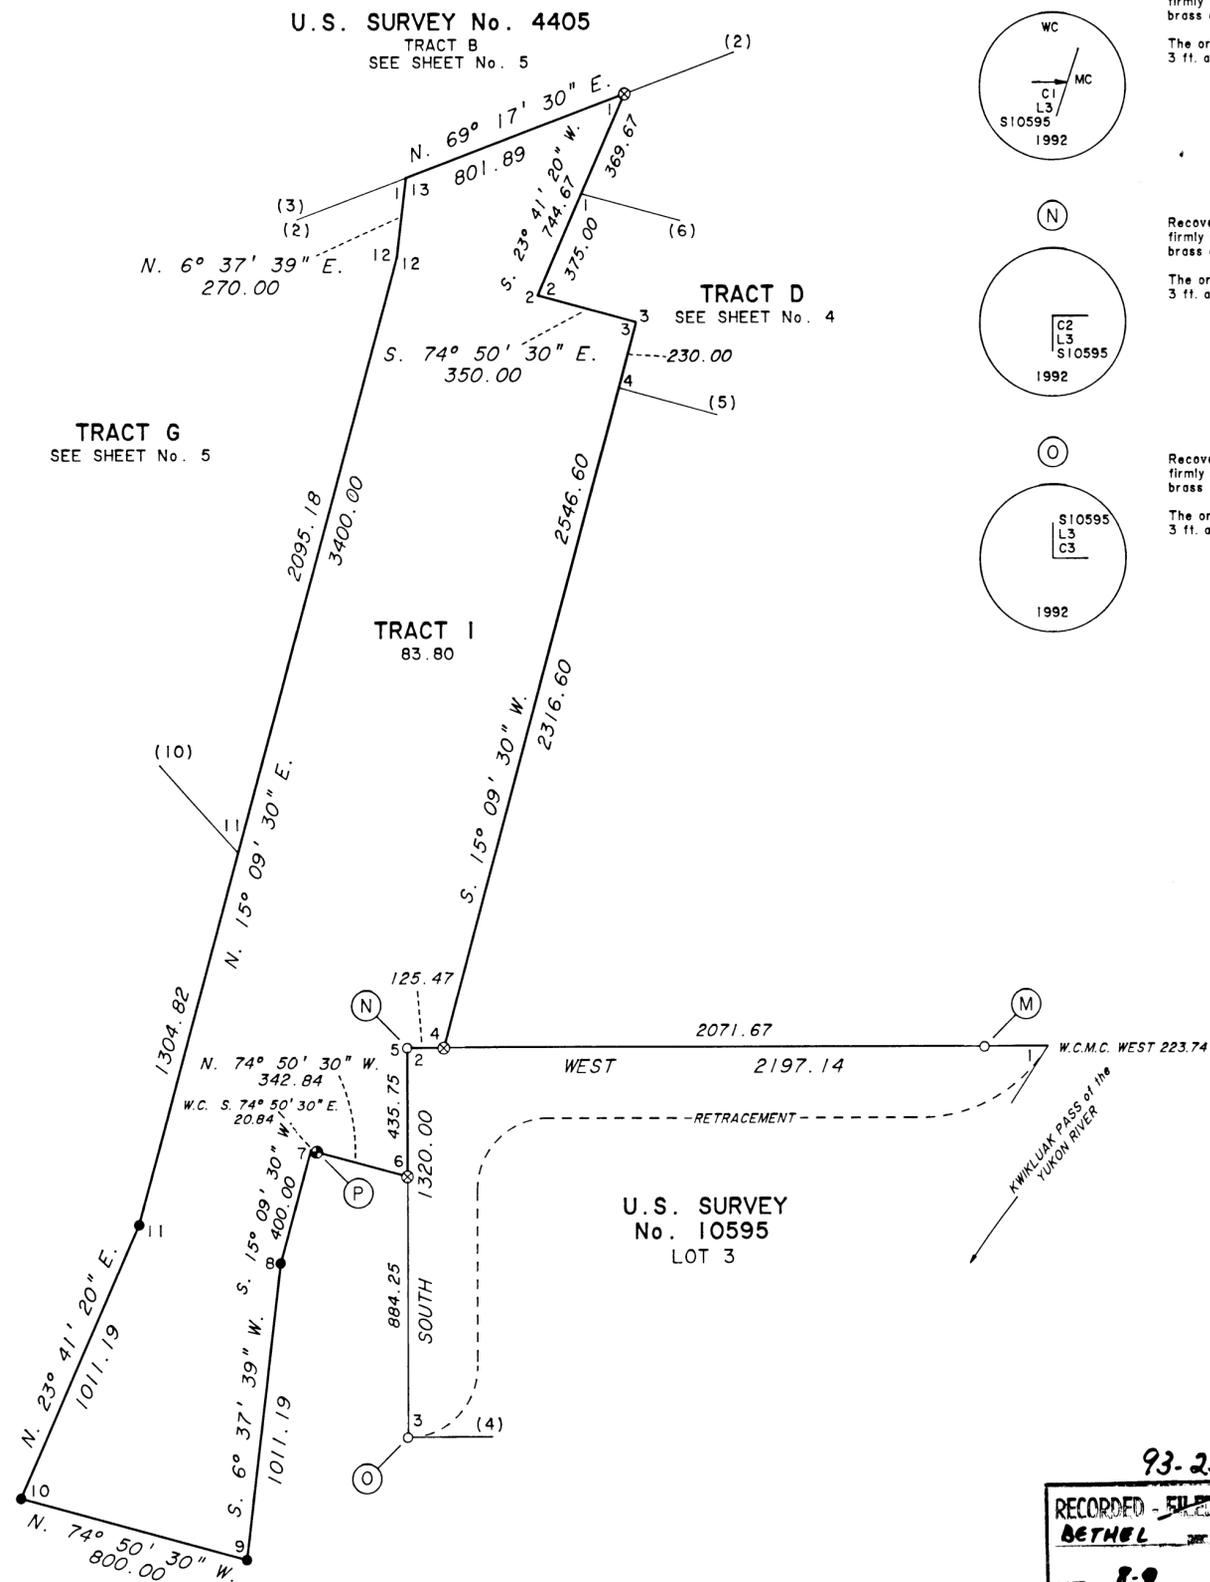

- LEGEND**
- Bureau of Land Management monument recovered this survey.
  - Bureau of Land Management monument set this survey.
  - Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 26 to 28 ins. in the ground, with brass cap mkd. ANC ANCSA 14C 1992 and with the appropriate cor. Nos., tract letter, block Nos., and tract lines. Refer to the accessory table for accessories established at each cor. Bury a clear DEEP-I magnet at the base of the stainless steel posts.
  - ⊗ Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 26 to 28 ins. in the ground, with brass cap mkd. ANC ANCSA 14C 1992 and with the appropriate cor. Nos., tract letter, block Nos., tract lines, and U.S. Survey No. No accessories were taken. Bury a clear DEEP-I magnet at the base of the stainless steel posts.

**ACCESSORIES**

Steel fence posts, 6 ft. long, driven 3 ft. in the ground, on the survey lines.

| Corner No.           | Direction | Distance |
|----------------------|-----------|----------|
| Cor. No. 8, Tract I  | Northeast | 3 ft.    |
| Cor. No. 9, Tract I  | Northwest | 3 ft.    |
| Cor. No. 10, Tract I | Southeast | 3 ft.    |
| Cor. No. 11, Tract I | Southeast | 3 ft.    |

93-25

RECORDED - FILED 20


BETHEL

DATE 8-9 '93

TIME 8:47 AM

Represented by USA/BLM

Address



ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH J  
P.L. 92-203 (85 STAT. 688, 702, 703)

**ALAKANUK NATIVE CORPORATION  
AT  
ALAKANUK, ALASKA**

AND THE DEPENDENT RESURVEY AND  
RETRACEMENT OF PORTIONS OF  
U.S. SURVEY NOS. 4405 AND 4092  
AND SUBDIVISION OF LOT 2  
U.S. SURVEY NO. 4092 INTO  
LOTS 7 AND 8

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

**NOTE E**

Due to erosion, the fresh water slough on the northerly boundary of U.S. Survey No. 4092 is now tidally influenced, and was meandered to the extent of tidal influence. There was no flow noted on this slough. Lot 3 of this survey has been lost due to erosion.

The witness corner to meander cor. No. 4 of U.S. Survey No. 4092 is lost. There is no remaining evidence of the original corner. Line 3-4 of original U.S. Survey No. 4092 was reestablished by the retracement of said survey using the record angle from the northerly boundary of original Lot 1, U.S. Survey No. 4092.

From the true point for cor. No. 3, Lot 8, U.S. Survey No. 4092, a meander cor., the original iron post monument for the witness cor. to cor. No. 4, U.S. Survey No. 4092, 2 1/2 ins. diam., 28 ins. long with brass cap mkd. C4 LOT 2 S4092 WCMC 1962; bears N. 64° 36' E., 16.84 ft. dist.; found in a disturbed condition at the base of a steep bank of the unnamed slough.



**LEGEND**

- Bureau of Land Management monument recovered this survey.
- Bureau of Land Management monument set this survey.
- ◇ Recovered stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. S4092 1991 and with the appropriate cor. Nos., Lot Nos., and Lot; no accessories of record.
- ⊗ Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 26 to 28 ins. in the ground, with brass cap mkd. ANC ANCSA 14C 1992 and with the appropriate tract lines, lot lines, right-of-way designation, and U.S. Survey Nos. No accessories were taken. Bury a clear DEEP-1 magnet at the base of the stainless steel posts.


U.S. SURVEY  
No. 3794  
SEE SHEET No. 2

Cor. No. 2, Lot 4,  
identical with  
Cor. No. 2, Lot 8,  
U.S. Survey No. 4092

**ENLARGED DIAGRAM 1**

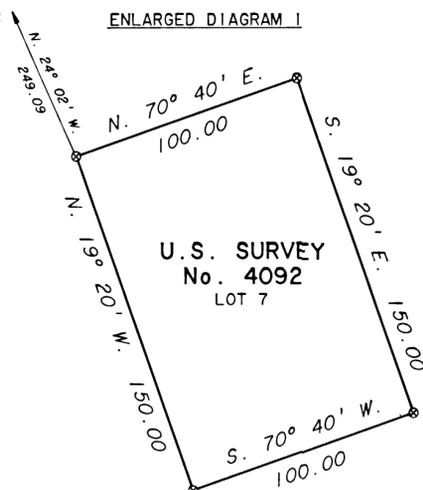


Q




Recovered an iron post, 2 1/2 ins. diam., firmly set, 2 ins. below the ground, with brass cap mkd. as shown  
No accessories of record.

R




Recovered an iron post, 2 1/2 ins. diam., firmly set, 12 ins. below the ground, with brass cap mkd. as shown; there was no evidence of the original pits.  
Dig pits, 18 x 18 x 12 ins., SE, W, and NW of the iron post, 3 ft. dist.

S




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown  
The original pits, 18 x 18 x 12 ins., NE and SE of the stainless steel post, 3 ft. dist.

T




Recovered a copperweld rod, 1/2 in. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown  
No accessories of record.

U



Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, 2 ins. below the ground, with brass cap mkd. as shown  
The improvement accessories were not searched for.

V




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown

Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 3 ft. SW of cor.

Invert and bury the original iron post monument from the witness cor. to cor. No. 4, U.S. Survey No. 4092, alongside the stainless steel post; see Note E.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

W



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown

Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 3 ft. SW of cor.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

**MEANDERS**

Along a well-defined bank, 4 to 8 ft. high, at the line of mean high tide.

**ALSTROM STREET**



1. S. 19° 52' E., 60.00 ft.

**LOT 8 U.S. SURVEY No. 4092**

1. S. 29° 13' E., 198.04 ft.
2. S. 43° 10' E., 183.03 ft.
3. S. 61° 52' E., 306.12 ft.
4. S. 62° 53' W., 151.32 ft.
5. S. 84° 24' W., 321.45 ft.
6. S. 81° 29' W., 353.30 ft.
7. S. 79° 18' W., 281.11 ft.

At end of course, confluence of the unnamed slough with the Alakanuk Pass of the Yukon River; thence downstream on the right bank of the Alakanuk Pass of the Yukon River.

THE ALSTROM STREET, 60 FT. WIDE  
RIGHT-OF-WAY, ENCOMPASSES 2.35 ACRES.

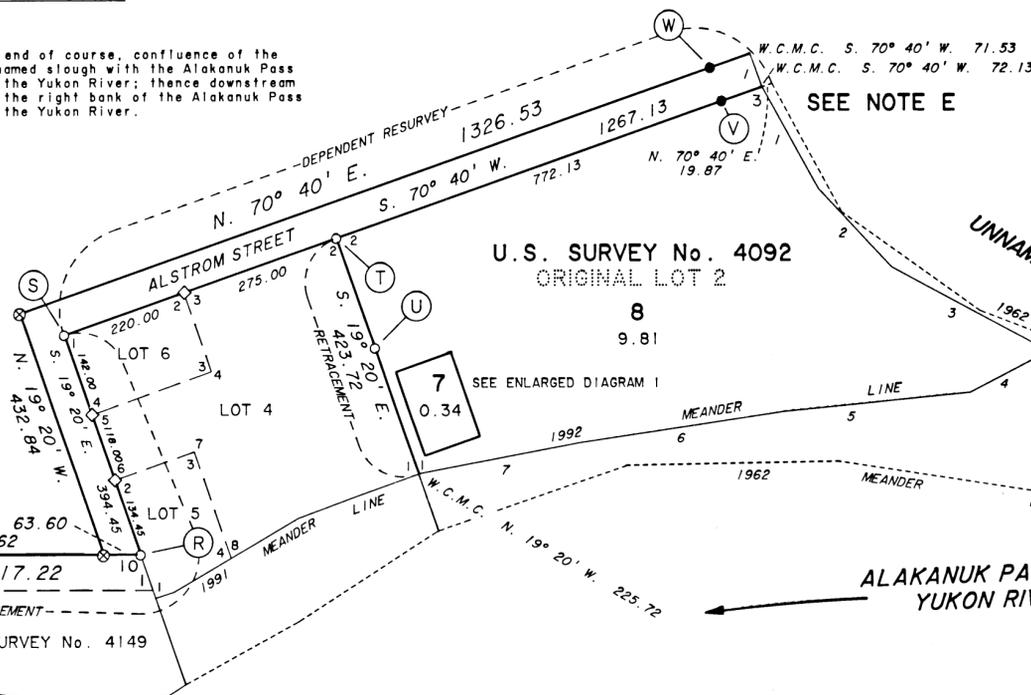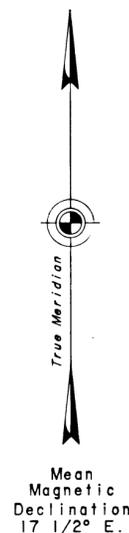

93-25

RECORDED - FILED 20-  
BGMEL REC. DATE  
DATE 8-9 1993  
TIME 8:47 AM  
Requested by USA/BLM  
Address