

Sheet 1 of 20 Sheets

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28 P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED AT ALEKNAGIK, ALASKA

AND THE DEPENDENT RESURVEY OF PORTIONS OF T. 8 S. R. 53 W. Tps. 9 S. Rs. 54, 55, AND 57 W., Tps. 10 AND 11 S. Rs. 55 AND 56 W., SEWARD MERIDIAN, ALASKA, AND PORTIONS OF U.S. SURVEY Nos. 4873, 4923, 4925, 4927, 9291, 9309, 9479, 9840, 9989, AND 12403 AND THE SUBDIVISION OF U.S. SURVEY No. 4925, LOT 1, TRACT A AND PLAT No. 80-5, LOT 1A

This plat contains the entire survey record.

The history of surveys is referenced on sheets numbered 2 and 3.

This survey was executed by Eric L. Stoll, Cadastral Surveyor, May 19, 1997, through June 18, 1998, in accordance with the principles set forth in the manual of Surveying Instructions, 1973, Special Instructions approved May 30, 1997, the Aleknagik ANCSA 14(c) map of Boundaries accepted April 3, 1996, and the Assignment Instructions dated May 15, 1997.

Field Assistants were:

- Michael O. Harmening, Land Surveyor
Matthew J. Kurchinski, Survey Technician
Clinton T. Lancaster, Survey Technician
Jose R. Hernandez, Survey Technician
Anthony J. Robinson, Contract Laborer

Area Surveyed: 550.83 Acres

Area Resurveyed: 416.50 Acres

The azimuth was established using Global Positioning Systems (G.P.S.), utilizing static relative positioning techniques and was confirmed with direct observations of the sun, using the hour angle method, and refers to the true meridian.

The geographic position of the southeast corner of Township 10 South, Range 55 West, Seward Meridian, Alaska, as determined from the 1967 record information, is:

Latitude: 59° 15' 36.75" NORTH NAD 27
Longitude: 158° 37' 13.55" WEST

The mean magnetic declination was observed during the execution of this survey.

This survey is situated within Township 8 South, Range 53 West, Townships 9 South, Ranges 54, 55, and 57 West, Townships 10 and 11 South, Ranges 55 and 56 West, Seward Meridian, Alaska.

The land is generally hilly, covered with mature spruce and birch trees, with alders, willow and berry brush undergrowth.

The soil is sandy clay loam, gravel, and rock. Soil type is dependent upon elevation.

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT Anchorage, Alaska


The survey represented by this plat, sheets 1-20 having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

Deputy State Director for Cadastral Survey, Alaska
Date: 11 MAY 1997

ENLARGED DIAGRAM

Vicinity Diagram Scale: 1" = 4 miles

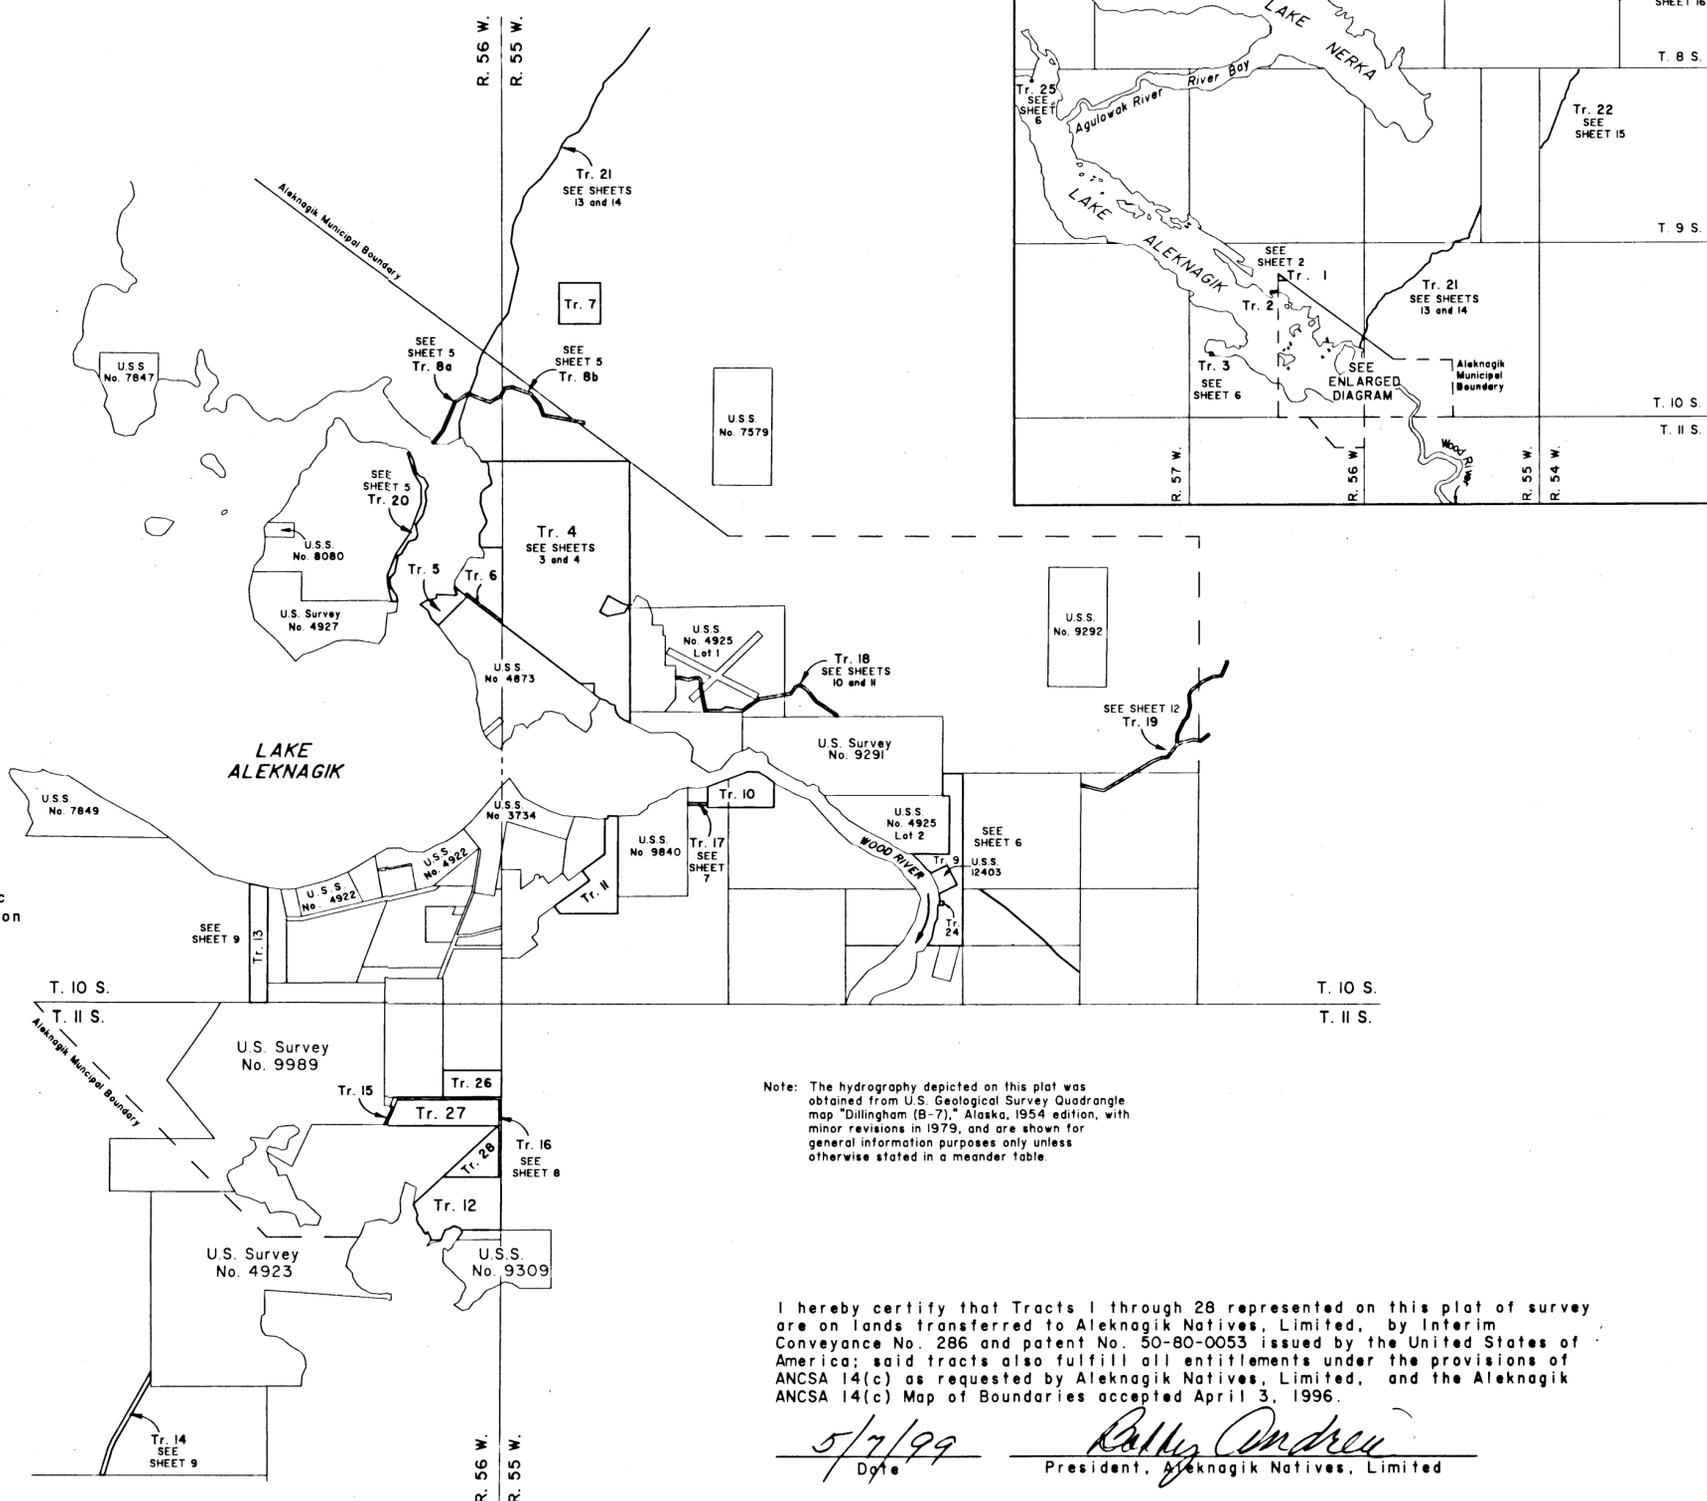



Note: The hydrography depicted on this plat was obtained from U.S. Geological Survey Quadrangle map "Dillingham (B-7)," Alaska, 1954 edition, with minor revisions in 1979, and are shown for general information purposes only unless otherwise stated in a meander table.

I hereby certify that Tracts 1 through 28 represented on this plat of survey are on lands transferred to Aleknagik Natives, Limited, by Interim Conveyance No. 286 and patent No. 50-80-0053 issued by the United States of America; said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Aleknagik Natives, Limited, and the Aleknagik ANCSA 14(c) Map of Boundaries accepted April 3, 1996.

5/7/99 Date: Rolly Andrew President, Aleknagik Natives, Limited

I, Eric L. Stoll, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 - 20, in conformity with the Special Instructions approved May 30, 1997, the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.

APRIL 20, 1999 Date: Eric L. Stoll Cadastral Surveyor

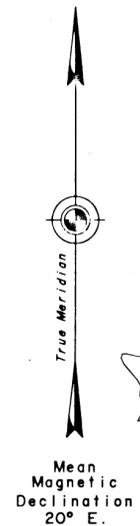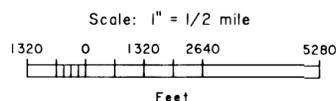

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28 P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED AT ALEKNAGIK, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 3, AND 17 FOR SURVEY INFORMATION

HISTORY OF SURVEYS

The west boundary of Township 8 South, Range 53 West, Seward Meridian, was surveyed by Henry J. Grimmonpre', Supervisory Cadastral Surveyor, in 1966.

A portion of the north boundary of Township 9 South, Range 54 West, Seward Meridian, being a portion of the Second Standard Parallel South through Range 54 West, was surveyed by Henry J. Grimmonpre', Supervisory Cadastral Surveyor, in 1966.

The west boundary of Township 9 South, Range 54 West, Seward Meridian, was surveyed by Frederick W. Ward, Supervisory Cadastral Surveyor, in 1966-1967, and a portion was dependently resurveyed by Timothy A. Kent, Cadastral Surveyor, in 1979.

A portion of the north boundary of Township 9 South, Range 55 West, Seward Meridian, being a portion of the Second Standard Parallel South through Range 55 West, was surveyed by Frederick W. Ward, Supervisory Cadastral Surveyor, in 1966.

The south and west boundaries of Township 9 South, Range 55 West, Seward Meridian, were surveyed by Frederick W. Ward, Supervisory Cadastral Surveyor, in 1966.

The north boundary of Township 9 South, Range 57 West, Seward Meridian, being a portion of the Second Standard Parallel South through Ranges 56 and 57 West, was surveyed by Frederick W. Ward, Supervisory Cadastral Surveyor, in 1966.

The east, south and west boundaries of Township 10 South, Range 55 West, Seward Meridian, were surveyed by Frederick W. Ward, Supervisory Cadastral Surveyor, in 1966.

A portion of the south boundary was dependently resurveyed and a portion of the subdivisional lines of Township 10 South, Range 55 West, were surveyed by Hobart B. Hyatt, Supervisory Cadastral Surveyor, in 1973, with additional dependent resurvey and subdivisional work by Eric L. Stoll, Cadastral Surveyor, in 1997.

The south boundary of Township 10 South, Range 56 West, Seward Meridian, was surveyed by Frederick W. Ward, Supervisory Cadastral Surveyor, in 1966 and 1967.

A portion of the south and east boundaries were dependently resurveyed and a portion of the subdivisional lines of Township 10 South, Range 56 West, Seward Meridian, were surveyed by Hobart B. Hyatt, Supervisory Cadastral Surveyor, in 1973, with additional dependent resurvey and subdivisional work by Eric L. Stoll, Cadastral Surveyor, in 1997.

The east boundary of Township 11 South, Range 56 West, Seward Meridian, was surveyed by Frederick W. Ward, Supervisory Cadastral Surveyor, in 1966.

The east boundary and a portion of the north boundary were dependently resurveyed and a portion of the subdivisional lines of Township 11 South, Range 56 West, Seward Meridian, were surveyed by Hobart B. Hyatt, in 1973, with additional dependent resurvey and subdivisional work by Eric L. Stoll, Cadastral Surveyor, in 1997.

U.S. Survey No. 4873, Lake Aleknagik Townsite, located on the north shore of Lake Aleknagik, was surveyed by Edward D. Conklin, Supervisory Cadastral Surveyor, in 1967, with the dependent resurvey and subdivision of Tracts A and C by Patrick S. Twohy, Cadastral Surveyor, in 1989.

U.S. Survey No. 4923, located approximately one mile southerly of the south shore of Lake Aleknagik and on the Dillingham-Aleknagik road, was surveyed by Walter W. Cooley, Cadastral Surveyor, in 1966.

U.S. Survey No. 4925, located at the east end of Lake Aleknagik on the north shore of the lake and left bank of the Wood River, was surveyed by Walter W. Cooley, Cadastral Surveyor, in 1966.

U.S. Survey No. 4927, located on the south shore of a large island at the east end of Lake Aleknagik, was surveyed by Henry J. Grimmonpre', Supervisory Cadastral Surveyor, in 1966.

ACCESSORY TABLE

Table with columns: Corner Number, Description, Bearing, Distance. Contains data for Tract 1 corners 1, 2, and 3.

ACCESSORY TABLE

Table with columns: Corner Number, Description, Bearing, Distance. Contains data for Tract 2 corners WCMC 1, 2, 3, and 4.

LEGEND

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheet 17.
• Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 25 to 28 ins. in the ground, with brass cap mkd. ANL ANCSA 14(c) 1997...




ACCESSORY TABLE

Table with columns: Description, Bearing, Distance. Contains data for corners of Secs. 19, 20, 29 and 30, and various spruce monuments.

MEANDERS TRACT 2

Along a well-defined bank, 0 to 1 ft. high, at the line of ordinary high water.

- 1. N. 80°26' W., 37.08 ft.
2. S. 53°34' W., 359.46 ft.
3. S. 72°49' W., 119.80 ft.
4. S. 78°48' W., 158.25 ft.
5. N. 57°29' W., 90.60 ft.
6. N. 62°07' W., 91.42 ft.
7. S. 69°59' W., 65.67 ft.
8. N. 83°24' W., 128.94 ft.
9. N. 72°56' W., 177.66 ft.

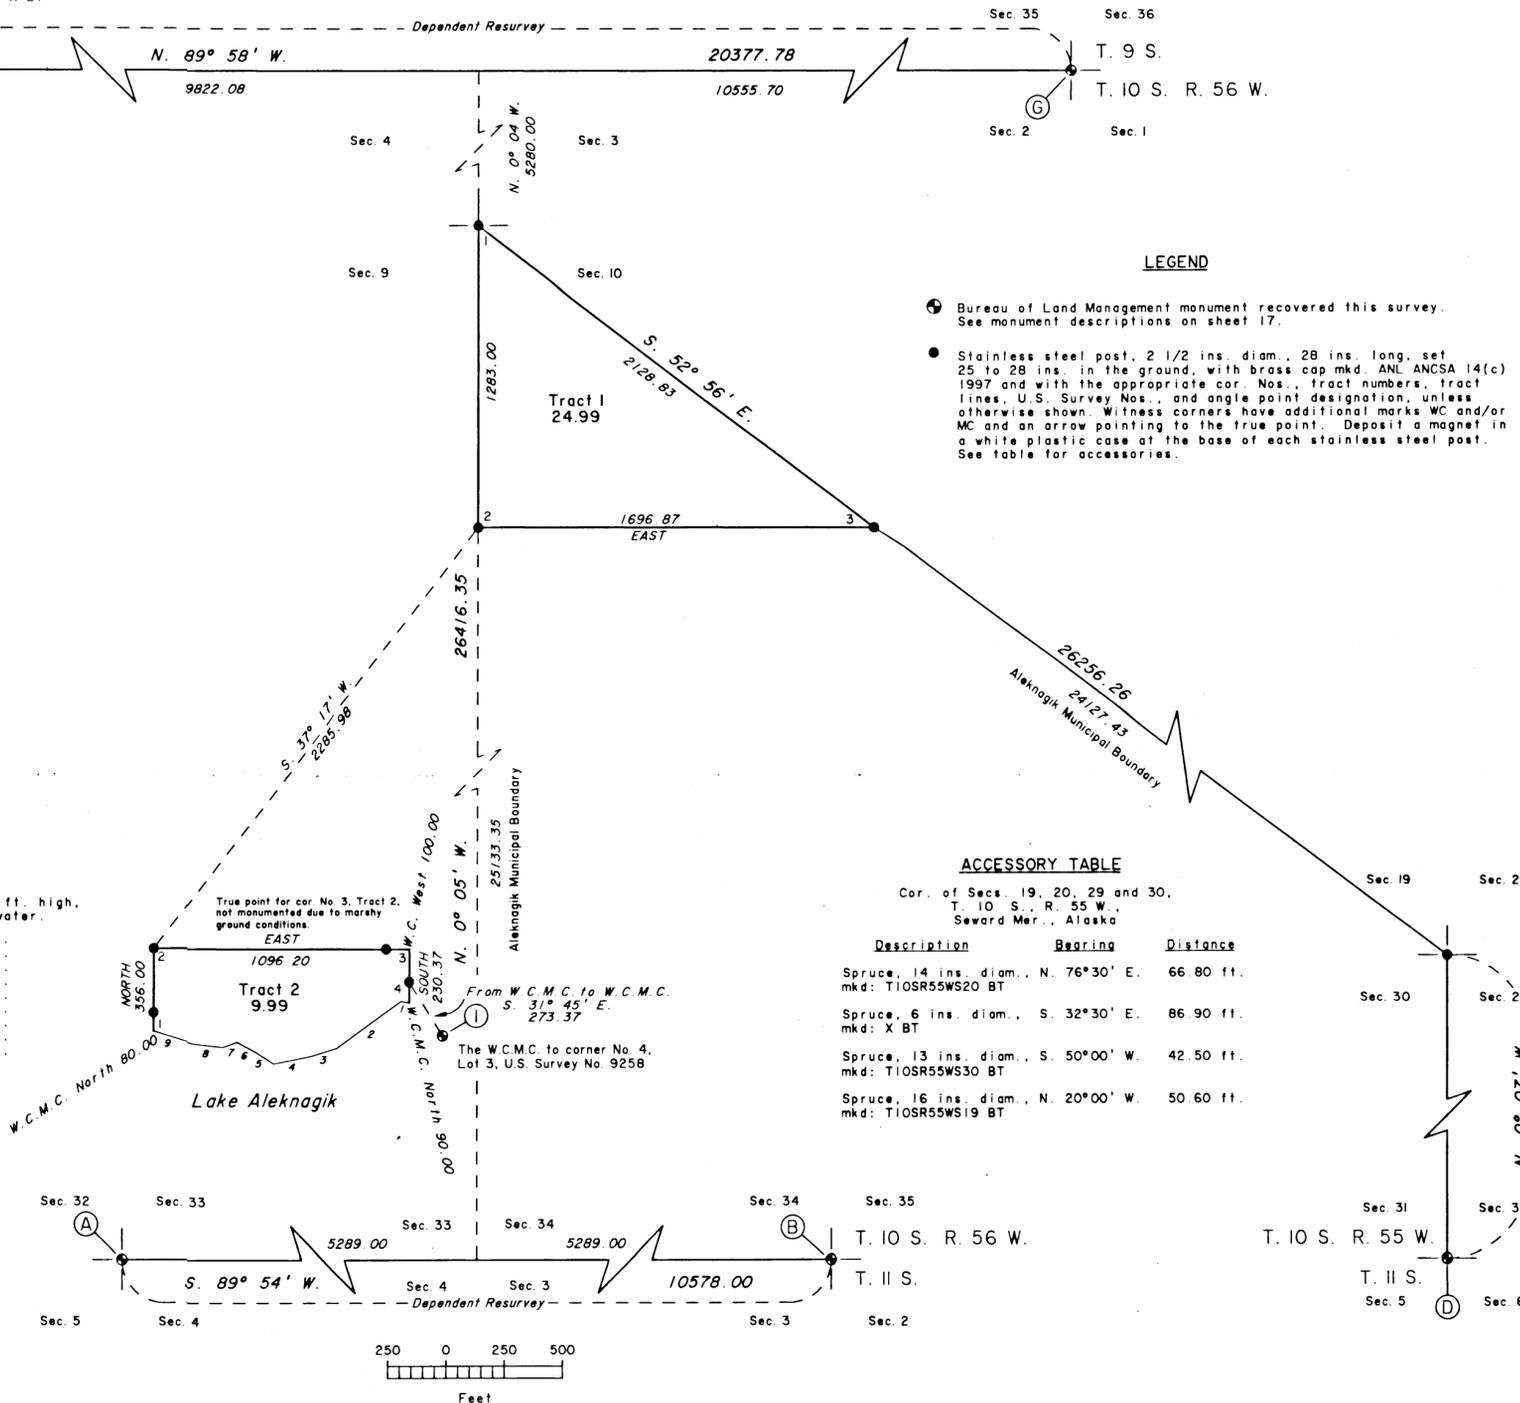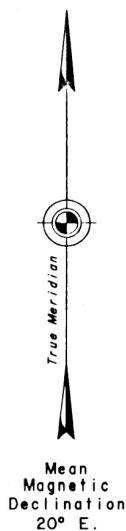

99-2 Bristol Bay Recording District

COPY

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28 P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED AT ALEKNAGIK, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2 AND 17. FOR SURVEY INFORMATION HISTORY OF SURVEYS

U.S. Survey No. 9258, located on the north shore of Lake Aleknagik approximately 5 miles northwesterly from Lake Aleknagik Townsite, was surveyed by Brian C. Anderson, Cadastral Surveyor, in 1988.

U.S. Survey No. 9291, located on the left bank of Wood River at the mouth of Lake Aleknagik, was surveyed by Patrick S. Twohy, Cadastral Surveyor, in 1989.

U.S. Survey No. 9309, located approximately 2 miles south of Lake Aleknagik Townsite on the northeast end of Twin Lakes (local name), was surveyed by Brian C. Anderson, Cadastral Surveyor, in 1988.

U.S. Survey No. 9479, located on the north side of Lake Aleknagik and contiguous with Lake Aleknagik Townsite, was surveyed by Patrick S. Twohy, Cadastral Surveyor, in 1989.

U.S. Survey No. 9840, located on the south shore of Lake Aleknagik at the outlet to the Wood River, was surveyed by Patrick S. Twohy, Cadastral Surveyor, in 1988.

U.S. Survey No. 9989, located in Section 36, Township 10 South, Range 56 West and Sections 1 and 2, Township 11 South, Range 56 West, was surveyed by Patrick S. Twohy, Cadastral Surveyor, in 1989.

U.S. Survey No. 12403, located in Section 32, Township 10 South, Range 55 West, on the left bank of the Wood River, was surveyed by Michael O. Harming, Cadastral Surveyor, in 1998.

Plat No. 80-5, Lots 1A, 1B, and 1C, a portion of Lot 1, U.S. Survey No. 4925, was surveyed by Richard K. DeCamp, Alaska Reg. No. 2071-S, in 1980, recorded with the Bristol Bay Recording District, State of Alaska, on April 14, 1980.

Plat No. 84-2, Wood River Heights Subdivision, was surveyed by Stanley E. Sears, Alaska Reg. No. 2087-S, in 1984, recorded with the Bristol Bay Recording District, State of Alaska, on April 20, 1984.


Plat No. 92-12, Sturneq Subdivision, was surveyed by Gregory W. Maxwell, Alaska Reg. No. 6934, in 1992, recorded with the Bristol Bay Recording District, State of Alaska, on April 27, 1992.

Plat Nos. 80-5, 84-2, and 92-12, each constitute a partial subdivision of Lot 1, U.S. Survey No. 4925.

Plat No. 93-4, the replat of Afsat Subdivision, was surveyed by Gregory W. Maxwell, Alaska Reg. No. 6934, in 1992, recorded with the Bristol Bay Recording District, State of Alaska, on June 3, 1993, and is located in Section 31, Township 10 South, Range 55 West.

ACCESSORY TABLE

Table with columns: Corner Number, Description, Bearing, Distance. Includes entries for WCMC 3, WCMC 4, and Spruce trees.

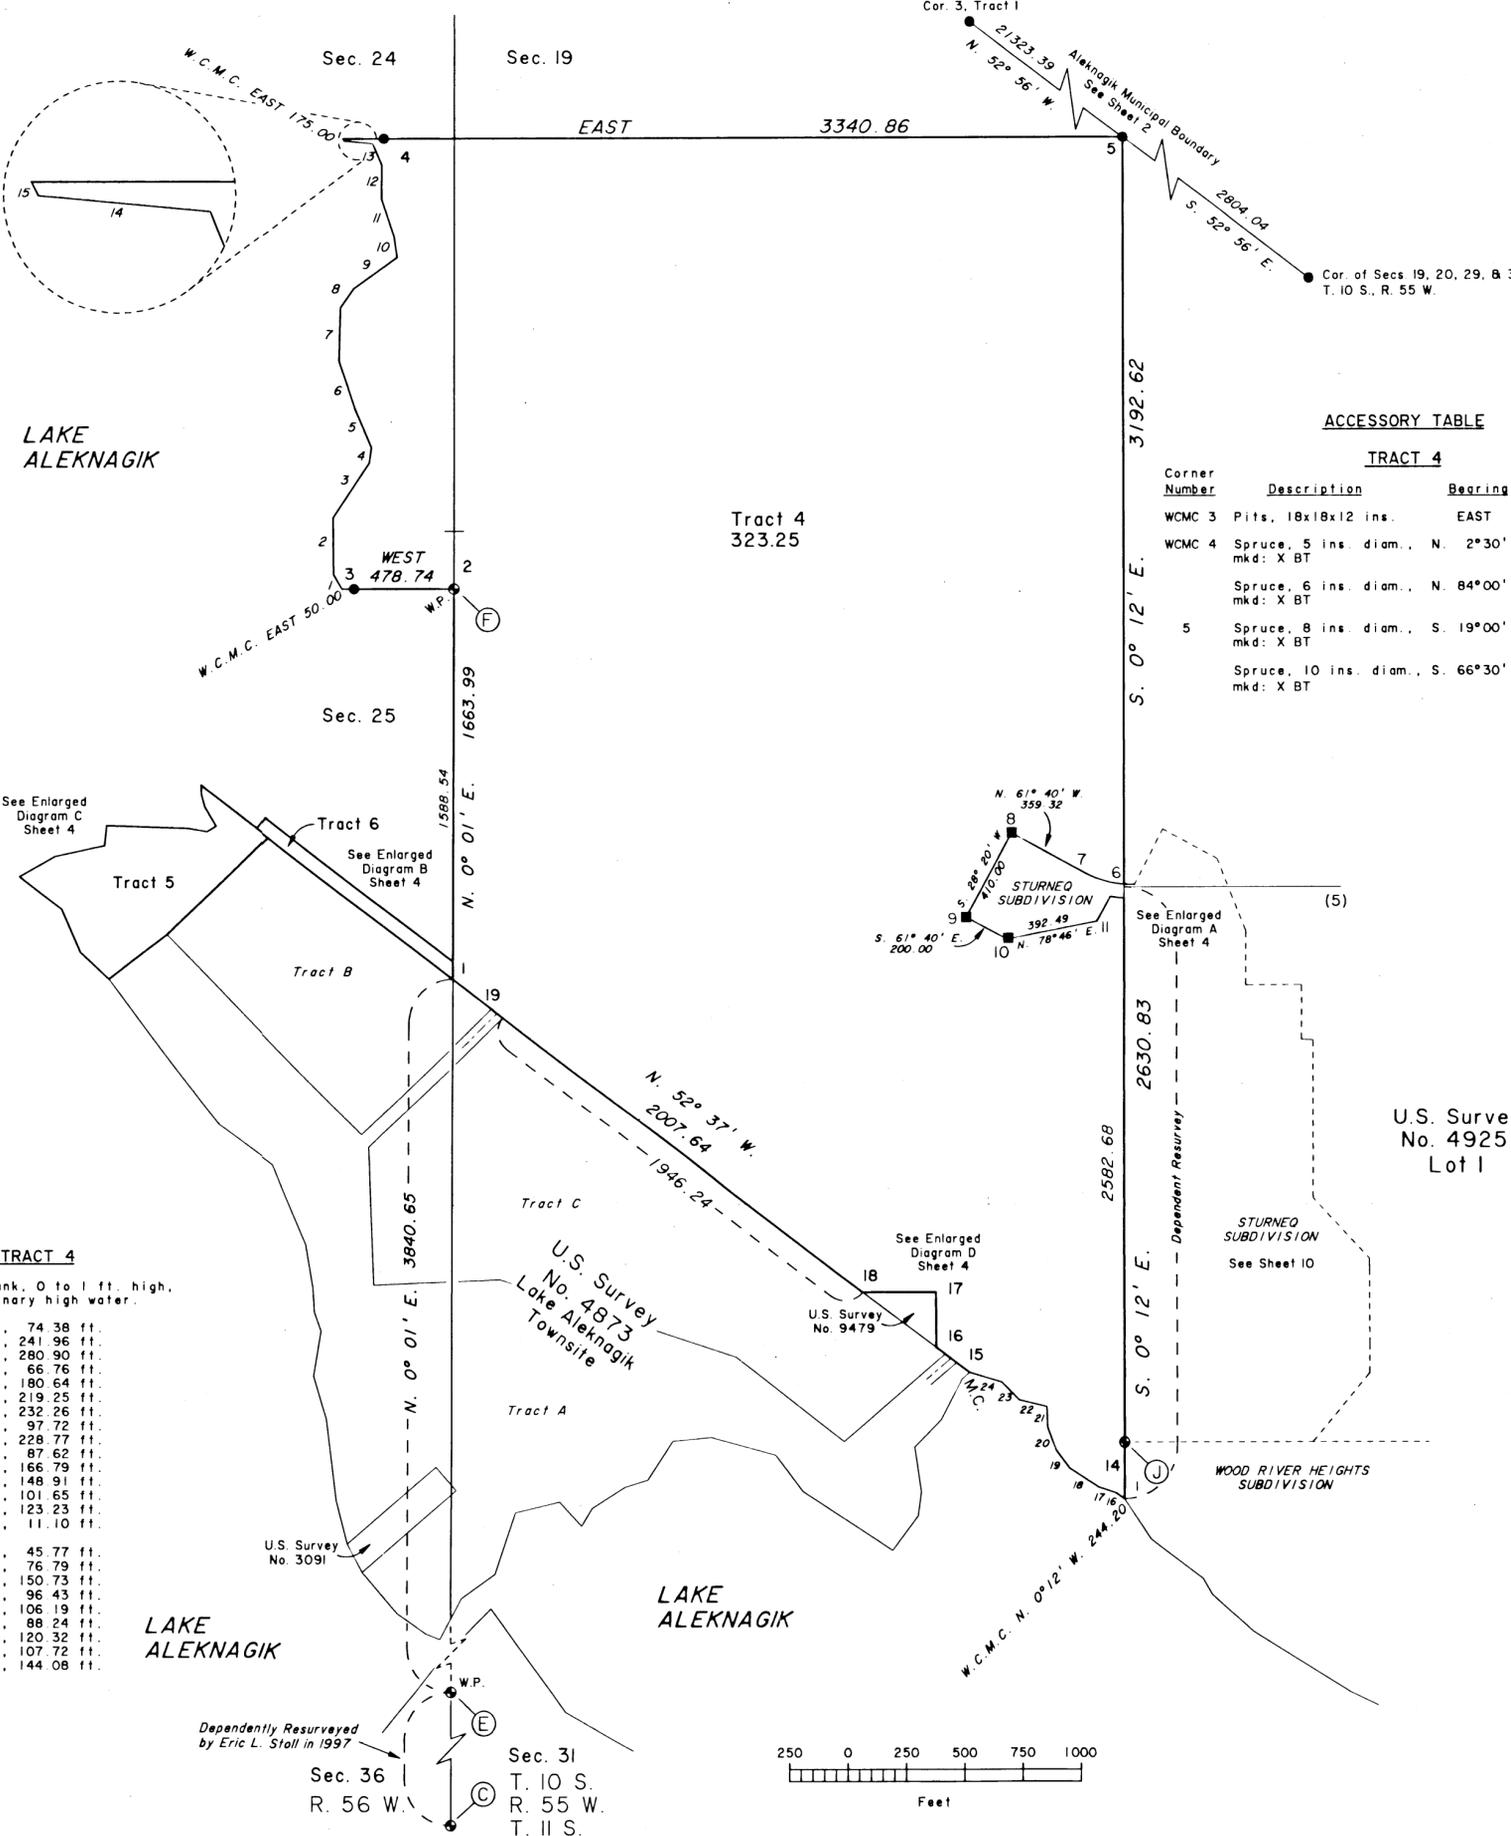

LAKE ALEKNAGIK

Tract 4 323.25

U.S. Survey No. 4925 Lot 1

LAKE ALEKNAGIK



MEANDERS TRACT 4

Along a well-defined bank, 0 to 1 ft. high, at the line of ordinary high water.

- List of 24 meander points with bearings and distances in feet. Example: 1. N. 30°45' W. 74.38 ft.

LEGEND

- Legend items: Bureau of Land Management monument, Stainless steel post, Witness cors., Found, 5/8 in. rebar.

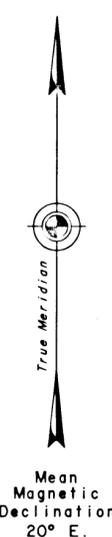



ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED  
AT  
**ALEKNAGIK, ALASKA**

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, 3, 17, AND 20  
FOR SURVEY INFORMATION



Enlarged Diagram A

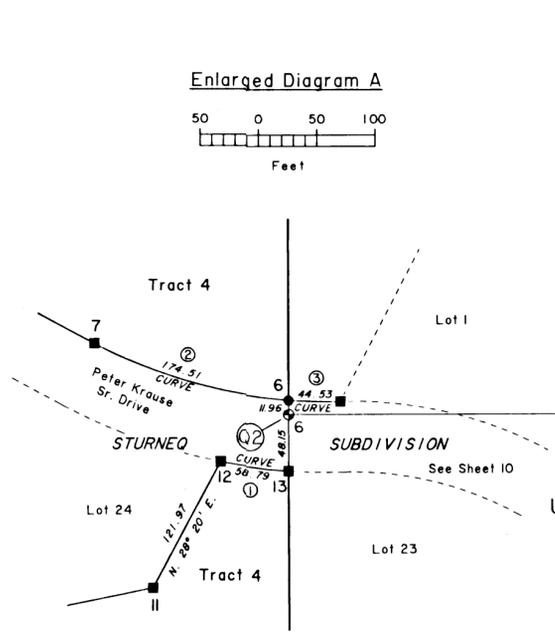

Curve Data

CURVE	RADIUS	DELTA ANGLE	CHORD	CHORD BRG
①	478.00 ft.	7° 02' 49"	58.75 ft.	S. 82° 37' 49" E.
②	418.00 ft.	23° 55' 13"	173.25 ft.	S. 73° 55' 21" E.
③	418.00 ft.	6° 06' 12"	44.51 ft.	S. 88° 55' 31" E.

Enlarged Diagram C

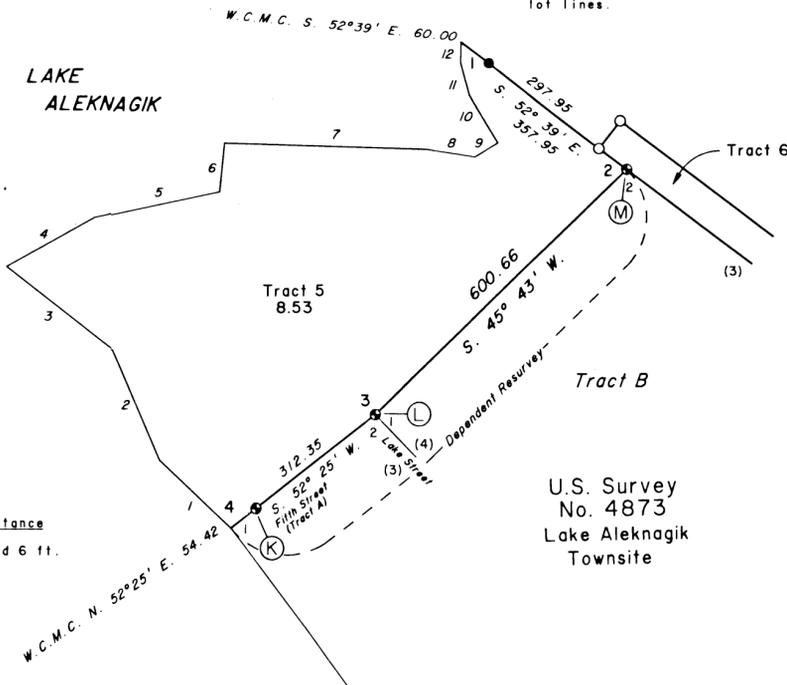

MEANDERS TRACT 5


Along a well-defined bank, 0 to 1 ft. high, of the line of ordinary high water.

1. N. 47°00' W., 167.13 ft.
2. N. 23°27' W., 202.98 ft.
3. N. 52°15' W., 230.11 ft.
4. N. 60°21' E., 172.46 ft.
5. N. 77°58' E., 219.55 ft.
6. N. 5°35' E., 84.83 ft.
7. S. 88°05' E., 346.97 ft.
8. S. 80°48' E., 83.64 ft.
9. N. 57°49' E., 46.40 ft.
10. N. 30°59' W., 95.45 ft.
11. N. 15°48' W., 55.49 ft.
12. N. 1°12' E., 35.43 ft.


ACCESSORY TABLE

TRACT 5

Corner Number	Description	Bearing	Distance
1	Pits, 18x18x12 ins.	S. 52°39' E.	3 and 6 ft.

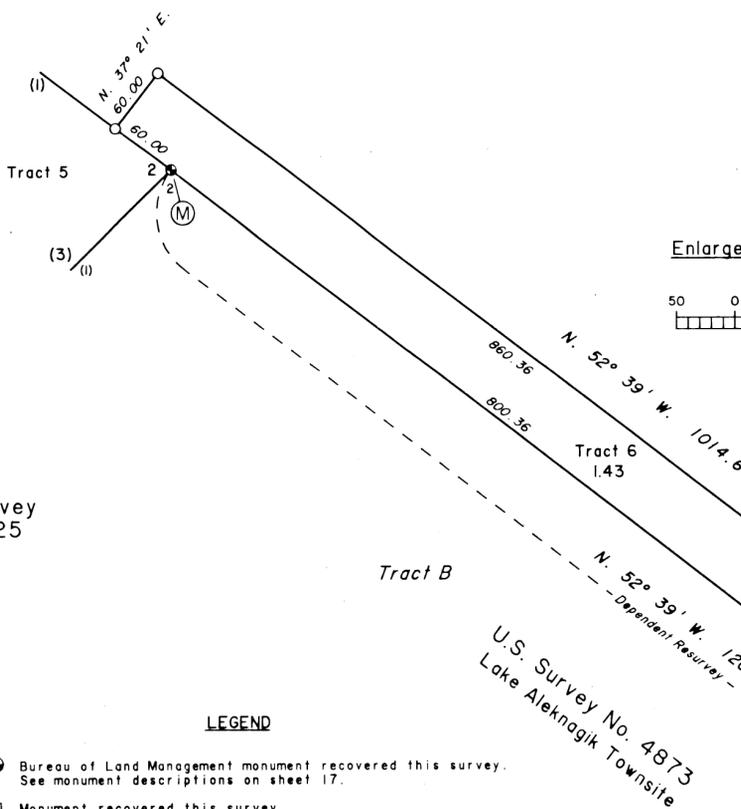

Enlarged Diagram B





LEGEND

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheet 17.
- Monument recovered this survey. See monument descriptions on sheet 17.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 25 to 28 ins. in the ground, with brass cap mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators. Witness cors. and meander cors. have additional marks WC and/or MC and an arrow pointing to the true point. Deposit a magnet in a white plastic case at the base of each stainless steel post. See table for accessories.
- Rebar, 5/8 in. diam., 30 ins. long, driven 25 to 28 ins. in the ground, with an aluminum cap, 2 1/2 ins. diam., mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators.
- Found, 5/8 in. rebar, with 2 ins. aluminum cap, firmly set, projecting 0 to 5 ins. above ground, with the marks GREGORY MAXWELL LS6934 1992, and with the appropriate cor. nos. and lot lines.

Note:  
Tract 6 is a right-of-way,  
with a 60.00 ft. perpendicular width  
from parallel sides.

Note:  
True points not monumented due  
to marshy, unstable ground conditions.

Enlarged Diagram D

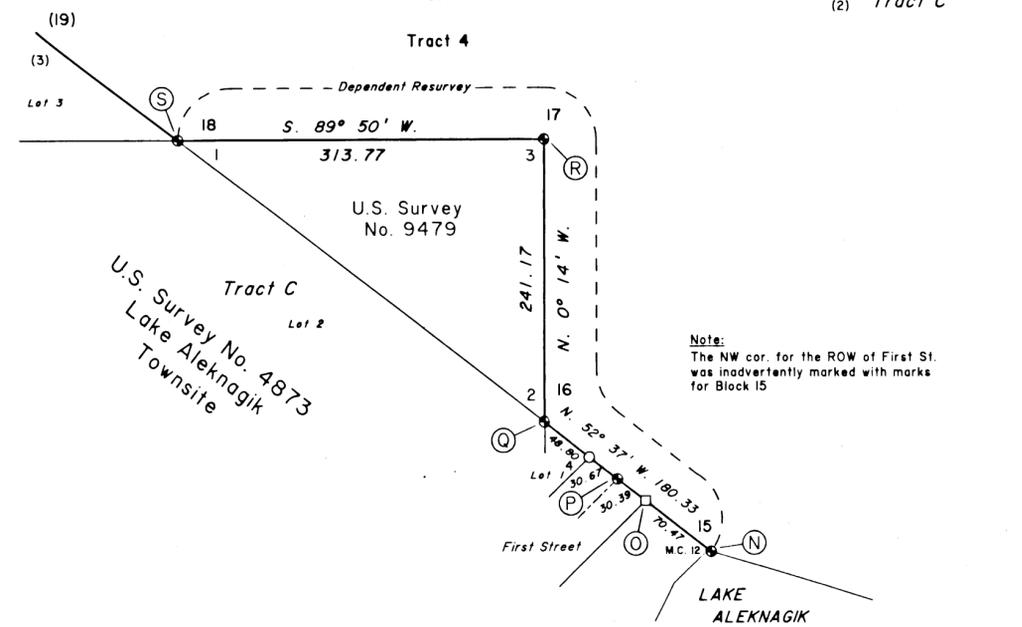

Note:  
The NW cor. for the ROW of First St.  
was inadvertently marked with marks  
for Block 15

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED  
AT  
ALEKNAGIK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, 3, 17, and 18.  
FOR SURVEY INFORMATION

ACCESSORY TABLE


TRACT 7

Corner Number	Description	Bearing	Distance
1	Spruce, 9 ins. diam., mkd: X BT	S. 85°15' E.	54.35 ft.
	Birch, 10 ins. diam., mkd: X BT	S. 63°30' W.	10.05 ft.
2	Spruce, 10 ins. diam., mkd: X BT	N. 74°00' E.	16.00 ft.
	Spruce, 13 ins. diam., mkd: X BT	S. 15°00' W.	11.25 ft.
3	Spruce, 12 ins. diam., mkd: X BT	S. 11°30' E.	150.10 ft.
	Spruce, 15 ins. diam., mkd: X BT	N. 68°30' W.	181.30 ft.
4	Spruce, 15 ins. diam., mkd: X BT	S. 87°00' W.	54.80 ft.
	Spruce, 11 ins. diam., mkd: X BT	N. 1°15' W.	84.20 ft.

ACCESSORY TABLE

TRACT 20

Corner Number	Description	Bearing	Distance
2	No Accessories Taken		
3	Birch, 6 ins. diam., mkd: X BT	S. 23°00' W.	38.00 ft.
	Spruce, 11 ins. diam., mkd: X BT	N. 73°30' W.	28.25 ft.
4	Spruce, 14 ins. diam., mkd: X BT	S. 10°45' E.	24.70 ft.
	Spruce, 15 ins. diam., mkd: X BT	N. 43°30' W.	31.70 ft.
5	Spruce, 10 ins. diam., mkd: X BT	S. 89°00' W.	20.42 ft.
	Spruce, 9 ins. diam., mkd: X BT	N. 48°45' W.	41.00 ft.
6	Spruce, 11 ins. diam., mkd: X BT	S. 58°00' W.	14.60 ft.
	Spruce, 10 ins. diam., mkd: X BT	N. 41°00' W.	25.20 ft.
7	Spruce, 8 ins. diam., mkd: X BT	S. 60°45' W.	28.45 ft.
	Spruce, 9 ins. diam., mkd: X BT	N. 63°00' W.	62.90 ft.
8	Spruce, 10 ins. diam., mkd: X BT	S. 80°45' W.	27.50 ft.
	Spruce, 13 ins. diam., mkd: X BT	N. 40°30' W.	56.50 ft.
9	Spruce, 6 ins. diam., mkd: X BT	S. 1°45' W.	13.70 ft.
	Spruce, 8 ins. diam., mkd: X BT	N. 77°30' W.	38.45 ft.
10	Spruce, 8 ins. diam., mkd: X BT	S. 12°30' W.	12.10 ft.
	Spruce, 7 ins. diam., mkd: X BT	N. 51°00' W.	8.25 ft.
MC 11	No Accessories Taken		

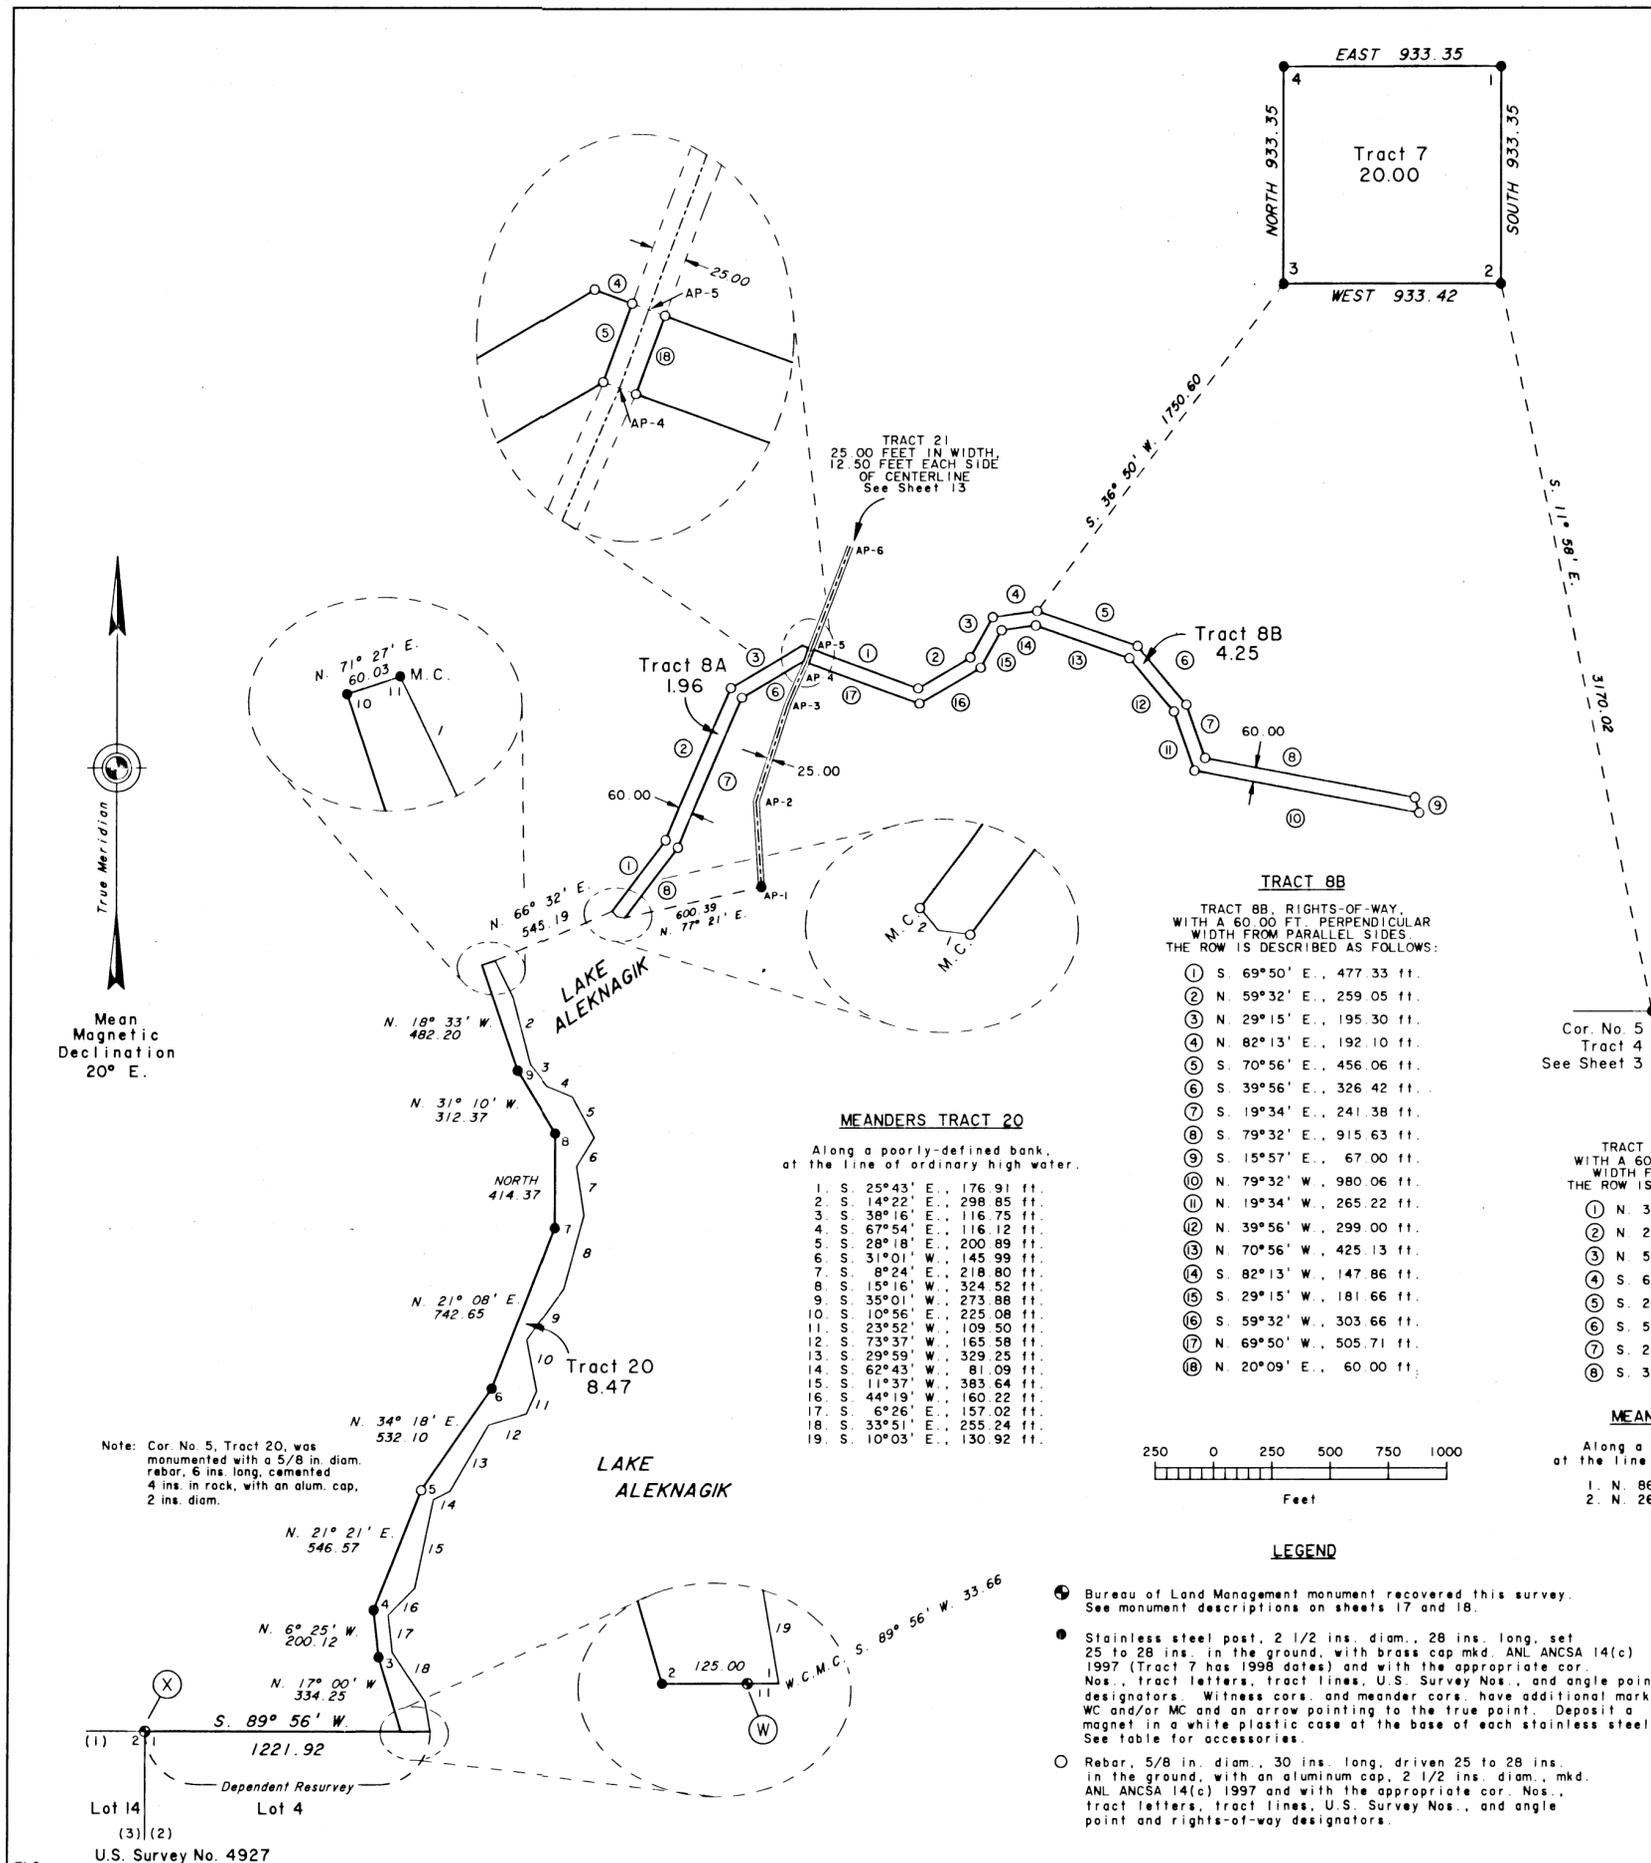

**TRACT 8B**  
TRACT 8B, RIGHTS-OF-WAY,  
WITH A 60.00 FT. PERPENDICULAR  
WIDTH FROM PARALLEL SIDES.  
THE ROW IS DESCRIBED AS FOLLOWS:

- ① S. 69°50' E., 477.33 ft.
- ② N. 59°32' E., 259.05 ft.
- ③ N. 29°15' E., 195.30 ft.
- ④ N. 82°13' E., 192.10 ft.
- ⑤ S. 70°56' E., 456.06 ft.
- ⑥ S. 39°56' E., 326.42 ft.
- ⑦ S. 19°34' E., 241.38 ft.
- ⑧ S. 79°32' E., 915.63 ft.
- ⑨ S. 15°57' E., 67.00 ft.
- ⑩ N. 79°32' W., 980.06 ft.
- ⑪ N. 19°34' W., 265.22 ft.
- ⑫ N. 39°56' W., 299.00 ft.
- ⑬ N. 70°56' W., 425.13 ft.
- ⑭ S. 82°13' W., 147.86 ft.
- ⑮ S. 29°15' W., 181.66 ft.
- ⑯ S. 59°32' W., 303.66 ft.
- ⑰ N. 69°50' W., 505.71 ft.
- ⑱ N. 20°09' E., 60.00 ft.

**TRACT 8A**  
TRACT 8A, RIGHTS-OF-WAY,  
WITH A 60.00 FT. PERPENDICULAR  
WIDTH FROM PARALLEL SIDES.  
THE ROW IS DESCRIBED AS FOLLOWS:


- ① N. 37°15' E., 377.63 ft.
- ② N. 23°21' E., 699.08 ft.
- ③ N. 59°12' E., 355.22 ft.
- ④ S. 69°50' E., 28.58 ft.
- ⑤ S. 20°09' W., 60.00 ft.
- ⑥ S. 59°12' W., 307.20 ft.
- ⑦ S. 23°21' W., 687.00 ft.
- ⑧ S. 37°15' W., 374.82 ft.

**MEANDERS TRACT 20**  
Along a poorly-defined bank,  
at the line of ordinary high water.

- 1. S. 25°43' E., 176.91 ft.
- 2. S. 14°22' E., 298.85 ft.
- 3. S. 38°16' E., 116.75 ft.
- 4. S. 67°54' E., 116.12 ft.
- 5. S. 28°18' E., 200.89 ft.
- 6. S. 31°01' W., 145.99 ft.
- 7. S. 8°24' E., 218.80 ft.
- 8. S. 15°16' W., 324.52 ft.
- 9. S. 35°01' W., 273.88 ft.
- 10. S. 10°56' E., 225.08 ft.
- 11. S. 23°52' W., 109.50 ft.
- 12. S. 73°37' W., 165.58 ft.
- 13. S. 29°59' W., 329.25 ft.
- 14. S. 62°43' W., 81.09 ft.
- 15. S. 11°37' W., 383.64 ft.
- 16. S. 44°19' W., 160.22 ft.
- 17. S. 6°26' E., 157.02 ft.
- 18. S. 33°51' E., 255.24 ft.
- 19. S. 10°03' E., 130.92 ft.

**MEANDERS TRACT 8A**  
Along a poorly-defined bank,  
at the line of ordinary high water.

- 1. N. 86°54' W., 41.19 ft.
- 2. N. 26°07' W., 29.00 ft.



**LEGEND**

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheets 17 and 18.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 25 to 28 ins. in the ground, with brass cap mkd. ANL ANCSA 14(c) 1997 (Tract 7 has 1998 dates) and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators. Witness cors. and meander cors. have additional marks WC and/or MC and an arrow pointing to the true point. Deposit a magnet in a white plastic case at the base of each stainless steel post. See table for accessories.
- Rebar, 5/8 in. diam., 30 ins. long, driven 25 to 28 ins. in the ground, with an aluminum cap, 2 1/2 ins. diam., mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point and rights-of-way designators.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28 P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED AT ALEKNAGIK, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, 3, AND 18 FOR SURVEY INFORMATION



MEANDERS TRACT 3

Along a well-defined bank, 0 to 1 ft. high, at the line of ordinary high water.

- 1. N 47°51' W, 77.04 ft.
2. N 42°41' W, 218.95 ft.
3. N 18°13' W, 88.29 ft.
4. N 83°38' W, 45.05 ft.
5. N 21°01' W, 30.25 ft.
6. N 24°33' E, 40.00 ft.
7. N 22°01' W, 93.40 ft.
8. N 29°55' W, 181.35 ft.
9. N 89°33' W, 175.35 ft.
10. N 78°11' W, 180.04 ft.
11. N 89°57' W, 78.76 ft.
12. S 72°26' W, 106.82 ft.

At 106.57 ft., along this course, a creek, 14 ft. wide, course N. 4° E.

Latitude 59°17'37.13" N Longitude 158°46'35.97" W (NAD 27) The W.C.M.C. to cor. No. 5, U.S. Survey No. 7542.

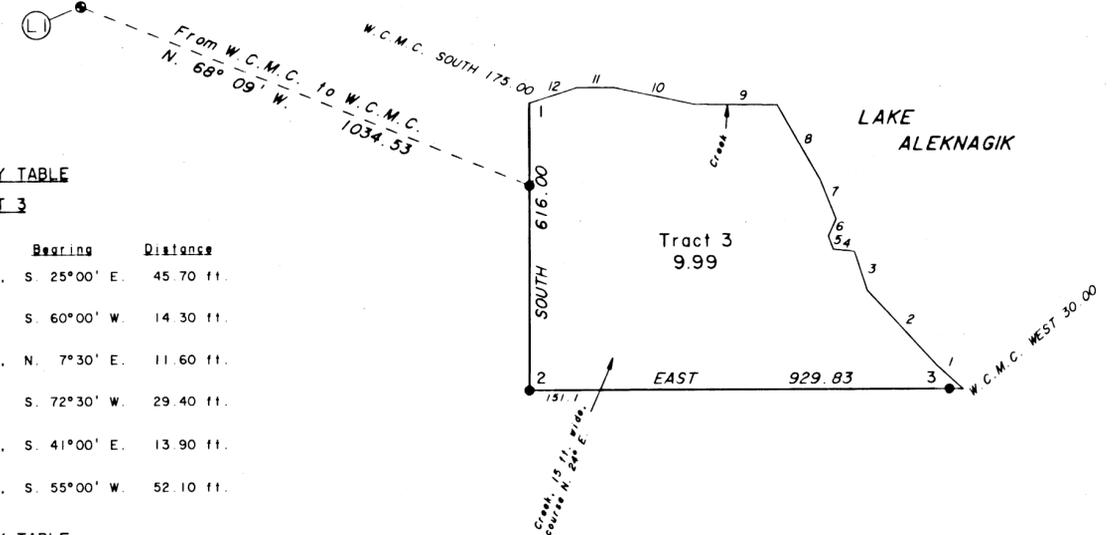

ACCESSORY TABLE

TRACT 3

Table with 4 columns: Corner Number, Description, Bearing, Distance. Lists survey points for Tract 3 including WCMC 1, 2, and 3 with descriptions of trees and bearings.

ACCESSORY TABLE


TRACT 9

Table with 4 columns: Corner Number, Description, Bearing, Distance. Lists survey points for Tract 9 including WCMC 1 with descriptions of trees and bearings.

MEANDERS TRACT 9

Downstream along the left bank of the Wood river, with portions of the record meanders, as described in the field note record of Township 10 South, Range 55 West, along a grass and rock bank, 1 to 3 ft. high, at the line of mean high tide.

- 1. S 46°14' E., 76.64 ft.
2. S 47°12' E., 125.06 ft.
3. S 42°03' E., 113.16 ft.
4. S 39°54' E., 152.77 ft.
5. S 49°32' E., 106.22 ft.
6. S 26°30' E., 33.65 ft.
7. S 11°00' E., 97.49 ft.
8. S 1°29' E., 67.59 ft.
9. S 11°49' W., 51.57 ft.
10. S 2°54' E., 107.89 ft.
11. S 5°34' W., 173.60 ft.
12. S 25°58' W., 128.25 ft.
13. S 11°17' W., 364.63 ft.
14. S 32°59' W., 207.22 ft.

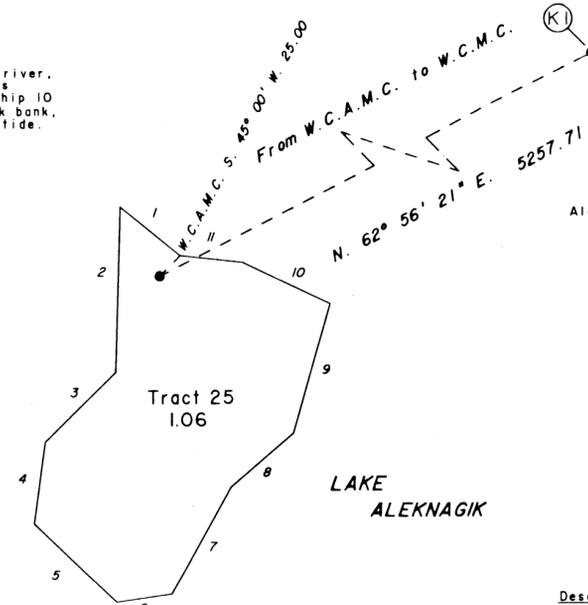


Latitude 59°26'00.82" N Longitude 158°55'12.86" W (NAD 27) The W.C.M.C. to Sec. 35, T. 8 S., R. 57 W., Seward Meridian, Alaska.

MEANDERS TRACT 25

Along a well-defined bank, 0 to 1 ft. high, at the line of ordinary high water.

- 1. N 50°52' W., 66.20 ft.
2. S 1°42' W., 141.77 ft.
3. S 45°52' W., 84.31 ft.
4. S 7°43' W., 69.49 ft.
5. S 46°38' E., 97.63 ft.
6. N 81°34' E., 47.56 ft.
7. N 29°14' E., 104.02 ft.
8. N 49°46' E., 69.84 ft.
9. N 16°02' E., 114.57 ft.
10. N 64°33' W., 82.56 ft.
11. N 83°33' W., 54.14 ft.



ACCESSORY TABLE

TRACT 25

Table with 3 columns: Description, Bearing, Distance. Lists structures for Tract 25: NW cor. bunkhouse, 10'x12' longside bears; NE cor. cabin, 12'x14' longside bears.


T. 10 S. R. 55 W.

(2)

Sec. 29

U.S. Survey No. 9291




Sec. 28

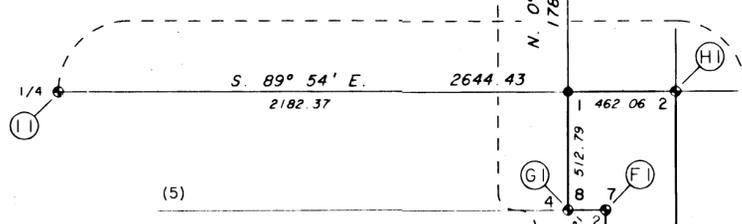


Sec. 32

U.S. Survey No. 4925 Lot 2

Sec. 33

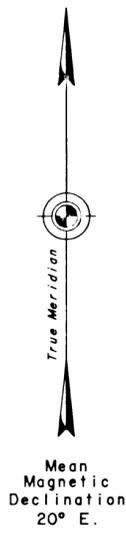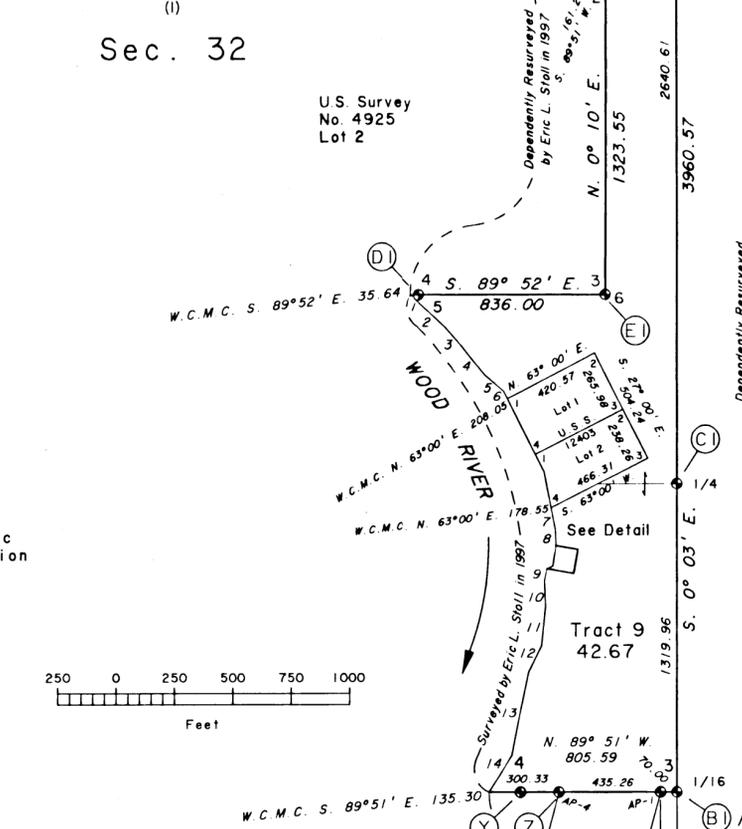


Detail

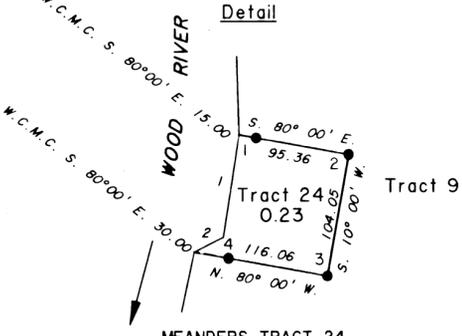

MEANDERS TRACT 24

Downstream along the left bank of the Wood river, with portions of the record meanders, as described in the field note record of Township 10 South, Range 55 West, along a grass and rock bank, 1 to 3 ft. high, at the line of mean high tide.

- 1. S 8°47' W., 87.38 ft.
2. S 63°29' W., 28.06 ft.



LEGEND

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheet 18.
● Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 25 to 28 ins. in the ground, with brass cap mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators. Witness cors. and meander cors. have additional marks WC and/or MC and an arrow pointing to the true point. Deposit a magnet in a white plastic case at the base of each stainless steel post. See table for accessories.

99-2 Bristol Bay Recording District

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED  
AT  
ALEKNAGIK, ALASKA




REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, 3, 18, AND 20  
FOR SURVEY INFORMATION

ACCESSORY TABLE

TRACT II			
Corner Number	Description	Bearing	Distance
2	Spruce, 10 ins. diam., mkd: X BT	N. 36°45' E.	15.00 ft.
	Spruce, 9 ins. diam., mkd: X BT	S. 16°45' E.	34.40 ft.
3	Spruce, 10 ins. diam., mkd: X BT	S. 69°00' W.	18.40 ft.
	Spruce, 11 ins. diam., mkd: X BT	N. 4°15' W.	21.60 ft.
7	Spruce, 9 ins. diam., mkd: X BT	N. 19°00' E.	42.70 ft.
	Spruce, 9 ins. diam., mkd: X BT	N. 34°45' W.	33.70 ft.
WCMC 8	Pits, 18 x 18 x 12 ins.	South	3 and 6 ft.

ACCESSORY TABLE

TRACT IO			
Corner Number	Description	Bearing	Distance
WCMC 1	Spruce, 8 ins. diam., mkd: X BT	S. 3°30' W.	26.40 ft.
	Spruce, 10 ins. diam., mkd: X BT	N. 83°15' W.	16.30 ft.
2	Spruce, 7 ins. diam., mkd: X BT	N. 30°15' E.	72.20 ft.
	Spruce, 8 ins. diam., mkd: X BT	S. 67°00' W.	32.80 ft.
3	Spruce, 10 ins. diam., mkd: X BT	N. 45°45' E.	12.60 ft.
	Spruce, 8 ins. diam., mkd: X BT	S. 44°20' E.	15.30 ft.
WCMC 4	Spruce, 6 ins. diam., mkd: X BT	S. 81°00' E.	31.80 ft.
	Spruce, 10 ins. diam., mkd: X BT	S. 16°00' W.	22.50 ft.

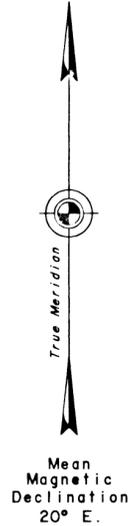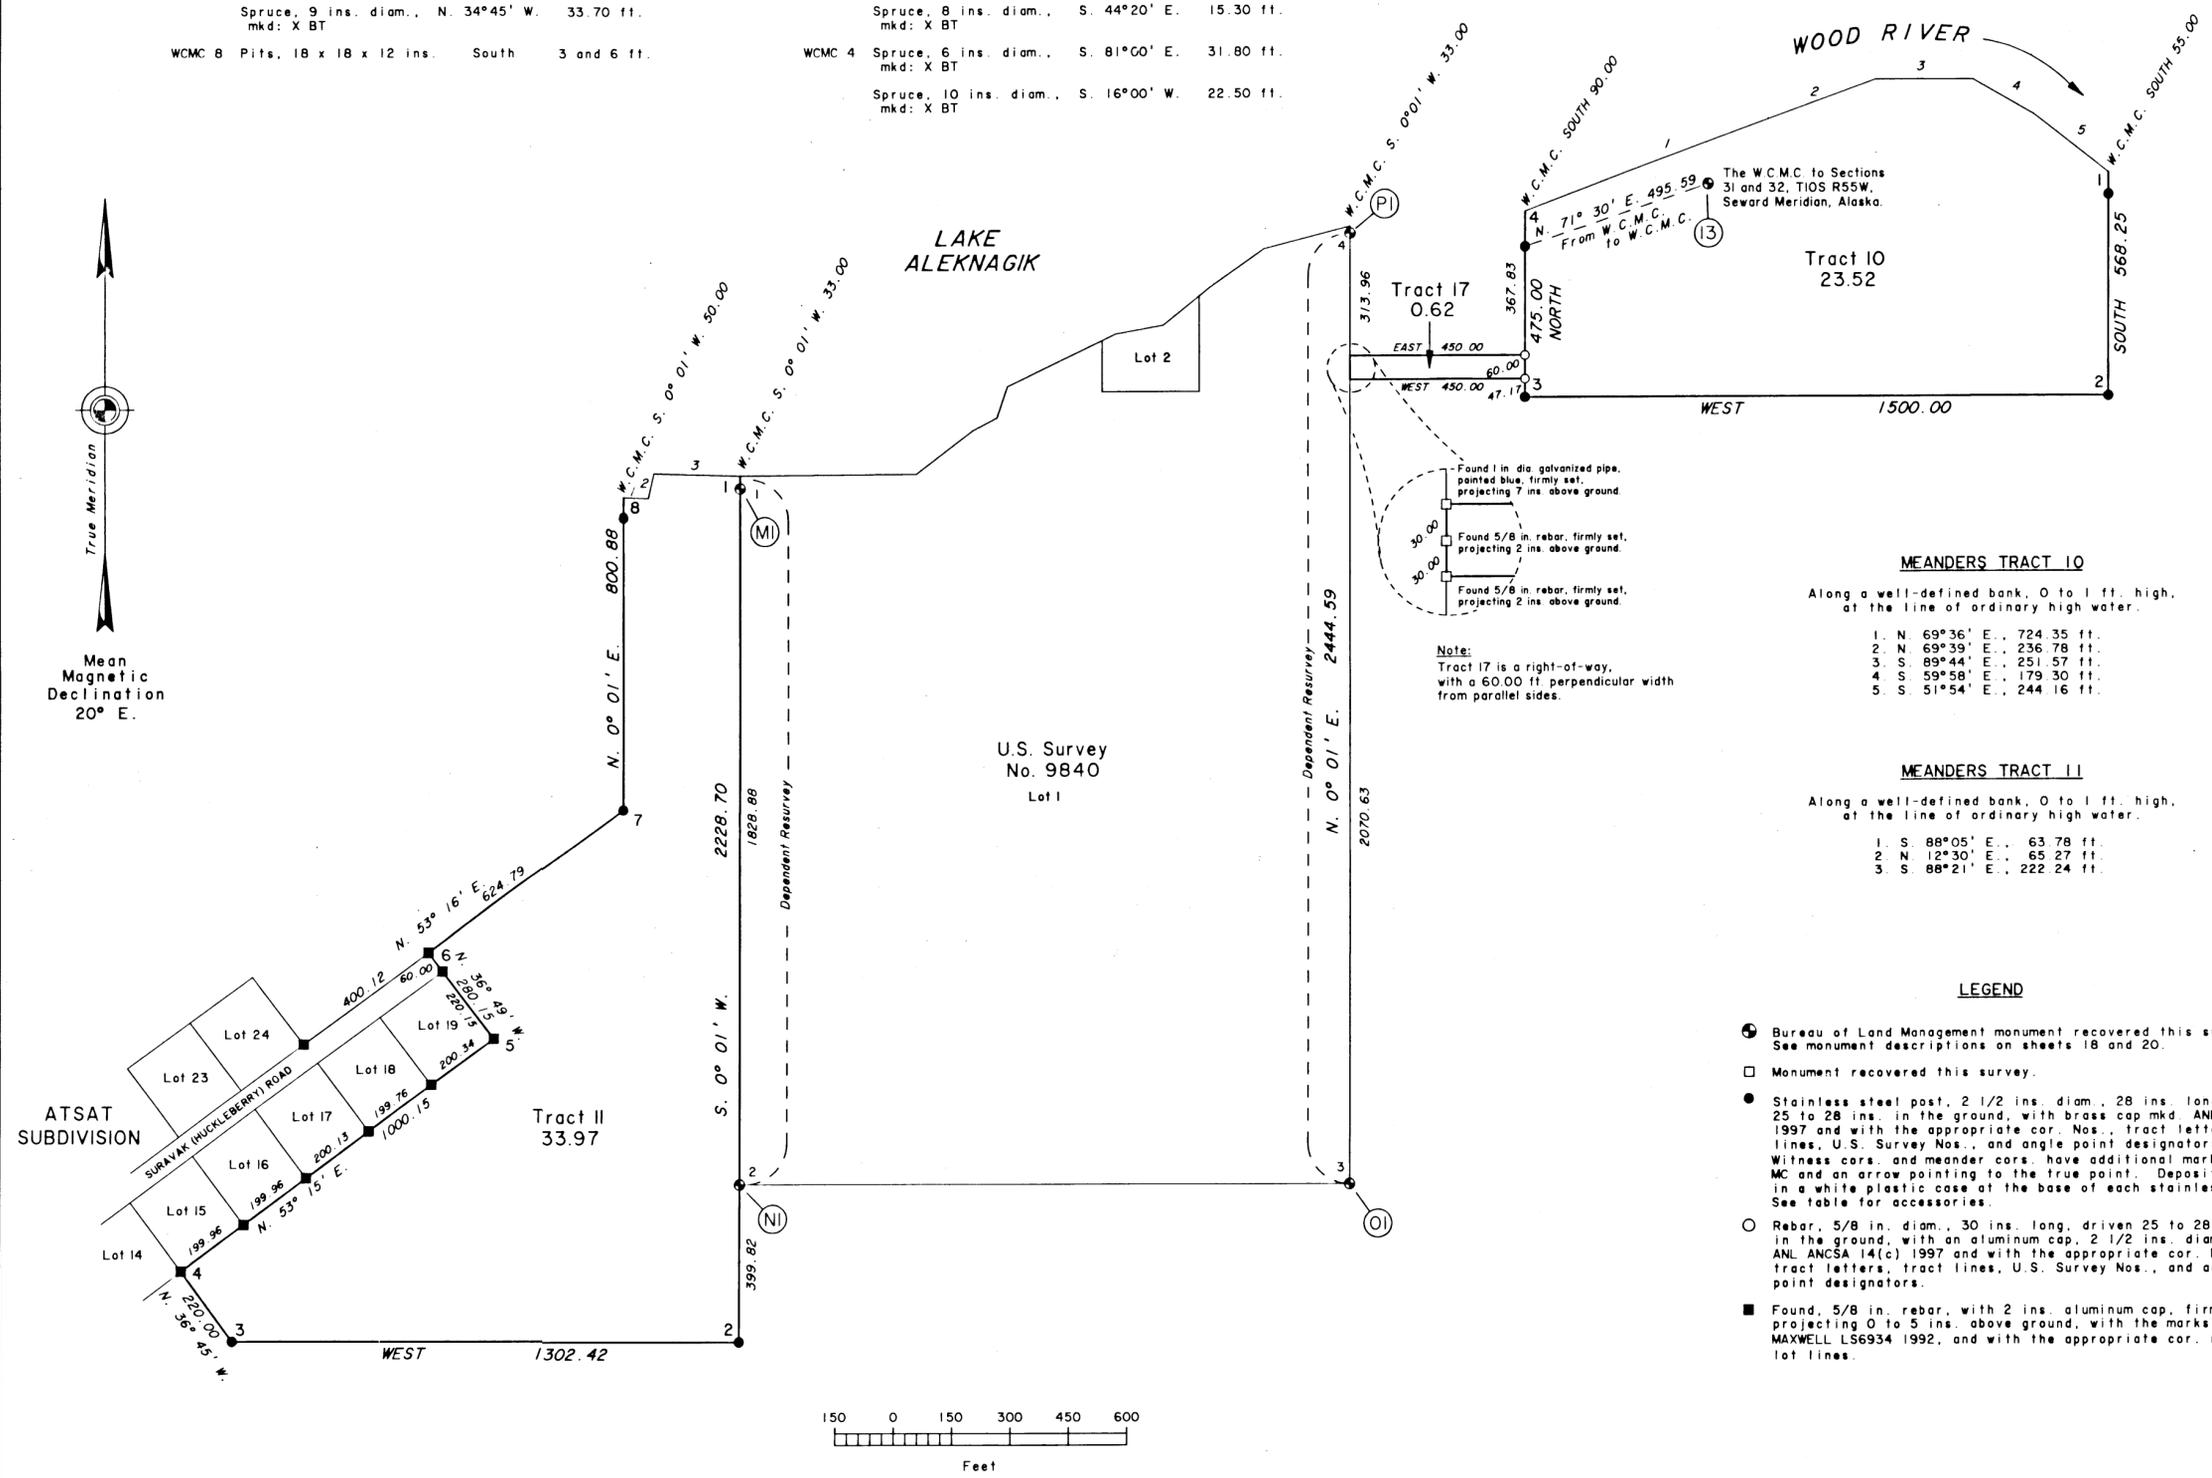

Note:  
Tract I7 is a right-of-way, with a 60.00 ft. perpendicular width from parallel sides.

MEANDERS TRACT IO

- Along a well-defined bank, 0 to 1 ft. high, at the line of ordinary high water.
1. N. 69°36' E., 724.35 ft.
  2. N. 69°39' E., 236.78 ft.
  3. S. 89°44' E., 251.57 ft.
  4. S. 59°58' E., 179.30 ft.
  5. S. 51°54' E., 244.16 ft.

MEANDERS TRACT II

- Along a well-defined bank, 0 to 1 ft. high, at the line of ordinary high water.
1. S. 88°05' E., 63.78 ft.
  2. N. 12°30' E., 65.27 ft.
  3. S. 88°21' E., 222.24 ft.

LEGEND

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheets 18 and 20.
- Monument recovered this survey.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 25 to 28 ins. in the ground, with brass cap mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators. Witness cors. and meander cors. have additional marks WC and/or MC and an arrow pointing to the true point. Deposit a magnet in a white plastic case at the base of each stainless steel post. See table for accessories.
- Rebar, 5/8 in. diam., 30 ins. long, driven 25 to 28 ins. in the ground, with an aluminum cap, 2 1/2 ins. diam., mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators.
- Found, 5/8 in. rebar, with 2 ins. aluminum cap, firmly set, projecting 0 to 5 ins. above ground, with the marks GREGORY MAXWELL LS6934 1992, and with the appropriate cor. nos. and lot lines.

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)



ALEKNAGIK NATIVES, LIMITED  
AT  
ALEKNAGIK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, 3, 18, AND 19  
FOR SURVEY INFORMATION

Note:  
Tract 16 is a right-of-way,  
with a 60.00 ft perpendicular width  
from parallel sides.

LEGEND

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheets 18 and 19.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 25 to 28 ins. in the ground, with brass cap mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators. Witness cors. and meander cors. have additional marks WC and/or MC and an arrow pointing to the true point. Deposit a magnet in a white plastic case at the base of each stainless steel post. See table for accessories.
- Rebar, 5/8 in. diam., 30 ins. long, driven 25 to 28 ins. in the ground, with an aluminum cap, 2 1/2 ins. diam., mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators.

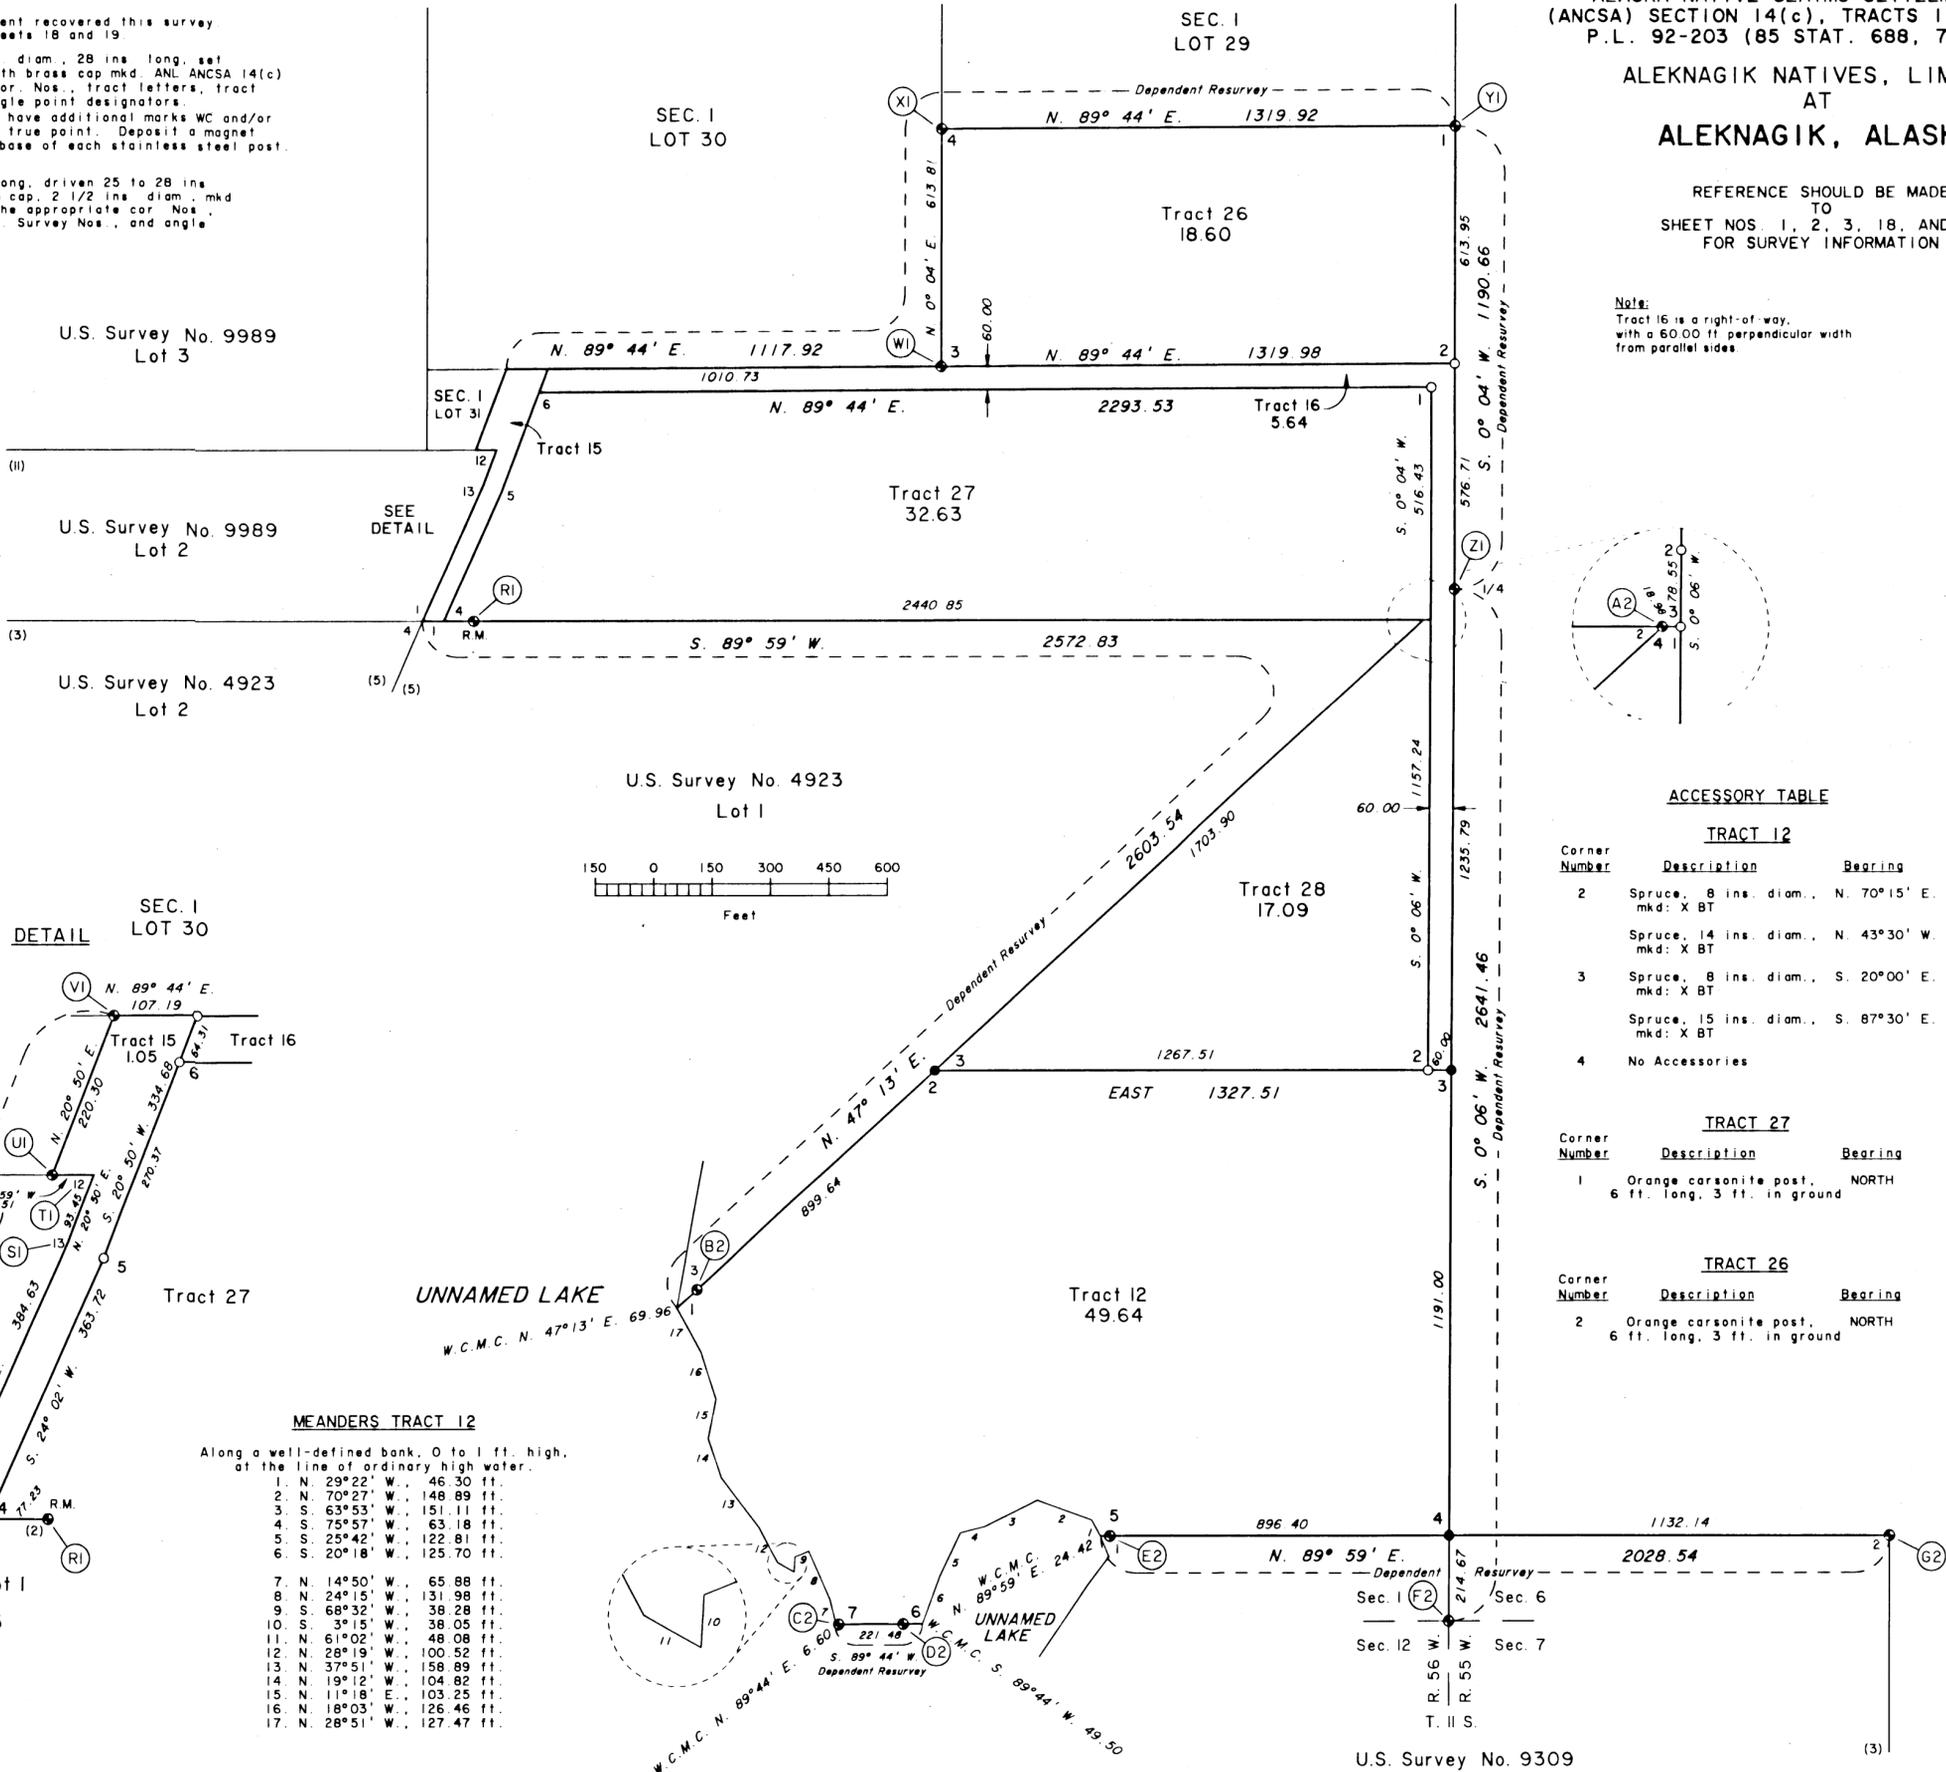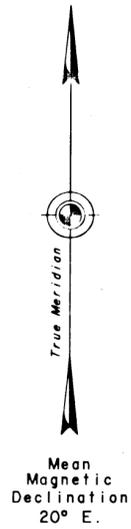

ACCESSORY TABLE

TRACT 12			
Corner Number	Description	Bearing	Distance
2	Spruce, 8 ins. diam., mkd: X BT	N. 70°15' E.	54.00 ft.
	Spruce, 14 ins. diam., mkd: X BT	N. 43°30' W.	16.20 ft.
3	Spruce, 8 ins. diam., mkd: X BT	S. 20°00' E.	42.30 ft.
	Spruce, 15 ins. diam., mkd: X BT	S. 87°30' E.	45.00 ft.
4	No Accessories		

TRACT 27			
Corner Number	Description	Bearing	Distance
1	Orange carsonite post, 6 ft. long, 3 ft. in ground	NORTH	1.00 ft.

TRACT 26			
Corner Number	Description	Bearing	Distance
2	Orange carsonite post, 6 ft. long, 3 ft. in ground	NORTH	1.00 ft.

MEANDERS TRACT 12

Along a well-defined bank, 0 to 1 ft. high, at the line of ordinary high water.

1. N. 29°22' W., 46.30 ft.
2. N. 70°27' W., 148.89 ft.
3. S. 63°53' W., 151.11 ft.
4. S. 75°57' W., 63.18 ft.
5. S. 25°42' W., 122.81 ft.
6. S. 20°18' W., 125.70 ft.
7. N. 14°50' W., 65.88 ft.
8. N. 24°15' W., 131.98 ft.
9. S. 68°32' W., 38.28 ft.
10. S. 3°15' W., 38.05 ft.
11. N. 61°02' W., 48.08 ft.
12. N. 28°19' W., 100.52 ft.
13. N. 37°51' W., 158.89 ft.
14. N. 19°12' W., 104.82 ft.
15. N. 11°18' E., 103.25 ft.
16. N. 18°03' W., 126.46 ft.
17. N. 28°51' W., 127.47 ft.

49-2 Bristol Bay Recording District

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)



ALEKNAGIK NATIVES, LIMITED  
AT  
ALEKNAGIK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, 3, AND 19  
FOR SURVEY INFORMATION

T. II S. R. 56 W.

LEGEND

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheet 19.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 25 to 28 ins. in the ground, with brass cap mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators. Witness cors. and meander cors. have additional marks WC and/or MC and an arrow pointing to the true point. Deposit a magnet in a white plastic case at the base of each stainless steel post. See table for accessories.

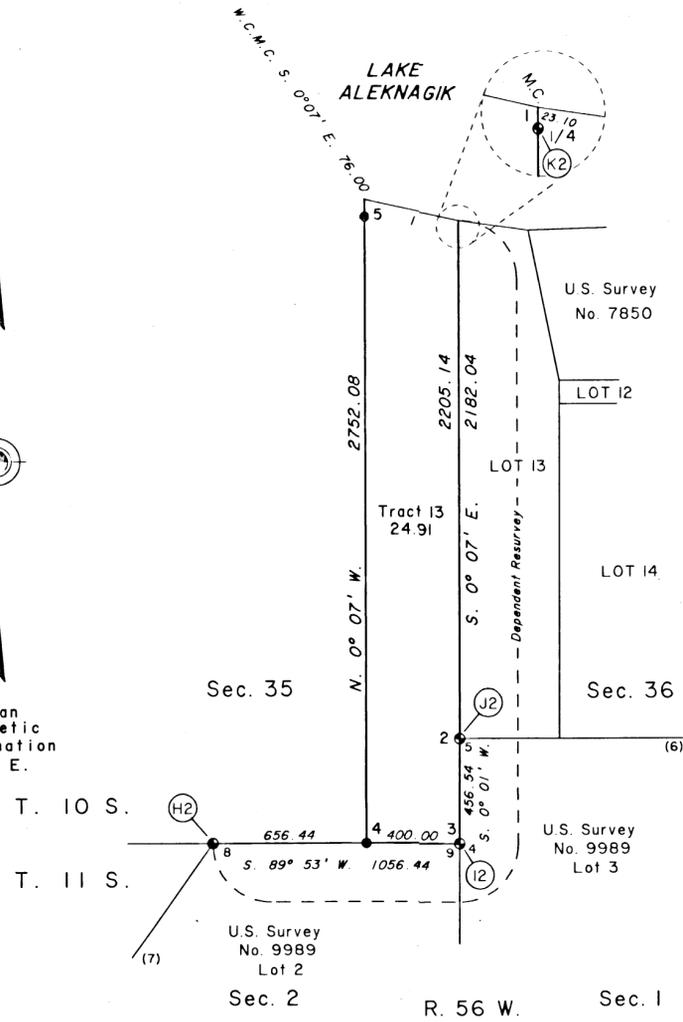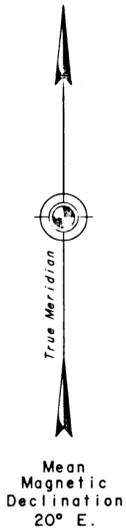

MEANDER TRACT 13


Along a well-defined bank, 0 to 1 ft. high, at the line of ordinary high water.

1. S. 77°25' E., 410.99 ft.

ACCESSORY TABLE


TRACT 13

Corner Number	Description	Bearing	Distance
4	Spruce, 11 ins. diam., mkd: X BT	S. 32°00' W.	40.70 ft.
	Spruce, 10 ins. diam., mkd: X BT	N. 45°30' W.	13.60 ft.
5	Spruce, 9 ins. diam., mkd: X BT	N. 41°00' E.	27.40 ft.
	Spruce, 14 ins. diam., mkd: X BT	S. 40°00' E.	14.10 ft.

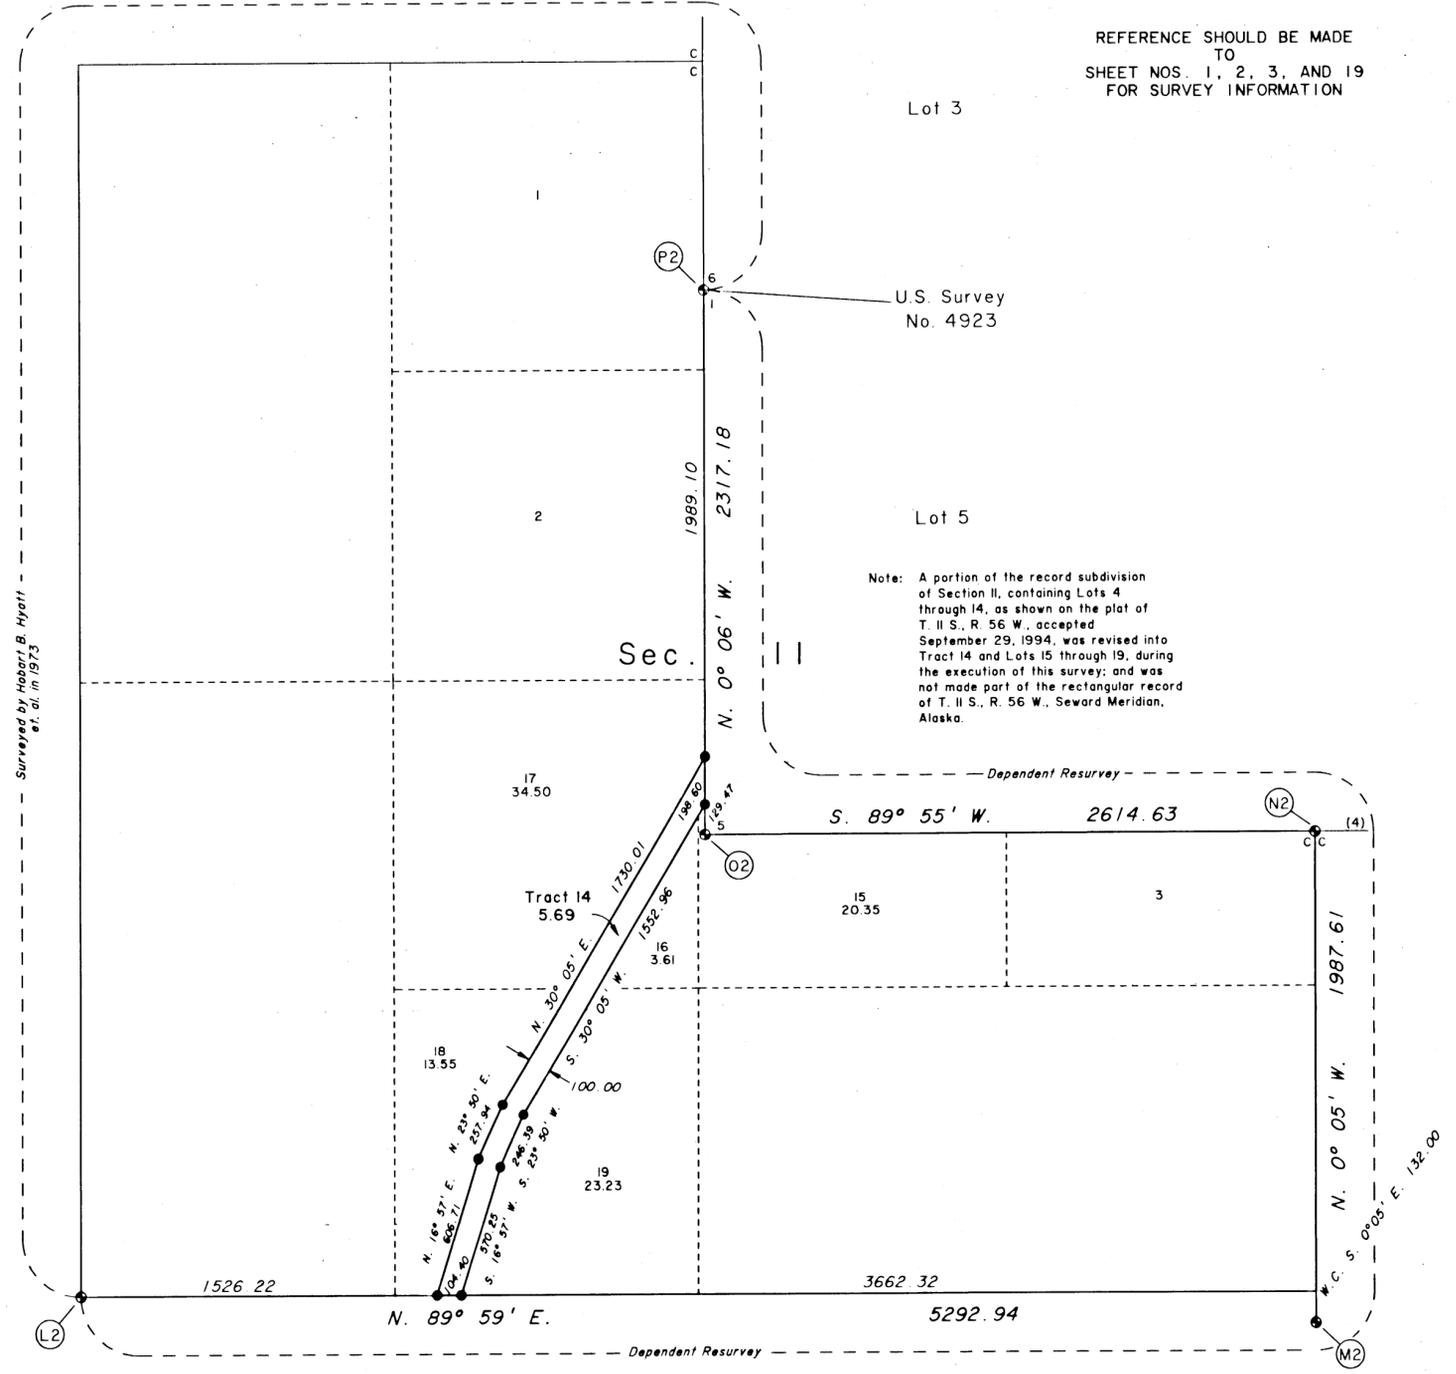

Note: A portion of the record subdivision of Section II, containing Lots 4 through 14, as shown on the plat of T. II S., R. 56 W., accepted September 29, 1994, was revised into Tract 14 and Lots 15 through 19, during the execution of this survey; and was not made part of the rectangular record of T. II S., R. 56 W., Seward Meridian, Alaska.

Note: Tract 14 is a right-of-way, with a 100.00 ft. perpendicular width from parallel sides.



ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED  
AT  
ALEKNAGIK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, 3, 17, AND 20  
FOR SURVEY INFORMATION


LEGEND

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheets 17 and 20.
- Subdivision monument recovered this survey.
- Rebar, 5/8 in. diam., 30 ins. long, driven 25 to 28 ins. in the ground, with an aluminum cap, 2 1/2 ins. diam., mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators.
- Found, 5/8 in. rebar, with 2 ins. aluminum cap, firmly set, projecting 0 to 5 ins. above ground, with the marks GREGORY MAXWELL L56934 1992, and with the appropriate cor. nos. and lot lines.

TRACT 18C

TRACT 18C, RIGHTS-OF-WAY,  
60.00 FEET IN WIDTH  
THE ROW IS DESCRIBED AS FOLLOWS:

- ① N 80°16' E., 118.70 ft.
- ② N 36°28' E., 189.67 ft.
- ③ N 66°59' E., 127.84 ft.
- ④ S 58°41' E., 204.17 ft.
- ⑤ S 38°03' E., 344.24 ft.
- ⑥ S 56°26' E., 525.70 ft.
- ⑦ S 28°54' E., 90.09 ft.
- ⑧ N 89°59' W., 68.54 ft.
- ⑨ N 28°54' W., 42.26 ft.
- ⑩ N 56°26' W., 520.70 ft.
- ⑪ N 38°03' W., 343.00 ft.
- ⑫ N 58°41' W., 162.50 ft.
- ⑬ S 66°59' W., 80.67 ft.
- ⑭ S 36°28' W., 197.43 ft.
- ⑮ S 80°16' W., 153.17 ft.
- ⑯ N 0°04' E., 60.89 ft.

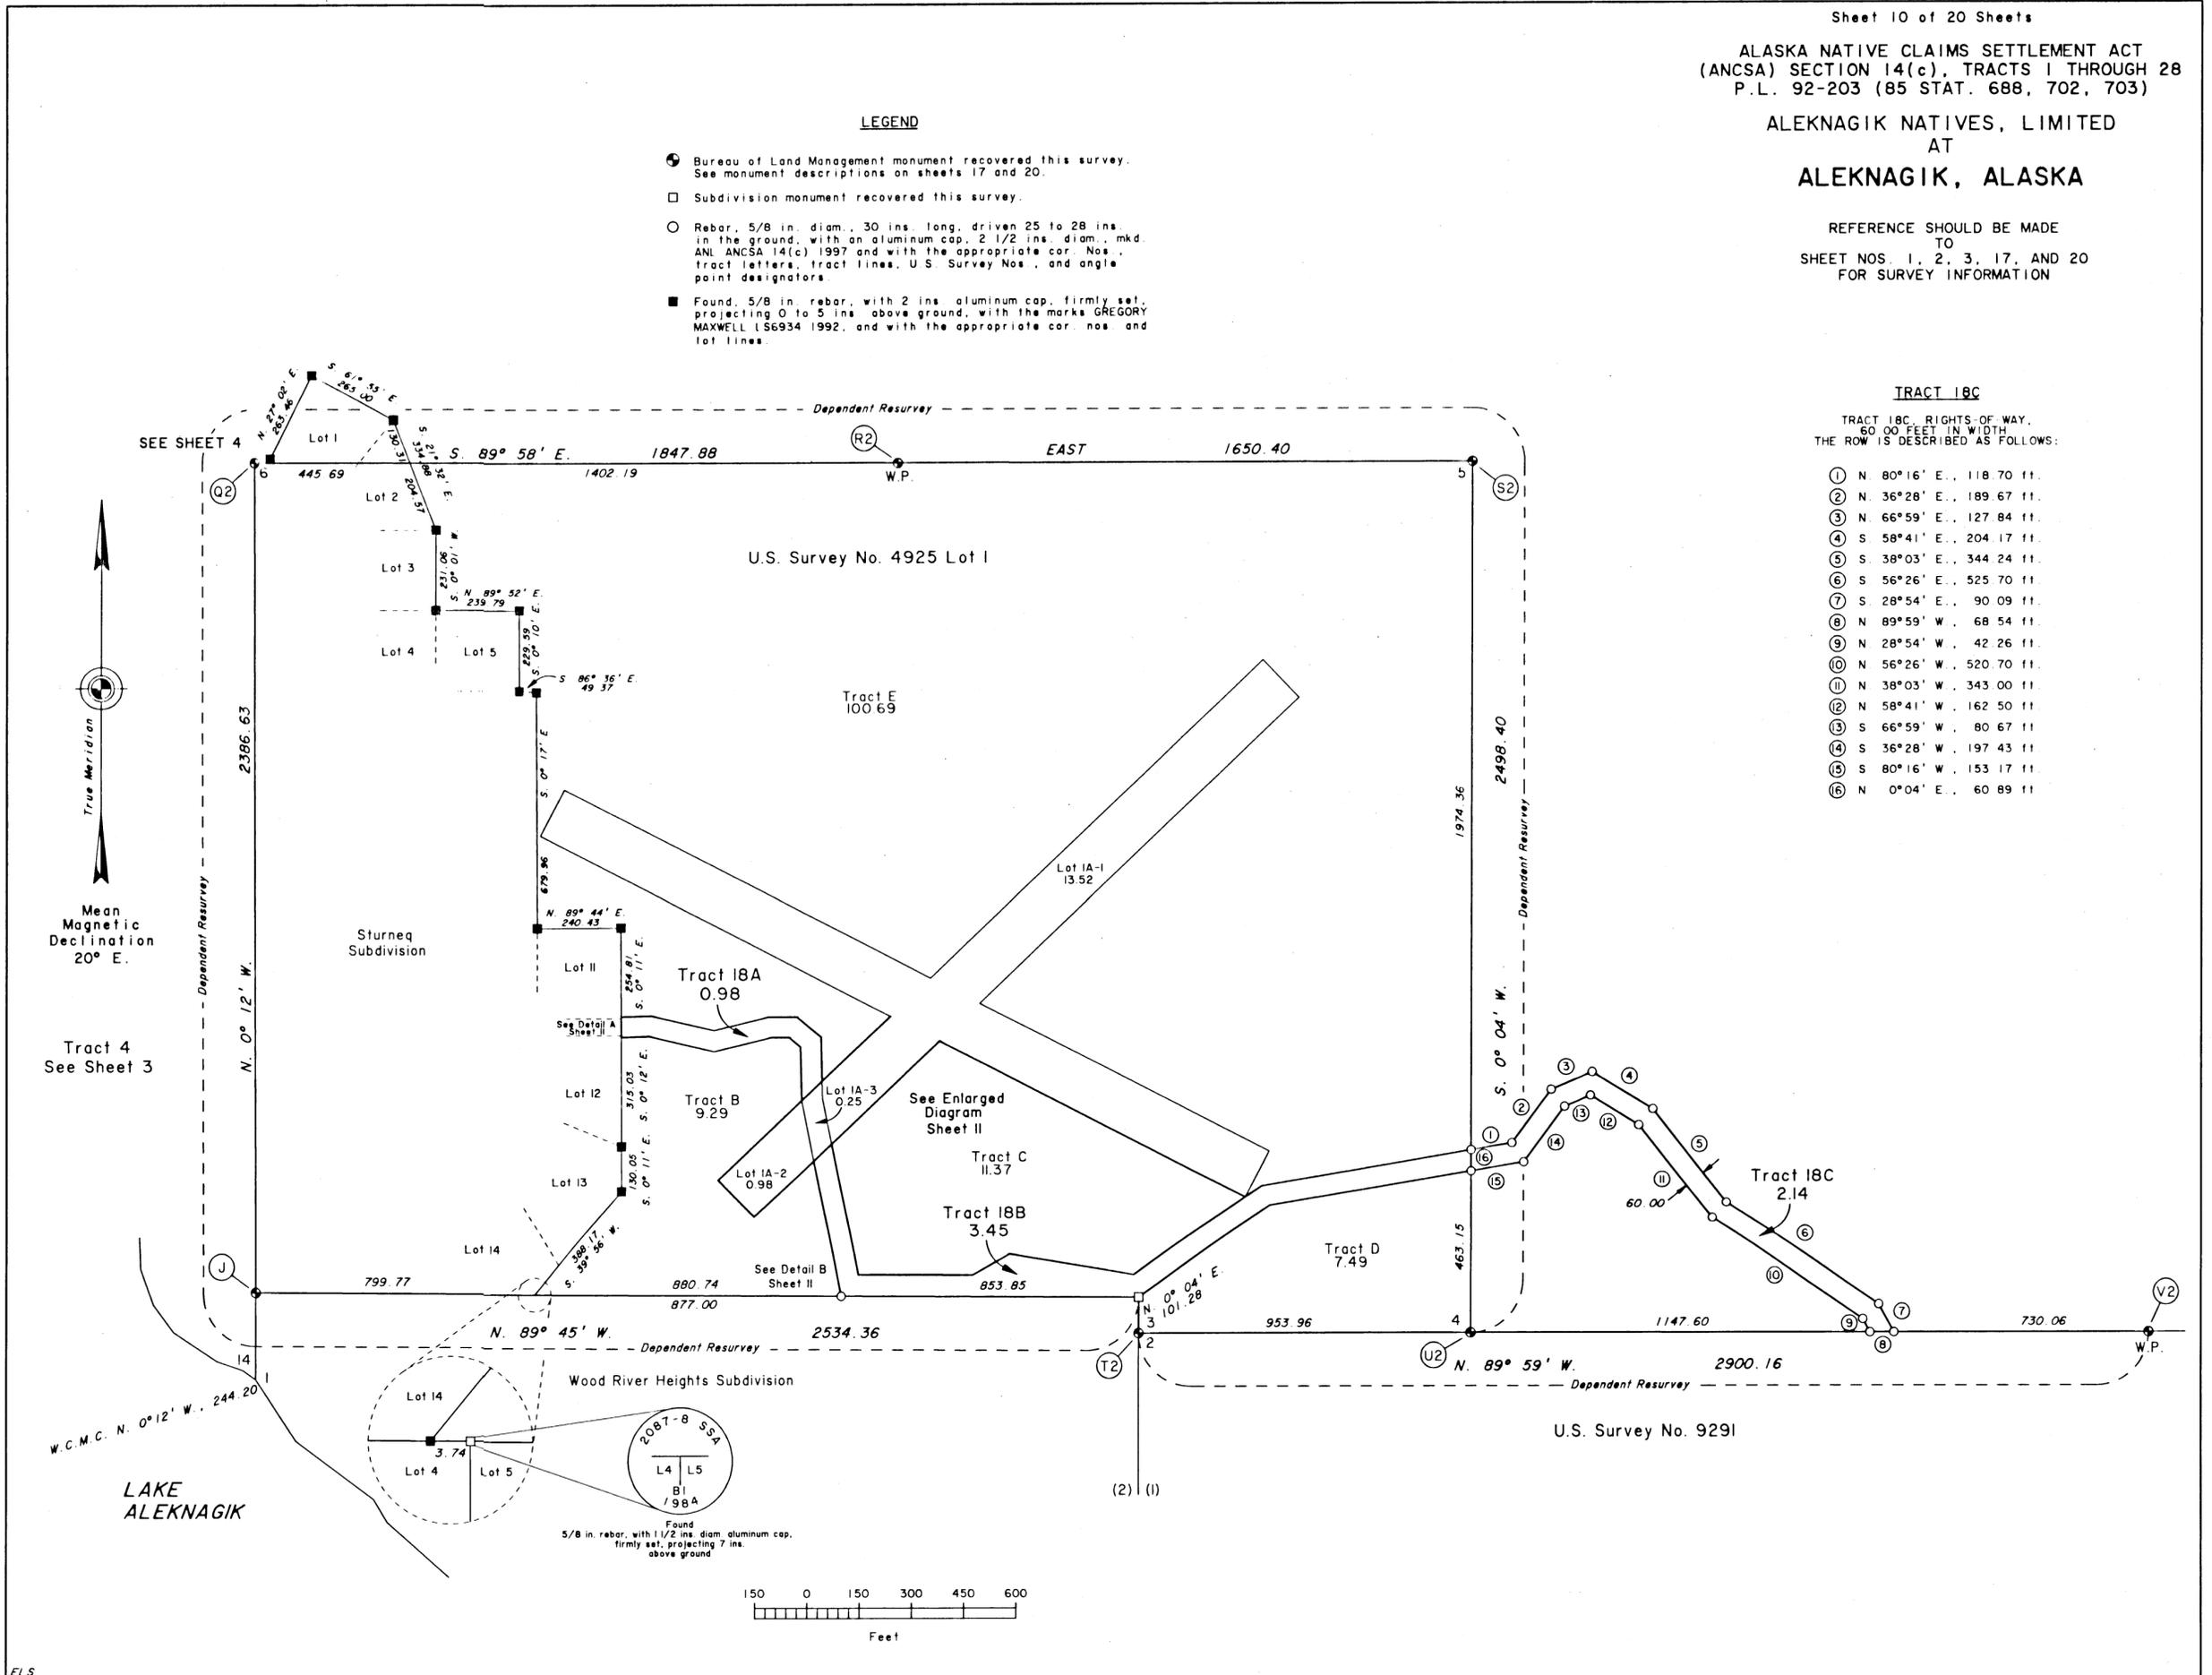


99-2 Bristol Bay Recording District

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)



ALEKNAGIK NATIVES, LIMITED  
AT  
**ALEKNAGIK, ALASKA**

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, 3, AND 20  
FOR SURVEY INFORMATION

Enlarged Diagram

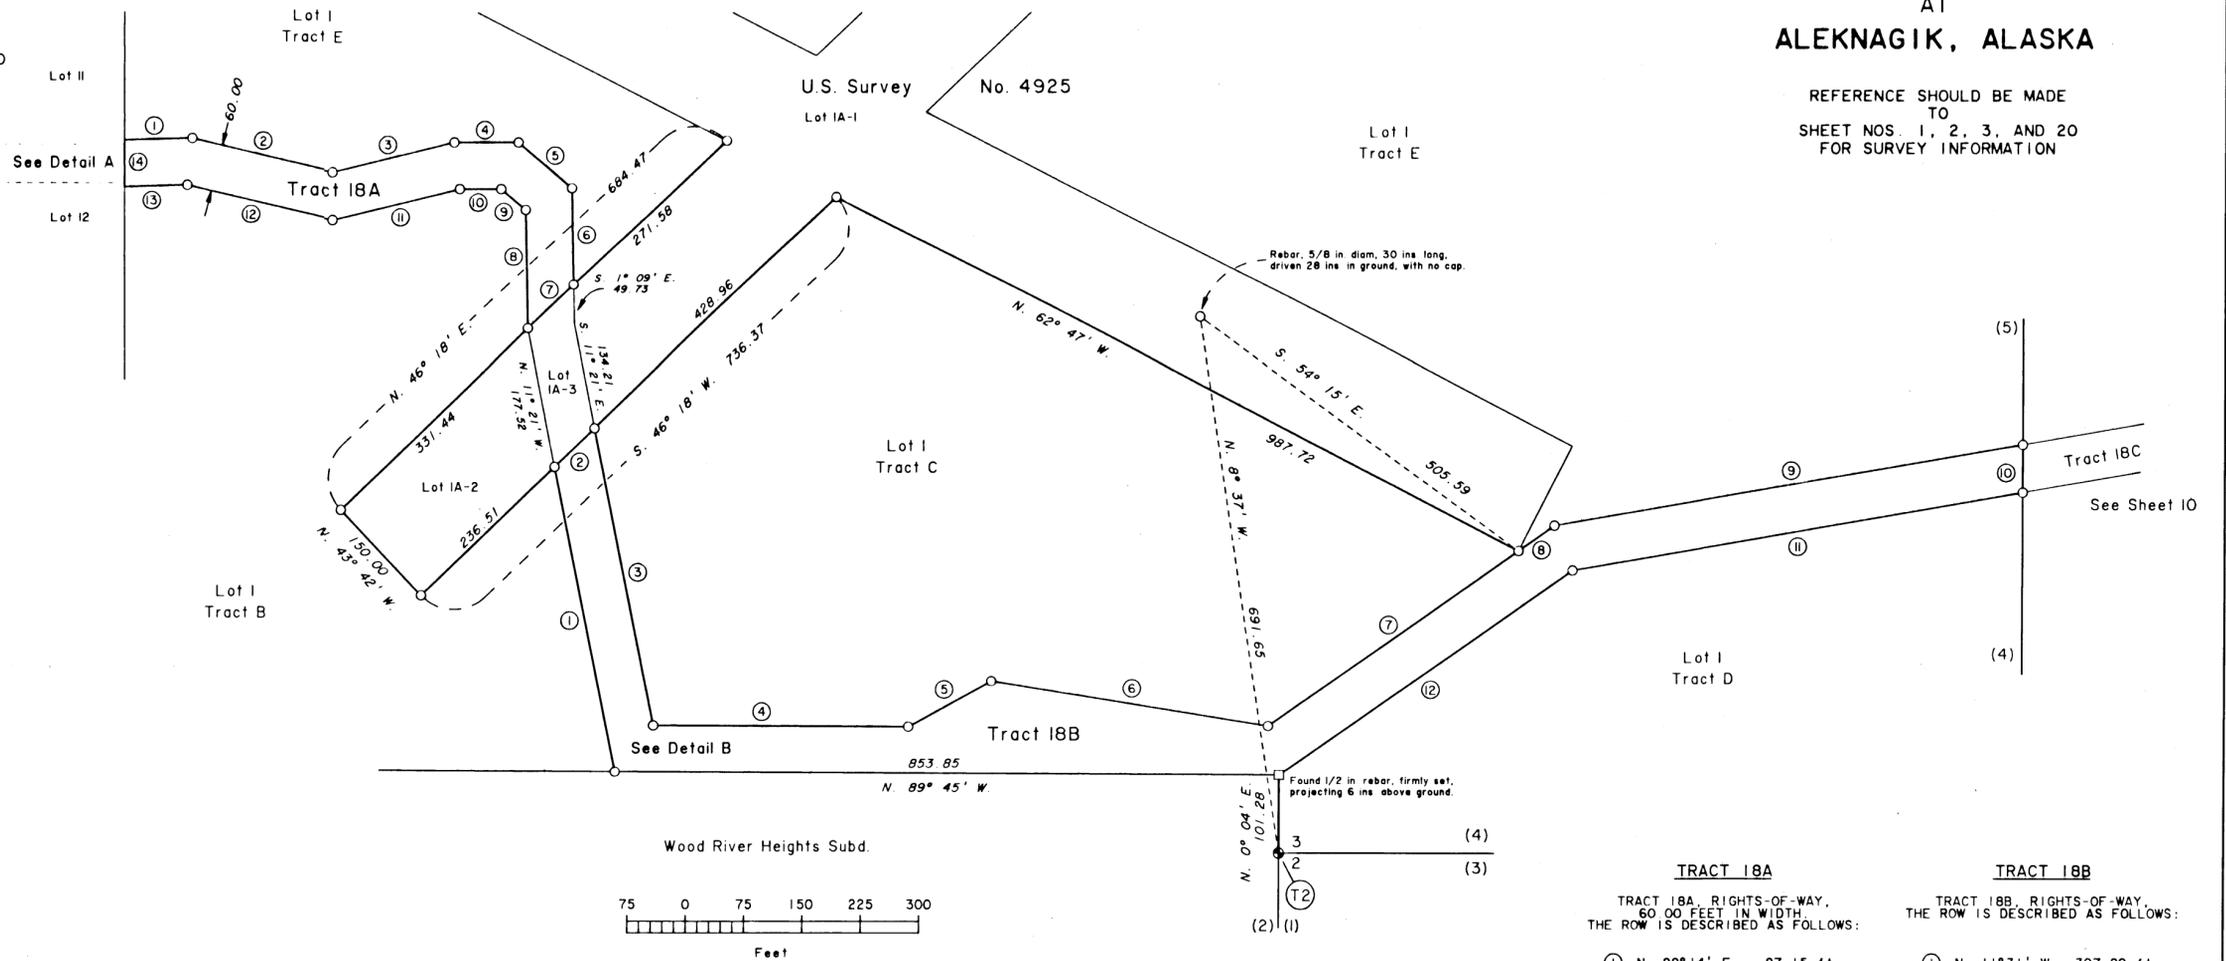

TRACT 18A		TRACT 18B	
TRACT 18A, RIGHTS-OF-WAY, 60.00 FEET IN WIDTH. THE ROW IS DESCRIBED AS FOLLOWS:		TRACT 18B, RIGHTS-OF-WAY, THE ROW IS DESCRIBED AS FOLLOWS:	
①	N 88°14' E., 87.15 ft.	①	N 11°31' W., 397.89 ft.
②	S 76°44' E., 185.03 ft.	②	N 46°18' E., 70.90 ft.
③	N 76°11' E., 161.24 ft.	③	S 11°31' E., 386.83 ft.
④	N 89°58' E., 82.54 ft.	④	S 89°45' E., 327.89 ft.
⑤	S 49°37' E., 90.64 ft.	⑤	N 61°13' E., 121.38 ft.
⑥	S 1°09' E., 126.73 ft.	⑥	S 80°50' E., 360.71 ft.
⑦	S 46°18' W., 81.45 ft.	⑦	N 55°05' E., 391.35 ft.
⑧	N 1°09' W., 154.80 ft.	⑧	N 55°05' E., 56.12 ft.
⑨	N 49°37' W., 41.54 ft.	⑨	N 80°16' E., 610.65 ft.
⑩	S 89°58' W., 53.23 ft.	⑩	S 0°04' W., 60.89 ft.
⑪	S 76°11' W., 168.43 ft.	⑪	S 80°16' W., 586.90 ft.
⑫	N 76°44' W., 191.55 ft.	⑫	S 55°05' W., 458.37 ft.
⑬	S 88°14' W., 80.60 ft.		
⑭	N 0°28' W., 60.02 ft.		

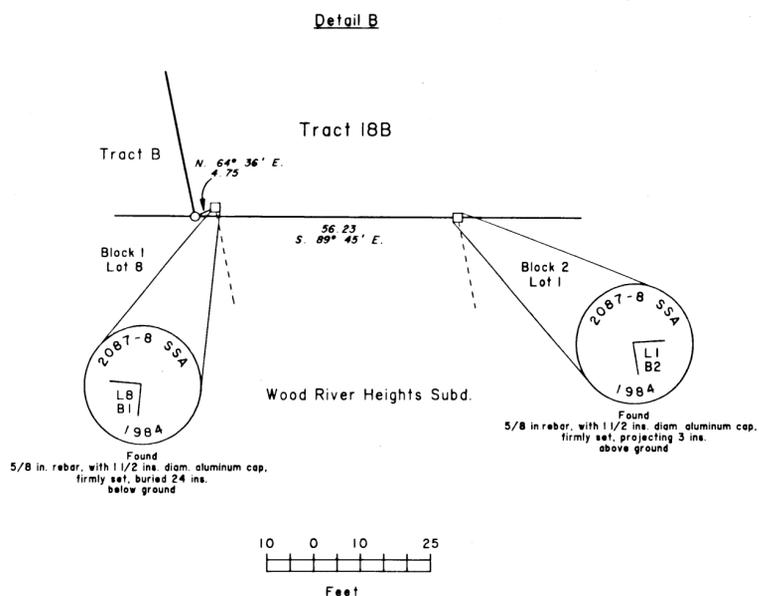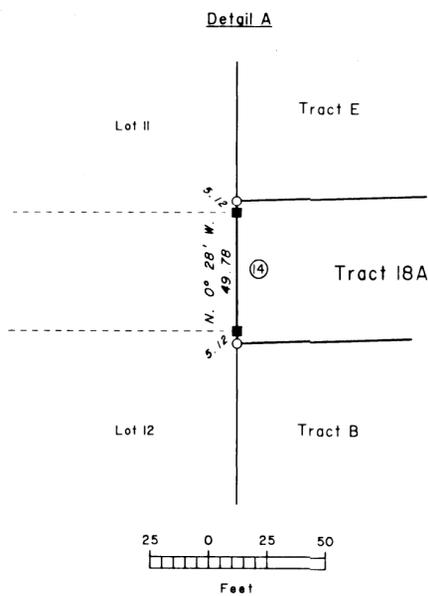

- LEGEND**
- Bureau of Land Management monument recovered this survey. See monument descriptions on sheet 20.
  - Subdivision monument recovered this survey.
  - Rebar, 5/8 in. diam., 30 ins. long, driven 25 to 30 ins. in the ground, with an aluminum cap, 2 1/2 ins. diam., mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators.
  - Found, 5/8 in. rebar, with 2 ins. aluminum cap, firmly set, projecting 0 to 5 ins. above ground, with the marks GREGORY MAXWELL LS6934 1992, and with the appropriate cor. nos. and lot lines.

99-2 Bristol Bay Recording District

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED  
AT  
ALEKNAGIK, ALASKA


REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, 3, AND 20  
FOR SURVEY INFORMATION

LEGEND

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheet 20.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, buried 2 to 6 ins. below ground, with brass cap mkd. ANL ANCSA 14(c) 1997 and with the appropriate cor. Nos., tract letters, tract lines, U.S. Survey Nos., and angle point designators. Witness cor. and meander cor. have additional marks WC and/or MC and an arrow pointing to the true point. Deposit a magnet in a white plastic case at the base of each stainless steel post. See table for accessories.



Mean  
Magnetic  
Declination  
20° E.

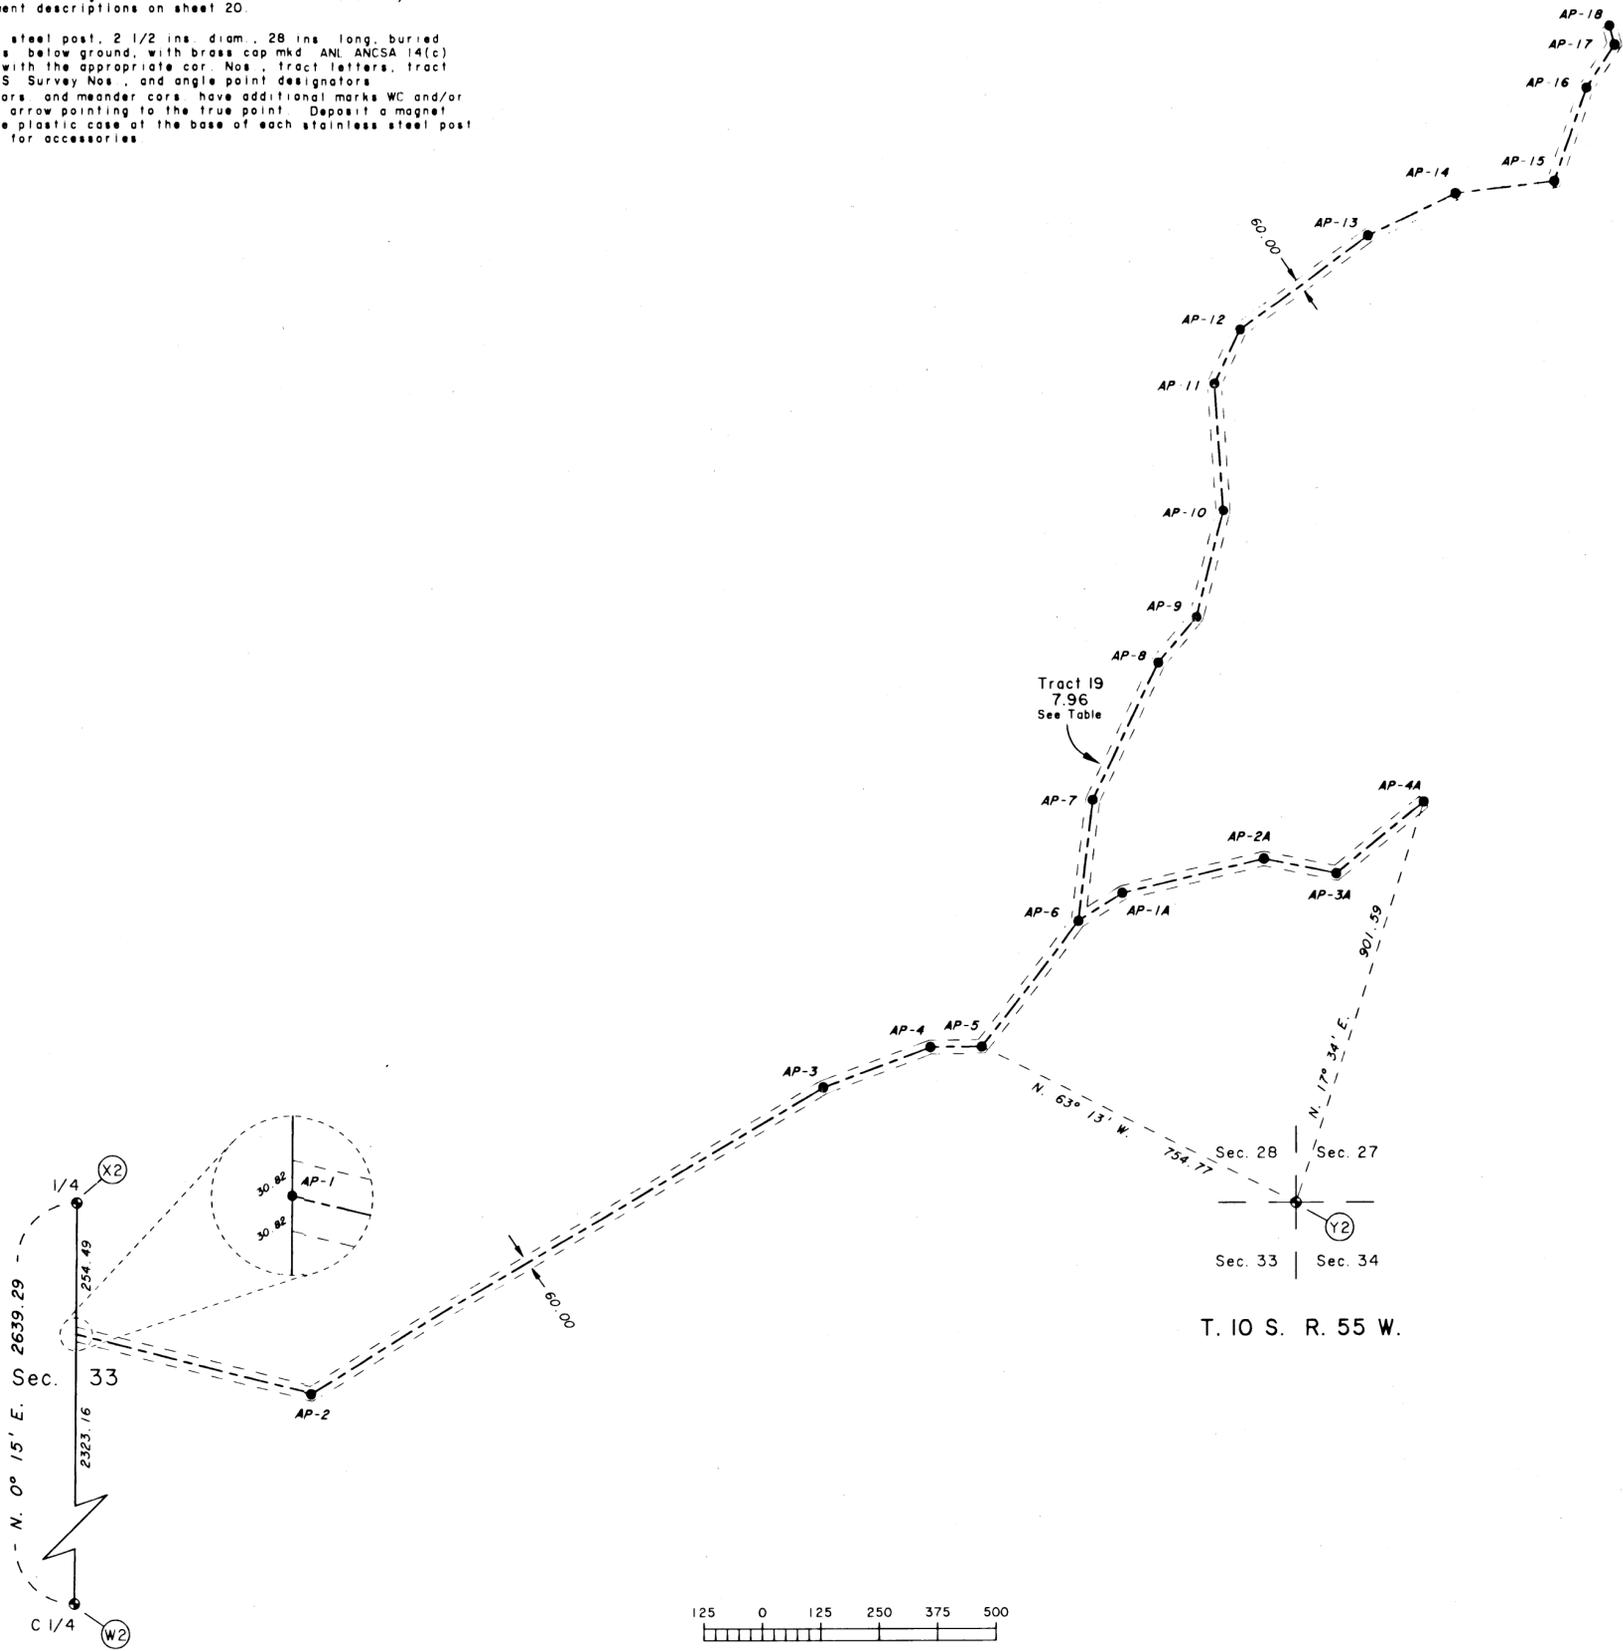

TRACT 19

CENTERLINE DESCRIPTION:

From AP-1, the intersection with the  
N-S centerline of Section 33, T. 10 S.,  
R. 55 W., S.M. Alaska, thence:

- S 76°32' E., 517.54 ft. to AP-2, thence;
- N 59°09' E., 1276.65 ft. to AP-3, thence;
- N 69°08' E., 245.79 ft. to AP-4, thence;
- N 89°19' E., 109.83 ft. to AP-5, thence;
- N 37°45' E., 337.20 ft. to AP-6, thence;
- N 6°39' E., 260.01 ft. to AP-7, thence;
- N 25°20' E., 326.83 ft. to AP-8, thence;
- N 40°15' E., 126.47 ft. to AP-9, thence;
- N 14°08' E., 232.93 ft. to AP-10, thence;
- N 3°58' E., 269.10 ft. to AP-11, thence;
- N 25°37' E., 126.84 ft. to AP-12, thence;
- N 53°17' E., 342.13 ft. to AP-13, thence;
- N 64°38' E., 207.63 ft. to AP-14, thence;
- N 83°01' E., 213.15 ft. to AP-15, thence;
- N 18°52' E., 211.91 ft. to AP-16, thence;
- N 33°09' E., 109.98 ft. to AP-17, thence;
- N 15°16' W., 41.82 ft. to AP-18, thence;

From AP-6, thence:

- N 57°55' E., 111.12 ft. to AP-1A, thence;
- N 76°34' E., 311.54 ft. to AP-2A, thence;
- S 78°46' E., 158.11 ft. to AP-3A, thence;
- N 50°54' E., 241.32 ft. to AP-4A, thence;


NOTE:

Tract 19 consists of a 60.00 ft. wide right of way,  
30.00 ft. on either side of the surveyed centerline.

This road was surveyed along the apparent centerline  
of the existing roadbed and monumented accordingly.

The acreage returned for Tract 19 was computed using  
the aforementioned centerline traverse information.

T. 10 S. R. 55 W.



ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED  
AT  
ALEKNAGIK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, AND 3  
FOR SURVEY INFORMATION

TRACT 21

CENTERLINE DESCRIPTION:

From AP-1, the intersection with  
Lake Aleknagik, at the line of ordinary  
high water, thence:

N. 3°43' W.	357.70 ft.	to AP-2, thence;
N. 17°53' E.	437.42 ft.	to AP-3, thence;
N. 23°42' E.	193.65 ft.	to AP-4, thence;
N. 20°09' E.	60.00 ft.	to AP-5, thence;
N. 21°00' E.	464.35 ft.	to AP-6, thence;
N. 3°47' E.	136.86 ft.	to AP-7, thence;
N. 17°30' E.	284.36 ft.	to AP-8, thence;
N. 29°29' E.	752.92 ft.	to AP-9, thence;
N. 37°49' E.	227.21 ft.	to AP-10, thence;
N. 36°23' E.	166.95 ft.	to AP-11, thence;
N. 12°50' E.	1060.37 ft.	to AP-12, thence;
N. 15°55' W.	608.68 ft.	to AP-13, thence;
N. 6°27' E.	381.14 ft.	to AP-14, thence;
N. 19°36' E.	169.63 ft.	to AP-15, thence;
N. 31°48' E.	199.65 ft.	to AP-16, thence;
N. 13°55' E.	306.43 ft.	to AP-17, thence;
N. 32°51' E.	233.50 ft.	to AP-18, thence;
N. 49°08' E.	352.83 ft.	to AP-19, thence;
N. 35°51' E.	620.02 ft.	to AP-20, thence;
N. 23°41' E.	316.63 ft.	to AP-21, thence;
N. 37°02' E.	187.04 ft.	to AP-22, thence;
N. 63°18' E.	275.60 ft.	to AP-23, thence;
N. 35°05' E.	375.87 ft.	to AP-24, thence;
N. 18°38' E.	210.71 ft.	to AP-25, thence;
N. 25°19' E.	326.04 ft.	to AP-26, thence;
N. 33°32' E.	228.78 ft.	to AP-27, thence;
N. 5°38' E.	107.52 ft.	to AP-28, thence;
N. 45°14' E.	667.89 ft.	to AP-29, thence;
N. 37°29' E.	1471.82 ft.	to AP-30, thence;
N. 77°02' E.	150.95 ft.	to AP-31, thence;
S. 90°18' E.	203.60 ft.	to AP-32, thence;
N. 72°53' E.	495.15 ft.	to AP-33, thence;
N. 54°02' E.	622.32 ft.	to AP-34, thence;
N. 77°02' E.	263.76 ft.	to AP-35, thence;
N. 61°19' E.	576.90 ft.	to AP-36, thence;
N. 74°28' E.	301.08 ft.	to AP-37, thence;
N. 54°44' E.	130.16 ft.	to AP-38, thence;
N. 77°29' E.	315.81 ft.	to AP-39, thence;
N. 47°14' E.	363.13 ft.	to AP-40, thence;
N. 43°29' E.	320.51 ft.	to AP-41, thence;
N. 26°26' E.	321.62 ft.	to AP-42, thence;
N. 51°23' E.	732.93 ft.	to AP-43, thence;
N. 54°17' E.	643.38 ft.	to AP-44.

Continued on Sheet 14

NOTE:

Tract 21 consists of a 25.00 ft. wide right of way,  
12.50 ft. on either side of the surveyed centerline.

This trail was surveyed along the apparent centerline  
and monumented accordingly.

The acreage returned for Tract 21 was computed using  
the aforementioned centerline traverse information.

ACCESSORY TABLE

TRACT 21

AP Number	Description	Bearing	Distance
1	No Accessories		
10	RM1	N. 85°00' E.	20.00 ft.
	RM2	S. 5°00' E.	20.00 ft.
15	RM1	S. 5°00' E.	20.00 ft.
	RM2	S. 85°00' W.	20.00 ft.
25	RM1	N. 60°00' E.	20.00 ft.
	RM2	N. 30°00' W.	20.00 ft.
30	RM1	N. 30°00' E.	20.00 ft.
	RM2	S. 60°00' E.	20.00 ft.
38	RM1	N. 45°00' E.	20.00 ft.
	RM2	S. 45°00' E.	20.00 ft.
44	RM1	S. 30°00' W.	20.00 ft.
	RM2	N. 60°00' W.	20.00 ft.

Reference Monument:

Rebar 5/8 ins. diam., 30 ins. long, driven 22 to 28 ins.  
in the ground, with aluminum cap mkd. ANL ANCSA 14(c)  
1997 and with typical marks as shown above.

Note:

Orange carsonite post, 6 ft. long, driven 3 ft. in  
the ground, located 1 foot North of each RM No. 1.



LEGEND

- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 25 to 28 ins. in the ground, with brass cap mkd. ANL ANCSA 14(c) 1997 and with typical marks as shown below. Witness cors. and meander cors. have additional marks WC and/or MC and an arrow pointing to the true point. Deposit a magnet in a white plastic case at the base of each stainless steel post. See table for accessories.

Typical AP Cap Markings



Typical RM Cap Markings

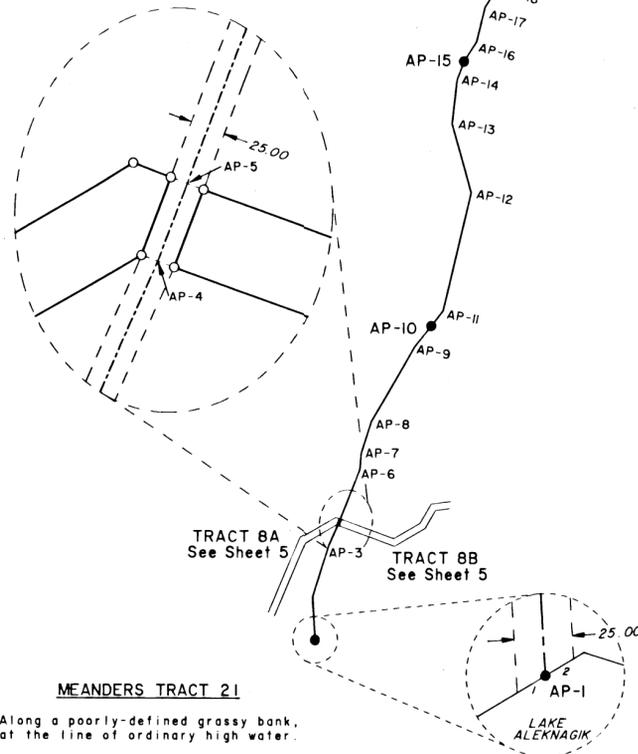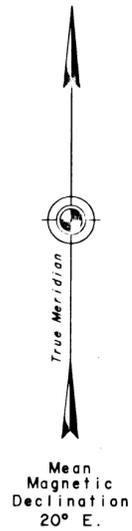

MEANDERS TRACT 21

Along a poorly-defined grassy bank,  
at the line of ordinary high water.

- N. 59°13' E., 14.04 ft.
- N. 59°13' E., 14.04 ft.

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED  
AT  
ALEKNAGIK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, 3, AND 20  
FOR SURVEY INFORMATION

TRACT 21

CENTERLINE DESCRIPTION:  
Continued from Sheet 13

From AP-44,

N 56°53' E	807.25 ft.	to AP-45, thence;
N 47°37' E	384.00 ft.	to AP-46, thence;
N 29°15' E	247.09 ft.	to AP-47, thence;
N 60°28' E	232.60 ft.	to AP-48, thence;
N 39°18' E	651.63 ft.	to AP-49, thence;
N 54°45' E	254.53 ft.	to AP-50, thence;
N 39°30' E	1129.84 ft.	to AP-51, thence;
N 55°20' E	868.25 ft.	to AP-52, thence;
N 42°52' E	204.74 ft.	to AP-53, thence;
N 6°35' E	267.06 ft.	to AP-54, thence;
N 2°25' E	216.71 ft.	to AP-55, thence;
N 24°57' E	294.10 ft.	to AP-56, thence;
N 8°51' E	545.08 ft.	to AP-57, thence;
N 48°05' E	340.20 ft.	to AP-58, thence;
S 82°01' E	621.00 ft.	to AP-59, thence;
N 63°13' E	971.45 ft.	to AP-60, thence;
N 80°10' E	342.73 ft.	to AP-61, thence;
N 89°38' E	894.40 ft.	to AP-62, thence;
N 62°29' E	337.90 ft.	to AP-63, thence;
N 44°09' E	623.42 ft.	to AP-64, thence;
N 49°32' E	177.90 ft.	to AP-65, thence;
N 6°37' E	142.11 ft.	to AP-66, thence;
N 44°50' E	179.73 ft.	to AP-67, thence;
N 19°54' E	251.51 ft.	to AP-68, thence;
N 3°25' W	181.56 ft.	to AP-69, thence;
N 3°25' W	167.56 ft.	to AP-70, thence;
N 64°58' E	354.45 ft.	to AP-71, thence;
N 74°48' E	341.36 ft.	to AP-72, thence;
N 83°17' E	715.35 ft.	to AP-73, thence;
N 42°05' E	260.19 ft.	to AP-74, thence;
N 81°22' E	1169.38 ft.	to AP-75, thence;
N 18°39' E	206.54 ft.	to AP-76, thence;
N 39°06' E	124.02 ft.	to AP-77, thence;
N 50°37' E	31.41 ft.	to AP-78, thence;
N 7°46' W	401.52 ft.	to AP-79, thence;
N 23°44' E	504.90 ft.	to AP-80, thence;
N 25°09' E	1230.42 ft.	to AP-81, thence;
N 24°05' E	808.24 ft.	to AP-82, thence;
N 22°01' E	1599.97 ft.	to AP-83, thence;
N 21°06' E	424.07 ft.	to AP-84, thence;
N 23°32' E	843.12 ft.	to AP-85, thence;
N 23°01' E	18.74 ft.	to AP-86.

NOTE:

Tract 21 consists of a 25.00 ft. wide right of way, 12.50 ft. on either side of the surveyed centerline.

This trail was surveyed along the apparent centerline and monumented accordingly.

The acreage returned for Tract 21 was computed using the aforementioned centerline traverse information.

ACCESSORY TABLE

TRACT 21

AP Number	Description	Bearing	Distance
50	RM1	S 10°00' W	20.00 ft.
	RM2	N 80°00' W	20.00 ft.
56	RM1	S 20°00' E	20.00 ft.
	RM2	S 70°00' W	20.00 ft.
61	RM1	S 35°00' W	20.00 ft.
	RM2	N 55°00' W	20.00 ft.
69	RM1	S 45°00' E	20.00 ft.
	RM2	S 45°00' W	20.00 ft.
75	RM1	S 35°00' W	20.00 ft.
	RM2	N 55°00' W	20.00 ft.
82	RM1	N 67°30' E	20.00 ft.
	RM2	S 22°30' E	20.00 ft.
86	RM1	N 68°00' E	20.00 ft.
	RM2	S 22°00' E	20.00 ft.

Reference Monument:

Rebar 5/8 ins. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with aluminum cap mkd. ANL ANCSA 14(c) 1997 and with typical marks as shown above.

Note:

Orange carsonite post, 6 ft. long, driven 3 ft. in the ground, located 1 foot North of each RM No. 1.

LEGEND

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheet 20.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 25 to 28 ins. in the ground, with brass cap mkd. ANL ANCSA 14(c) 1997 and with typical marks as shown below. Witness cors. and meander cors. have additional marks WC and/or MC and an arrow pointing to the true point. Deposit a magnet in a white plastic case at the base of each stainless steel post. See table for accessories.

Typical AP Cap Markings




Typical RM Cap Markings




T. 9 S. R. 55 W.

Sec. 33

Sec. 34

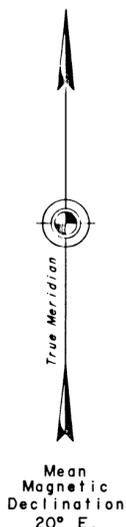

Continued from Sheet 13



99-2 Bristol Bay Recording District

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED  
AT  
ALEKNAGIK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, 3, AND 20  
FOR SURVEY INFORMATION




LEGEND

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheet 20.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 25 to 28 ins. in the ground, with brass cap mkd. ANL ANCSA 14(c) 1997 and with typical marks as shown below. Witness cors and meander cors. have additional marks WC and/or MC and an arrow pointing to the true point. Deposit a magnet in a white plastic case at the base of each stainless steel post. See table for accessories.

Typical AP Cap Markings



Typical RM Cap Markings

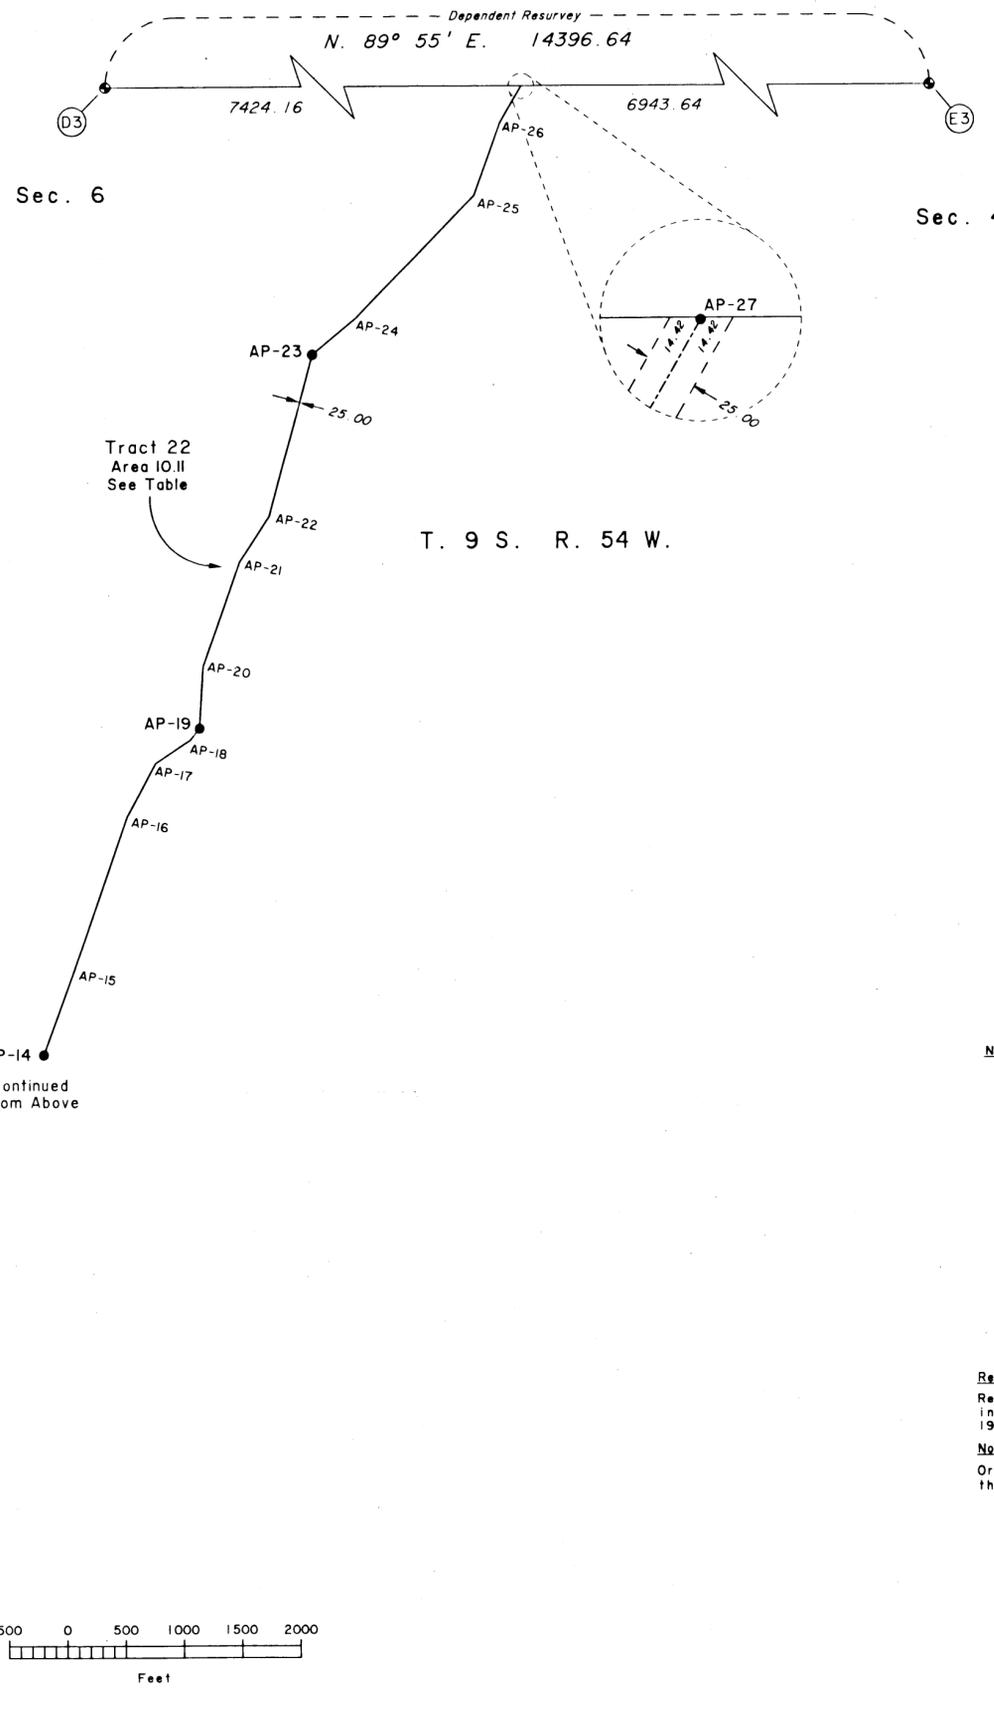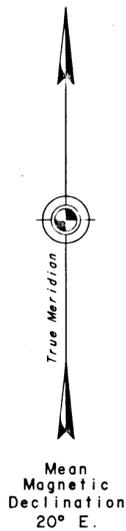

TRACT 22

CENTERLINE DESCRIPTION:

From AP-1, the intersection with the West boundary of T. 9 S., R. 54 W., Seward Meridian, Alaska, thence:

N. 20°00' E., 1093.38 ft.	to AP-2, thence;
N. 26°36' E., 1019.22 ft.	to AP-3, thence;
N. 35°19' E., 96.70 ft.	to AP-4, thence;
N. 74°43' E., 175.48 ft.	to AP-5, thence;
N. 32°13' E., 151.97 ft.	to AP-6, thence;
N. 50°41' E., 190.74 ft.	to AP-7, thence;
N. 47°01' E., 248.29 ft.	to AP-8, thence;
N. 35°51' E., 293.03 ft.	to AP-9, thence;
N. 16°46' E., 381.43 ft.	to AP-10, thence;
N. 21°35' E., 460.59 ft.	to AP-11, thence;
N. 19°41' E., 900.70 ft.	to AP-12, thence;
N. 21°22' E., 609.04 ft.	to AP-13, thence;
N. 21°02' E., 2494.89 ft.	to AP-14, thence;
N. 19°39' E., 750.89 ft.	to AP-15, thence;
N. 18°51' E., 1420.98 ft.	to AP-16, thence;
N. 28°07' E., 523.80 ft.	to AP-17, thence;
N. 56°43' E., 354.47 ft.	to AP-18, thence;
N. 38°54' E., 125.04 ft.	to AP-19, thence;
N. 3°27' E., 529.97 ft.	to AP-20, thence;
N. 19°29' E., 935.45 ft.	to AP-21, thence;
N. 34°05' E., 456.95 ft.	to AP-22, thence;
N. 14°55' E., 1433.34 ft.	to AP-23, thence;
N. 50°37' E., 484.42 ft.	to AP-24, thence;
N. 43°50' E., 1464.64 ft.	to AP-25, thence;
N. 19°47' E., 651.94 ft.	to AP-26, thence;
N. 30°00' E., 368.62 ft.	to AP-27, the intersection with the North boundary of T. 9 S., R. 54 W., Seward Meridian, Alaska.

NOTE:

Tract 22 consists of a 2500 ft. wide right of way, 1250 ft. on either side of the surveyed centerline. This trail was surveyed along the apparent centerline and monumented accordingly.

The acreage returned for Tract 22 was computed using the aforementioned centerline traverse information.

TRACT 22

AP Number	Description	Bearing	Distance
1	RM1	N. 65°00' E.	20.00 ft.
	RM2	S. 25°00' E.	20.00 ft.
8	RM1	N. 85°00' E.	20.00 ft.
	RM2	S. 5°00' E.	20.00 ft.
13	RM1	N. 65°00' E.	20.00 ft.
	RM2	S. 25°00' E.	20.00 ft.
14	RM1	N. 65°00' E.	20.00 ft.
	RM2	S. 25°00' E.	20.00 ft.
19	RM1	N. 85°00' E.	20.00 ft.
	RM2	S. 5°00' E.	20.00 ft.
23	RM1	N. 60°00' E.	20.00 ft.
	RM2	S. 30°00' E.	20.00 ft.
27	RM1	N. 75°00' E.	20.00 ft.
	RM2	S. 15°00' E.	20.00 ft.

Reference Monument:

Rebar 5/8 ins. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with aluminum cap mkd. ANL ANCSA 14(c) 1997 and with typical marks as shown above.

Note:

Orange carsonite post, 6 ft. long, driven 3 ft. in the ground, located 1 foot North of each RM No. 1.

99-2 Bristol Recording District  
Bay

COPY

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28  
P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED  
AT  
ALEKNAGIK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1, 2, 3, AND 20  
FOR SURVEY INFORMATION


LEGEND

- Bureau of Land Management monument recovered this survey. See monument descriptions on sheet 20.
- Stainless steel post, 2 1/2 ins. diam., 28 ins. long, set 25 to 28 ins. in the ground, with brass cap mkd. ANL ANCSA 14(c) 1997 and with typical marks as shown below. Witness cors. and meander cors. have additional marks WC and/or MC and an arrow pointing to the true point. Deposit a magnet in a white plastic case at the base of each stainless steel post. See table for accessories.

Typical AP Cap Markings




Typical RM Cap Markings

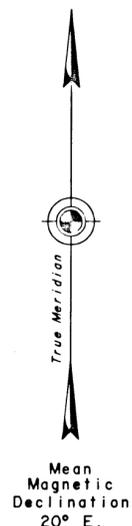


MEANDERS TRACT 23

Along a well-defined grassy bank, 1 to 2 ft. high, at the line of ordinary high water.



- S. 72°46' E., 16.73 ft.
- S. 72°46' E., 16.73 ft.

FORWARD BEARING  
N. 73°03'28" W.  
11794.40



TRACT 23  
CENTERLINE DESCRIPTION:

From AP-1, the intersection with the West boundary of T. 8 S., R. 53 W., Seward Meridian, Alaska, thence:

- N. 45°42' E., 2598.75 ft. to AP-2, thence;
- N. 51°20' E., 989.02 ft. to AP-3, thence;
- N. 55°23' E., 1870.31 ft. to AP-4, thence;
- N. 39°40' E., 1345.28 ft. to AP-5, thence;
- N. 44°49' E., 3077.44 ft. to AP-6, thence;
- N. 38°56' E., 993.65 ft. to AP-7, thence;
- N. 27°48' E., 549.47 ft. to AP-8, thence;
- N. 16°06' W., 1534.62 ft. to AP-9, thence;
- N. 6°29' W., 74.19 ft. to AP-10, thence;
- N. 16°27' E., 1944.25 ft. to AP-11, thence;
- N. 3°29' E., 428.80 ft. to AP-12, thence;
- N. 25°43' E., 101.18 ft. to AP-13, thence;
- N. 23°41' E., 603.30 ft. to AP-14, thence;
- N. 23°10' E., 876.99 ft. to AP-15, thence;
- N. 55°13' E., 291.61 ft. to AP-16, thence;
- N. 68°40' E., 296.15 ft. to AP-17, thence;
- N. 77°09' E., 173.76 ft. to AP-18, thence;
- N. 42°23' E., 332.00 ft. to AP-19, thence;
- N. 23°39' E., 220.87 ft. to AP-20, thence;
- N. 4°31' E., 602.75 ft. to AP-21, thence;
- N. 42°47' E., 222.52 ft. to AP-22, thence;
- N. 58°40' E., 184.87 ft. to AP-23, thence;
- N. 35°15' E., 382.45 ft. to AP-24, thence;
- N. 18°25' W., 627.61 ft. to AP-25, thence;
- N. 27°07' E., 97.49 ft. to AP-26, thence;
- N. 50°44' E., 279.96 ft. to AP-27, thence;
- N. 58°54' E., 906.88 ft. to AP-28, thence;
- N. 58°54' E., 98.93 ft. to AP-29, the intersection with Okstukuk Lake, at the line of ordinary high water.

NOTE:

Tract 23 consists of a 25.00 ft. wide right of way, 12.50 ft. on either side of the surveyed centerline.

This trail was surveyed along the apparent centerline and monumented accordingly.

The acreage returned for Tract 23 was computed using the aforementioned centerline traverse information.

TRACT 23


AP Number	Description	Bearing	Distance
1	RM1	N. 85°00' E.	20.00 ft.
	RM2	S. 5°00' E.	20.00 ft.
2	RM1	N. 90°00' E.	20.00 ft.
	RM2	S. 0°00' E.	20.00 ft.
4	RM1	S. 80°00' E.	20.00 ft.
	RM2	S. 10°00' W.	20.00 ft.
6	RM1	N. 90°00' E.	20.00 ft.
	RM2	S. 0°00' E.	20.00 ft.
9	RM1	N. 30°00' E.	20.00 ft.
	RM2	S. 60°00' E.	20.00 ft.
12	RM1	N. 50°00' E.	20.00 ft.
	RM2	S. 30°00' E.	20.00 ft.
19	RM1	N. 90°00' E.	20.00 ft.
	RM2	S. 0°00' E.	20.00 ft.
25	RM1	N. 45°00' E.	20.00 ft.
	RM2	S. 45°00' E.	20.00 ft.
28	RM1	S. 10°00' W.	20.00 ft.
	RM2	N. 80°00' W.	20.00 ft.

Reference Monument:

Rebar 5/8 ins. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with aluminum cap mkd. ANL ANCSA 14(c) 1997 and with typical marks as shown above.

Note:


Orange carsonite post, 6 ft. long, driven 3 ft. in the ground, located 1 foot North of each RM No. 1.

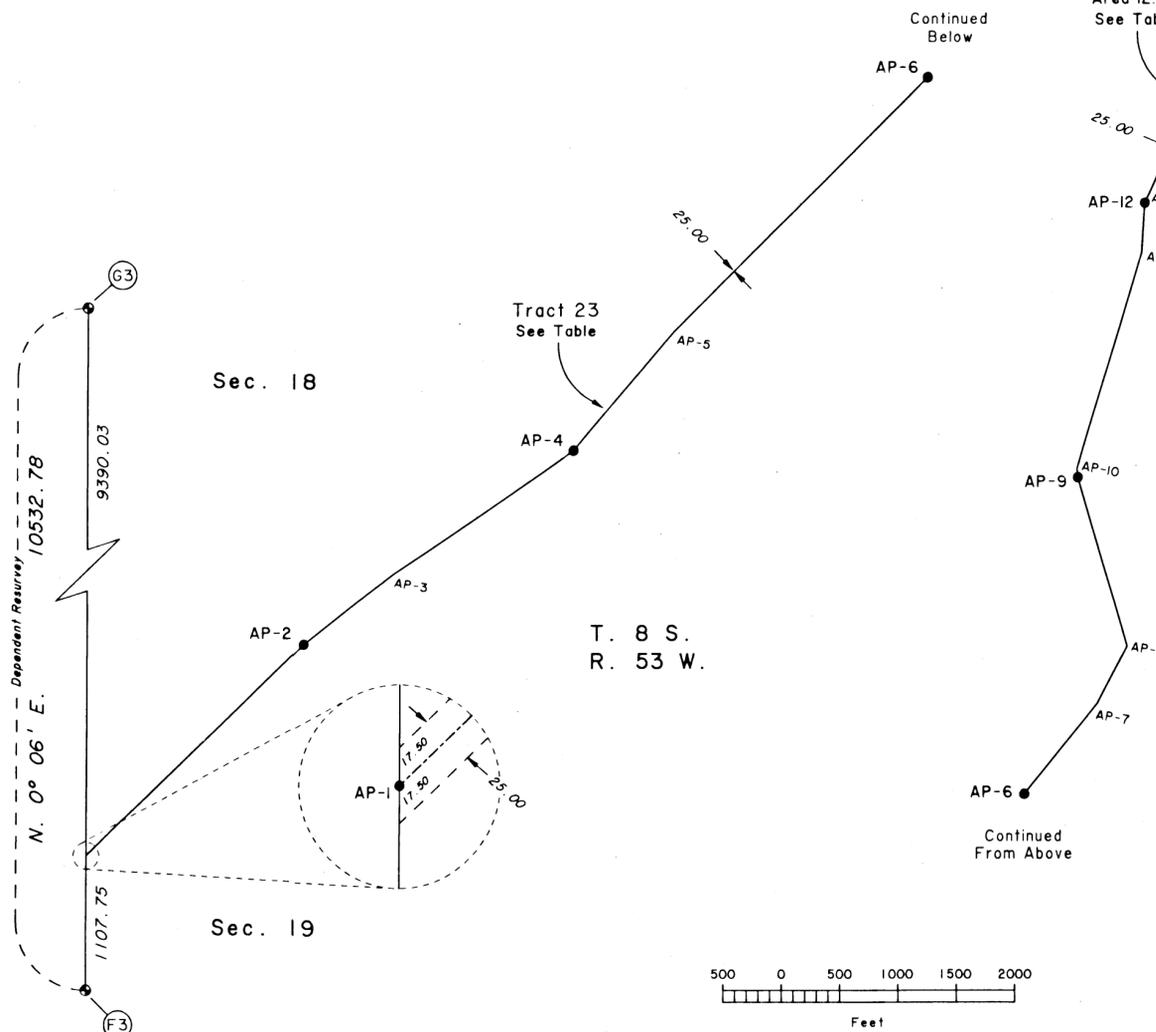


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28 P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED AT ALEKNAGIK, ALASKA


REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, AND, 3 FOR SURVEY INFORMATION




Found an iron post, 2 1/2 ins. diam., firmly set, 2 ins. above ground, encircled by mound of stone 2 1/2 ft. base, with brass cap mkd. as shown, from which the 1966 original bearing trees  
A spruce, 9 ins. diam., bears N. 33° E., 52.2 ft. dist., with fragmented scribe marks on a partially healed blaze.  
A spruce, 10 ins. diam., bears S. 14° E., 72.0 ft. dist., with scribe marks X BT visible on a partially healed blaze  
A spruce, 7 ins. diam., bears N. 10° W., 62.1 ft. dist., with scribe marks X BT visible on a partially healed blaze and the remains of an original 1966 bearing tree  
A dead spruce, 7 ins. diam., bears S. 57 1/2° W., 83.5 ft. dist., with scribe marks TIIS R56W S5 BT on an open face and the 1997 bearing tree  
A spruce, 10 ins. diam., bears S. 41 1/2° W., 79.4 ft. dist., with scribe marks TIIS R56W S5 BT on an open blaze.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the remains of the original 1966 bearing trees  
A spruce stump, 1 1/2 ft. high, 4 ins. diam., bears S. 8° E., 88.7 ft. dist., with scribe marks BT on an open face.  
A dead spruce, 9 ins. diam., bears S. 62 1/2° W., 74.9 ft. dist., with scribe marks TIIS R56W S3 BT on an open face and the 1997 bearing trees  
A spruce, 7 ins. diam., bears S. 4 3/4° E., 84.8 ft. dist., with scribe marks TIIS R56W S2 BT on an open blaze.  
A spruce, 10 ins. diam., bears S. 76 1/2° W., 93.3 ft. dist., with scribe marks X BT on an open blaze  
Recovered original pits, 18 x 18 x 12 ins., in secs. 34 and 35, 3 ft. dist.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as shown, from which the remains of the 1966 original bearing trees  
A spruce stump, 11 ins. diam., 18 ins. high, bears N. 41° E., 47.5 ft. dist., with scribe marks BT visible on an open face.  
A spruce stump, 13 ins. diam., 2 1/2 ft. high, bears S. 47° E., 50.8 ft. dist., with scribe mark T visible on an open face.  
A spruce stump, 8 ins. diam., 5 ft. high, bears S. 32° W., 50.2 ft. dist., with scribe marks TIIS R56W S1 BT on an open face.  
A dead spruce, 12 ins. diam., bears N. 18° W., 45.5 ft. dist., with scribe marks TIOS R56W S36 BT on an open face and the 1997 bearing trees  
A spruce, 8 ins. diam., bears N. 34° E., 38.0 ft. dist., with scribe marks TIOS R55W S31 BT on an open face.  
A spruce, 7 ins. diam., bears S. 33 1/4° E., 33.6 ft. dist., with scribe marks TIIS R55W S6 BT on an open face.  
A spruce, 7 ins. diam., bears S. 29 1/2° W., 70.6 ft. dist., with scribe marks TIIS R56W S1 BT on an open face.  
A spruce, 6 ins. diam., bears N. 21 3/4° W., 34.2 ft. dist., with scribe marks TIOS R56W S36 BT on an open face.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees  
A spruce, 13 ins. diam., bears N. 8° E., 88.4 ft. dist., with incorrect marks TION R55W S30 BT visible on a partially healed blaze.  
A spruce stump, 9 ins. diam., 1 ft. high, bears S. 8° E., 28.1 ft. dist., with remainder of the tree laying along side with scribe marks visible on a partially healed blaze.  
A dead spruce, 11 ins. diam., bears N. 58° W., 26.4 ft. dist., with marks visible but not legible on a partially healed blaze. (Record, N. 59 1/2° W.)  
and the 1997 bearing trees  
A birch, 6 ins. diam., bears S. 45 1/4° E., 52.1 ft. dist., with scribe marks X BT on an open blaze.  
A spruce, 9 ins. diam., bears S. 74 1/2° W., 33.0 ft. dist., with scribe marks TIIS R55W S6 BT on an open blaze.  
A spruce, 8 ins. diam., bears N. 20 1/2° E., 76.6 ft. dist., with scribe marks X BT on an open blaze.




Found a fiberglass post, 2 1/2 ins. diam., base firmly set, 6 ins. below ground, with top 16 ins. of post and brass cap laying alongside, mkd. as shown, from which the original bearing tree and accessory  
A spruce, 12 ins. diam., bears S. 38 1/2° E., 151.8 ft. dist., with a fully healed blaze  
The NE cor. of an airplane hanger, bears S. 17° W., 233.65 ft. dist.  
A 12 ins. long, galvanized iron spike was placed inside base of fiberglass post.




Found fiberglass post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown, from which the original 1966 bearing trees  
A spruce, 5 ins. diam., bears S. 21 1/2° E., 44.2 ft. dist., with scribe marks X BT visible on a partially healed blaze and the remains of the original 1966 bearing tree  
A spruce stump, 11 ins. diam., 1 ft. high, bears N. 77° W., 41.5 ft. dist., with no visible scribe marks or blaze and the 1997 bearing tree  
A spruce, 5 ins. diam., bears S. 63 3/4° W., 25.1 ft. dist., with visible scribe marks X BT on an open blaze.  
This cor. is now designated as cor. No. 2, Tract 4; no marks were added to the brass cap.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. as shown.  
The dim remains of the original pits, NE, SE, and SW of post, 3 ft. dist.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, encircled by a collar of stone 3 ft. diam., from which the original 1966 bearing tree  
A spruce, 14 ins. diam., bears S. 31 1/2° E., 18.5 ft. dist., with a fully healed blaze and the 1997 bearing tree  
A spruce, 12 ins. diam., bears N. 43 1/4° E., 75.8 ft. dist., with scribe marks X BT on an open blaze.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees  
A spruce, 5 ins. diam., bears N. 25° E., 51.5 ft. dist., with a fully healed blaze. (Record, N. 21° E.)  
A spruce, 12 ins. diam., bears S. 79° E., 28.8 ft. dist., with a fully healed blaze. (Record, S. 83 1/2° E.)




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees  
A spruce stump, 13 ins. diam., 1 1/2 ft. high, bears East, 62.7 ft. dist., with a fully healed blaze. (Record, N. 85° E.)  
A spruce, 10 ins. diam., bears S. 5° E., 56.7 ft. dist., with a fully healed blaze and a new bearing tree  
A spruce, 10 ins. diam., bears N. 86° E., 51.7 ft. dist., mkd. X BT.  
This cor. is now designated as the witness cor. to meander cor. No. 14, Tract 4; added marks 1997 to the cap.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.  
This cor. is now designated as the witness cor. to meander cor. No. 4, Tract 5; no marks were added to the cap.




Found an iron post, 2 1/2 ins. diam., firmly set, leaning northeasterly, 18 ins. below ground, with brass cap mkd. as shown.  
No evidence of original pits; no additional accessories taken.  
This cor. is now designated as cor. No. 3, Tract 5; no marks were added to the cap.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.  
No evidence of original pits; no additional accessories taken.  
This cor. is now designated as cor. No. 2, Tract 5; no marks were added to the cap.




Found an iron post, 2 1/2 ins. diam., firmly set, flush with ground, with brass cap mkd. as shown.  
No evidence of original pits; no additional accessories taken.  
This cor. is now designated as meander cor. No. 15, Tract 4; no marks were added to the cap.




Found a copperweld monument, firmly set, projecting 1 in. above ground, with brass cap mkd. as shown.  
The term COPPERWELD as used in these monumentation descriptions is a brand name for a copper coated steel rod with a brass cap which was authorized for use in monumentation of corners in certain areas where the use of a regulation iron post was not practical.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, 12 ins. below ground, with brass cap mkd. as shown.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap incorrectly mkd. as shown.  
This cor. is now designated as cor. No. 16, Tract 4; no marks were added to the cap.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees  
A spruce, 8 ins. diam., bears N. 22 1/4° E., 40.9 ft. dist., with a fully healed blaze  
A spruce, 10 ins. diam., bears N. 38 1/2° W., 31.7 ft. dist., with a fully healed blaze.  
This cor. is now designated as cor. No. 17, Tract 4; no marks were added to the cap.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown, from which the original bearing trees  
A spruce, 10 ins. diam., bears N. 33 1/2° E., 18.5 ft. dist., with a fully healed blaze.  
A spruce, 8 ins. diam., bears N. 77° E., 44.8 ft. dist., with a fully healed blaze.  
This cor. is now designated as cor. No. 18, Tract 4; no marks were added to the cap.




Found a copperweld monument, firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown.  
The term COPPERWELD as used in these monumentation descriptions is a brand name for a copper coated steel rod with a brass cap which was authorized for use in monumentation of corners in certain areas where the use of a regulation iron post was not practical.



Found an iron post, firmly set, flush with ground, with brass cap mkd. as shown.



Found a copperweld monument, firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown.  
The term COPPERWELD as used in these monumentation descriptions is a brand name for a copper coated steel rod with a brass cap which was authorized for use in monumentation of corners in certain areas where the use of a regulation iron post was not practical.  
This cor. is now designated as cor. No. 19, Tract 4; no marks were added to the brass cap.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.  
Evidence of original pits, West, 3 and 6 ft. dist.  
This cor. is now designated as the witness cor. to meander cor. No. 1, Tract 20; no marks were added to the brass cap.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28 P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED AT ALEKNAGIK, ALASKA


REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, AND 3 FOR SURVEY INFORMATION



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown, from which the remaining 1967 bearing trees  
A spruce, 13 ins. diam., bears N. 69 3/4° E., 29.0 ft. dist., mkd. X BT.  
(Record, S. 72° E.)  
and the remains to the original 1967 bearing trees  
A birch stump, flush with ground, bears S. 52 1/2° E., 29.3 ft. dist., with tree laying along side mkd. S4927 C1 L4 BT.  
(Record, S. 47° E., 27.0 ft.)

A dead spruce, 14 ins. diam., bears S. 19° W., 52.8 ft. dist., with scribe marks S4927 C2 L3 BT on an open face  
and the 1997 bearing tree

A birch, 11 ins. diam., bears S. 47 1/4° E., 49.7 ft. dist., with scribe marks S4927 C1 L4 BT on an open blaze.




Found stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 9 ins. diam., bears S. 64 3/4° E., 21.9 ft. dist., with scribe marks X BT on an open blaze.

A birch, 5 ins. diam., bears S. 12 1/2° W., 13.2 ft. dist., with scribe marks X BT on an open blaze.


This cor. is now designated as the witness cor. to meander No. 4, Tract 9; no marks were added to the brass cap.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 7 ins. diam., bears N. 83 1/2° E., 6.3 ft. dist., with scribe marks X BT on an open blaze.


A spruce, 12 ins. diam., bears S. 13 3/4° E., 37.3 ft. dist., with scribe marks X BT on an open blaze.



Found a stainless steel post, 2 1/2 ins. diam., firmly set, flush with ground, with brass cap mkd. as shown.



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which  
The original mound of stone, 3 1/2 ft. base, 1 1/2 ft. high, bears West, 3.5 ft. dist.  
This cor. is now designated as cor. No. 3, Tract 9; no marks were added to the brass cap.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the remains of the original 1973 bearing trees


A dead spruce, 4 ins. diam., bears N. 45° W., 67.0 ft. dist., with marks X BT on an open face.

A spruce stump, 8 ins. diam., bears N. 11 1/2° W., 104.3 ft. dist., with marks X BT on an open face.

and the 1997 bearing trees

A spruce, 4 ins. diam., bears S. 87° W., 55.7 ft. dist., with scribe marks X BT on an open blaze.

A spruce, 5 ins. diam., bears N. 18 1/4° W., 55.3 ft. dist., with scribe marks X BT on an open blaze.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 13 ins. diam., bears N. 9° E., 21.8 ft. dist., with a fully healed blaze.

A spruce, 13 ins. diam., bears N. 71° E., 33.7 ft. dist., with a fully healed blaze.

This cor. is now designated as the witness cor. to meander cor. No. 5, Tract 9; no marks were added to the brass cap.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the remaining original bearing tree

A spruce, 8 ins. diam., bears N. 11° W., 49.5 ft. dist., with a fully healed blaze.


and the remains of an original bearing tree

A dead spruce, 8 ins. diam., bears N. 72° W., 26.4 ft. dist., with scribe marks X BT on an open face.

and a 1997 bearing tree

A spruce, 6 ins. diam., bears S. 83° E., 29.0 ft. dist., with scribe marks X BT on an open blaze.

This cor. is now designated cor. No. 6, Tract 9;




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears S. 4° W., 27.1 ft. dist., with a fully healed blaze.

A spruce, 10 ins. diam., bears N. 64 1/2° W., 29.8 ft. dist., with a fully healed blaze.

This cor. is now designated cor. No. 7, Tract 9; no marks were added to the brass cap.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears N. 24 1/4° E., 27.2 ft. dist., with a fully healed blaze.

A spruce, 7 ins. diam., bears N. 73° W., 73.9 ft. dist., with fragmentary scribe marks on a mostly healed blaze.

This cor. is now designated cor. No. 8, Tract 9; no marks were added to the brass cap.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original 1973 bearing trees

A spruce, 11 ins. diam., bears N. 84 1/2° E., 6.3 ft. dist., with a fully healed blaze.

A spruce, 5 ins. diam., bears N. 33 1/4° W., 7.8 ft. dist., with scribe marks X BT on an open blaze.

and the remains of the original 1973 bearing trees

A spruce stump, 7 ins. diam., 6 ft. high, bears S. 24° E., 38.7 ft. dist., with scribe marks TIOS R55W S33 BT on an open face.


A spruce stump, 8 ins. diam., 1 ft. high, bears S. 23° W., 37.0 ft. dist., with remainder of tree laying alongside, mkd. TIOS R55W S32 BT.

and the 1997 bearing trees

A spruce, 9 ins. diam., bears S. 40° W., 60.0 ft. dist., with scribe marks TIOS R55W S32 BT on an open blaze.

A spruce, 9 ins. diam., bears N. 20 3/4° W., 41.7 ft. dist., with scribe marks TIOS R55W S29 BT on an open blaze.

This cor. is now designated as cor. No. 2, Tract 9; no marks were added to the brass cap.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the remaining original 1973 bearing tree


A spruce, 10 ins. diam., bears S. 19° W., 50.5 ft. dist., with scribe marks 1/4 S32 BT on an open face.

and the remains of the original 1973 bearing tree

A spruce stump, 5 ins. diam., height not noted, bears N. 6° W., 65.7 ft. dist., with visible scribe marks X BT on an open face.

and a 1997 bearing tree


A spruce, 6 ins. diam., bears N. 64° W., 27.1 ft. dist., with scribe marks X BT on an open blaze.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 11 ins. diam., bears S. 41 3/4° W., 24.4 ft. dist., with a fully healed blaze.

A spruce, 8 ins. diam., bears N. 52 1/4° W., 11.9 ft. dist., with a fully healed blaze.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the remaining original 1966 bearing trees


A birch, 14 ins. diam., bears S. 55° E., 96.4 ft. dist., with scribe marks X BT on an open blaze.

and the remains of the original 1966 bearing tree

A dead spruce, 6 ins. diam., bears N. 64° E., 77.9 ft. dist., with scribe marks X BT on an open face.

and a 1997 bearing tree


A spruce, 12 ins. diam., bears N. 63° E., 83.2 ft. dist., with scribe marks X BT on an open blaze.



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears S. 40 1/2° E., 56.7 ft. dist., with a fully healed blaze.

A spruce, 11 ins. diam., bears S. 19° W., 104.3 ft. dist., with a fully healed blaze (Record, S. 15 1/2° W.)




Found an iron post, 2 1/2 ins. diam., firmly set, flush with ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears S. 84° W., 33.0 ft. dist., with scribe marks X BT on a partially healed blaze.

A spruce, 8 ins. diam., bears N. 31 1/4° W., 35.6 ft. dist., with scribe marks X BT on a partially healed blaze.


This cor. is now designated as the witness cor. to meander cor. No. 1, Tract 11; no marks were added to the brass cap.



Found an iron post, 2 1/2 ins. diam., firmly set, flush with ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 9 ins. diam., bears N. 56 3/4° E., 21.2 ft. dist., with scribe marks L1 C2 S9840 BT on a partially healed blaze. (Record, N. 56° E., 24.4 ft.)


A spruce, 7 ins. diam., bears N. 44 1/2° W., 14.3 ft. dist., with scribe marks BT on a partially healed blaze. (Record, N. 44° W.)



Found an iron post, 2 1/2 ins. diam., firmly set, flush with ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 6 ins. diam., bears N. 55° E., 7.9 ft. dist., with scribe marks BT on a partially healed blaze.


A spruce, 10 ins. diam., bears N. 28° W., 54.1 ft. dist., with scribe marks S9840 L1 C3 BT on an open blaze.



Found an iron post, 2 1/2 ins. diam., firmly set, flush with ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 15 ins. diam., bears S. 25 1/4° E., 80.5 ft. dist., with scribe marks X BT on a partially healed blaze. (Record, S. 25° E.)


A spruce, 12 ins. diam., bears S. 33 1/2° W., 83.8 ft. dist., with scribe marks X BT on a partially healed blaze.



Found an iron post, 2 1/2 ins. diam., firmly set, for a reference monument, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 12 ins. diam., bears S. 80° E., 11.6 ft. dist., with scribe marks X BT on a partially healed blaze.

A spruce, 10 ins. diam., bears S. 10° W., 35.3 ft. dist., with scribe marks X BT on a partially healed blaze.



Found a plastic post, 2 1/2 ins. diam., firmly set, for a reference monument, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the original 1966 bearing tree

A spruce, 8 ins. diam., bears N. 45° E., 6.9 ft. dist., with a fully healed blaze.

and the remains of the original 1966 bearing tree

A spruce, 11 ins. diam., found laying on ground, root crown undefined, trunk bears S. 86 1/2° E., 27.7 ft. dist., with scribe marks X BT on an open blaze.

and a 1997 bearing tree

A spruce, 6 ins. diam., bears S. 83° E., 38.8 ft. dist., with scribe marks X BT on an open blaze.



Point for cor. No. 13, Lot 2, U.S. Survey No. 9989, on the apparent center line of the Dillingham-Lake Aleknagik Road, from which the original reference monuments.

A stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, bears S. 65° W., 82.5 ft. dist., mkd. RM 125 LKS C13 L2 S9989 1989.

A stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, bears N. 25° W., 82.5 ft. dist., mkd. RM S9989 L2 C13 125 LKS 1989.



Point for cor. No. 12, Lot 2, U.S. Survey No. 9989, on the apparent center line of the Dillingham-Lake Aleknagik Road, from which the original reference monuments.


A stainless steel post, 2 1/2 ins. diam., firmly set, 8 ins. below ground, bears S. 65° W., 82.5 ft. dist., mkd. RM 125 LKS C12 L2 S9989 1989.

A stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 in. above ground, bears N. 25° W., 82.5 ft. dist., mkd. RM S9989 L2 C12 125 LKS 1989.


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28 P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED AT ALEKNAGIK, ALASKA


REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, AND 3 FOR SURVEY INFORMATION




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the original 1966 bearing trees




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the original 1989 bearing trees




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. as shown, from which the original 1973 bearing trees




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original 1973 bearing trees



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the remains of the 1973 bearing trees



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original 1997 bearing trees




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the original 1973 bearing trees




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original 1989 bearing trees




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original 1973 bearing trees




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original 1997 bearing trees




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the original 1988 bearing trees




Found an iron post, 2 1/2 ins. diam., firmly set, flush with ground, with brass cap, mkd. as shown, from which the original 1973 bearing trees




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the remains of the 1966 bearing tree




Found stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the original 1997 bearing trees




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, from which the original 1973 bearing trees



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. as shown, from which the original 1975 bearing trees




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the original 1966 bearing trees



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the remains of the original 1973 bearing tree




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the original 1988 bearing trees




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. as shown, from which the original 1975 bearing trees




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the original 1966 bearing trees




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, from which the original 1966 bearing trees



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the original 1988 bearing trees



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. as shown, from which the original 1975 bearing trees



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the original 1966 bearing trees



Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, from which the original 1966 bearing trees



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the original 1988 bearing trees



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. as shown, from which the original 1975 bearing trees




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the original 1966 bearing trees


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 28 P.L. 92-203 (85 STAT. 688, 702, 703)

ALEKNAGIK NATIVES, LIMITED AT ALEKNAGIK, ALASKA


REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, AND, 3 FOR SURVEY INFORMATION




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd as shown, from which the remains of the 1966 bearing tree... A spruce stump, 11 ins. diam., 1 1/2 ft. high, bears N 24 1/4° E., 18.8 ft. dist., with scribe marks BT on an open face... A spruce, 9 ins. diam., bears S 82 1/2° E., 17.6 ft. dist., with a fully healed blaze... and a new bearing tree... A spruce, 9 ins. diam., bears N 5 3/4° E., 50.1 ft. dist., mkd. X BT. Added marks 1997 to the brass cap.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd as shown, from which the original 1966 bearing trees... A birch, 9 ins. diam., bears S 19 1/2° E., 31.7 ft. dist., with a fully healed blaze... A dead spruce, 7 ins. diam., bears S 21° W., 58.1 ft. dist., scribe marks not noted and a new bearing tree... A spruce, 10 ins. diam., bears S 66° W., 59.4 ft. dist., mkd. X BT. Added marks 1997 to the brass cap.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd as shown, from which the original 1966 bearing trees... A spruce, 7 ins. diam., bears S 35° W., 32.3 ft. dist., with a fully healed blaze... A spruce, 10 ins. diam., bears N 25° W., 46.9 ft. dist., with a fully healed blaze.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd as shown, from which the original 1966 bearing trees... A spruce snag, 10 ins. diam., 2 ft. high, bears S 49° W., 41.6 ft. dist., with no visible scribe marks on a partially healed blaze... A spruce, 10 ins. diam., bears N 56° W., 15.8 ft. dist., with no visible scribe marks on a mostly healed blaze... and the 1989 bearing tree... A spruce, 7 ins. diam., bears S 37 3/4° E., 27.1 ft. dist., with scribe marks S9291 C2 BT visible on an open blaze.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd as shown, from which the original 1966 bearing trees... A spruce, 10 ins. diam., bears N 59° E., 6.3 ft. dist., with a fully healed blaze... A spruce, 12 ins. diam., bears S 42° W., 21.1 ft. dist., with a fully healed blaze... A dead spruce, 9 ins. diam., bears N 65° W., 23.6 ft. dist., scribe marks not noted.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd as shown, from which the original 1989 bearing trees... A spruce, 7 ins. diam., bears S 63 3/4° W., 66.7 ft. dist., with a fully healed blaze... A spruce, 6 ins. diam., bears N 6° W., 28.6 ft. dist., with a fully healed blaze.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd as shown, from which the original 1997 bearing trees... A cottonwood, 16 ins. diam., bears S 47 1/2° E., 64.8 ft. dist., with scribe marks C 1/4 S33 BT on an open blaze... A birch, 10 ins. diam., bears S 39 1/2° W., 52.7 ft. dist., with scribe marks C 1/4 S33 BT on an open blaze.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd as shown... The original rock accessory, 8 x 8 x 6 ins., laying adjacent to the N edge of the post... The original pits, 18 x 18 x 12 ins. deep, on line E and W of post, 3 ft. dist.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, encircled by a collar of stone 1 1/2 ft. diam., with brass cap mkd as shown... The original mound of stone, 3 ft. base, 1 ft. high, bears W, 3 ft. dist.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, encircled by a collar of stone, 2 ft. diam., with brass cap mkd as shown, from which the original 1966 bearing trees... A spruce, 8 ins. diam., bears S 68 1/2° W., 49.5 ft. dist., with fragmented scribe marks visible on a partially healed blaze... A dead spruce, 7 ins. diam., bears N 39 1/2° W., 42.9 ft. dist., with scribe marks X BT on an open face... and the 1997 bearing tree... A spruce, 6 ins. diam., bears N 29 1/4° E., 59.7 ft. dist., with scribe marks X BT on an open blaze.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd as shown, from which the remains of the 1966 bearing tree... A spruce stump, 6 ins. diam., 6 ins. high, bears N 63 1/2° E., 174.9 ft. dist., with the remains of tree trunk laying alongside with scribe marks X BT visible on an open face... and the original 1966 bearing trees... A spruce, 7 ins. diam., bears S 67 1/4° E., 110.9 ft. dist., with scribe marks X BT on a partially healed blaze... A spruce, 7 ins. diam., bears S 60 1/2° W., 125.4 ft. dist., with scribe marks X BT on a partially healed blaze... and the 1997 bearing tree... A spruce, 5 ins. diam., bears N 16° E., 121.4 ft. dist., with scribe marks X BT on an open blaze.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, height above ground not noted, with brass cap mkd as shown, from which the original 1966 bearing trees... A spruce, 7 ins. diam., bears S 35° E., 50.8 ft. dist., with a fully healed blaze... A dead spruce, 9 ins. diam., bears S 59° W., 38.9 ft. dist., with a fully healed blaze... and the 1997 bearing tree... A spruce, 5 ins. diam., bears S 10 1/2° W., 35.6 ft. dist., with scribe marks X BT on an open blaze.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd as shown, from which the original 1966 bearing trees... A spruce, 11 ins. diam., bears S 56 1/2° W., 57.4 ft. dist., with scribe marks X BT on a partially healed blaze... A spruce, 7 ins. diam., bears N 59° W., 61.4 ft. dist., with a fully healed blaze.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd as shown, from which the original 1966 bearing trees... A spruce, 5 ins. diam., bears S 65° E., 15.1 ft. dist., with a fully healed blaze... A spruce, 8 ins. diam., bears S 71° W., 26.6 ft. dist., with a fully healed blaze... A spruce, 9 ins. diam., bears N 51° W., 24.3 ft. dist., with scribe marks T8S R54W S34 BT on a partially healed blaze.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd as shown, from which the original 1966 bearing trees... A spruce, 13 ins. diam., bears N 80 3/4° E., 34.7 ft. dist., with a fully healed blaze... A spruce, 8 ins. diam., bears S 11 1/2° W., 17.2 ft. dist., with a fully healed blaze and snow blaze... A spruce, 10 ins. diam., bears N 51° W., 25.1 ft. dist., with fragmentary scribe marks on a partially healed blaze.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd as shown, from which the original 1966 bearing trees... A spruce, 7 ins. diam., bears N 28° E., 33.5 ft. dist., with a fully healed blaze... A spruce, 10 ins. diam., bears S 65 1/2° E., 26.2 ft. dist., with a fully healed blaze... A spruce, 7 ins. diam., bears S 63° W., 27.6 ft. dist., with a fully healed blaze... A spruce, 12 ins. diam., bears N 26° W., 18.3 ft. dist., with a fully healed blaze.



Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd as shown, from which the remains of the 1966 bearing trees... A dead spruce, 2 ins. diam., bears N 47° E., 71.3 ft. dist., with scribe marks X BT on an open face... A spruce stump, 12 ins. diam., 3 ft. high, bears N 40° W., 55.4 ft. dist., with visible scribe marks BT, the remains of tree trunk are laying alongside with visible scribe marks T8S R54W S12... and the 1997 bearing trees... A spruce, 4 ins. diam., bears N 4 1/2° W., 66.6 ft. dist., with scribe marks X BT on an open blaze... A spruce, 10 ins. diam., bears N 62 1/2° W., 87.2 ft. dist., with scribe marks X BT on an open blaze.



Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd as shown, from which the remains of the 1966 bearing tree... A spruce stump, 9 ins. diam., 3 ft. high, bears N 30 1/2° W., 36.9 ft. dist., with scribe marks T8S R54W S36 visible on remainder of open blaze... and the original 1966 bearing trees... A spruce, 11 ins. diam., bears N 33 1/2° E., 45.5 ft. dist., with fragmentary scribe marks on a mostly healed blaze... A spruce, 11 ins. diam., bears S 47° E., 34.3 ft. dist., with fragmentary scribe marks on a mostly healed blaze... A dead spruce, 8 ins. diam., bears S 42° W., 52.8 ft. dist., with scribe marks T8SR54W S6 on an open face... and the 1997 bearing trees... A spruce, 7 ins. diam., bears S 31° W., 60.0 ft. dist., with scribe marks X BT on an open blaze... A spruce, 10 ins. diam., bears N 60° W., 38.8 ft. dist., with scribe marks X BT on an open blaze.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd as shown, from which the original bearing trees... A spruce, 9 ins. diam., bears S 72° E., 35.0 ft. dist., with scribe marks BT on a partially healed blaze... A dead spruce, 10 ins. diam., bears S 24° W., 67.2 ft. dist., with scribe marks X BT on an open face.

99-2 RECORDED FILED Bristol Bay REC DIST 115 CC DATE 5-12-99 TIME 12:00 P.M. SEARCHED BY U.S. Dept of Interior BLH