

Sheet 1 of 26 Sheets
ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C)
TRACTS B, B-1, C THROUGH X, AND Z
P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWO, INC.
AT
ANGOON, ALASKA
AND

THE DEPENDENT RESURVEY OF PORTIONS OF
Ts. 50 AND 51 S., Rs. 67 AND 68 E.,
C.R.M.; THE RETRACEMENT OF PORTIONS OF
U.S. SURVEY Nos. 1283, 1567, 1613,
1757, 1800, 2416, 2503, 3756, 10475,
10784, 13167; AND THE RETRACEMENT OF
NUMEROUS PRIVATE SURVEYS.

This plat, in 26 sheets, contains the entire survey record.

This survey was executed by Kristine S. Ogonowski, Alaska Registered Land Surveyor No. 8536, for Kootznoowoo, Inc., September 1, 2006 through July 11, 2007, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973; Special Instructions, dated October 5, 2005, approved May 8, 2006; Amended Special Instructions, dated June 14, 2006, approved June 16, 2006; Angoon ANCSA 14(c) Map of Boundaries, approved June 18, 2004; Contract No. NAA060014, awarded August 17, 2006, and Notice to Proceed dated August 24, 2006.

Field Assistants were:

Ralph J. Mancuso, RLS, Land Surveyor
Max A. Schillinger, RLS, Land Surveyor
Richard L. Gaffey, LSIT, Party Chief
Tanner R.P. Gaffey, Survey Technician
Bryce M. Withers, Survey Technician
Zachary D. Withers, Survey Technician
Demetrius S. Johnson, Survey Technician
Levi D. Johnson, Survey Aid
Kurt T. Sharp, Survey Aid
Dennis Jack (NMI), Survey Aid
Rita J. Loomis, Cook

Area: 766.55 Acres

The azimuth was determined by Global Positioning Systems using static relative positioning techniques, and refers to the true meridian. The directions of all lines are mean bearings.

The geographic position of the witness corner to the meander corner to Townships 50 and 51 South, Ranges 67 East, Copper River Meridian, as determined from a tie to the National Geodetic Survey Control Station "TABLE", is:

Latitude: 57° 29' 16.94" North NAD 27
Longitude: 134° 34' 43.27" West

The mean magnetic declination was obtained from direct field observations.

This survey is situated in and around the city of Angoon, within Townships 50 South, Ranges 67 and 68 East and Township 51 South, Range 68 East, Copper River Meridian, Alaska.

The topography is generally rolling terrain, with mature forest of spruce and western hemlock, with an understory of devil's club, berry bushes and ferns. Forest duff lies over layers of organic loam, rocky mineral soil and bedrock.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director
Craig [Signature]
Acting

11/12/08
Date


Deputy State Director for Cadastral Survey, Alaska
Juneau 2008-35

SHEET INDEX

Sheet 2	History of Surveys, Section Breakdown
Sheet 3	Tracts B, B-1 and Road ROW No. 4
Sheet 4	Tracts C, D and A2
Sheet 5	Tract X and Road ROW No. 1
Sheet 6	Tracts E, A-1, A-2, Auk'Tah Lake Road Subdivision and Road ROW No. 2
Sheet 7	Tracts G, M and Lot 10B, U.S. Survey No. 3756
Sheet 8	Tracts H and L
Sheet 9	Tract F
Sheet 10	Lots 286B, 286C, 287B, 287C, Keet Subdivision and Lot 6A, Tract A, U.S. Survey No. 2416
Sheet 11	Tracts I and Z, and Road ROW No. 3
Sheet 12	Tract J and Tract "H" (Keet Subd.)
Sheet 13	Tract K
Sheet 14	Tracts N, O, P and Q
Sheet 15	Tracts R, S, T, U, V and W
Sheets 16-26	Monuments Descriptions


NOTES

- Only the tracts created this survey are identified on this sheet, and marked as the following example: 'X'. See the appropriate sheet for specific information on retracements of record surveys.
- Representation of record plats are for graphical purposes only.
- All distances are in feet.
- General location descriptions for each parcel can be found on the appropriate sheet.
- Meanders were obtained through direct field observations and are for the purpose of ascertaining the upland area only.

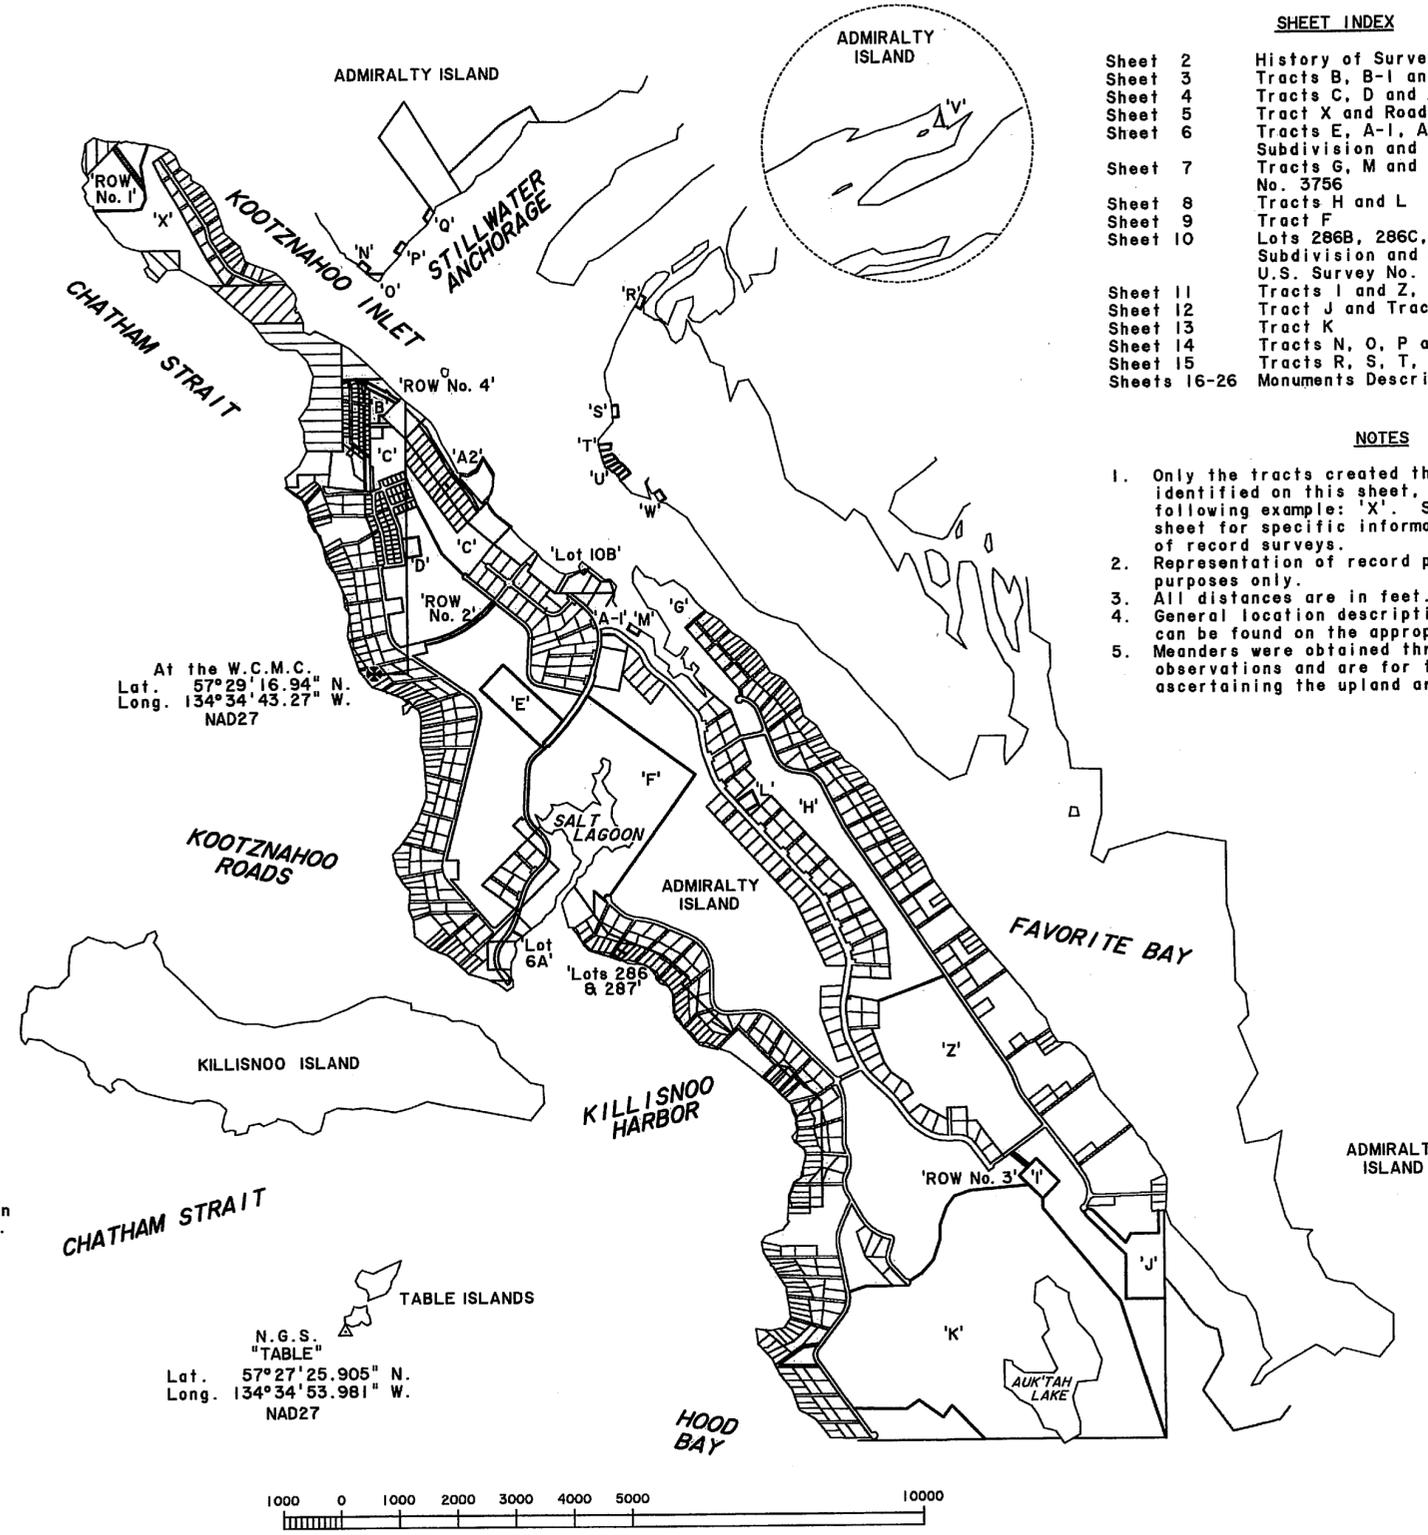

At the W.C.M.C.
Lat. 57° 29' 16.94" N.
Long. 134° 34' 43.27" W.
NAD27

N.G.S.
"TABLE"
Lat. 57° 27' 25.905" N.
Long. 134° 34' 53.981" W.
NAD27

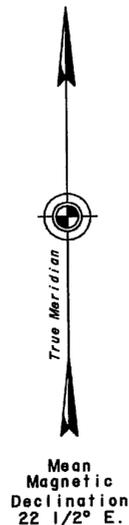

I, Kristine S. Ogonowski, Alaska Registered Land Surveyor No. 8536, for Kootznoowoo, Inc., HEREBY CERTIFY that I have executed the ANCSA 14(c) Survey depicted on this plat of 26 sheets, in conformance with the Special Instructions, approved May 8, 2006; Amended Special Instructions, approved June 16, 2006, Contract No. NAA060014, awarded August 17, 2006, the principles of survey described in the Manual of Instructions for the Survey of the Public Lands of the United States, 1973, and in the specific manner described on this plat.



I hereby certify that the tracts represented on this plat of survey are on lands conveyed to Kootznoowoo, Inc. by Public Law 96-487, Section 506. This survey accurately describes the lands intended to be conveyed pursuant to the requirements of ANCSA 14(c)(1) and (3). Said tracts also fulfill all entitlements under the provisions of ANCSA 14(c), as requested by the Kootznoowoo, Inc. Angoon Map of Boundaries, accepted June 18, 2004.

OCTOBER 19, 2008
Date

[Signature]
President, Kootznoowoo, Inc.

September 30, 2008
Date

Kristine S Ogonowski
Alaska Registered Land Surveyor

HISTORY OF SURVEYS

U.S. Survey No. 1283 (H.E.S. No. 109) was surveyed by George W. Root, Surveyor, in 1918. U.S. Survey No. 1567 was surveyed by Dan P. Mumbrue, U.S. Surveyor, in 1927. U.S. Survey No. 1613 was surveyed by Dan P. Mumbrue, U.S. Surveyor, in 1927. U.S. Survey No. 1757 was surveyed by Dan P. Mumbrue, U.S. Surveyor, in 1927. U.S. Survey No. 1800 was surveyed by Dan P. Mumbrue, U.S. Surveyor, in 1927. U.S. Survey No. 2256 was surveyed by Chas. P. Seelye, Transitman, G.L.O., in 1936. U.S. Survey No. 2416 was surveyed by F.W. Williamson, Cadastral Engineer, G.L.O. and Leonard M. Berlin, Surveyor, G.L.O., in 1938. U.S. Survey No. 2437 was surveyed by F.W. Williamson, Cadastral Engineer, G.L.O., in 1939. U.S. Survey No. 2503 was surveyed by F.W. Williamson, Associate Cadastral Engineer, G.L.O., in 1941. U.S. Survey No. 3755 was surveyed by Robert Q. Pickering, Cadastral Surveyor, in 1960. U.S. Survey No. 3756 was surveyed by Robert Q. Pickering, Cadastral Surveyor, in 1960. The partial dependent resurvey and the additional subdivision of Block 12, U.S. Survey No. 1567 was surveyed by Warren P. Latvala, Supervisory Cadastral Surveyor and Ralph W. Wilson, Cadastral Surveyor, in 1971. U.S. Survey No. 10475 was surveyed by Robert T. Kean, Alaska Registered Land Surveyor No. 3943, in 1990. U.S. Forest Service Angoon Administrative Site was surveyed by David I. Wood, Alaska Registered Land Surveyor No. 3499, in 1991, recorded as Plat No. 91-59RS, Juneau Recording District. The same survey is represented as U.S. Survey No. 10784, surveyed by David I. Wood, F.S. Cadastral Surveyor, in 1991 through 1996. U.S. Survey No. 13167 was surveyed by Kristine Staffeldt Ogonowski, Alaska Registered Land Surveyor No. 8536, in 2002. The boundaries of fractional Ts. 50 S., Rs. 67 and 68 E. and T. 51 S., R. 68 E., C.R.M., were surveyed by Floyd G. Betts, U.S. Cadastral Engineer, Dan P. Mumbrue, U.S. Surveyor, and Chas. P. Seelye, U.S. Transitman, in 1928 through 1929. The subdivision and meanders of fractional T. 50 S., R. 67 E., C.R.M., were surveyed by Floyd G. Betts, U.S. Cadastral Engineer, Dan P. Mumbrue, U.S. Surveyor, and Chas. P. Seelye, U.S. Transitman, in 1928 through 1931. The subdivision and meanders of fractional T. 51 S., R. 68 E., C.R.M., were surveyed by Dan P. Mumbrue, U.S. Surveyor, and Chas. P. Seelye, U.S. Transitman, in 1928 through 1931. The subdivision and meanders of fractional T. 50 S., R. 68 E., C.R.M., were surveyed by Dan P. Mumbrue, U.S. Surveyor, and Chas. P. Seelye, U.S. Transitman, in 1928 through 1932. The Supplemental plat of section 36, T. 50 S., R. 67 E., C.R.M., subdivided Lot 1 into Lots 6 and 7, approved May 10, 1937. The Supplemental plat of section 36, T. 50 S., R. 67 E., C.R.M., subdivided Lot 3 into Lots 8 and 9, approved October 25, 1938. The east boundary and subdivision of T. 51 S., R. 68 E., C.R.M., were surveyed by Floyd G. Betts, Cadastral Engineer, in 1938. The Supplemental plat of section 30, T. 50 S., R. 68 E., C.R.M., segregates U.S. Survey No. 3755 and amends the lotting, approved December 4, 1962. The Supplemental plat of section 31, T. 50 S., R. 67 E., C.R.M., amends lottings created by the segregation of U.S. Survey Nos. 2256, 2437 and 3756, approved April 9, 1963. The dependent resurvey of portions of the south and east boundaries and the survey of a portion of the subdivision of section lines and the subdivision of Lot 15 into Lots 16, 17 and 18 of section 31, and the dependent resurvey of portions of U.S. Survey Nos. 3756 and 10475, in T. 50 S., R. 68 E., C.R.M., were surveyed by Douglas N. Haywood, Cadastral Surveyor, in 1998 through 1999.

HISTORY OF SURVEYS, cont.


The Supplemental plat of section 3, T. 50 S., R. 68 E., C.R.M., segregates U.S. Survey No. 10784 and amends the lotting, approved March 23, 2007. The recovery of selected corners and the survey of a portion of the meanders of T. 50 S., R. 68 E., Copper River Meridian, was surveyed by Kristine Staffeldt Ogonowski, Alaska Registered Land Surveyor No. 8536, in 2002. The dependent resurvey of a portion of the subdivision lines and the survey of a portion of the subdivision of section lines and a portion of the meanders of T. 51 S., R. 68 E., C.R.M., were surveyed by Kristine Staffeldt Ogonowski, Alaska Registered Land Surveyor No. 8536, in 2002. The Supplemental plat of section 36, T. 50 S., R. 67 E., C.R.M., amended Lot 7 into Lot 10 and segregated U.S. Survey No. 10784, approved June 2, 2006. Turnkey III Housing Subdivision, Phase I was surveyed by George R. Marks, Alaska Registered Land Surveyor No. 1644, in 1972, recorded as Plat No. 77-54, Juneau Recording District. The metes and bounds survey of U.S. Forest Service Angoon Administrative Site was surveyed by T. Williams, U.S. Forest Service, in 1973, updated in 1975. This plat is not recorded, and resides at the Chatham Area office in Sitka, Alaska. Alaska Tidelands Survey No. 1017 was surveyed by David S. Miller, Alaska Registered Land Surveyor No. 3316, recorded as Plat No. 76-30, Juneau Recording District. Turnkey III Housing Subdivision, Phase II was surveyed by George R. Marks, Alaska Registered Land Surveyor No. 1644, in 1977, recorded as Plat No. 77-61, Juneau Recording District. Subdivision of Lot 7, U.S. Survey No. 3756 was surveyed by Ronald D. King, Alaska Registered Land Surveyor No. 6262, in 1984, recorded as Plat No. 84-119, Juneau Recording District. Tracts 1 and 2, a subdivision of a fraction of Lot 9B, U.S. Survey No. 3756 was surveyed by Ronald D. King, Alaska Registered Land Surveyor No. 6262, recorded as Plat No. 84-120, Juneau Recording District. Augoon Subdivision No. 1 was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1980, recorded as Plat No. 86-65, Juneau Recording District. Augoon Subdivision No. 2 was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1980, recorded as Plat No. 86-66, Juneau Recording District. Samuel G. Johnson Subdivision Addition was surveyed by Daniel A. Wohl, Alaska Registered Land Surveyor No. 6716, in 1986, recorded as Plat No. 87-6, Juneau Recording District. Samuel G. Johnson Subdivision was surveyed by John M. Lauritzen, Alaska Registered Land Surveyor No. 5115, in 1986, recorded as Plat No. 88-21, Juneau Recording District. Kootznoowoo Survey No. 100 was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1991, recorded as Plat No. 92-4, Juneau Recording District. Alaska Tideland Survey No. 1026 was surveyed by R. J. Hungerford, Alaska Registered Land Surveyor No. 5453, in 1991, recorded as Plat No. 92-17, Juneau Recording District. Kootznoowoo Heights Subdivision was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1995, recorded as Plat No. 95-21, Juneau Recording District. Lot 1A Block 4 and Lots 6A, 6B Block 5, Samuel G. Johnson Subdivision was surveyed by Paul D. Whipple, Alaska Registered Land Surveyor No. 6992, in 1996, recorded as Plat No. 96-18, Juneau Recording District. State of Alaska Department of Transportation and Public Facilities Right of Way Map of Angoon City Streets, B.I.A. Project No. 020(I), State of Alaska Project No. 71963 was surveyed by Robert B. Murphy, Alaska Registered Land Surveyor No. 7331, in 1995, recorded as Plat No. 96-36, Juneau Recording District. Auk'tah Lake Road Subdivision was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1994, recorded as Plat No. 96-84, Juneau Recording District. Kanasnow Subdivision was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1994, recorded as Plat No. 97-4, Juneau Recording District. Keet Subdivision was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1995, recorded as Plat No. 96-85, Juneau Recording District.

HISTORY OF SURVEYS, cont.

Bear Ridge Subdivision was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1995, recorded as Plat No. 96-87, Juneau Recording District. Kanalku View Subdivision was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1995, recorded as Plat No. 96-88, Juneau Recording District. Beaver Dam Subdivision was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1995, recorded as Plat No. 96-89, Juneau Recording District. Danger Point Subdivision was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1995, recorded as Plat No. 96-92, Juneau Recording District. Angoon, Alaska, Kootznoowoo and Seaplane Float Roads Grading, Paving and Drainage Project No. STP-0003(29), State of Alaska Project No. 71526 was surveyed by Tracy W. Moore, Alaska Registered Engineer No. 4932, in 1995. This plat is not recorded and resides at the Alaska Dept. of Transportation and Public Facilities Southeast office. South Favorite Bay Subdivision was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1995, recorded as Plat No. 96-93, Juneau Recording District. North Favorite Bay Subdivision was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1996, recorded as Plat No. 96-107, Juneau Recording District. Topographic Survey of the Proposed U.S. Postal Service Angoon Post Office Site was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1996. This plat is not recorded and resides at the R&M Engineering, Inc. office in Juneau. Keet 2 Subdivision of a fraction of Tract "E", U.S. Survey No. 2416, was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1996, recorded as Plat No. 98-47, Juneau Recording District. Lot 174 and Tract F-1, a subdivision of Tract "F", South Favorite Bay 2 Subdivision was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 1998, recorded as Plat No. 98-48, Juneau Recording District. S.E.A.R.H.C. Tract was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 2000, recorded as Plat No. 2000-25, Juneau Recording District. Killisnoo Road Subdivision, a subdivision of sections 6 and 7, T. 51 S., R. 68 E., C.R.M., was surveyed by Malcolm A. Menzies, Alaska Registered Land Surveyor No. 1410, in 2000, recorded as Plat No. 2001-14, Juneau Recording District. Angoon Kootznoowoo and Seaplane Float Roads Project No. STP-0003(29), State of Alaska Project No. 71526 was surveyed by Robert B. Murphy, Alaska Registered Land Surveyor No. 7331, in 1995, recorded as Plat No. 2006-54, Juneau Recording District.

NOTES

- 1. Section corner of sections 25, 30, 31 and 36 Townships 50 South, Ranges 67 and 68 East, Copper River Meridian, was re-established by proportionate distance along the township line. 2. The line between Lots 6 and 10, section 36, Township 50 South, Range 67 East, Copper River Meridian was established from points proportioned along the easterly boundary of U.S. Survey No. 1567 and the township line between sections 31 and 36.

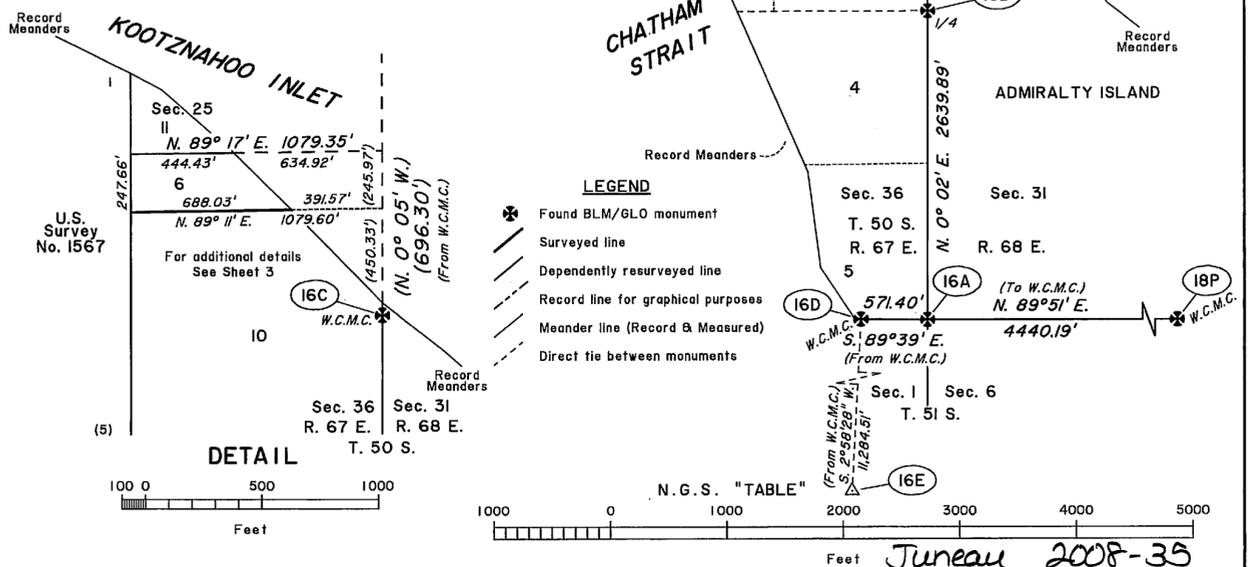

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703) KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C)
TRACTS B, B-1, C THROUGH X, AND Z
P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC.
AT
ANGOON, ALASKA
AND

THE DEPENDENT RESURVEY OF PORTIONS OF
Ts. 50 AND 51 S., Rs. 67 AND 68 E.,
C.R.M.; THE RETRACEMENT OF PORTIONS OF
U.S. SURVEY Nos. 1283, 1567, 1613,
1757, 1800, 2416, 2503, 3756, 10475,
10784, 13167; AND THE RETRACEMENT OF
NUMEROUS PRIVATE SURVEYS.





REFERENCE SHOULD BE MADE TO
SHEET No. 1 FOR SURVEY INFORMATION

NOTES

1. The general location of the survey represented on this sheet is within section 36, Township 50 South, Range 67 East, Copper River Meridian.
2. Points of tangency and curvature along the centerline of the Kootznahoo Road were searched for, but not found.
3. See Sheet No. 2 for the section breakdown calculations of section 36.
4. Monument identifiers represent the sheet on which the monument description is located.
5. The letters "I" and "O" were not used to identify monuments on this sheet.
6. Representation of record plats are for graphical purposes only.

ROW No. 4 CURVE TABLE

DELTA	RADIUS	CHORD BRG	CHORD	LENGTH
1. 9°47'	914.93	N. 57°58' W.	156.10	156.29
2. 10°17'	984.93	S. 57°43' E.	176.66	176.90

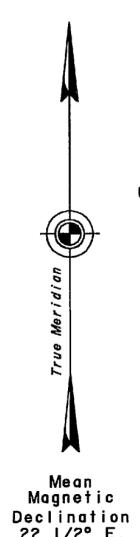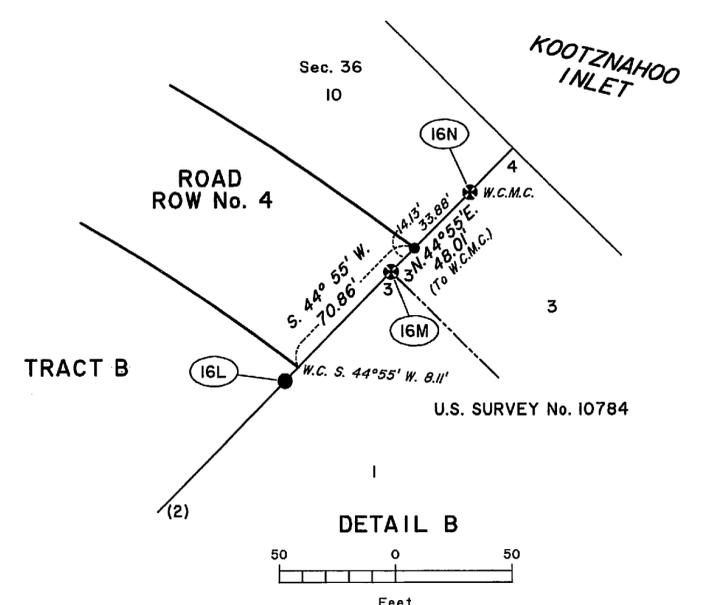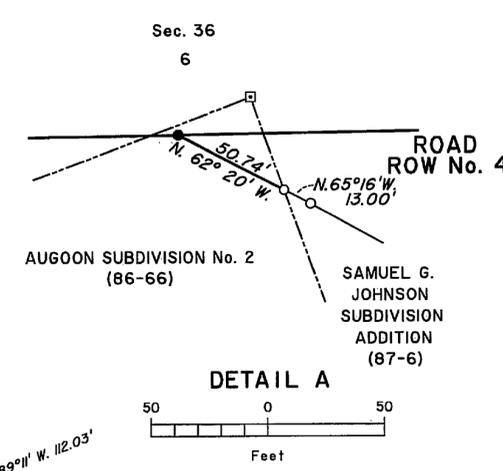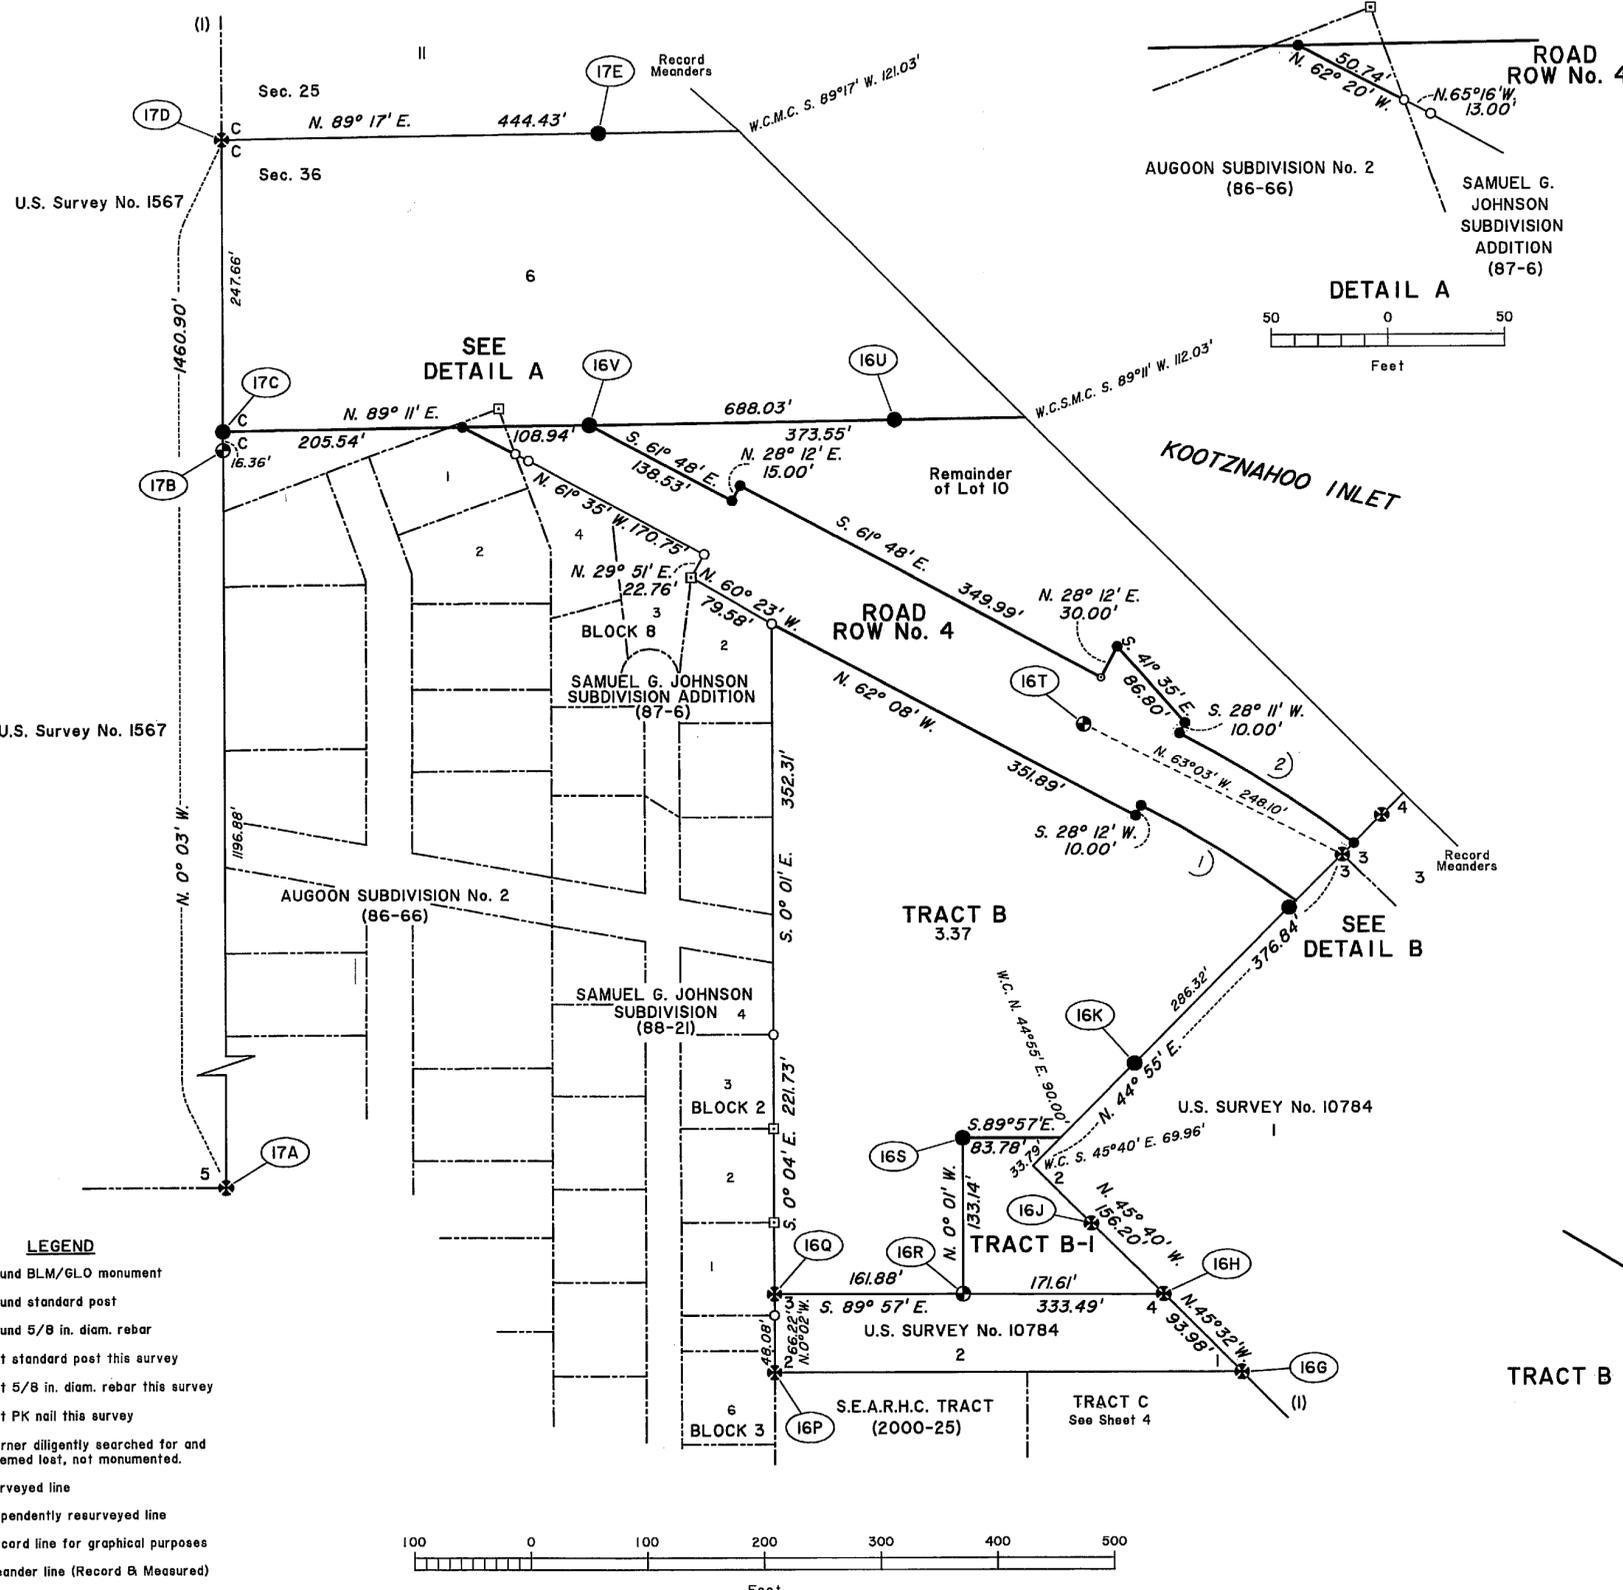

- LEGEND**
- ⊗ Found BLM/GLO monument
 - ⊙ Found standard post
 - Found 5/8 in. diam. rebar
 - Set standard post this survey
 - Set 5/8 in. diam. rebar this survey
 - ⊙ Set PK nail this survey
 - Corner diligently searched for and deemed lost, not monumented.
 - Surveyed line
 - - - Dependently resurveyed line
 - · - · - Record line for graphical purposes
 - · - · - Meander line (Record & Measured)
 - - - Direct tie between monuments
 - ⊙ Curve Identifier

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C)
TRACTS B, B-I, C THROUGH X, AND Z
P.L. 92-203, (85 STAT. 688, 702, 703)






KOOTZNOOWO, INC.
AT
ANGOON, ALASKA
AND

THE DEPENDENT RESURVEY OF PORTIONS OF
Ts. 50 AND 51 S., Rs. 67 AND 68 E.,
C.R.M.; THE RETRACEMENT OF PORTIONS OF
U.S. SURVEY Nos. 1283, 1567, 1613,
1757, 1800, 2416, 2503, 3756, 10475,
10784, 13167; AND THE RETRACEMENT OF
NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO
SHEET No. 1 FOR SURVEY INFORMATION

NOTES

1. The general location of the survey represented on this sheet is within sections 31 and 36, Townships 50 South, Ranges 67 and 68 East, Copper River Meridian.
2. Representation of record plats are for graphical purposes only.
3. Tract C shares common boundaries with record surveys that were not completely retraced and record angles and distances were used to close the parcel mathematically in excess of 1:5000. Those boundaries not retraced are shown as record lines.
4. Monument identifiers represent the sheet on which the monument description is located.
5. The letters "I" and "O" were not used to identify monuments on this sheet.

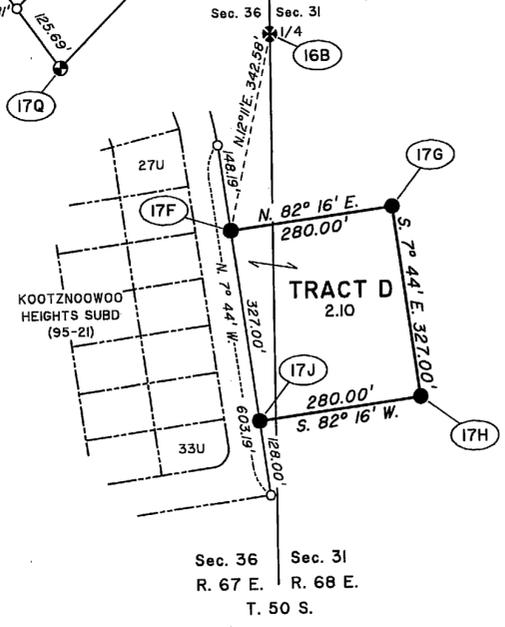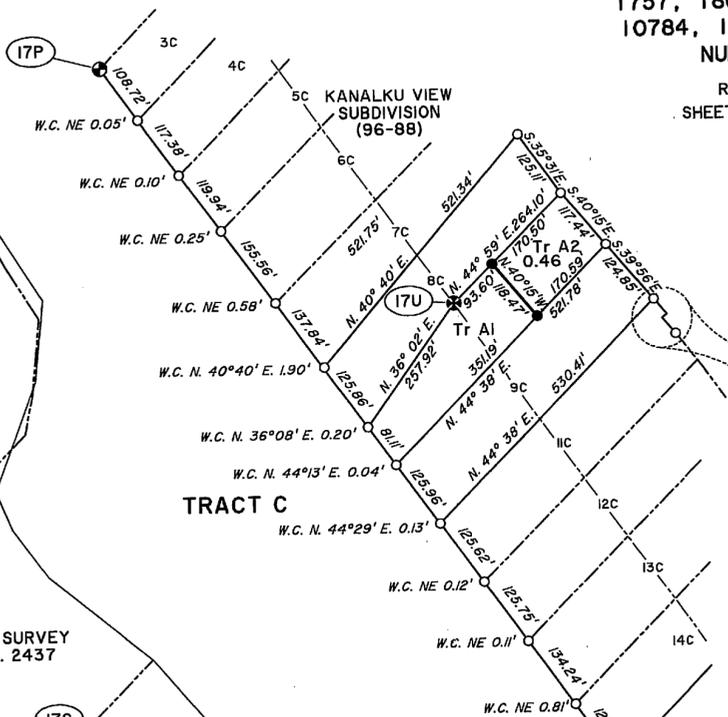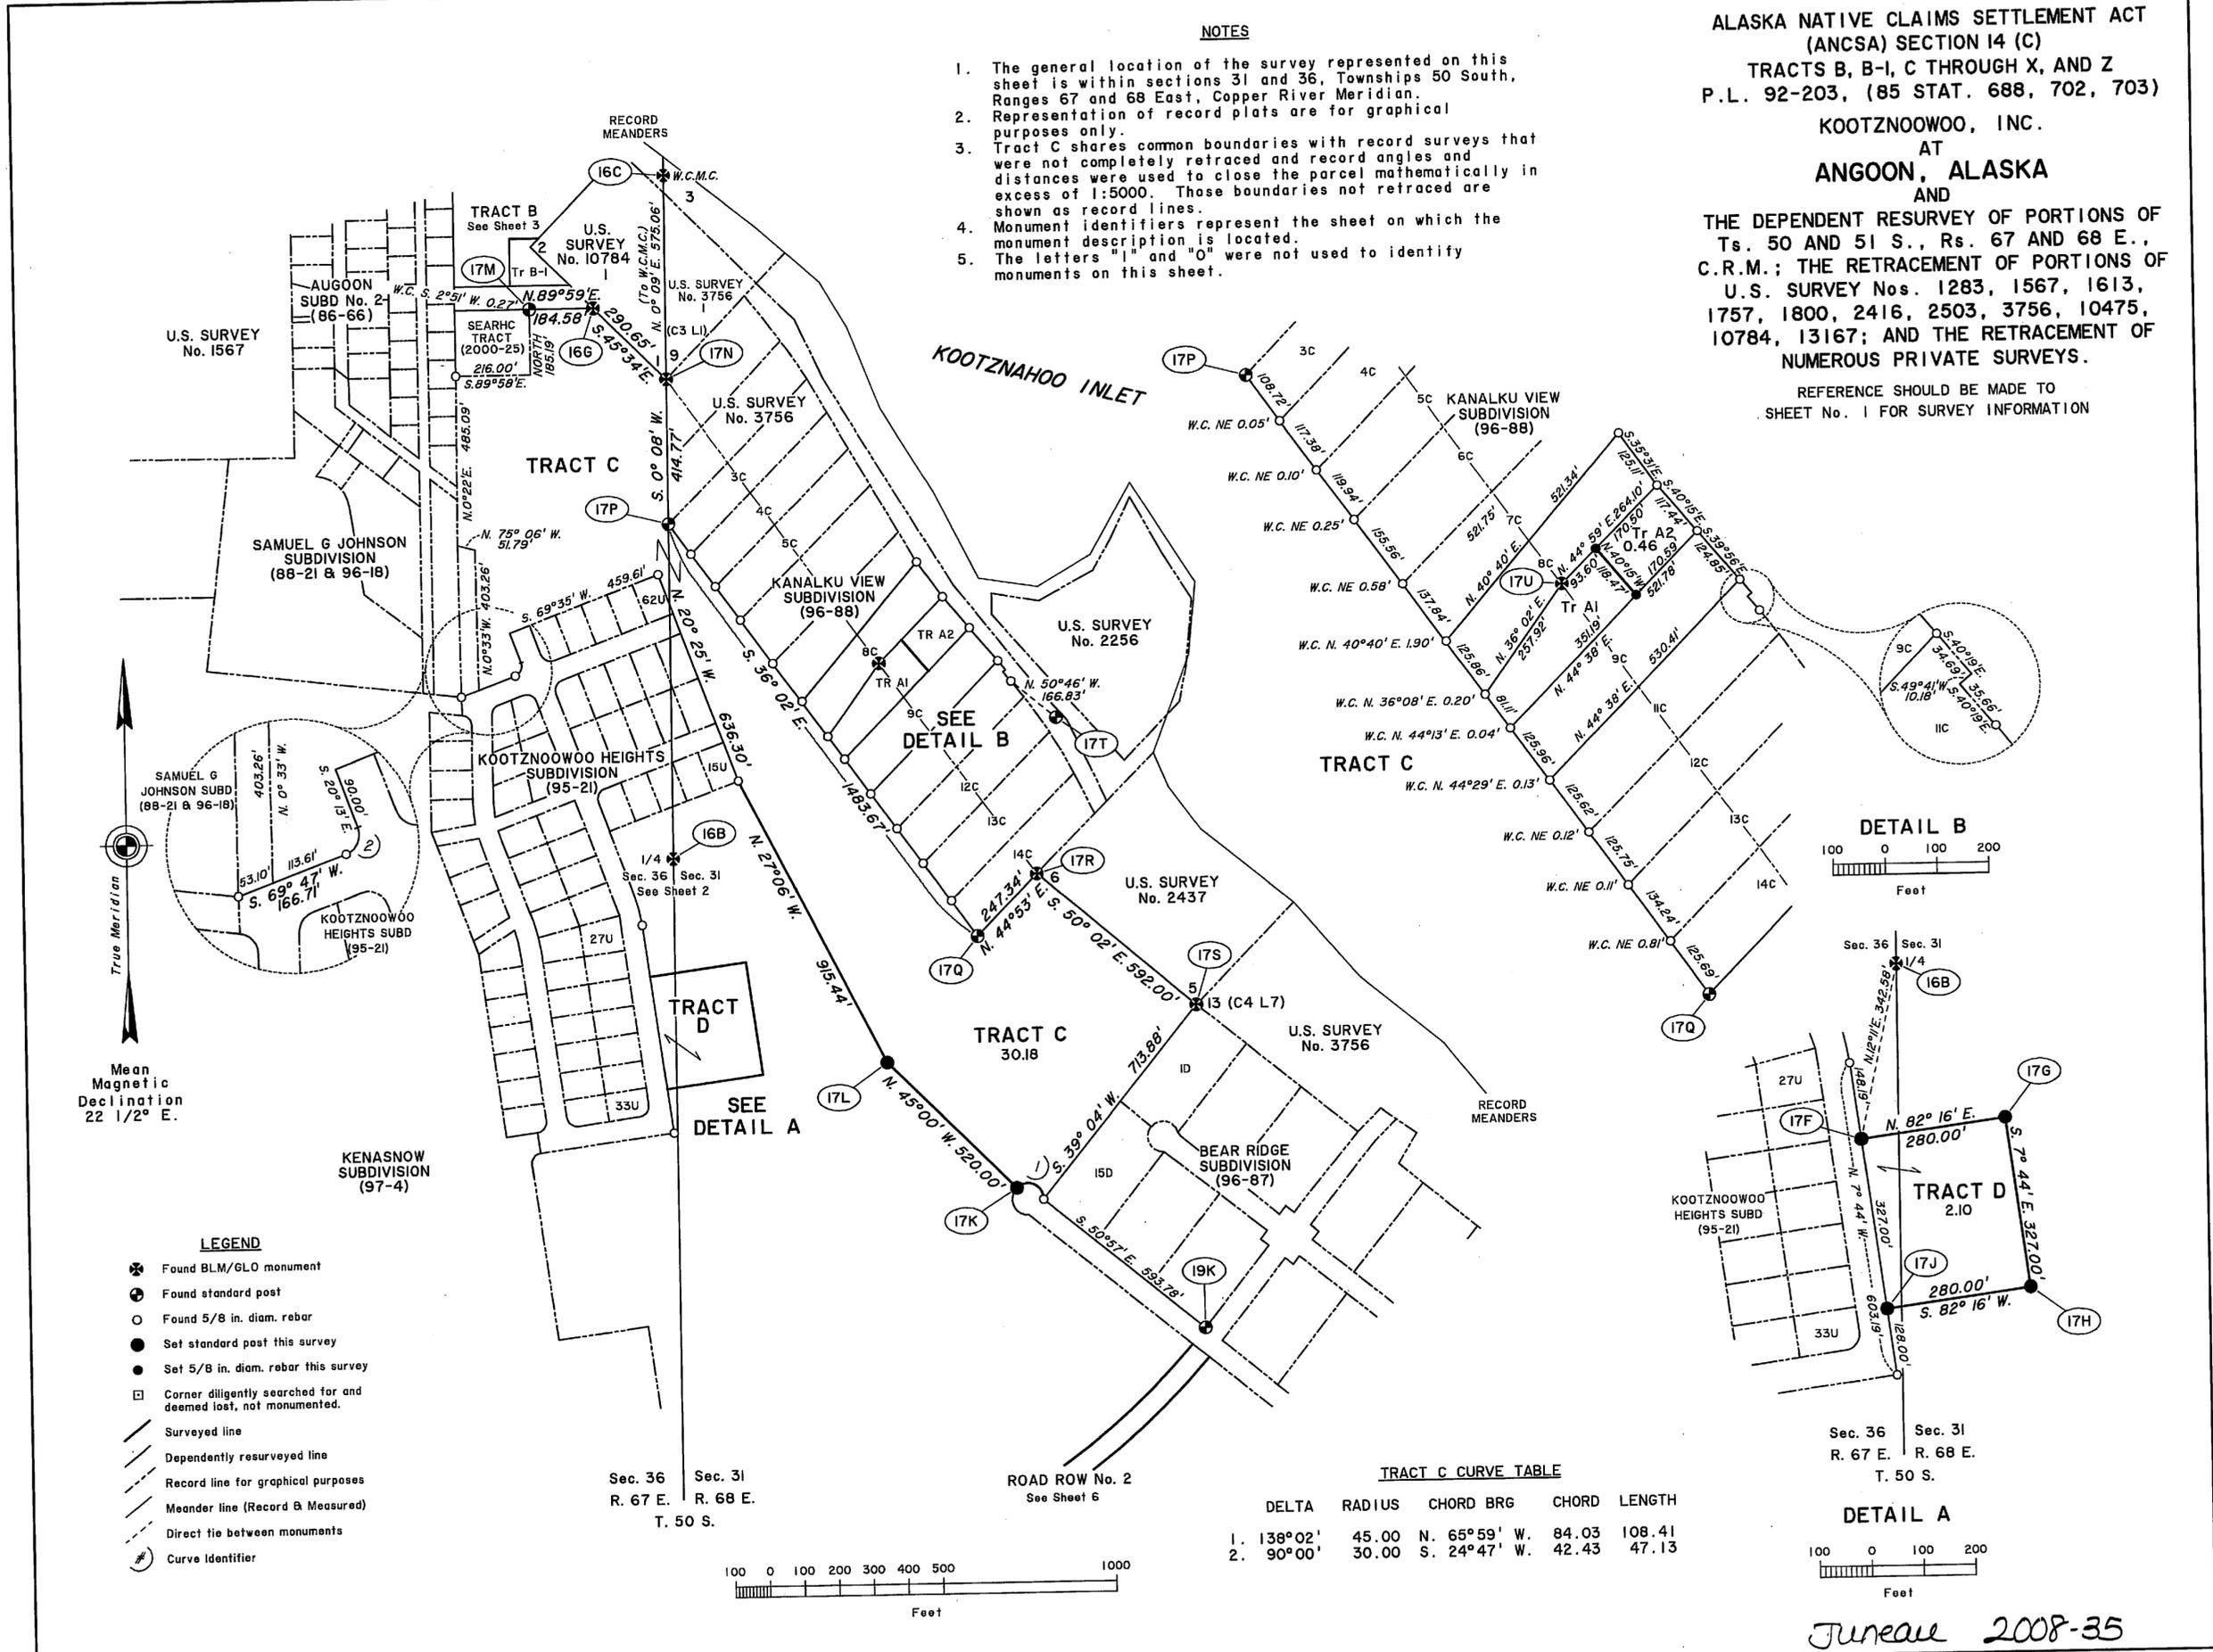

TRACT C CURVE TABLE


DELTA	RADIUS	CHORD BRG	CHORD	LENGTH
1. 136°02'	45.00	N. 65°59' W.	84.03	108.41
2. 90°00'	30.00	S. 24°47' W.	42.43	47.13



Mean Magnetic Declination 22 1/2° E.

LEGEND

- ⊗ Found BLM/GLO monument
- ⊙ Found standard post
- Found 5/8 in. diam. rebar
- Set standard post this survey
- Set 5/8 in. diam. rebar this survey
- Corner diligently searched for and deemed lost, not monumented.
- Surveyed line
- - - Dependently resurveyed line
- · - Record line for graphical purposes
- · - Meander line (Record & Measured)
- · - Direct tie between monuments
- # Curve Identifier



Juneau 2008-35

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C)
TRACTS B, B-1, C THROUGH X, AND Z
P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC.
AT
ANGOON, ALASKA
AND

THE DEPENDENT RESURVEY OF PORTIONS OF
Ts. 50 AND 51 S., Rs. 67 AND 68 E.,
C.R.M.; THE RETRACEMENT OF PORTIONS OF
U.S. SURVEY Nos. 1283, 1567, 1613,
1757, 1800, 2416, 2503, 3756, 10475,
10784, 13167; AND THE RETRACEMENT OF
NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO
SHEET No. 1 FOR SURVEY INFORMATION

NOTES

1. The general location of the survey represented on this sheet is within sections 25 and 26, Township 50 South, Range 67 East, Copper River Meridian.
2. Representation of record plats are for graphical purposes.
3. Monument identifiers represent the sheet on which the monument description is located. The letters "I" and "O" were not used to identify monuments on this sheet.

TRACT X

MEANDERS TRACT X

From the true point for the most northerly corner of Tract X, a meander corner, not monumented.

Thence with the present day meanders of Kootznahoo Inlet, along a gently sloping beach of small boulders and occasional outcrops of bedrock, with beach grasses, at the line of mean high tide.

1. S. 81°12' E., 116.56 ft.
2. S. 73°27' E., 224.95 ft.
3. S. 58°01' E., 54.66 ft.

At end of course, the true point for the most northerly corner of Lot 1, Danger Point Subdivision, identical with the most northeasterly corner of Tract X, both meander corners, not monumented.

From the true point for corner No. 8, U.S. Survey No. 1757, identical with the most southwesterly corner of Tract X, both meander corners, not monumented.

Thence with the present day meanders of Chatham Strait, along a gently sloping beach of small boulders and occasional outcrops of bedrock, at the line of mean high tide.

4. N. 60°19' W., 590.79 ft. At end of course, the true point for corner No. 1, U.S. Survey No. 1800, identical with a corner of Tract X, both meander corners, not monumented.


From the true point for corner No. 3, U.S. Survey No. 1800, identical with a corner of Tract X, both meander corners, not monumented.

Thence with the present day meanders of Chatham Strait, along a gently sloping beach of small boulders and occasional outcrops of bedrock, at the line of mean high tide.

5. N. 76°15' W., 189.15 ft.
6. N. 68°40' W., 130.56 ft.
7. N. 48°36' W., 173.92 ft.
8. N. 34°36' W., 257.60 ft.
9. N. 46°14' W., 112.94 ft.
10. N. 36°49' W., 175.06 ft.
11. N. 23°47' W., 58.70 ft.

At end of course, the true point for the most westerly corner of Tract X, a meander corner, not monumented.

Juneau 2008-35

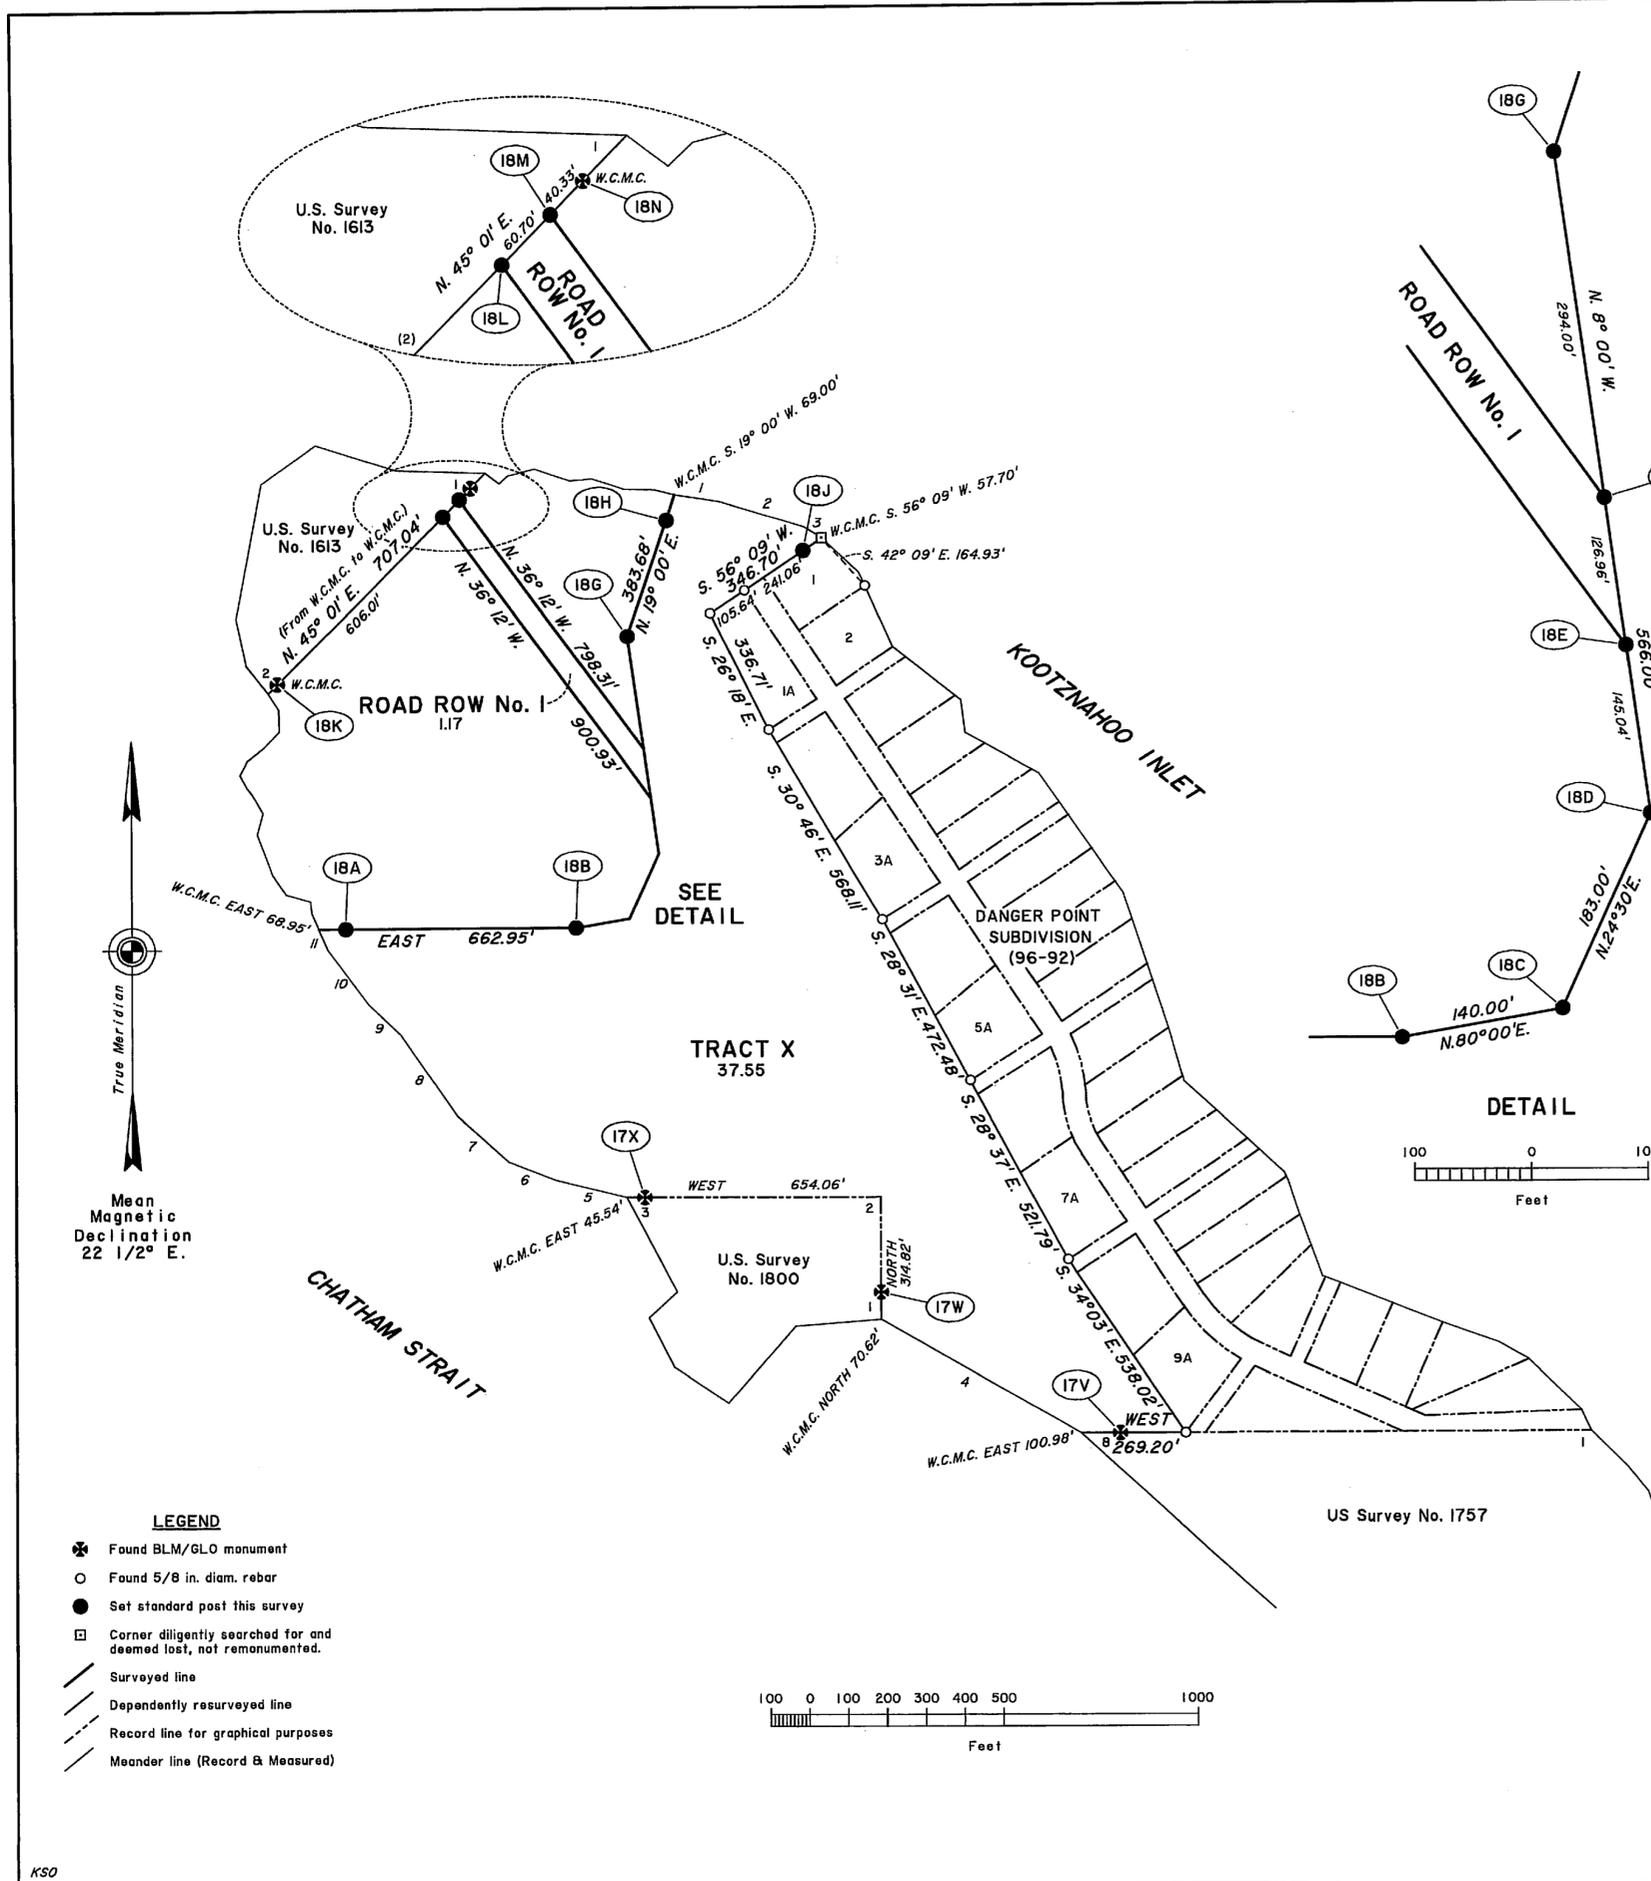

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

MEANDERS TRACT G

From the point for a corner of Tract G, a meander corner, not monumented. Thence with the present day meanders of a small unnamed bay, along a gently sloping muddy beach of small boulders and intermittent outcrops of bedrock, with beach grasses, at the line of mean high tide.

- 1. N. 33°30' W., 134.99 ft. At 98.51 ft., the meander corner of secs. 5, 6, 31 and 32, Ts. 50 and 51, Rs. 68 E., C.R.M.
2. N. 33°32' E., 145.51 ft.
3. N. 41°09' W., 132.30 ft.
4. S. 43°07' W., 73.40 ft.
5. S. 15°11' E., 74.19 ft.
6. N. 71°43' W., 123.68 ft.
7. N. 11°22' W., 155.22 ft.
8. N. 82°09' W., 34.71 ft.
9. N. 35°00' E., 210.00 ft.
10. N. 63°00' E., 60.00 ft.
11. S. 30°47' W., 127.35 ft.
12. S. 58°32' W., 105.84 ft.
13. N. 53°16' W., 246.49 ft.
14. N. 20°02' E., 288.57 ft.
15. N. 31°30' W., 423.70 ft.
16. N. 70°25' W., 159.30 ft.
17. N. 30°34' W., 504.44 ft.
18. N. 0°23' E., 160.44 ft.
19. N. 24°21' E., 134.97 ft.
20. S. 40°16' E., 234.92 ft.
21. S. 73°34' E., 160.70 ft.
22. S. 43°24' E., 159.28 ft.
23. N. 67°16' E., 231.07 ft.
24. S. 55°16' E., 284.12 ft.
25. S. 36°48' E., 303.48 ft.
26. S. 47°33' E., 166.25 ft.

ADJUSTED RECORD MEANDERS OF U.S. SURVEY No. 3756


From the true point for corner No. 2, Lot 9, identical with corner No. 1, Lot 10, U.S. Survey No. 3756, both meander corners, not monumented.

Thence with the adjusted record meanders of Favorite Bay, along a gently sloping muddy beach of small boulders, with beach grasses, at the line of mean high tide.

- 1. N. 77°00' E., 251.79 ft. At end of course, the true point for the most northerly corner of Lot 10A, identical with the most southwesterly corner of Lot 10B, U.S. Survey No. 3756, both meander corners, not monumented.
2. N. 13°03' W., 84.44 ft.
3. N. 38°18' E., 88.15 ft.
4. S. 51°32' E., 484.61 ft.
5. N. 87°55' E., 97.49 ft.
6. S. 43°04' E., 162.09 ft.
7. S. 21°26' W., 121.09 ft.

TRACT G CURVES


Table with columns: DELTA, RADIUS, CHORD BRG, CHORD, LENGTH. Contains 4 rows of curve data.

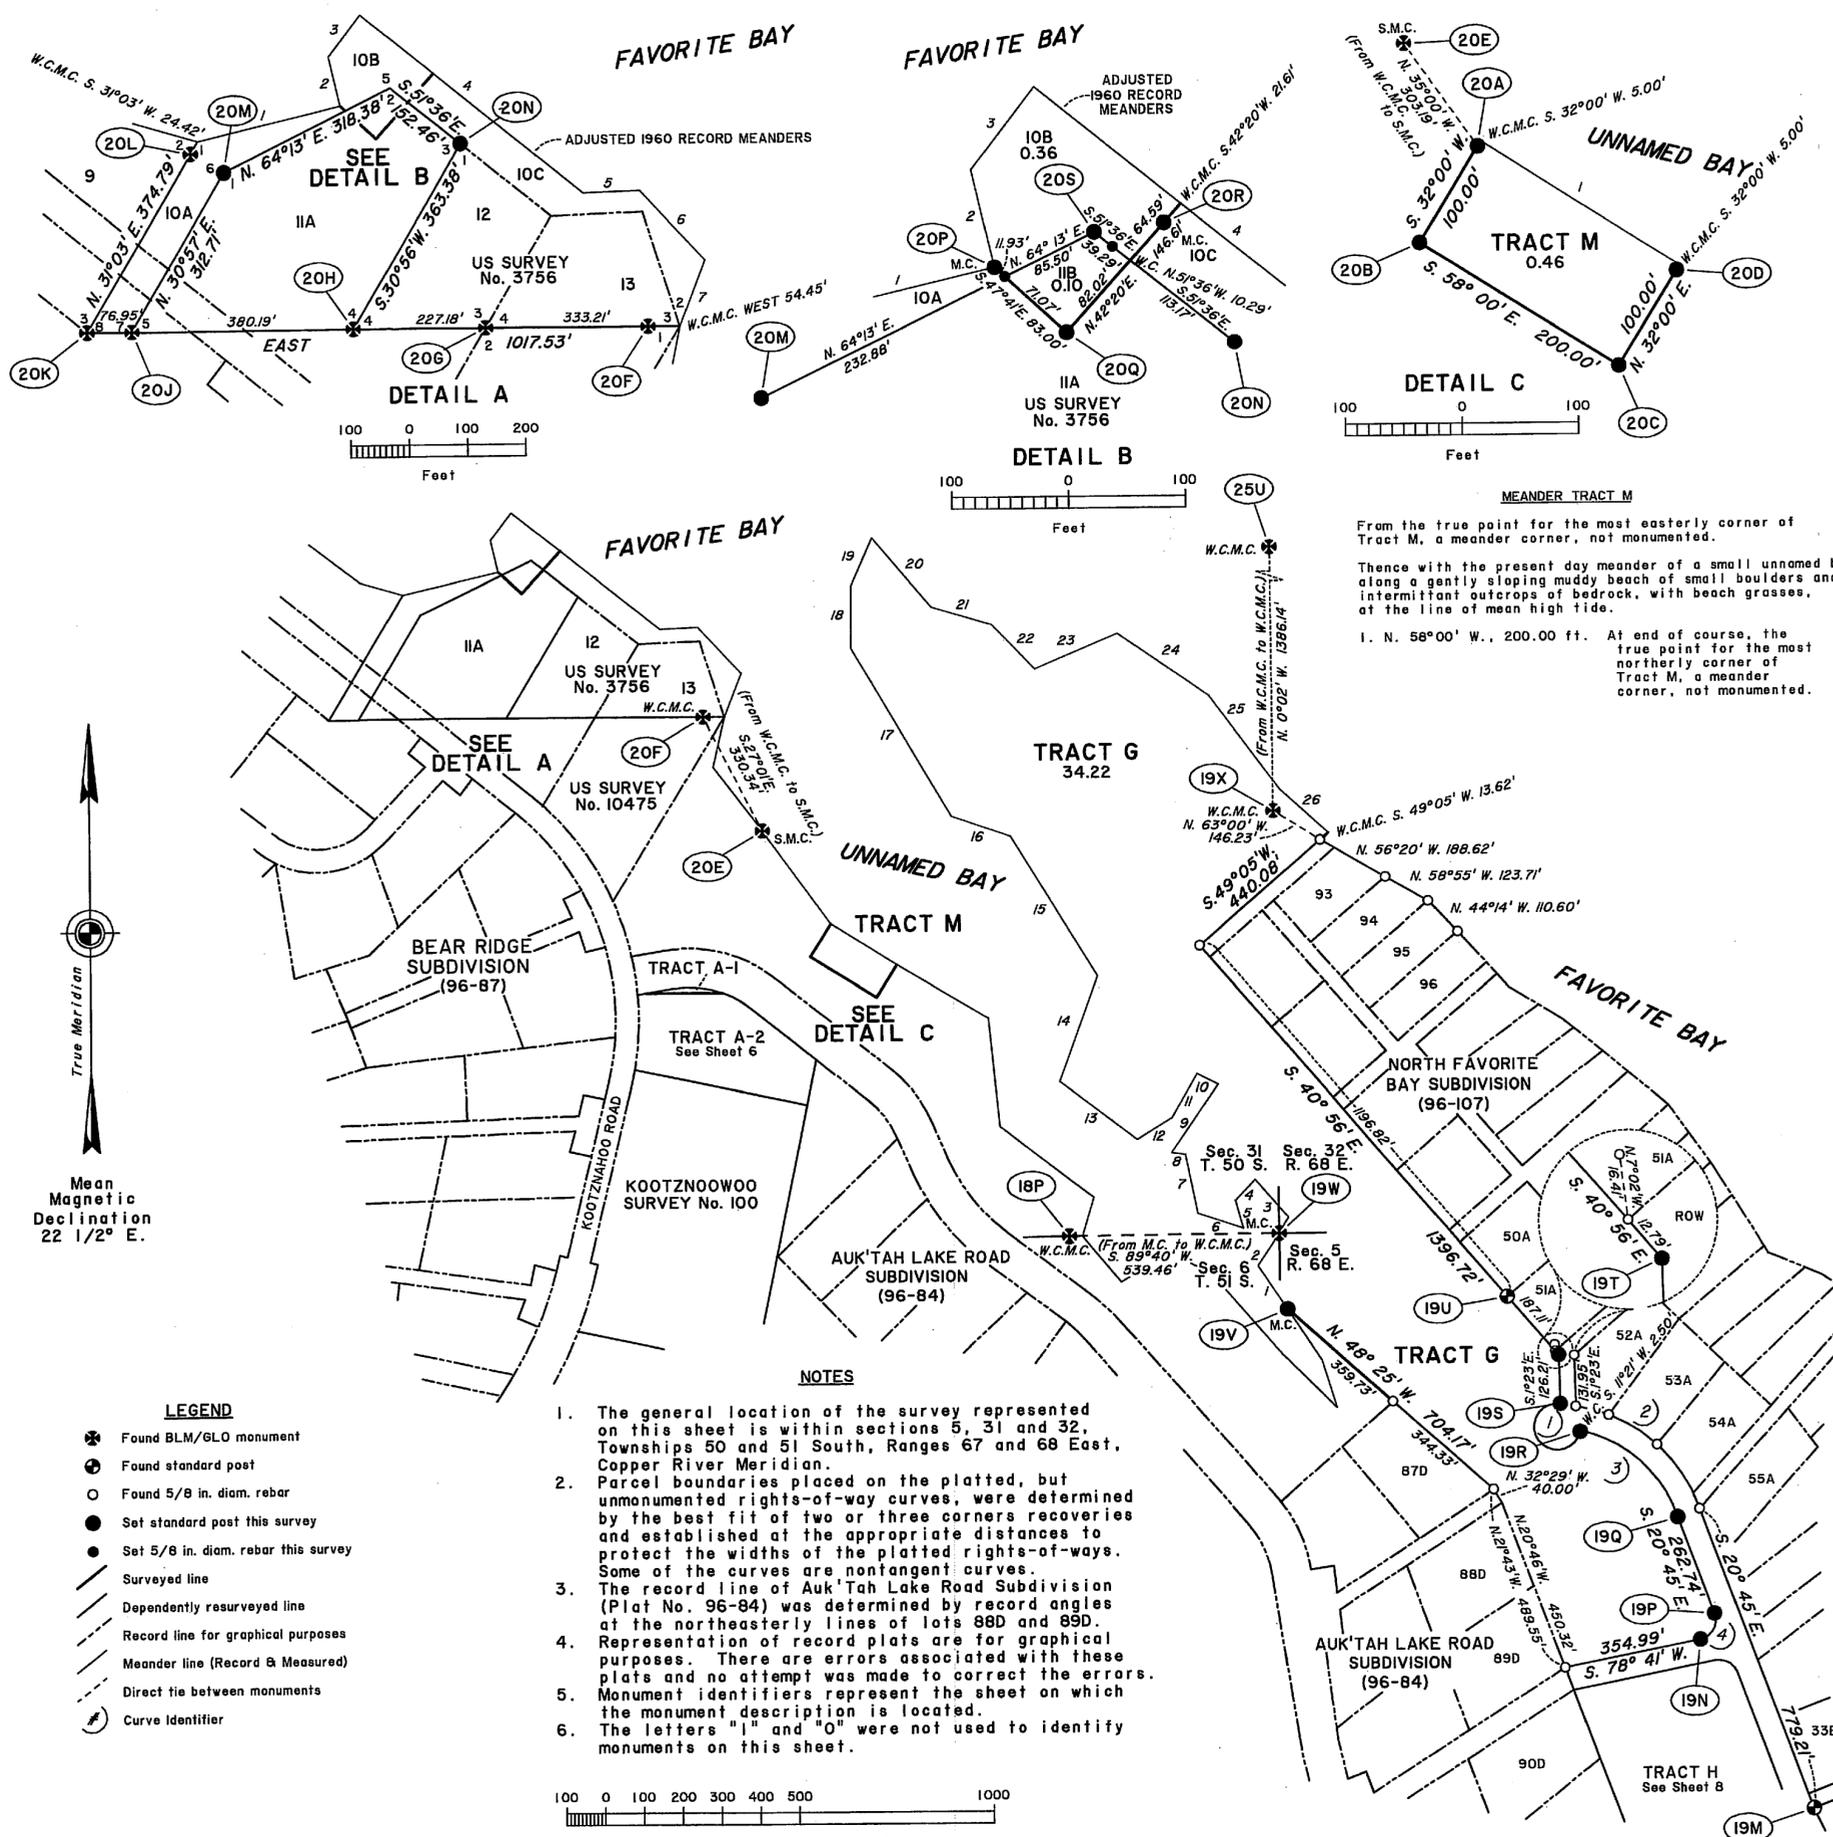

Mean Magnetic Declination 22 1/2° E.

- LEGEND
Found BLM/GLO monument
Found standard post
Found 5/8 in. diam. rebar
Set standard post this survey
Set 5/8 in. diam. rebar this survey
Surveyed line
Dependently resurveyed line
Record line for graphical purposes
Meander line (Record & Measured)
Direct tie between monuments
Curve Identifier

- NOTES
1. The general location of the survey represented on this sheet is within sections 5, 31 and 32, Townships 50 and 51 South, Ranges 67 and 68 East, Copper River Meridian.
2. Parcel boundaries placed on the platted, but unmonumented rights-of-way curves, were determined by the best fit of two or three corners recoveries and established at the appropriate distances to protect the widths of the platted rights-of-ways. Some of the curves are nontangent curves.
3. The record line of Auk'tah Lake Road Subdivision (Plat No. 96-84) was determined by record angles at the northeasterly lines of lots 88D and 89D.
4. Representation of record plats are for graphical purposes. There are errors associated with these plats and no attempt was made to correct the errors.
5. Monument identifiers represent the sheet on which the monument description is located.
6. The letters "I" and "O" were not used to identify monuments on this sheet.



Jureau 2008-35

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C)
TRACTS B, B-I, C THROUGH X, AND Z
P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC.
AT
ANGOON, ALASKA
AND

THE DEPENDENT RESURVEY OF PORTIONS OF
Ts. 50 AND 51 S., Rs. 67 AND 68 E.,
C.R.M.; THE RETRACEMENT OF PORTIONS OF
U.S. SURVEY Nos. 1283, 1567, 1613,
1757, 1800, 2416, 2503, 3756, 10475,
10784, 13167; AND THE RETRACEMENT OF
NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO
SHEET No. 1 FOR SURVEY INFORMATION

NOTES





1. The general location of the survey represented on this sheet is mostly within section 5, Township 51 South, Range 68 East, Copper River Meridian.
2. The most westerly corner of Tract L is positioned within the access road to the rock pit and was not monumented due to the potential of destruction from continued use of the pit.
3. The most southerly corner of lot 35C of Auk'Tah Lake Road Subdivision (Plat No. 96-84) is positioned within a pile of boulders near the access road to the rock pit and was not monumented due to the potential of destruction from continued use of the pit.
4. Parcel boundaries placed on the platted, unmonumented rights-of-way curves, were determined by the best fit of two or three corners recoveries and established at the appropriate distances to protect the widths of the platted rights-of-ways. Some of the curves are nontangent curves.
5. Representation of record plats are for graphical purposes. There are errors associated with these plats and no attempt was made to correct the errors.
6. Monument identifiers represent the sheet on which the monument description is located.
7. The letters "I" and "O" were not used to identify monuments on this sheet.

LEGEND

- ⊗ Found BLM/GLO monument
- ⊙ Found standard post
- Found 5/8 in. diam. rebar
- Set standard post this survey
- Corner diligently searched for and deemed lost, not monumented.
- Surveyed line
- - - - - Dependently resurveyed line
- ⋯ Record line for graphical purposes
- ⋯ Meander line (Record & Measured)
- Direct tie between monuments
- ⌒ Curve Identifier

TRACT H CURVE TABLE

DELTA	RADIUS	CHORD BRG	CHORD	LENGTH
1. 2° 12'	498.44	N. 32° 53' W.	19.20	19.20
2. 6° 49'	558.44	N. 30° 43' W.	66.40	66.44
3. 67° 25'	460.83	N. 60° 50' W.	511.44	542.17
4. 67° 50'	400.83	N. 61° 03' W.	447.36	474.60
5. 67° 26'	400.08	N. 54° 33' W.	445.00	471.76
6. 68° 01'	460.08	N. 54° 46' W.	514.61	546.11
7. 99° 25'	42.37	N. 61° 03' W.	64.63	73.51

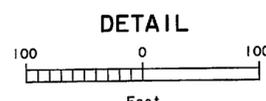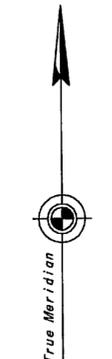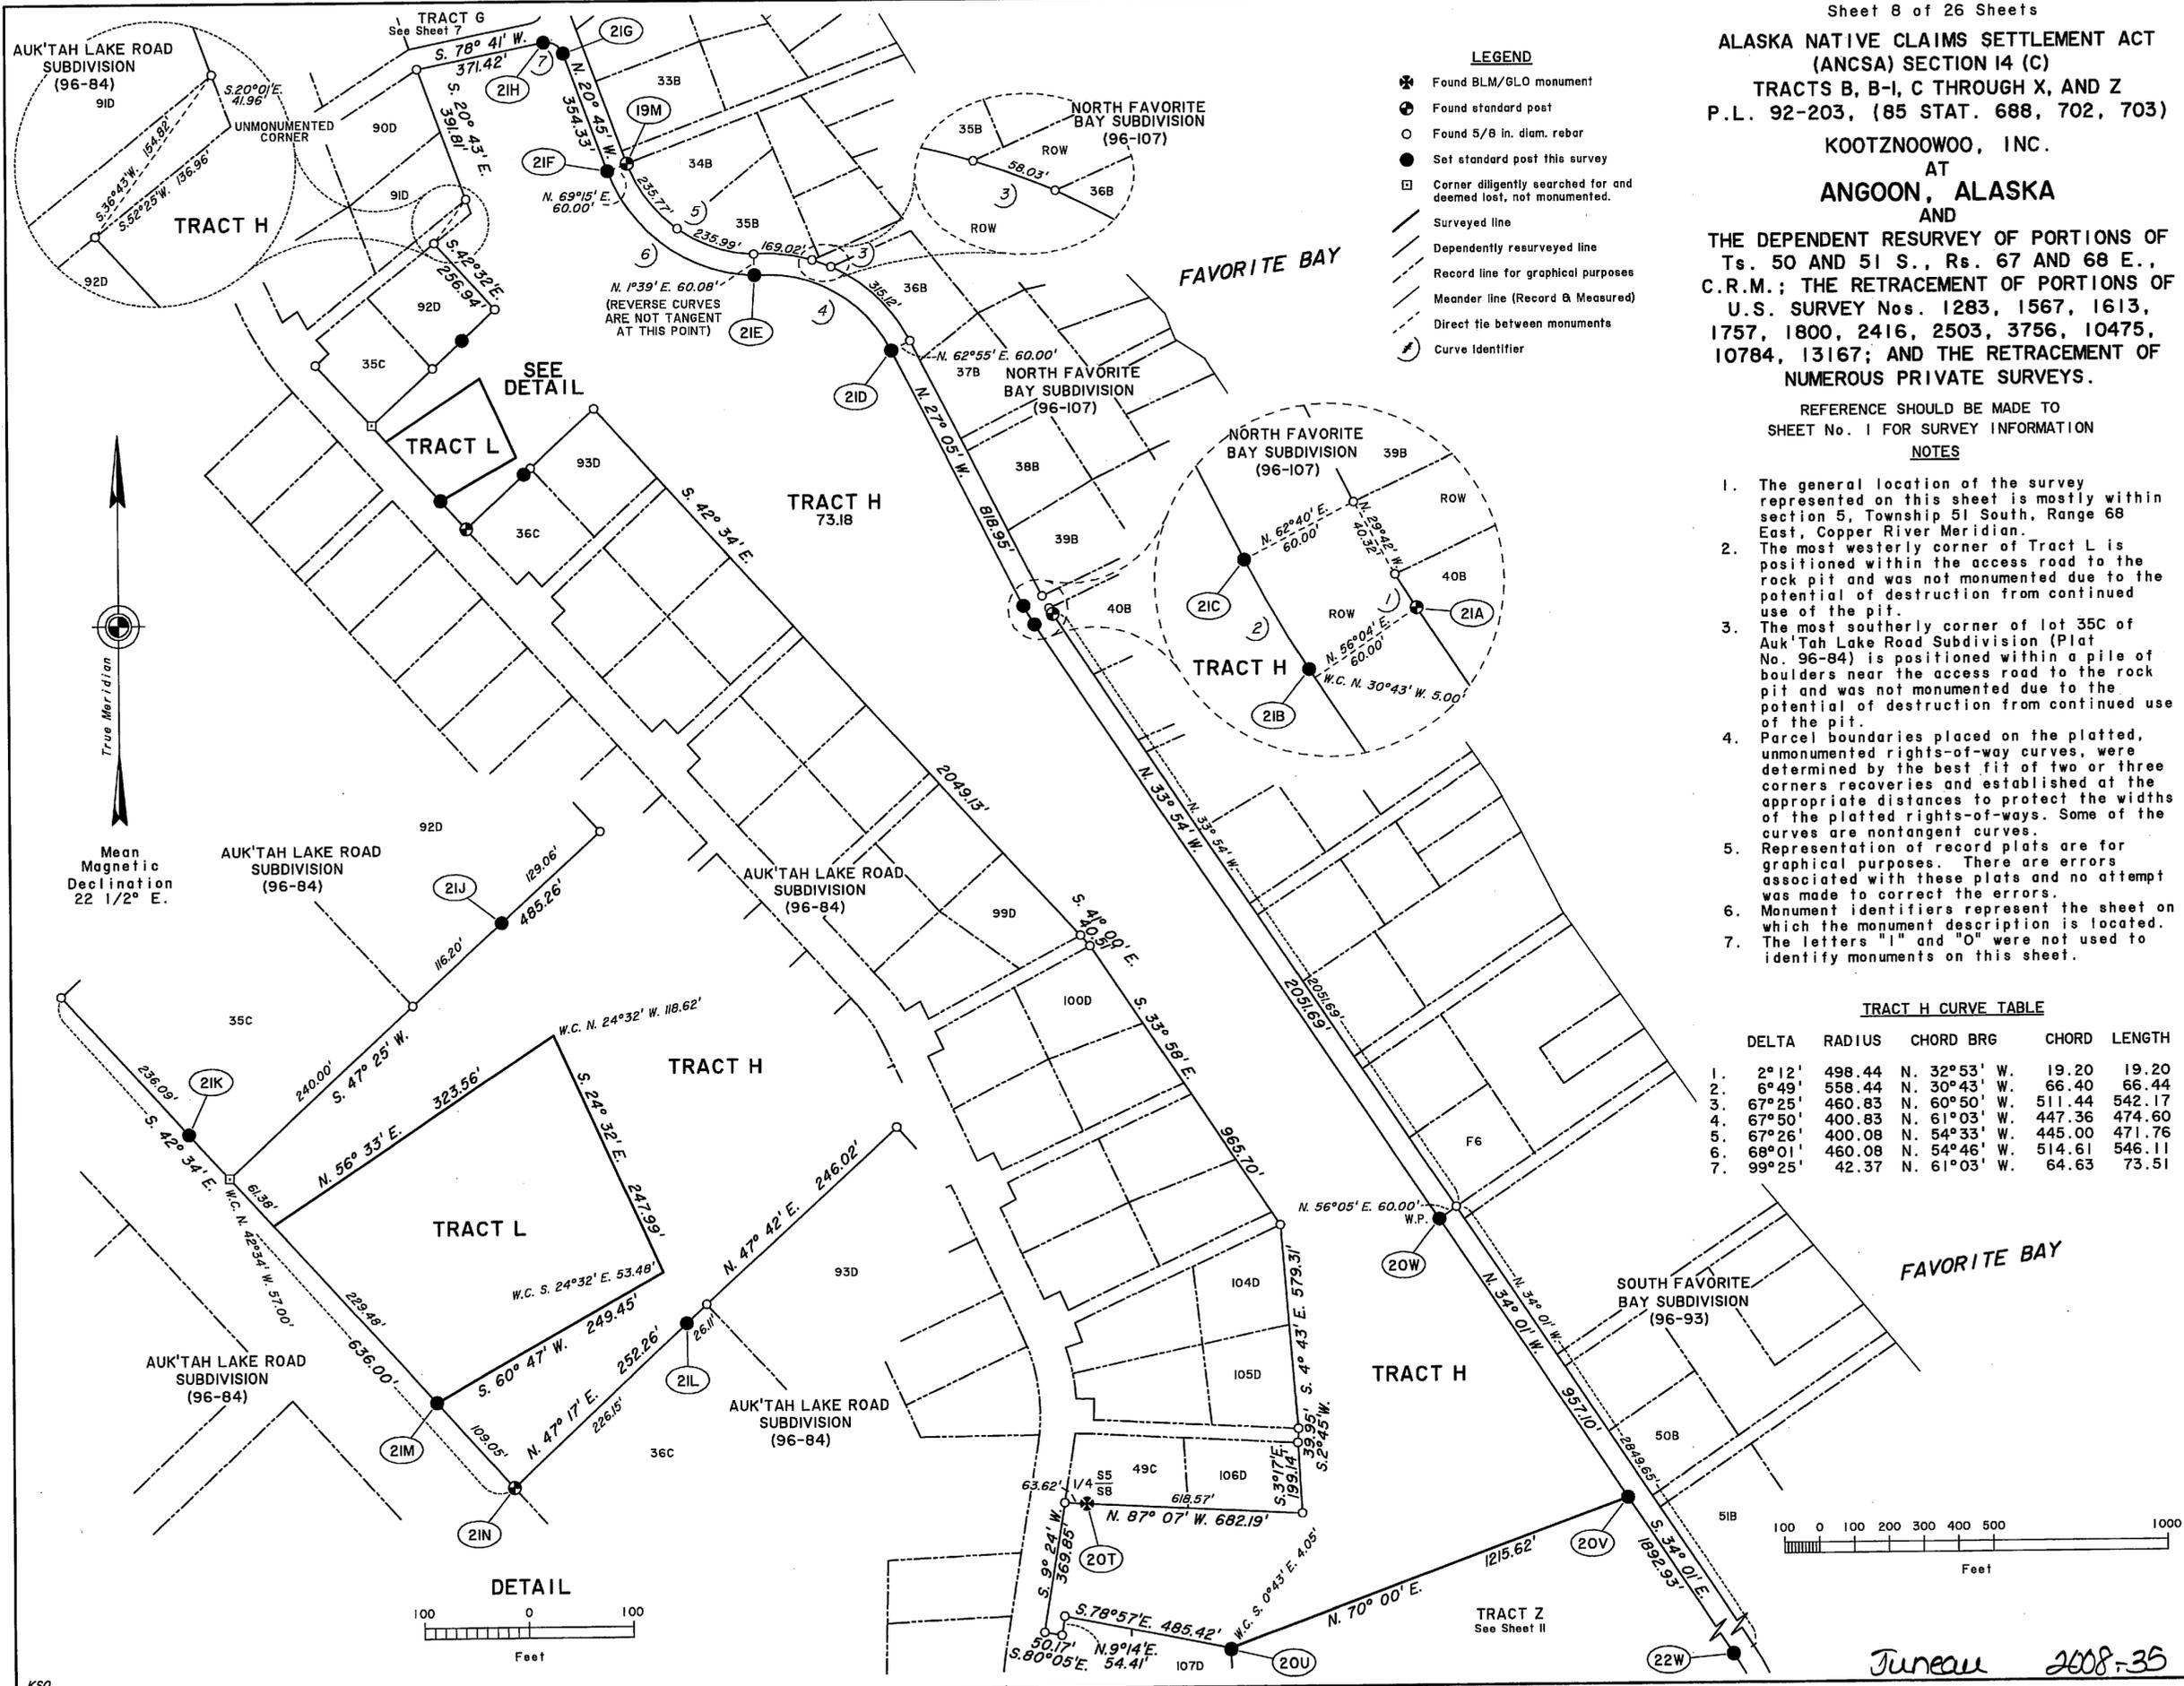

Juneau 2008-35

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C)
TRACTS B, B-1, C THROUGH X, AND Z
P.L. 92-203, (85 STAT. 688, 702, 703)
KOOTZNOOWO, INC.
AT
ANGOON, ALASKA
AND
THE DEPENDENT RESURVEY OF PORTIONS OF
Ts. 50 AND 51 S., Rs. 67 AND 68 E.,
C.R.M.; THE RETRACEMENT OF PORTIONS OF
U.S. SURVEY Nos. 1283, 1567, 1613,
1757, 1800, 2416, 2503, 3756, 10475,
10784, 13167; AND THE RETRACEMENT OF
NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO
SHEET No. 1 FOR SURVEY INFORMATION

TRACT F CURVES

DELTA	RADIUS	CHORD BRG	CHORD	LENGTH
1. 53°53'	410.68	N. 23°46' W.	372.14	386.22
2. 45°19'	352.14	N. 25°50' E.	271.31	278.51
3. 3°40'	2897.89	N. 46°40' E.	185.42	185.45
4. 2°55'	2913.56	N. 43°22' E.	148.30	148.32
5. 9°05'	1960.81	N. 37°22' E.	310.53	310.86
6. 174°05'	60.00	S. 38°55' W.	119.84	182.30

MEANDERS TRACT F




From the true point for a corner of
Tract F, a meander corner, not monumented.

Thence with the present day meanders of Salt
Lagoon, along a gently sloping muddy beach of
small boulders and outcrops of bedrock, with
beach grasses, at the line of mean high tide.

1. N. 46°10' E., 49.58 ft.
2. N. 11°52' E., 113.05 ft.
3. N. 66°53' E., 82.64 ft.
4. N. 45°40' E., 85.57 ft.
5. N. 15°20' E., 104.62 ft.
6. N. 52°18' E., 101.48 ft.
7. N. 16°36' E., 142.09 ft.
8. N. 46°29' E., 211.97 ft.
9. S. 85°49' E., 82.60 ft.
10. S. 47°43' E., 110.70 ft.
11. N. 49°15' E., 79.03 ft.
12. N. 72°40' E., 171.28 ft.
13. S. 56°08' E., 75.73 ft.
14. N. 37°00' E., 170.00 ft.
15. N. 32°00' W., 150.00 ft.
16. N. 62°46' W., 280.07 ft.
17. N. 24°45' W., 169.20 ft.
18. N. 4°21' E., 153.37 ft.
19. N. 31°39' E., 146.76 ft.
20. N. 45°35' W., 204.81 ft.
21. N. 27°20' W., 198.01 ft.
22. N. 35°03' E., 198.42 ft.
23. N. 8°24' E., 144.11 ft.
24. N. 16°37' W., 37.43 ft.
25. N. 62°29' W., 123.77 ft.
26. S. 30°35' W., 67.41 ft.
27. S. 26°26' E., 84.36 ft.
28. S. 33°23' W., 146.53 ft.
29. S. 80°57' W., 105.52 ft.
30. S. 25°33' E., 134.96 ft.
31. S. 20°13' W., 196.86 ft.
32. S. 33°21' E., 258.00 ft.
33. N. 72°31' W., 141.00 ft.
34. S. 47°33' W., 231.66 ft.
35. N. 64°15' W., 121.55 ft.
36. N. 59°18' W., 196.36 ft.
37. S. 74°04' W., 166.40 ft.
38. N. 83°00' W., 103.00 ft.
39. S. 18°17' E., 85.38 ft.
40. S. 36°51' W., 195.10 ft.
41. S. 64°47' W., 72.33 ft.
42. N. 50°30' W., 156.06 ft.
43. S. 31°15' E., 212.66 ft.

At end of course,
the true point for
a corner of Tract F,
a meander corner,
not monumented.

- NOTES**
- The general location of the survey represented on this sheet is mostly within section 6, Township 51 South, Range 68 East, Copper River Meridian.
 - Points of tangency and curvature along the centerline of the Kootznahoo Road were searched for, but not found. Four centerline monuments were found and used to adjust the asbuilt bearings and distances to re-create the centerline. The Kootznahoo Road right-of-way was re-created adjusting bearings and distances to the found monuments of U.S. Survey Nos. 10475 and 2503, and those defining Road ROW No. 4 (see sheet 3).
 - The record line of Keet Subdivision (Plat No. 96-85) was determined by record angle at the most northerly corner of lot 103B.
 - Monument identifiers represent the sheet on which the monument description is located.
 - The letters "I" and "O" were not used to identify monuments on this sheet.

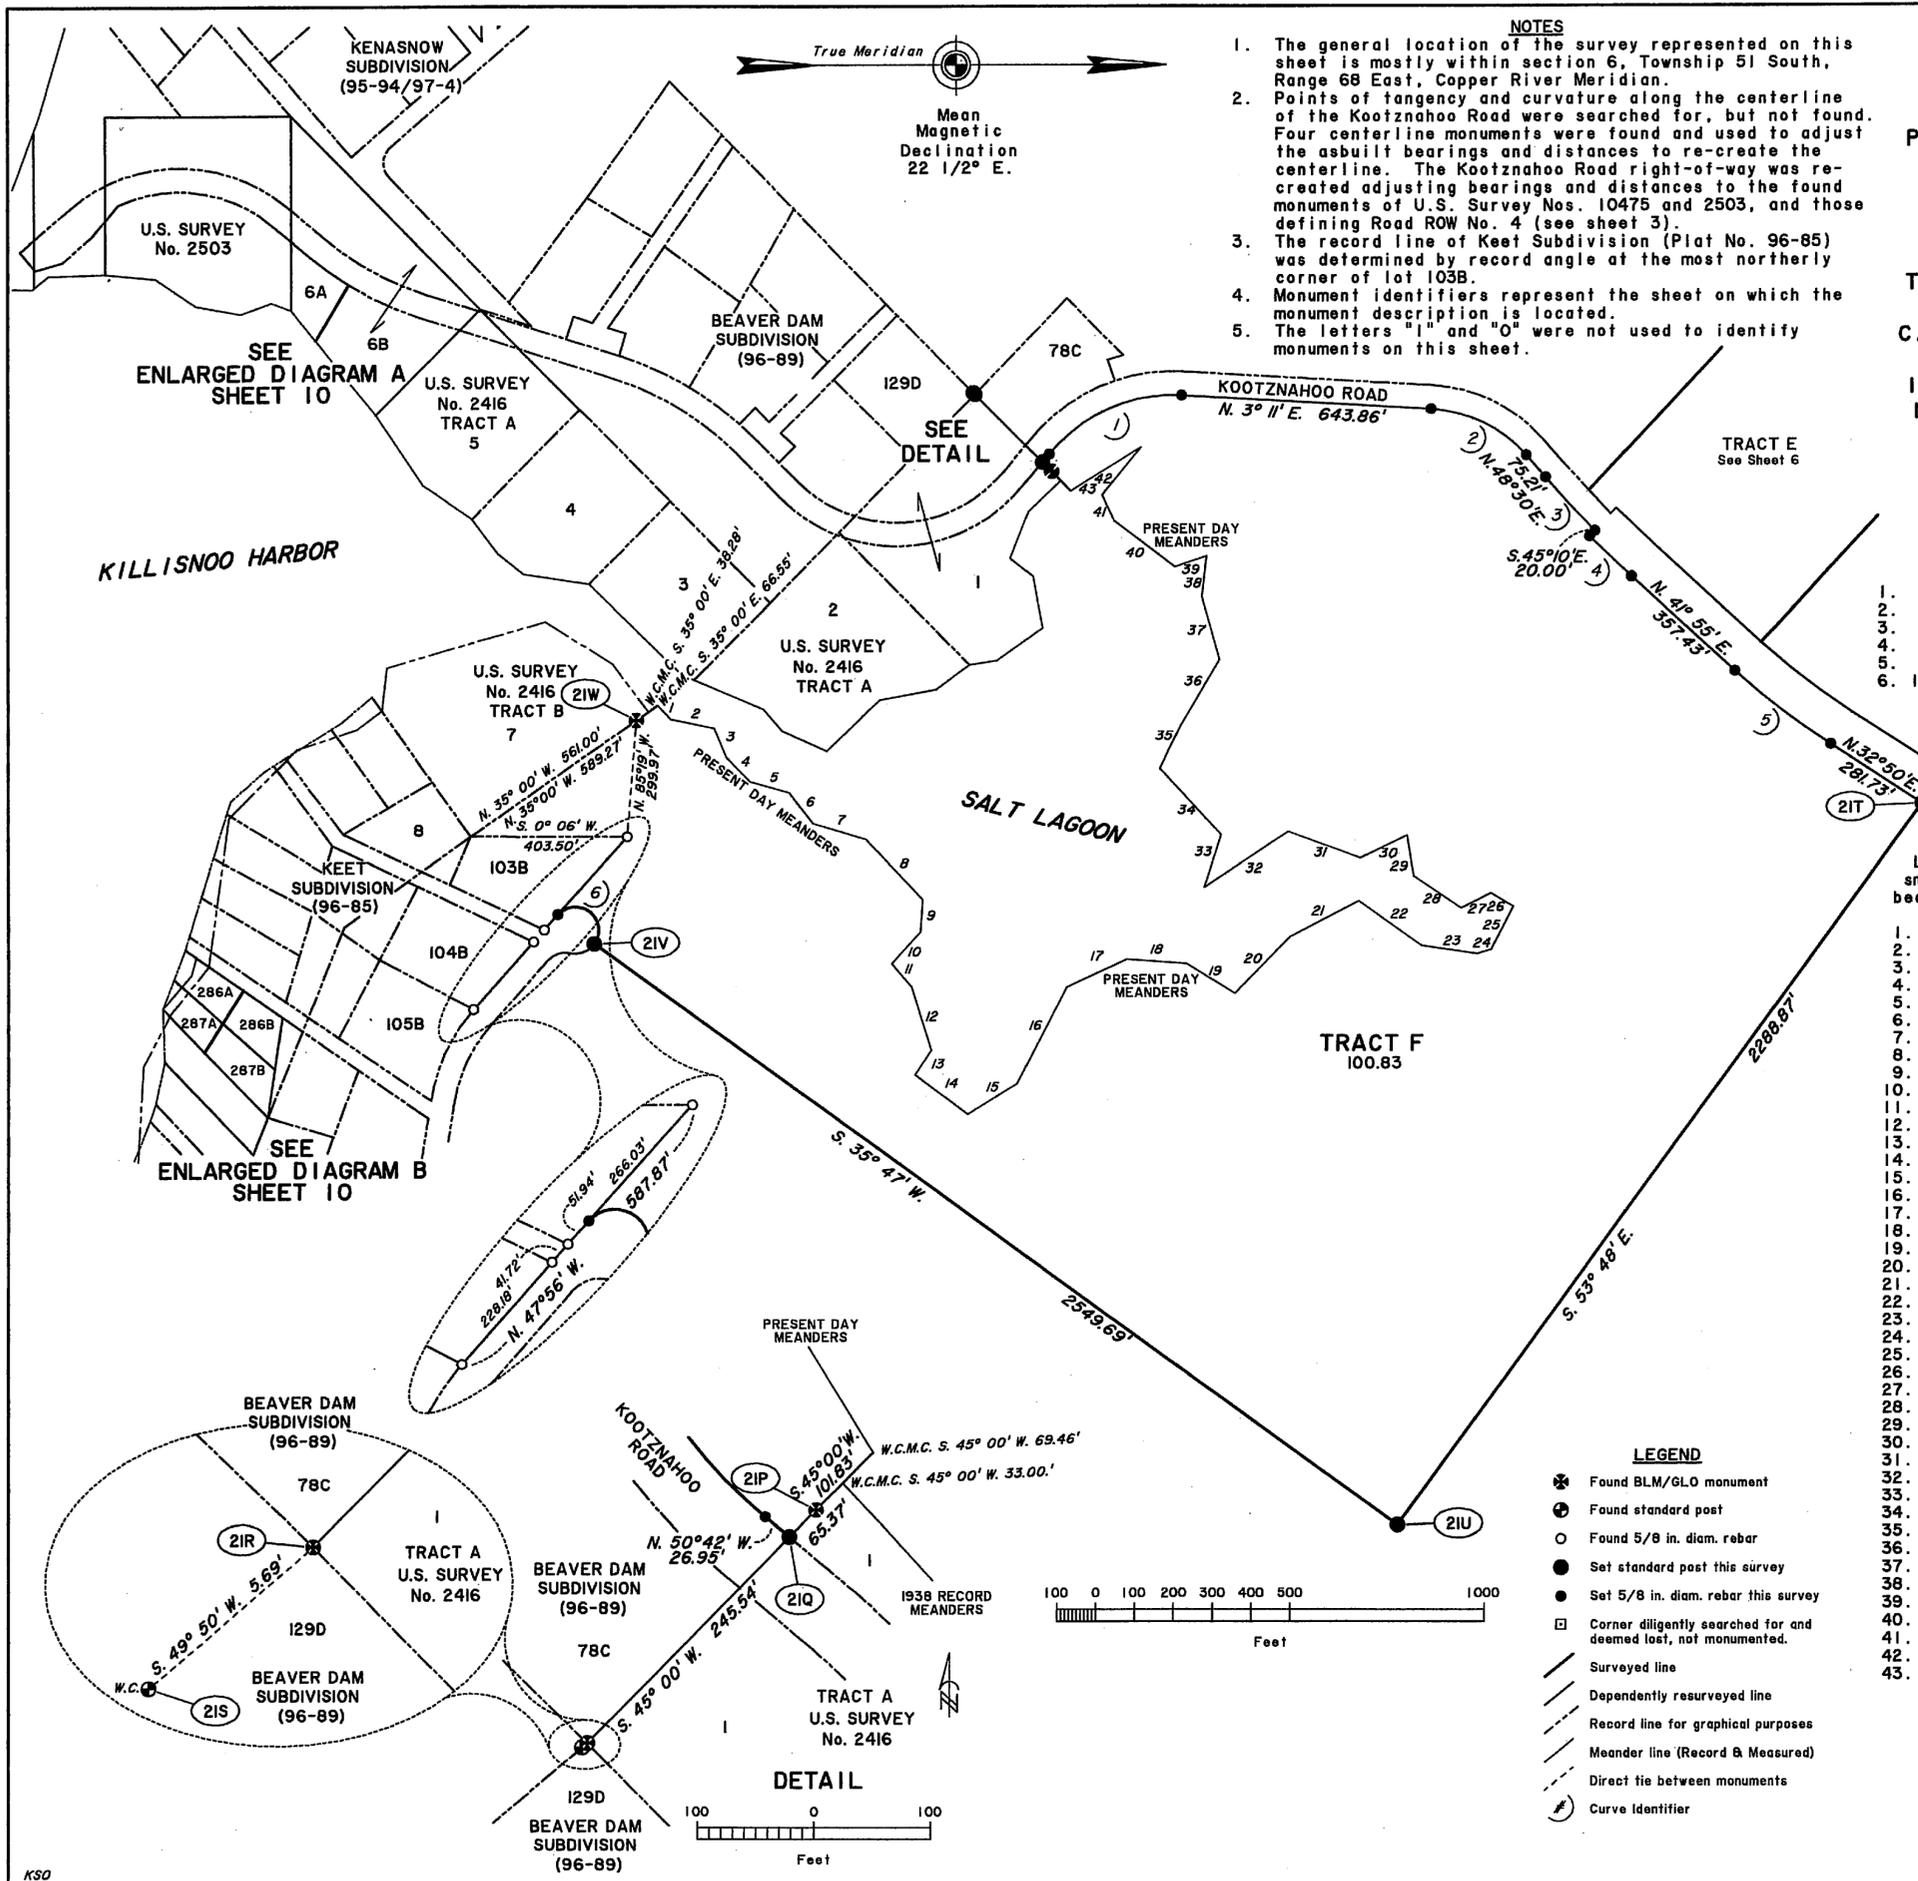

- LEGEND**
- ⊗ Found BLM/GLO monument
 - ⊙ Found standard post
 - Found 5/8 in. diam. rebar
 - Set standard post this survey
 - Set 5/8 in. diam. rebar this survey
 - Corner diligently searched for and deemed lost, not monumented.
 - Surveyed line
 - - - - - Dependently resurveyed line
 - - - - - Record line for graphical purposes
 - - - - - Meander line (Record & Measured)
 - - - - - Direct tie between monuments
 - ⊙ Curve Identifier

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC. AT ANGOON, ALASKA


AND THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

LOT 6A CURVE

DELTA	RADIUS	CHORD BRG	CHORD	LENGTH
1.	8°21'	848.04 N. 35°14' E.	123.48	123.59

ENLARGED DIAGRAM A (FROM SHEET 9)



True Meridian
Mean Magnetic Declination 22 1/2° E.

KENASNOW SUBDIVISION (95-94/97-4)

MEANDER LOT 6, TRACT A, U.S. SURVEY No. 2416

From the true point for corner No. 4, original Lot 6, identical with corner No. 1, Lot 5 and identical with the easterly corner of Lot 6B, all meander corners, not monumented.

Thence with the record meander of Killisnoo Harbor, along a grassy, muddy and cobbled, gently sloping beach, at the line of mean high tide.

1. S. 50°52' W., 345.38 ft.

At 245.79 ft., the true point for the most easterly corner of Lot 6A, identical with the most southerly corner of Lot 6B, both meander corners, not monumented. At end of course, the true point for corner No. 1, original Lot 6, identical with the southeasterly corner of Lot 6A, and identical with corner No. 1, U.S. Survey No. 2503, all meander corners, not monumented.

LEGEND

- ⊗ Found BLM/GLO monument
- ⊙ Found standard post
- Found 5/8 in. diam. rebar
- Set standard post this survey
- Set 5/8 in. diam. rebar this survey
- Surveyed line
- - - - - Dependent resurveyed line
- · - · - Record line for graphical purposes
- · - · - Meander line (Record & Measured)
- - - - - Direct tie between monuments
- Ⓢ Curve Identifier

NOTES

- The general location of the surveys represented on this sheet are within section 6, Township 51 South, Range 68 East, Copper River Meridian.
- From M.C. to M.C. of lot 288, Keet Subdivision Plat No. 96-85 refers to this meander course as a curve. Only the retraced chord bearing and distance are shown on this plat.
- Points of tangency and curvature along the centerline of the Kootznahoo Road were searched for, but not found. Four centerline monuments were found and used to adjust the asbuilt bearings and distances to re-create the centerline. The Kootznahoo Road right-of-way was re-created adjusting bearings and distances to the found monuments of U.S. Survey Nos. 10475 and 2503, and those defining Road ROW No. 4 (see sheet 3).
- Monument identifiers represent the sheet on which the monument description is located.
- The letters "I" and "O" were not used to identify monuments on this sheet.

PRESENT DAY MEANDERS LOTS 286 AND 287, KEET SUBDIVISION

From the point for the most southerly corner of Lot 287B, identical with the most easterly corner of Lot 288C, Keet Subdivision, Plat No. 96-85, all meander corners, monumented with a rebar, 5/8 in. diam., firmly set, projecting 6 ins. above ground, with a yellow plastic cap marked MENZIES 1410-S.

Thence with the present day meanders of Killisnoo Harbor, along a cobbled, gently sloping beach, at the line of mean high tide.


- N. 49°11' W., 113.50 ft. At 75.20 ft., the point for the most westerly corner of Lot 287B, identical with the most northerly corner of Lot 287C, identical with the most southerly corner of Lot 286B, and identical with the most easterly corner of Lot 286C, all meander corners, set a rebar, 5/8 in. diam., 30 ins. long, driven 22 ins. in the ground, with alum. cap marked KI L286B L287B MC 2007.
- N. 75°00' W., 47.25 ft. At end of course, the true point for the most westerly corner of Lot 286B, identical with the most northerly corner of Lot 286C, both meander corners, at the line of mean high tide, not monumented due to liability of destruction by water action.

RETRACED MEANDERS OF LOTS 286, 287 AND 288, KEET SUBDIVISION


From the point for the southeasterly corner of Lot 288, Keet Subdivision, Plat No. 96-85, a meander corner, monumented with a rebar, 5/8 in. diam., firmly set, projecting 4 ins. above ground, with a yellow plastic cap marked MENZIES 1410-S.

Thence with the retraced meanders of Killisnoo Harbor, along a cobbled, gently sloping beach.

- N. 86°40' W., 134.76 ft. At end of course, the most southerly corner of Lot 287B, identical with the most easterly corner of Lot 287C, and identical with the most westerly corner of Lot 288, Keet Subdivision, Plat No. 96-85, all meander corners, hereinbefore described. At 82.89 ft., the point for the most westerly meander corner of Lot 287C, identical with the most southerly corner of Lot 286C, monumented with a rebar, 5/8 in. diam., firmly set, flush with the ground, with a yellow plastic cap marked MENZIES 1410-S.
- N. 73°11' W., 165.36 ft. At end of course, the point for the most westerly meander corner of Lot 286C, monumented with a rebar, 5/8 in. diam., firmly set, projecting 5 ins. above ground, with a yellow plastic cap marked MENZIES 1410-S.

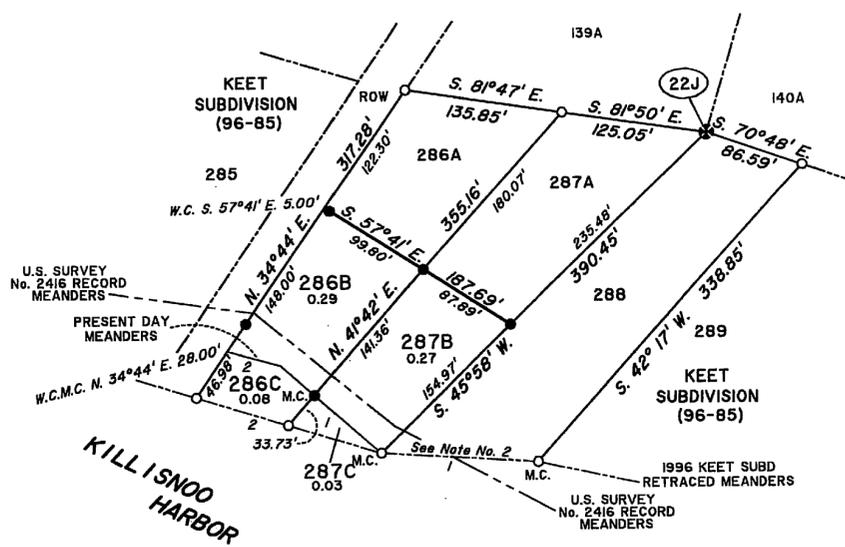

ENLARGED DIAGRAM B (FROM SHEET 9)







ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C)
TRACTS B, B-I, C THROUGH X, AND Z
P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC.
AT
ANGOON, ALASKA
AND

THE DEPENDENT RESURVEY OF PORTIONS OF
Ts. 50 AND 51 S., Rs. 67 AND 68 E.,
C.R.M.; THE RETRACEMENT OF PORTIONS OF
U.S. SURVEY Nos. 1283, 1567, 1613,
1757, 1800, 2416, 2503, 3756, 10475,
10784, 13167; AND THE RETRACEMENT OF
NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO
SHEET No. 1 FOR SURVEY INFORMATION

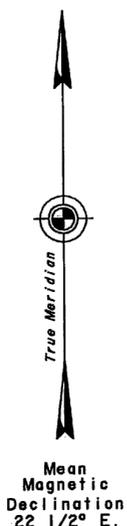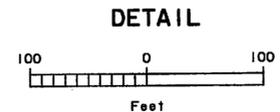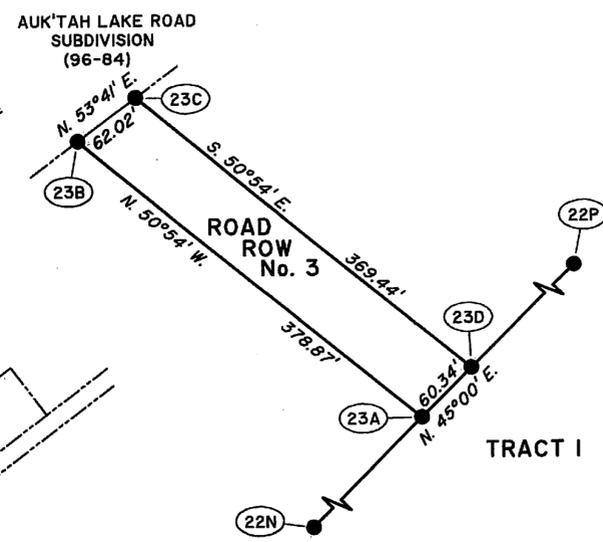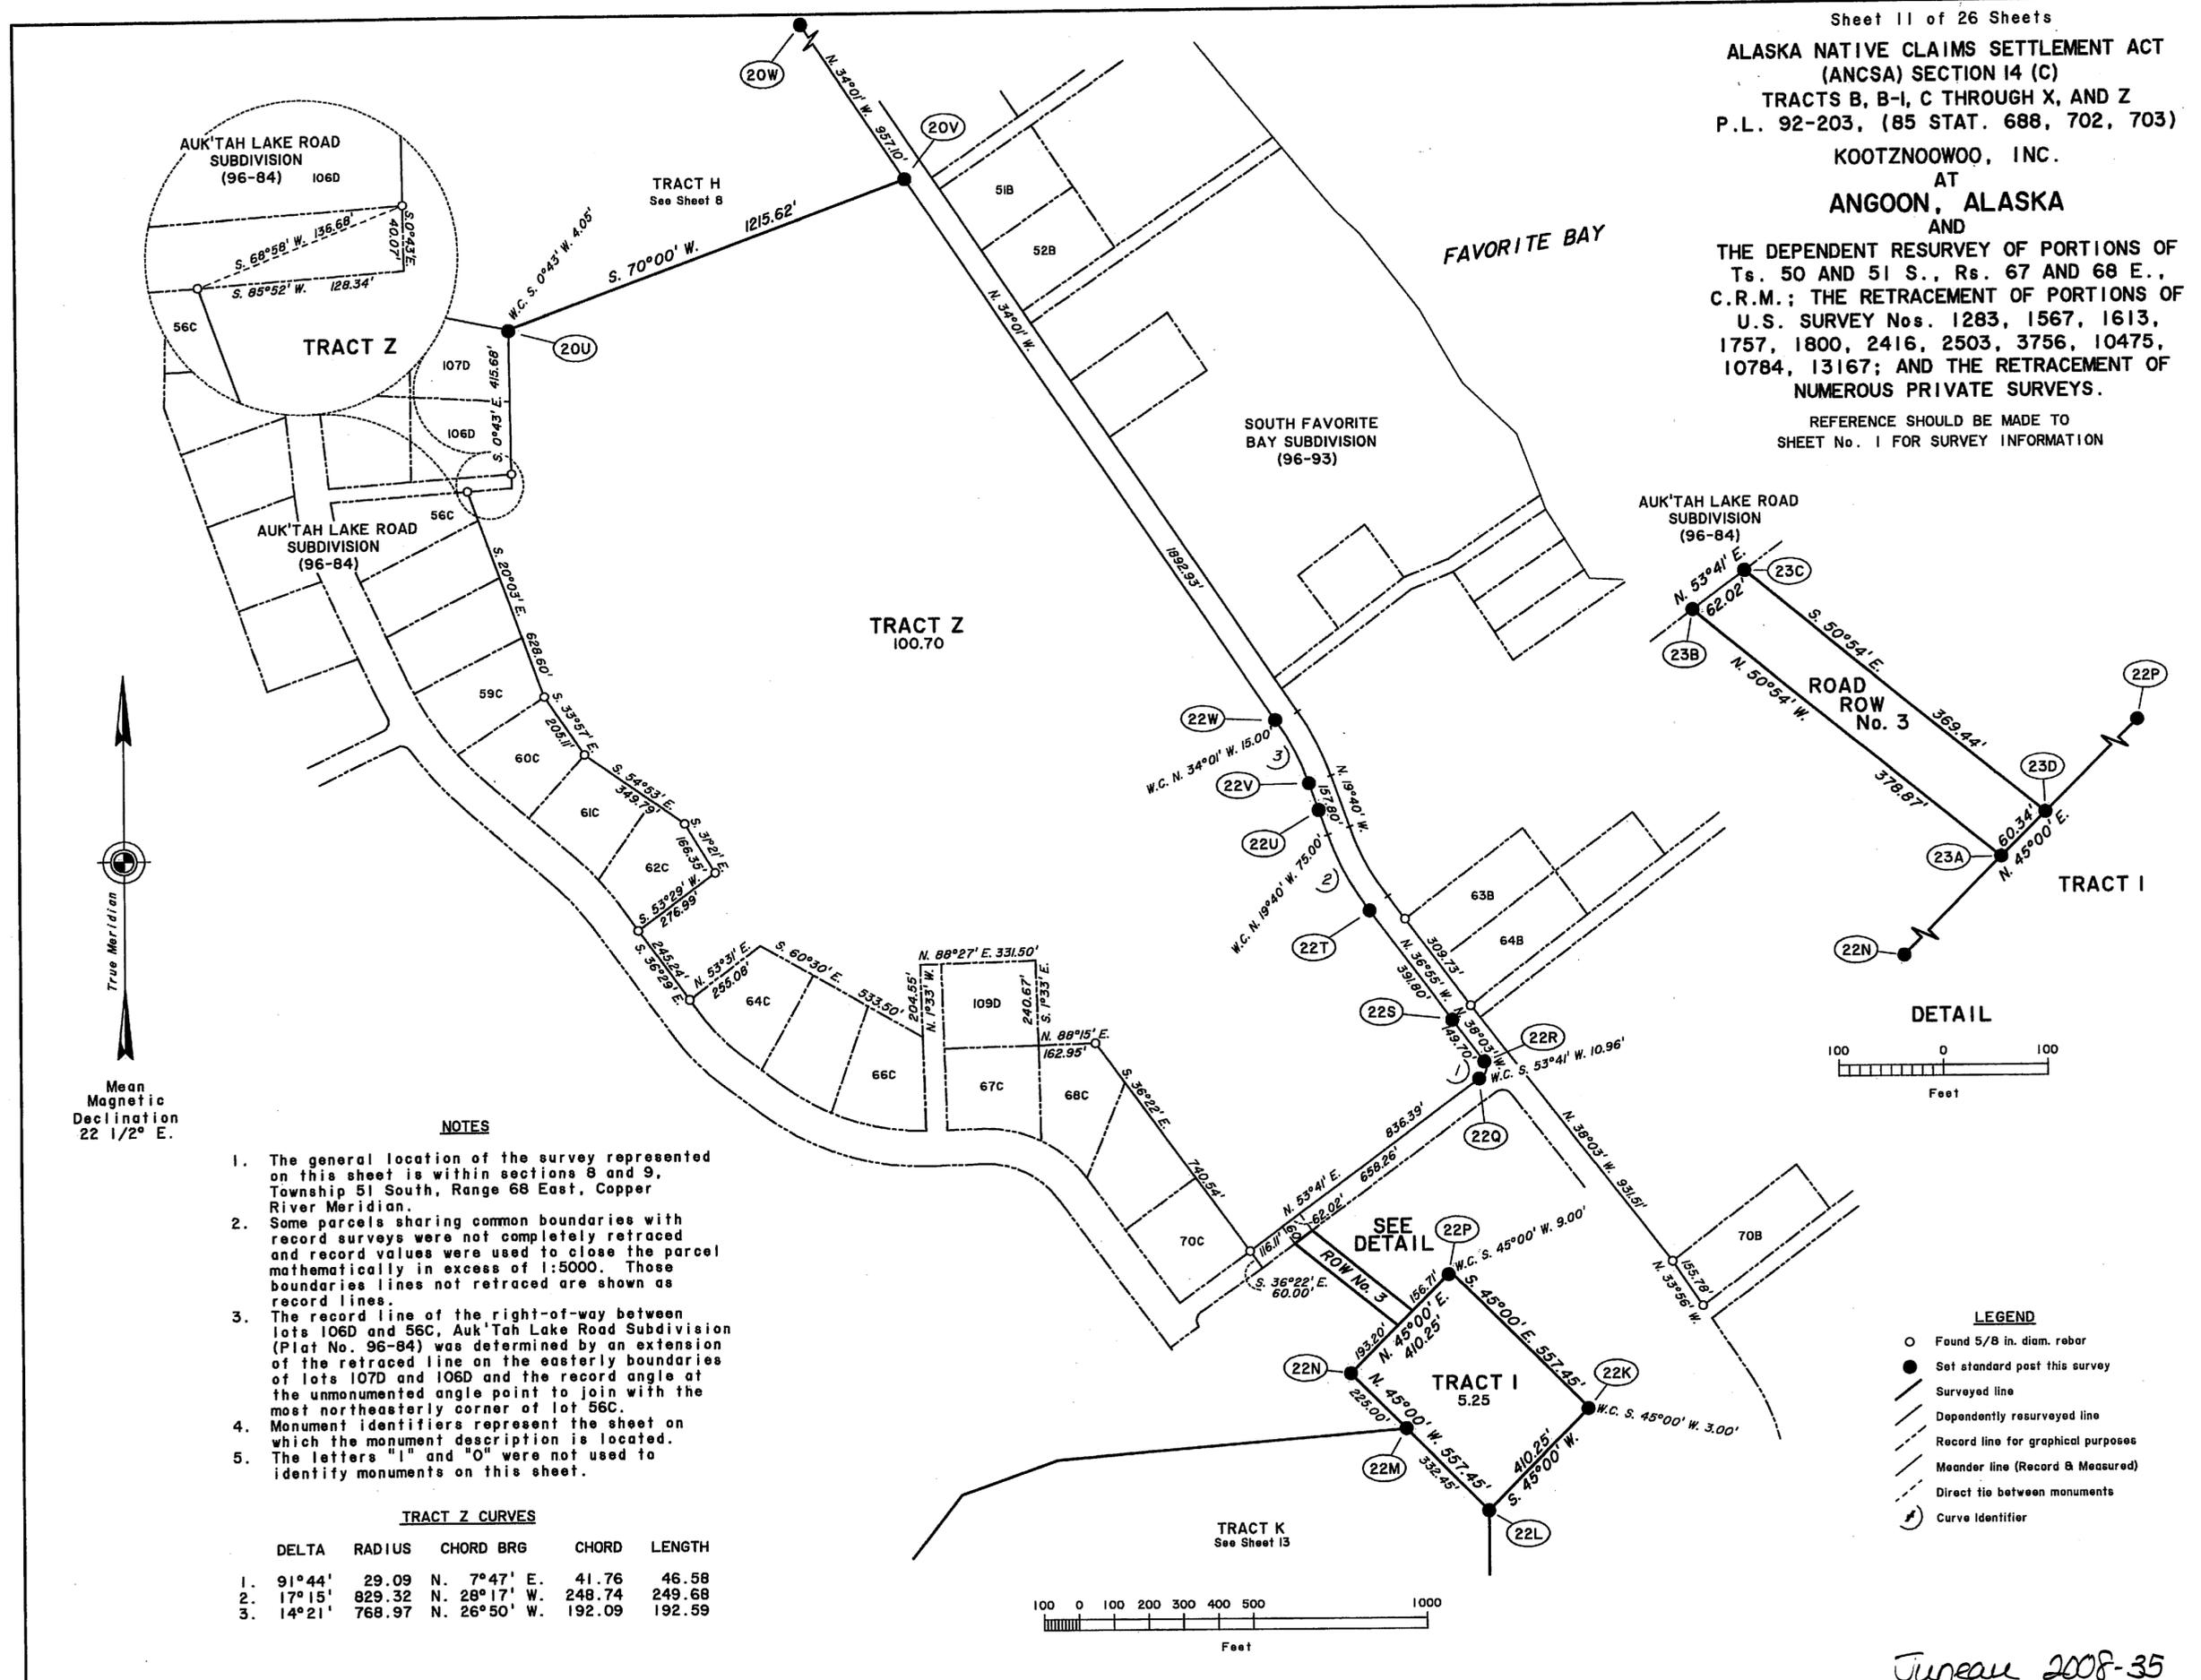


NOTES

- The general location of the survey represented on this sheet is within sections 8 and 9, Township 51 South, Range 68 East, Copper River Meridian.
- Some parcels sharing common boundaries with record surveys were not completely retraced and record values were used to close the parcel mathematically in excess of 1:5000. Those boundaries lines not retraced are shown as record lines.
- The record line of the right-of-way between lots 106D and 56C, Auk'Tah Lake Road Subdivision (Plat No. 96-84) was determined by an extension of the retraced line on the easterly boundaries of lots 107D and 106D and the record angle at the unmonumented angle point to join with the most northeasterly corner of lot 56C.
- Monument identifiers represent the sheet on which the monument description is located.
- The letters "I" and "O" were not used to identify monuments on this sheet.

TRACT Z CURVES

DELTA	RADIUS	CHORD BRG	CHORD	LENGTH
1. 91°44'	29.09	N. 7°47' E.	41.76	46.58
2. 17°15'	829.32	N. 28°17' W.	248.74	249.68
3. 14°21'	768.97	N. 26°50' W.	192.09	192.59



- LEGEND
- Found 5/8 in. diam. rebar
 - Set standard post this survey
 - Surveyed line
 - - - - - Dependent resurveyed line
 - Record line for graphical purposes
 - ~ Meander line (Record & Measured)
 - Direct tie between monuments
 - ⊙ Curve Identifier

Juneau 2008-35

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC.

AT ANGOON, ALASKA

AND THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

NOTES

- 1. The general location of the survey represented on this sheet is within sections 8, 9, 16 and 17, Township 51 South, Range 68 East, Copper River Meridian.
2. Curves for Tract K were designed with regard to the recovered monuments of Keet Subdivision plat No. 96-85.
3. Tract "H" was surveyed during the execution of Keet Subdivision, recorded as Plat No. 96-85, and monumented this survey.
4. Monument identifiers represent the sheet on which the monument description is located.
5. The letters "I" and "O" were not used to identify monuments on this sheet.

MEANDERS TRACT K

From the true point for the easterly special meander corner on the E-W centerline of section 16, identical with a corner of Tract K, not monumented.

Thence counterclockwise with the 2002 record meanders of Auk'Tah Lake, at ordinary high water.

- 1. N. 60°39' E., 94.38 ft.
2. N. 1°14' E., 211.86 ft.
3. N. 17°29' W., 211.86 ft.
4. N. 19°14' W., 99.00 ft.
5. N. 11°45' W., 145.20 ft.
6. N. 18°42' E., 264.66 ft.
7. N. 83°53' E., 330.00 ft.
8. N. 15°57' E., 350.46 ft.
9. N. 23°58' W., 409.86 ft.
10. N. 42°26' W., 370.26 ft.
11. N. 20°58' W., 304.26 ft.
12. N. 21°28' W., 99.00 ft.
13. N. 2°31' W., 132.00 ft.
14. N. 62°54' W., 92.40 ft.
15. N. 59°40' W., 151.80 ft.
16. N. 21°58' W., 52.80 ft.

At end of course, the easterly meander corner of sections 9 and 16. Thence with the adjusted 1928-1931 record meanders.

- 17. N. 46°35' W., 175.13 ft.
18. S. 59°21' W., 237.76 ft.

At end of course, the westerly meander corner of sections 9 and 16.

- 19. S. 5°11' W., 330.87 ft.
20. S. 50°25' E., 191.85 ft.
21. S. 15°30' E., 370.64 ft.
22. S. 43°52' W., 165.23 ft.
23. S. 24°59' E., 423.58 ft.
24. S. 27°28' E., 178.69 ft.
25. S. 44°22' W., 99.14 ft.
26. N. 89°09' W., 507.77 ft.
27. N. 56°36' W., 223.92 ft.

MEANDERS TRACT K, cont.

- 28. N. 13°30' W., 78.98 ft.
29. N. 83°09' W., 133.17 ft.
30. S. 0°03' E., 165.45 ft.
31. S. 1°03' E., 291.19 ft.
32. S. 57°09' E., 152.12 ft.



At end of course, the northerly meander corner of sections 16 and 17.

- 33. S. 42°49' E., 183.55 ft.
34. S. 63°36' E., 224.40 ft.
35. S. 35°33' E., 171.60 ft.
36. S. 24°47' E., 276.54 ft.
37. S. 75°21' E., 211.20 ft.
38. S. 34°33' E., 128.70 ft.


At end of course, the true point for the westerly special meander cor. on the E-W centerline of sec. 16, identical with a corner of Tract K, both meander corners, not monumented.

TRACT K CURVES

Table with columns: DELTA, RADIUS, CHORD BRG, CHORD, LENGTH. Contains 4 rows of curve data.

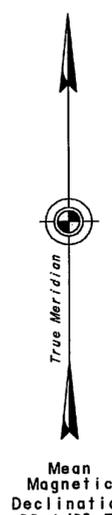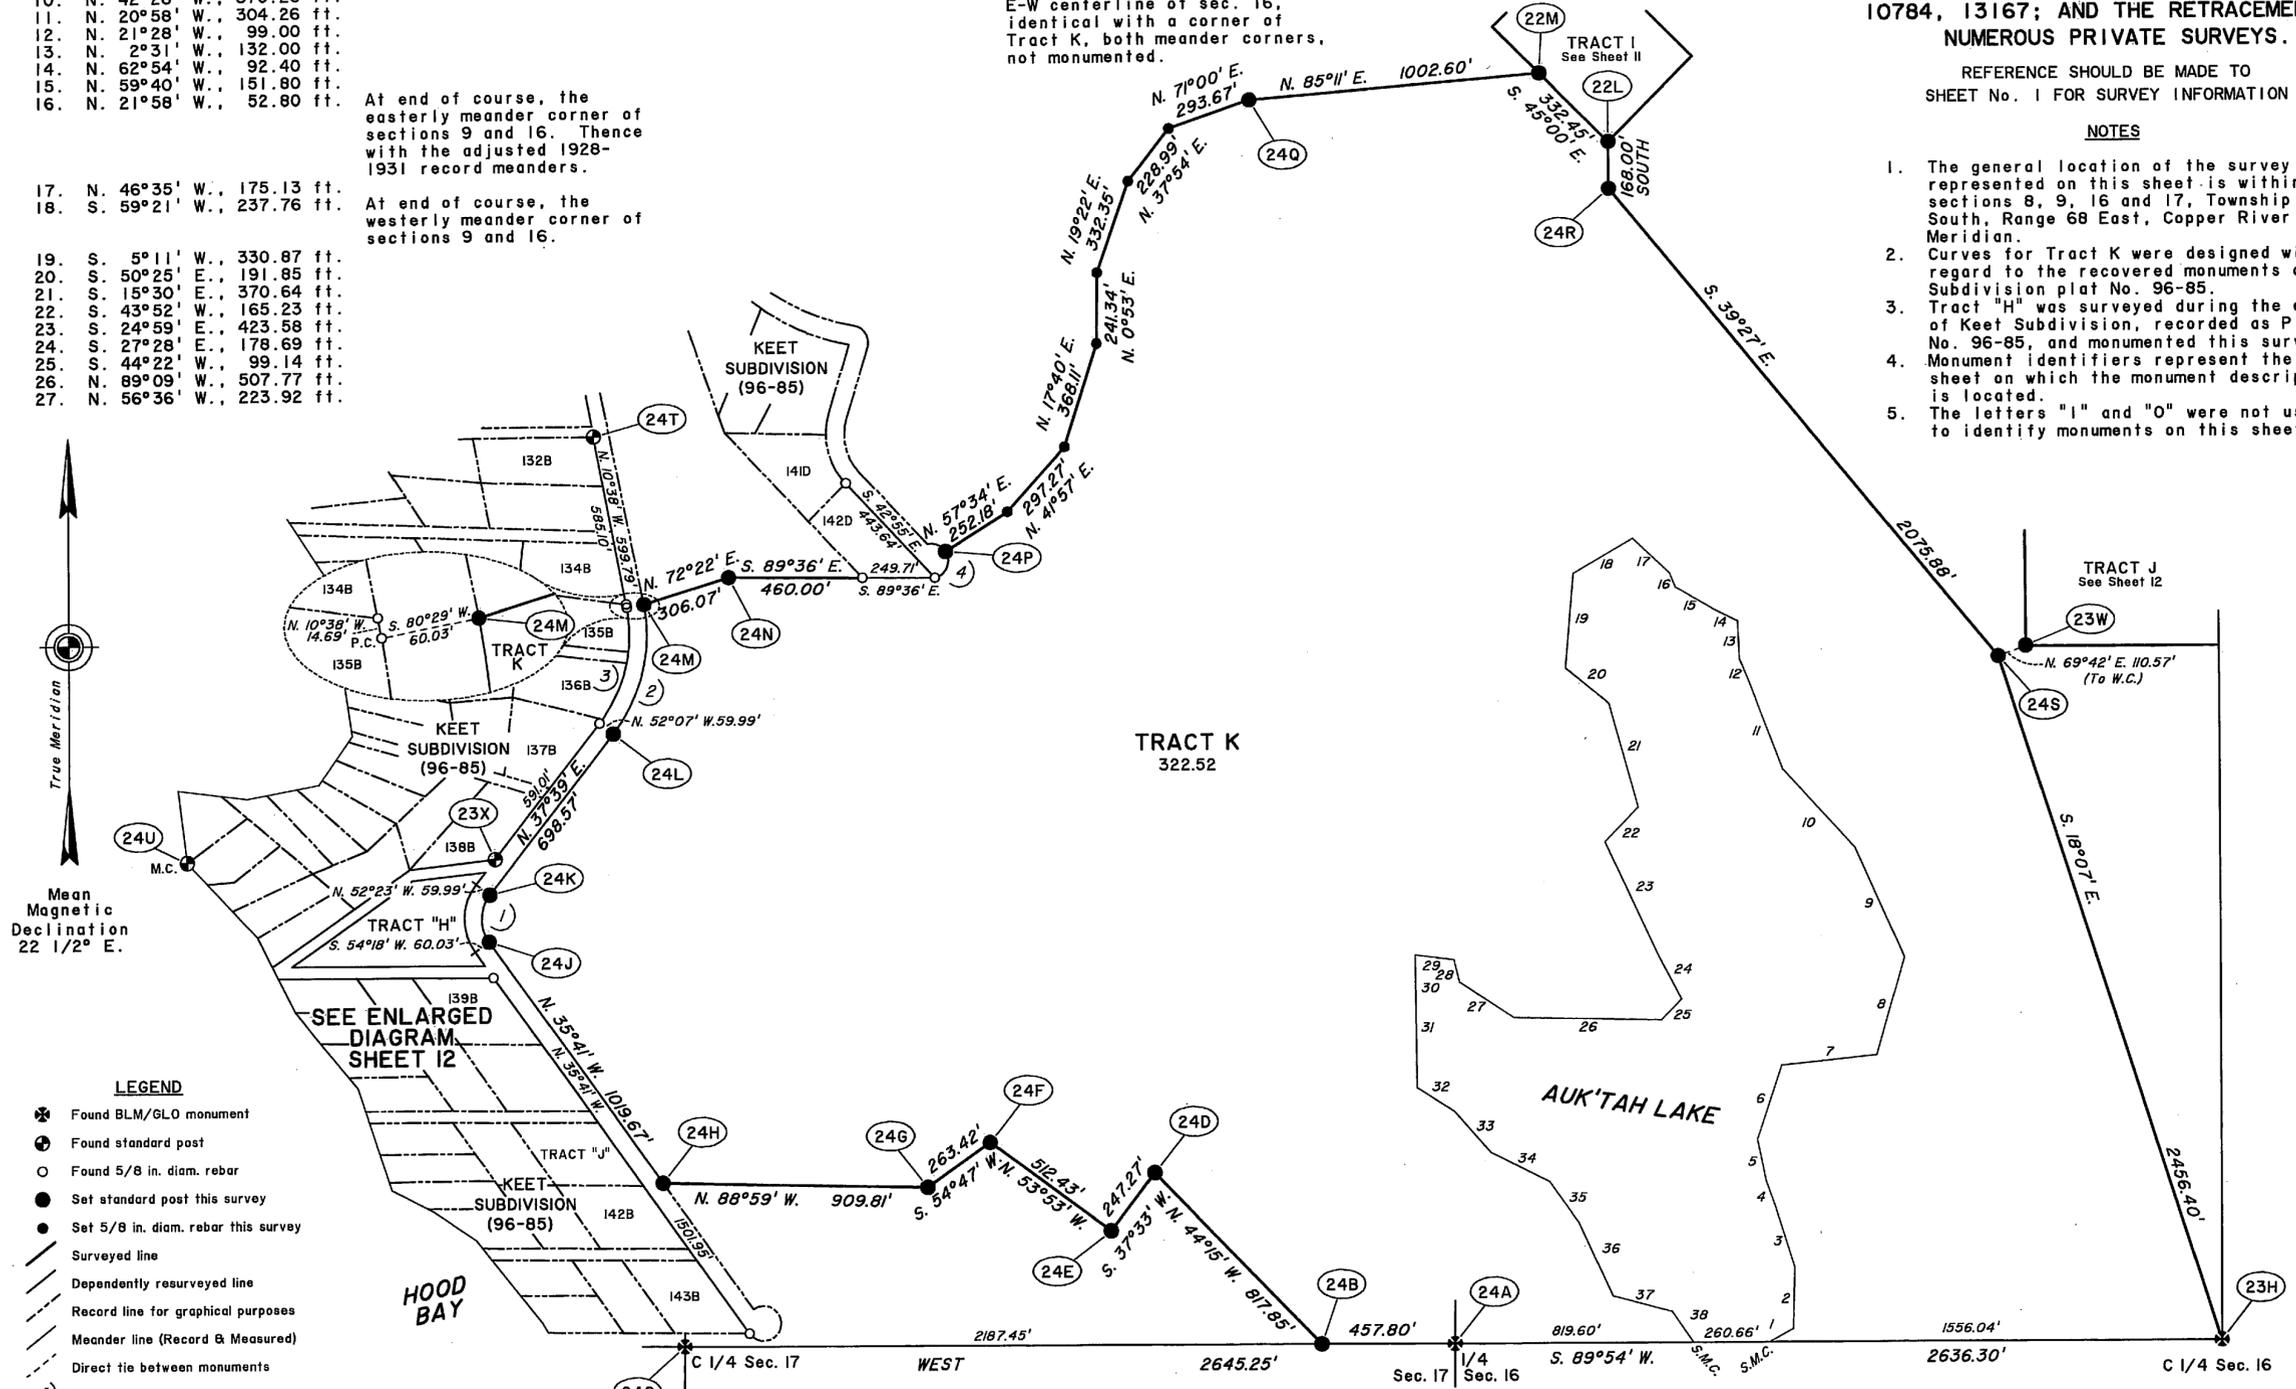

- LEGEND
Found BLM/GLO monument
Found standard post
Found 5/8 in. diam. rebar
Set standard post this survey
Set 5/8 in. diam. rebar this survey
Surveyed line
Dependently resurveyed line
Record line for graphical purposes
Meander line (Record & Measured)
Direct tie between monuments
Curve Identifier



Juneau 2008-35

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

MEANDERS U.S. SURVEY No. 1283

From corner No. 4, U.S. Survey No. 1283, identical with corner No. 1, Lot 1, U.S. Survey No. 3755, both meander corners.

Thence with the adjusted 1918 record meanders of Stillwater Anchorage, along a cobbled, gently sloping beach, at the line of mean high tide.

- 1. S. 61°53' W., 500.34 ft.
2. S. 17°51' W., 100.07 ft.

At end of course, the true point for corner No. 1, U.S. Survey No. 1283, identical with the most easterly corner of Tract Q, both meander corners, not monumented.

MEANDERS TRACT Q

From the true point for the most southerly corner of Tract Q, a meander corner, not monumented.

Thence with the meanders of Stillwater Anchorage, along a grassy and cobbled, gently sloping beach, at the line of mean high tide.

- 1. N. 32°57' E., 200.02 ft.

At end of course, the true point for the most easterly corner of Tract Q, identical with corner No. 1, U.S. Survey No. 1283, both meander corners, not monumented.

- NOTES
1. The general location of the surveys represented on this sheet are within sections 25 and 30, Townships 50 South, Ranges 67 and 68 East, Copper River Meridian.
2. Monument identifiers represent the sheet on which the monument description is located.
3. The letters "I" and "O" were not used to identify monuments on this sheet.

MEANDERS TRACT N

From the true point for the most southerly corner of Tract N, a meander corner, not monumented.

Thence with the meanders of Kootznahoo Inlet, along a cobbled, gently sloping beach, at the line of mean high tide.

- 1. N. 50°10' W., 148.82 ft.
2. N. 38°59' W., 37.21 ft.

At end of course, the true point for the most westerly corner of Tract N, a meander corner, not monumented.

MEANDERS TRACT O

From the true point for the most easterly corner of Tract O, a meander corner, not monumented.

Thence with the meanders of Stillwater Anchorage, along a cobbled, gently sloping beach, at the line of mean high tide.

- 1. S. 26°06' W., 120.92 ft.
2. S. 69°04' W., 45.06 ft.

Thence with the meanders of Kootznahoo Inlet, at the line of mean high tide.

- 3. N. 64°07' W., 74.03 ft.
4. N. 50°10' W., 144.24 ft.

At end of course, the true point for the most westerly corner of Tract O, a meander corner, not monumented.



MEANDERS TRACT P

From the true point for the most easterly corner of Tract P, a meander corner, not monumented.


Thence with the meanders of Stillwater Anchorage, along a grassy and cobbled, gently sloping beach, at the line of mean high tide.

- 1. S. 34°15' W., 200.00 ft.

At end of course, the true point for the most southerly corner of Tract P, a meander corner, not monumented.

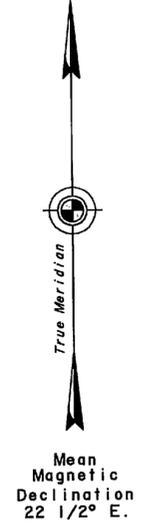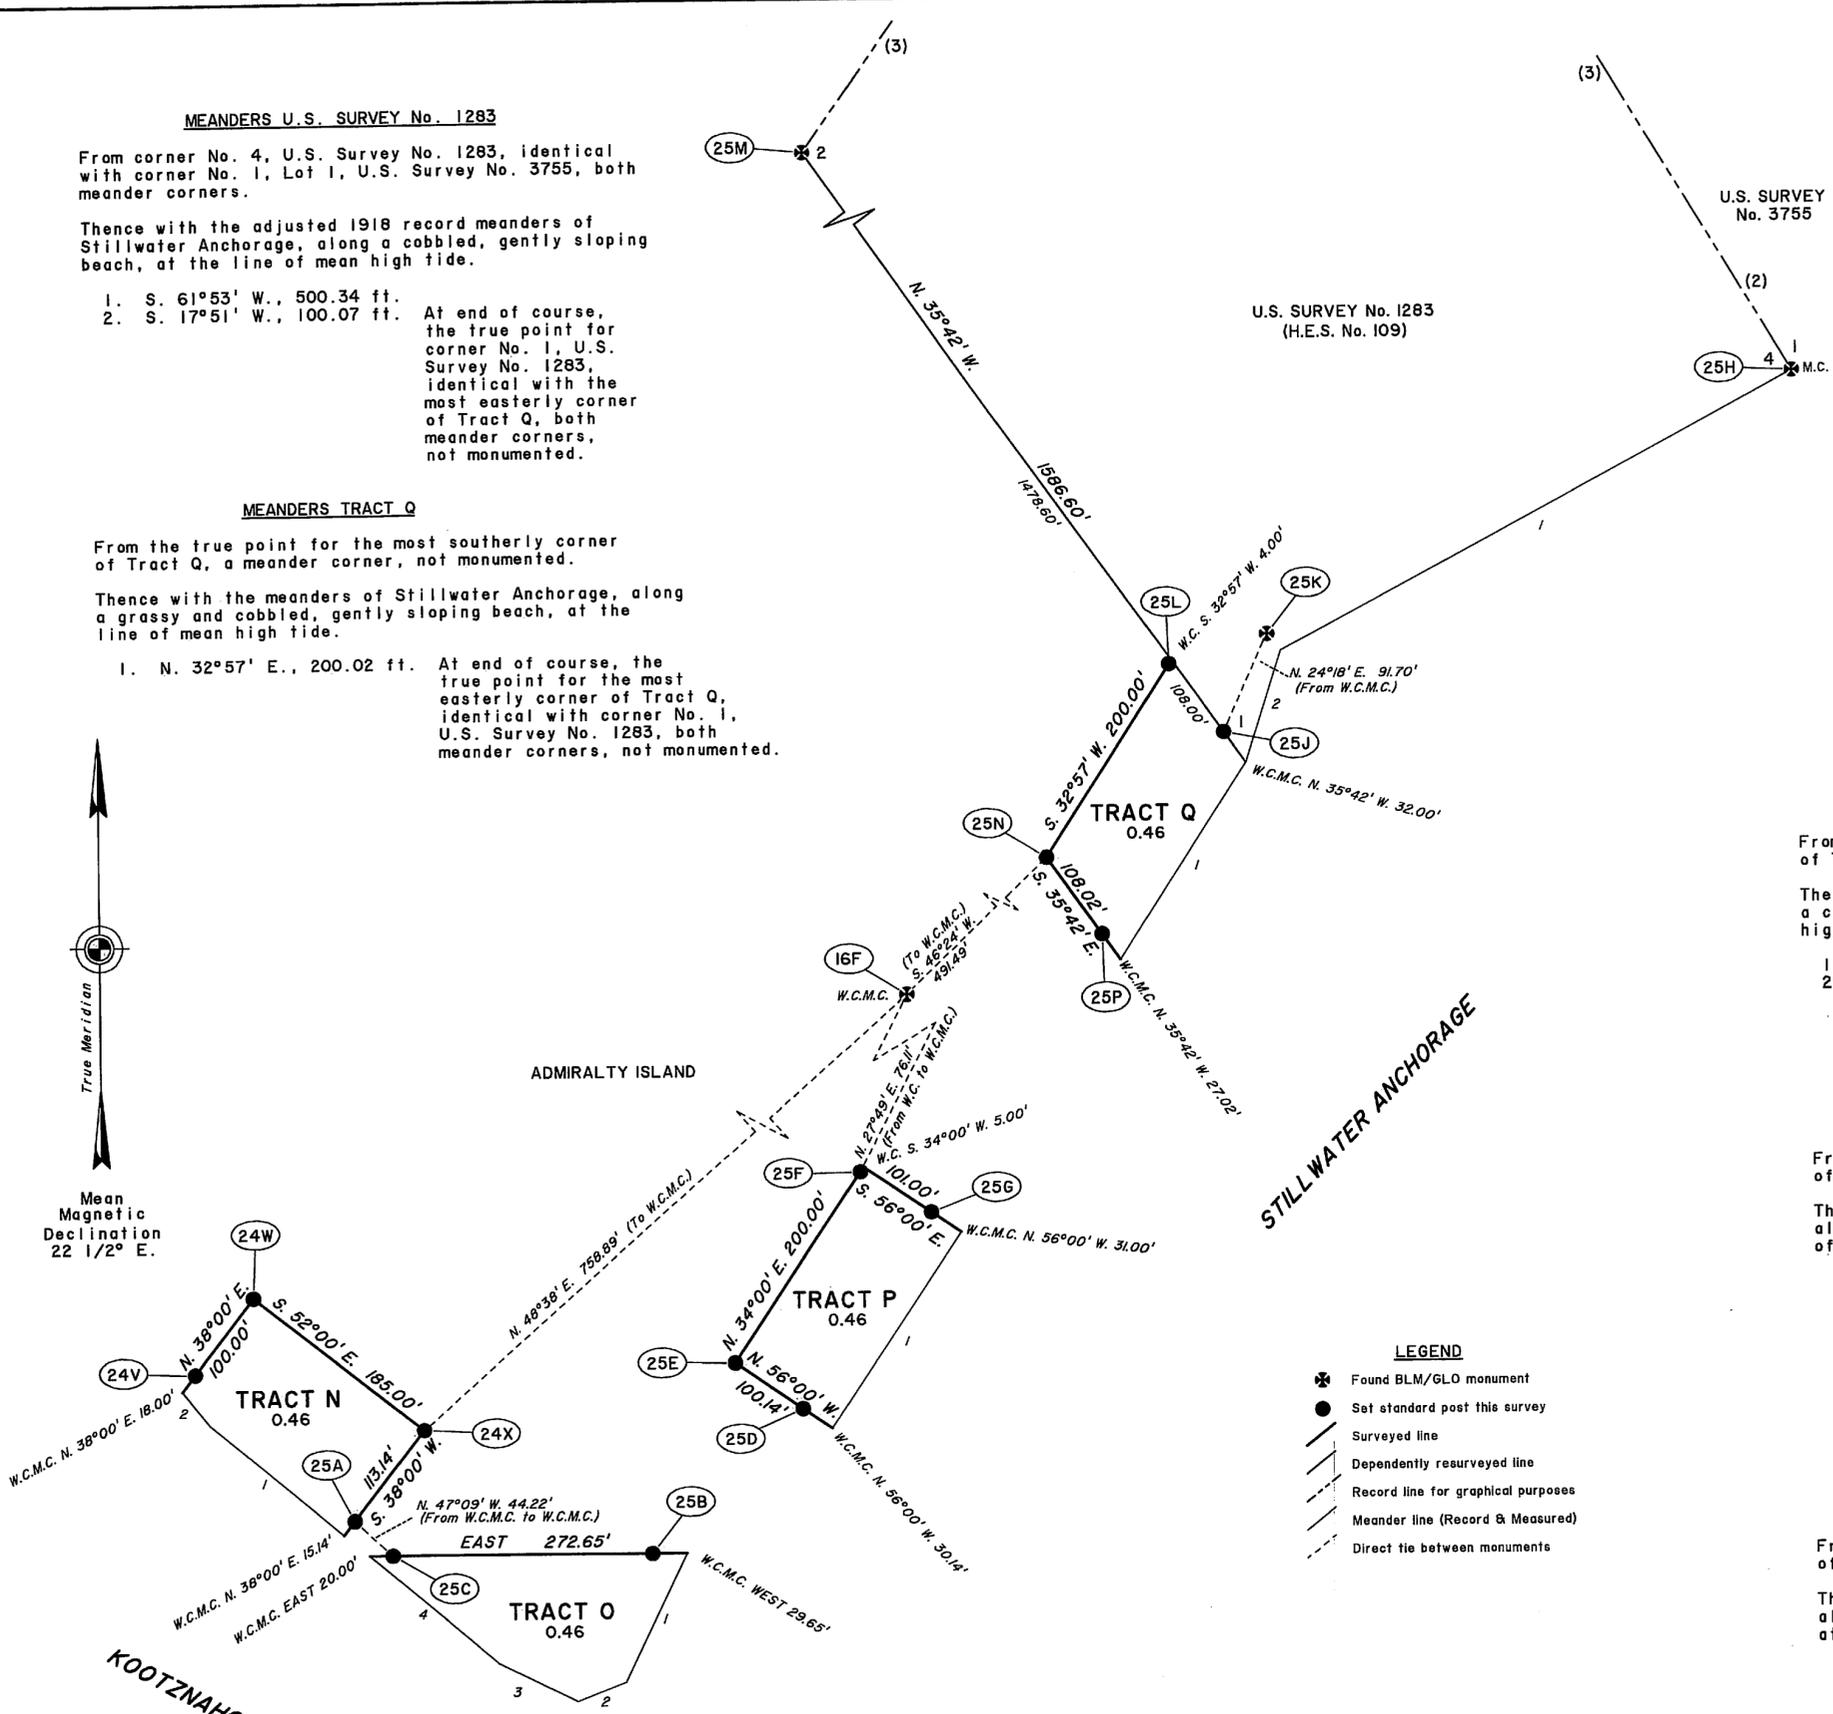

LEGEND
Found BLM/GLO monument
Set standard post this survey
Surveyed line
Dependently resurveyed line
Record line for graphical purposes
Meander line (Record & Measured)
Direct tie between monuments



ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C)
TRACTS B, B-1, C THROUGH X, AND Z
P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC.
AT
ANGOON, ALASKA
AND

THE DEPENDENT RESURVEY OF PORTIONS OF
Ts. 50 AND 51 S., Rs. 67 AND 68 E.,
C.R.M.; THE RETRACEMENT OF PORTIONS OF
U.S. SURVEY Nos. 1283, 1567, 1613,
1757, 1800, 2416, 2503, 3756, 10475,
10784, 13167; AND THE RETRACEMENT OF
NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO
SHEET No. 1 FOR SURVEY INFORMATION

NOTES

1. The general location of the Tract V is within section 10, Tract R is within section 30, and Tracts S, T, U and W are within section 31, Township 50 South, Range 68 East, Copper River Meridian.
2. Monument identifiers represent the sheet on which the monument description is located.
3. The letters "I" and "O" were not used to identify monuments on this sheet.

MEANDERS TRACT T

From the true point for the most westerly corner of Tract T, a meander corner, not monumented.

Thence with the meanders of Favorite Bay, along a cobbled, gently sloping beach, at the line of mean high tide.

1. S. 11°30' E., 108.44 ft. At end of course, the true point for the most southerly corner of Tract T, a meander corner, not monumented.

MEANDERS TRACT U

From the true point for the most southerly corner of Tract U, a meander corner, not monumented.

Thence with the meanders of Favorite Bay, along a cobbled, muddy, gently sloping beach, at the line of mean high tide.

1. N. 28°14' W., 82.28 ft. At 17.66 ft., the true point for the corner common to Lots 4 and 5, a meander corner, not monumented.
2. N. 47°01' W., 93.37 ft. At 32.25 ft., the true point for the corner common to Lots 3 and 4, a meander corner, not monumented.
3. N. 59°23' W., 181.92 ft. At 148.92 ft., the true point for the corner common to Lots 2 and 3, a meander corner, not monumented.
4. N. 17°23' W., 167.49 ft. At 61.87 ft., the true point for the corner common to Lots 1 and 2, a meander corner, not monumented.

MEANDERS TRACT V

From the point for the most northerly corner of Tract V, a meander corner.

Thence with the meanders of a small unnamed bay, along a cobbled, gently sloping beach, at the line of mean high tide.

1. S. 15°50' W., 136.69 ft.
2. S. 29°52' W., 143.48 ft.
3. East, 176.66 ft.

At end of course, the true point for the most easterly corner of Tract V, a meander corner, not monumented.

MEANDERS TRACT W

From the true point for the most westerly corner of Tract W, a meander corner, not monumented.

Thence with the meanders of Favorite Bay, along a grassy and cobbled, gently sloping beach, at the line of mean high tide.

1. S. 32°53' E., 150.18 ft.
2. S. 65°31' E., 29.43 ft.

At end of course, the true point for the most southerly corner of Tract W, a meander corner, not monumented.

LEGEND

- ⊗ Found BLM/GLO monument
- Set standard post this survey
- Set 5/8 in. diam. rebar this survey
- Surveyed line
- - - - - Dependent resurveyed line
- - - - - Record line for graphical purposes
- - - - - Meander line (Record & Measured)
- Direct tie between monuments

MEANDERS TRACT R

From the true point for the most northerly corner of Tract R, a meander corner, not monumented.

Thence with the meanders of Kootznahoo Inlet, along a cobbled, muddy, gently sloping beach, at the line of mean high tide.

1. S. 21°22' W., 157.82 ft.
2. S. 33°24' W., 47.44 ft.

At end of course, the true point for the most westerly corner of Tract R, a meander corner, not monumented.





MEANDERS TRACT S

From the true point for the most southerly corner of Tract S, a meander corner, not monumented.

Thence with the meanders of Kootznahoo Inlet, along a grassy and cobbled, gently sloping beach, at the line of mean high tide.

1. N. 4°31' W., 200.00 ft.

At end of course, the true point for the most westerly corner of Tract S, a meander corner, not monumented.

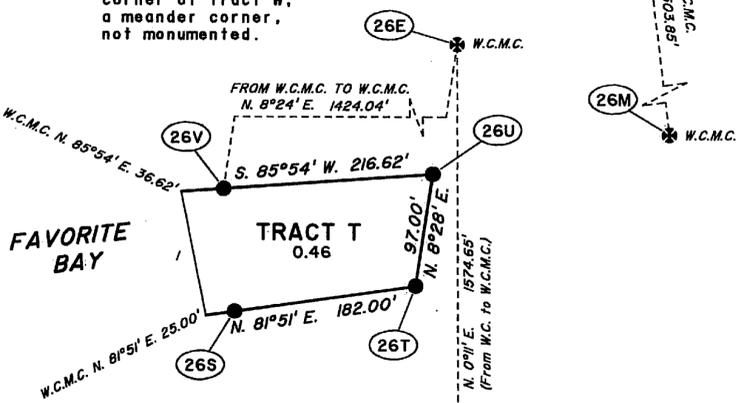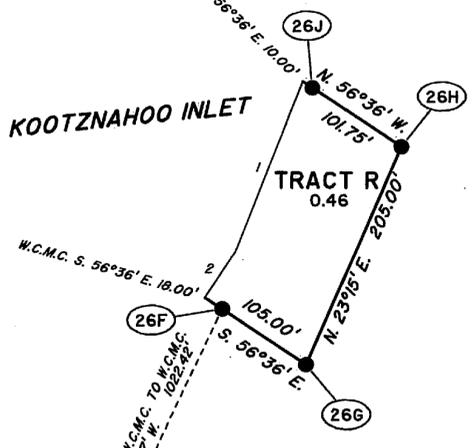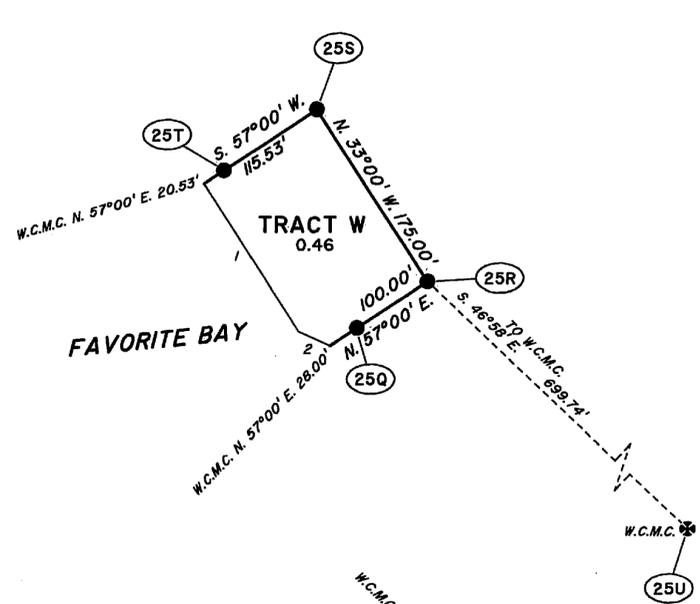


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION



Found an iron post, 3 ins. diam., loosely set, straightened over base to project 15 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A hemlock snag, 27 ins. diam., bears N. 58° E., 37.5 ft. dist., with fragmentary scribe mks. visible in a rotted blaze.

A hemlock snag, 26 ins. diam., bears S. 71° E., 35.4 ft. dist., with a completely healed blaze.

A hemlock, 13 ins. diam., bears S. 80 1/2° W., 29.0 ft. dist., with fragmentary scribe mks. visible in a partially healed blaze.


A hemlock, 19 ins. diam., bears N. 38 1/2° W., 19.4 ft. dist., with fragmentary scribe mks. visible in a partially healed blaze.

And new bearing trees

A spruce, 14 ins. diam., bears N. 58° E., 29.5 ft. dist., mkd. T50S R68E S31 BT.

A hemlock, 19 ins. diam., bears S. 27° E., 24.0 ft. dist., mkd. T51S R68E S6 BT.

Add the mks. 2006 to the brass cap.



Found a rusted iron post, 2 ins. diam., loosely set, projecting 16 ins. above ground, with brass cap mkd. 1/4 S36 S31 1928, from which the original bearing trees


A hemlock, 9 ins. diam., bears N. 60 3/4° E., 25.4 ft. dist., with a completely healed blaze. (Record: N. 54° E., 24.4 ft./37 lks. dist.)

A hemlock, 28 ins. diam., bears N. 57 1/2° W., 20.5 ft. dist., with the scribe mks. BT visible in a partially healed blaze.

At the corner point,

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown.

Deposit the original cap alongside and a magnet in a white plastic case at the base of the stainless steel post.




Found an iron post, 2 1/2 ins. diam., firmly set, supported by a rock mound, 24 ins. diam. by 30 ins. high to within 5 ins. of the top, measured from lower side, with brass cap incorrectly mkd. as shown, from which the original 1928 bearing trees

A hemlock, 23 ins. diam., bears S. 57° E., 19.6 ft. dist., with a completely healed blaze. (Record: 17.8 ft./27 lks. dist.)

A spruce stump, 24 ins. diam., bears S. 55° W., 11.5 ft. dist., with no scribe mks. visible in a rotted blaze.

And the 1960 bearing tree

A spruce, 34 ins. diam., bears N. 58° W., 15.0 ft. dist., with no scribe mks. visible in a partially healed blaze.



Found an iron post, 1 in. diam., loosely set and broken flush with the ground, with brass cap mkd. T50S R67E S36 WCMC S1 T51S 1928, from which the original bearing trees


A spruce, 37 ins. diam., bears S. 34° E., 16.0 ft. dist., with a completely healed blaze. To verify this bearing tree, plunge cuts were made to remove the tree tissue grown since the original scribing, making the fragmentary scribe mks. visible. The plug was reinserted into the tree. (Record: S. 37° E., 121.4 ft./184 lks. dist.)

A spruce, 46 ins. diam., bears N. 35 1/2° W., 32.5 ft. dist., with a completely healed blaze. To verify this bearing tree, plunge cuts were made to remove the tree tissue grown since the original scribing, making fragmentary scribe mks. visible. The plug was reinserted into the tree. (Record: 23.8 ft./36 lks. dist.)

At the corner point,

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which new bearing trees

Deposit the original post alongside and a magnet in a white plastic case at the base of the stainless steel post.



Found a National Geodetic Survey Control Station standard bronze disk, cemented in a drill hole, on a rock outcrop, with top incompletely mkd. as shown.



A hemlock, 13 ins. diam., bears S. 80 1/2° W., 29.0 ft. dist., with fragmentary scribe mks. visible in a partially healed blaze.

A hemlock, 19 ins. diam., bears N. 38 1/2° W., 19.4 ft. dist., with fragmentary scribe mks. visible in a partially healed blaze.

And new bearing trees

A spruce, 14 ins. diam., bears N. 58° E., 29.5 ft. dist., mkd. T50S R68E S31 BT.

A hemlock, 19 ins. diam., bears S. 27° E., 24.0 ft. dist., mkd. T51S R68E S6 BT.

Add the mks. 2006 to the brass cap.



Found a rusted iron post, 2 ins. diam., loosely set, projecting 16 ins. above ground, with brass cap mkd. 1/4 S36 S31 1928, from which the original bearing trees


A hemlock, 9 ins. diam., bears N. 60 3/4° E., 25.4 ft. dist., with a completely healed blaze. (Record: N. 54° E., 24.4 ft./37 lks. dist.)

A hemlock, 28 ins. diam., bears N. 57 1/2° W., 20.5 ft. dist., with the scribe mks. BT visible in a partially healed blaze.

At the corner point,

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown.

Deposit the original cap alongside and a magnet in a white plastic case at the base of the stainless steel post.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees


A hemlock stump, 16 ins. diam., bears N. 29° E., 13.2 ft. dist., with fragmentary scribe mks. visible in a partially healed blaze.

A hemlock, 15 ins. diam., bears S. 48° E., 12.8 ft. dist., with a completely healed blaze.

And new bearing tree

A spruce, 15 ins. diam., bears N. 10 1/2° W., 61.1 ft. dist., mkd. X BT.

Add the mks. 2007 to the brass cap.



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.

A hemlock, 10 ins. diam., bears N. 29° E., 12.2 ft. dist., with fragmentary scribe mks. visible in a partially healed blaze.

A hemlock, 13 ins. diam., bears S. 25° E., 13.6 ft. dist., with a completely healed blaze.

Found a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which new bearing trees


A spruce, 18 ins. diam., bears N. 85° E., 54.7 ft. dist., mkd. X BT.

A hemlock, 13 ins. diam., bears N. 18 3/4° W., 17.1 ft. dist., mkd. X BT.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls near utility entrance gate to communications tower, not monumented due to liability of destruction by heavy equipment.

Monument is located on gentle NE slope, among spruce and hemlock, with devil's club and ferns. The post is set in organic muck over clay.



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown, from which


The N foundation corner of U.S. Forest Service building, 46 ft. x 32 ft., bears S. 36° E., 70.3 ft. dist., long side bears S. 65° E.

A spruce, 15 ins. diam., bears S. 77 1/2° W., 6.7 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls on unsupported overburden at top of cliff, 18 ft. high, not monumented.

Monument is located on moderate E slope, above cliff overhanging Kootznahoo Road, among spruce and hemlock, with berry bushes and false azaleas. The post is set in organic soil.




Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, encircled by a rock collar, 16 ins. diam., with alum. cap mkd. as shown, from which the original bearing tree (Record: stainless steel post)

A spruce, 14 ins. diam., bears S. 46° E., 10.4 ft. dist., with a completely healed blaze. (Record: S. 42° E.)

A hemlock, 23 ins. diam., bears N. 36 1/2° W., 35.1 ft. dist., with the mks. C3 LI S10784 BT in a partially healed blaze. (Record: N. 34° W., 31.7 ft./48 lks. dist.)

The improvements were not verified.



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, encircled by a rock collar, 24 ins. diam., with brass cap mkd. as shown, from which the original bearing trees (Record: alum. post)


A spruce, 20 ins. diam., bears S. 66° E., 20.3 ft. dist., with a completely healed blaze. (Record: S. 73° E.)

A dead spruce, 24 ins. diam., bears S. 28° W., 21.2 ft. dist., with fragmentary scribe mks. visible in a partially healed blaze. (Record: S. 23° W., 20.5 ft./31 lks. dist.)

And new bearing tree

A hemlock, 16 ins. diam., bears S. 37° W., 28.3 ft. dist., mkd. X BT.

Add the mks. 2006 to the brass cap.



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.

A hemlock, 10 ins. diam., bears N. 29° E., 12.2 ft. dist., with fragmentary scribe mks. visible in a partially healed blaze.

A hemlock, 13 ins. diam., bears S. 25° E., 13.6 ft. dist., with a completely healed blaze.


Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

The most SW corner of concrete foundation of the Post Office building, 70 ft. x 41 ft., bears N. 65° E., 90.2 ft. dist., long side bears E.



The most SE corner of concrete foundation of City Hall, 63 ft. x 40 ft., bears N. 53° W., 8.0 ft. dist., long side bears N.

Deposit a magnet in a white plastic case alongside the stainless steel post.

Add the mks. 2007 to the brass cap.



Found an alum. rod, 1 in. diam., firmly set, flush with the ground, with alum. cap incorrectly mkd. as shown.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which

An alum. rod, 1 in. diam., bears North, 46.7 ft. dist., with alum. cap mkd. USPS 1998 R&M ENGR 1410-S.

A rebar, 5/8 in. diam., bears N. 0°01' W., 26.92 ft. dist., with yellow plastic cap mkd. JOHNSON 3-7570.

The NE corner of concrete foundation of U.S. Post Office building, 2 ft. above ground, bears S. 9° W., 65.1 ft. dist.


A luminair, bears N. 81 3/4° W., 71.0 ft. dist., measured to a metal tag, 6 ft. above ground, on N side, marked 4*40 S.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in grass, among alder, at the E edge of the N Post Office parking lot. The post is set in excavated rock.



Found an iron post, 1 in. diam., firmly set, 5 ins. below asphalt road surface, enclosed in a monument box in the centerline of Kootznahoo Road, with brass cap mkd. as shown.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 23 ins. diam., with brass cap mkd. as shown, from which


A hemlock, 6 ins. diam., bears S. 20 1/2° W., 52.7 ft. dist., mkd. X BT.

A spruce, 23 ins. diam., bears N. 86° W., 70.3 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls on SW shore of Kootznahoo Inlet, not monumented due to the liability of destruction by tidal action.

Monument is located on gentle E slope, among spruce and hemlock, with grass, false azaleas and berry bushes. Old Killisnoo Road, 16 ft. wide, bears W. 24.5 ft. dist., centerline bears N. 40° W. and S. 40° E. The post is set in organic soil.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 24 ins. diam., with brass cap mkd. as shown, from which

A hemlock, 7 ins. diam., bears N. 74 1/2° E., 27.5 ft. dist., mkd. X BT.

A rebar, 5/8 in. diam., firmly set, projecting 6 ins. above ground, bears S. 34° E., 5.05 ft. dist., with alum. cap mkd. ROW LOT 4 2005 7570-S.

A hemlock, 11 ins. diam., bears N. 29 1/2° W., 22.8 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.


Monument is located on steep N slope of road fill, among spruce and hemlock, with grass and berry bushes. The centerline of Kootznahoo Road bears S. 31.5 ft. dist., centerline bears N. 65° W. and S. 65° E. The post is set in organic soil.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-I, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF T.S. 50 AND 51 S., R.S. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




Found an iron post, 2 ins. diam., firmly set, projecting 16 ins. above ground, with brass cap mkd. as shown.

There is no remaining evidence of the original bearing trees.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. as shown.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on level ground, among berry bushes. The W foundation piling of a church, bears SE, 1.0 ft. dist. The post is set in muck.



Found an iron post, 1 in. diam., firmly set, 6 ins. below ground, with brass cap mkd. as shown, from which the remains of the original bearing tree


A rotted spruce stump, 17 ins. diam., bears N. 32 3/4° W. 23.3 ft. dist., with no scribe mks. visible.

And new bearing objects

The most NW corner of a multifamily housing complex, bears N. 49° E., 67.4 ft. dist., complex locally known as Teacher's housing.

The top bolt of a fire hydrant, bears S. 30 3/4° E., 124.0 ft. dist.

Add the mks. 2006 to the brass cap.



No evidence of the original corner was found.

At the original witness corner point, re-established by proportionate dist., not suitable for remonumentation.

At the point selected for the witness corner,

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown, from which


A hemlock, 17 ins. diam., bears S. 13 1/4° E., 14.1 ft. dist., mkd. X BT.

A rebar, 5/8 in. diam., firmly set, projecting 2 ins. above ground, bears S. 47 3/4° E., 5.8 ft. dist., with yellow plastic cap mkd. JOHNSON S7570.

A magnet, in a blue plastic case, bears S. 77° W., 9.9 ft. dist., buried 24 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls on the E shore of Kootznooh Inlet, not monumented due to the liability of destruction by tidal action.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 16 ins. diam., bears N. 22 1/4° E., 51.0 ft. dist., mkd. X BT.

A hemlock, 24 ins. diam., bears S. 65 1/4° W., 59.9 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle W slope, among hemlock and spruce, with berry bushes. The post is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 8 ins. diam., bears S. 29 3/4° W., 19.5 ft. dist., mkd. X BT.

A spruce, 13 ins. diam., bears N. 22° W., 34.2 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on steep NE slope, among hemlock and spruce, with berry bushes. The post is set in organic and mineral soil with gravel.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 9 ins. diam., bears S. 25 3/4° E., 18.2 ft. dist., mkd. X BT.

A spruce, 13 ins. diam., bears N. 83° W., 45.1 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, among hemlock and spruce, with berry bushes and devil's club. The post is set in organic muck.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 11 ins. diam., bears N. 45° E., 28.6 ft. dist., mkd. X BT.

A hemlock, 9 ins. diam., bears S. 49° E., 18.2 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on rolling ground, among hemlock and spruce, with devil's club, berry bushes and ferns. The post is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which

A hemlock, 6 ins. diam., bears S. 57 3/4° E., 11.6 ft. dist., mkd. X BT.

A hemlock, 7 ins. diam., bears S. 49 3/4° W., 34.0 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle NE slope, among western and mountain hemlock, with berry bushes. The post is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 5 ins. diam., bears N. 53 1/2° E., 13.6 ft. dist., mkd. X BT.


A hemlock, 16 ins. diam., bears N. 62 3/4° W., 46.1 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on uneven ground, among western and mountain hemlock, with berry bushes. The post is set in organic soil.




Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with alum. cap mkd. as shown.




Found an iron post, 2 1/2 ins. diam., loosely set, straightened over base to project 5 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A hemlock, 16 ins. diam., bears N. 12° E., 57.2 ft. dist., with a completely healed blaze. To verify this bearing tree, plunge cuts were made to remove the tree tissue grown since the original scribing, making the scribe mks. S3756 C9 LOT1 C3 BT visible. The plug was reinserted into the tree.


A hemlock, 13 ins. diam., bears N. 57° E., 8.2 ft. dist., with a completely healed blaze. (Record: N. 62° E.)



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.



Found an alum. post, 2 1/2 ins. diam., firmly set, flush with the ground, with alum. cap mkd. as shown.




Found an iron post, 1 in. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as shown, from which the remaining original bearing tree

A hemlock, 16 ins. diam., bears S. 88° E., 4.0 ft. dist., with a completely healed blaze.

And new bearing tree

A hemlock, 12 ins. diam., bears N. 6° W., 47.3 ft. dist., mkd. X BT.

Add the mks. 2007 to the brass cap.



Found an iron post, 1 in. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as shown, from which the remaining original bearing tree


A hemlock stump, 17 ins. diam., bears N. 25° E., 60.6 ft. dist., with no scribe mks. visible.

And new bearing trees


A spruce, 12 ins. diam., bears S. 5° W., 24.7 ft. dist., mkd. X BT.

A hemlock, 16 ins. diam., bears S. 72° W., 26.8 ft. dist., mkd. X BT.

Add the mks. 2007 to the brass cap.



Found an iron post, 1 in. diam., firmly set, 4 ins. below asphalt road surface, encased in a monument box in the centerline of Kootznooh Road, with brass cap mkd. as shown.



Found an iron post, 2 1/2 ins. diam., loosely set, straightened over base to project 3 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees


A hemlock snag, 8 ins. diam., bears S. 70° E., 8.3 ft. dist., with fragmentary mks. 56 visible in a partially healed blaze. (Record: S. 82 3/4° E.)

A hemlock, 11 ins. diam., bears N. 5 3/4° W., 31.3 ft. dist., with a completely healed blaze.

And new bearing tree

A hemlock, 10 ins. diam., bears N. 88° E., 33.2 ft. dist., mkd. X BT.

Add the mks. 2007 to the brass cap.



Found a rusted iron post, 2 ins. diam., firmly set, projecting 13 ins. above ground, with brass cap mkd. WC C8 MC HES S1757 1927, from which the remains of the original bearing trees

A rotted hemlock stump, 18 ins. diam., bears N. 14 1/2° E., 23.1 ft. dist., with the scribe mks. 1757 BT visible in a partially healed blaze.

A hemlock stump, 12 ins. diam., bears S. 51° E., 14.5 ft. dist., with the scribe mks. 17 visible in a rotted blaze. (Record: spruce)

Add the mks. 2006 to the brass cap.


At the corner point,

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 22 ins. diam., bears N. 27° E., 44.5 ft. dist., mkd. X BT.

A hemlock, 10 ins. diam., bears S. 61° E., 25.4 ft. dist., mkd. X BT.

Deposit the original post alongside and a magnet in a white plastic case at the base of the stainless steel post.



Found an iron post, 2 ins. diam., firmly set, broken flush with the ground, with no cap, from which the original bearing trees


A pistol-butt hemlock, 13 ins. diam., bears S. 74 1/2° E., 12.6 ft. dist., with a completely healed blaze. (Record: S. 87° E., 10.6 ft./16 lks. dist.)

A hemlock, 17 ins. diam., bears N. 35 3/4° W., 11.9 ft. dist., with a completely healed blaze.

At the corner point,

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd. as shown

Deposit a magnet in a white plastic case at the base of the stainless steel post.



Found an iron post, 2 ins. diam., firmly set, broken and projecting 6 ins. above ground, with brass cap mkd. WC MC C3 S1800 1927, from which the original bearing trees

A wind-fallen spruce, 15 ins. diam., bears N. 34° E., 19.4 ft. dist., with no scribe mks. visible. (Record: N. 27 3/4° E., 25 lks. dist.)

A spruce, 27 ins. diam., bears N. 83 3/4° E., 19.5 ft. dist., with a completely healed blaze. (Record: 21.1 ft./32 lks. dist.)

At the corner point,

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 11 ins. diam., bears N. 45 1/4° W., 29.4 ft. dist., mkd. X BT.


Deposit the original cap alongside and a magnet in a white plastic case at the base of the stainless steel post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-I, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)


KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




18A Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 8 ins. diam., bears N. 43 3/4° E., 24.1 ft. dist., mkd. X BT.
A hemlock, 18 ins. diam., bears S. 37° E., 56.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on beach with bedrock, boulders and gravel, not monumented due to the liability of destruction by tidal action.
Monument is located on moderate SW slope, among hemlock, with berry bushes. The post is set in organic soil.




18G Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 13 ins. diam., bears N. 75 3/4° E., 75.0 ft. dist., mkd. X BT.
A pistol-butt hemlock, 6 ins. diam., bears S. 58 3/4° W., 22.6 ft. dist., bearing and dist. measured to a spike, 6 ins. long, driven 3 ins. into the NW side, 1 ft. above ground level, mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on nearly level ground, among hemlock and spruce, with berry bushes and wind-fallen trees. The post is set in organic soil.




18M Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, supported by a rock mound, 24 ins. at base by 12 ins. high, with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on steep NE slope, among second growth hemlock and spruce, with dense brush. The post is set in organic soil.




18B Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which
A hemlock, 8 ins. diam., bears N. 10° E., 10.7 ft. dist., mkd. X BT.
A hemlock, 14 ins. diam., bears S. 79 1/2° E., 63.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on moderate E slope, among hemlock and spruce, with berry bushes and skunk cabbage. The post is set in organic muck over clay.




18H Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which
A spruce, 13 ins. diam., bears N. 62 1/2° E., 36.1 ft. dist., mkd. X BT.
A hemlock, 24 ins. diam., bears S. 2° E., 41.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on boulder and bedrock beach, not monumented due to the liability of destruction by tidal action.
Monument is located on steep N slope, among hemlock and spruce, with berry bushes, false azalea and devil's club. A cliff, 35 ft. high, bears N. 19° E., 30 ft. dist., face bears N. 70° E. and S. 80° W. The post is set in organic soil.




18N Found an iron post, 2 ins. diam., loosely set, broken, 5 ins. below ground, with brass cap mkd. MC SI613 CI WC 1927, from which the original bearing trees
A hemlock, 16 ins. diam., bears N. 78 1/2° W., 35.7 ft. dist., with no scribe mks. visible in a rotted blaze. (Record: N. 80° W.)
A hemlock, 32 ins. diam., bears N. 54° W., 22.3 ft. dist., with a completely healed blaze.
At the corner point,
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, supported by a rock mound, 18 ins. at base by 10 ins. high, with brass cap mkd. as shown.
Deposit the original cap alongside and a magnet in a white plastic case at the base of the stainless steel post.




18C Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which
A hemlock, 23 ins. diam., bears S. 20° E., 43.2 ft. dist., mkd. X BT.
A spruce, 17 ins. diam., bears S. 86 1/4° W., 21.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on rolling ground, among hemlock and spruce, with berry bushes. The post is set in organic soil.




18J No evidence of the original corner was found.
The true point, re-established at the intersection of the extension of the most N corners of Lot 1A, Danger Point Subdivision, and the line of mean high tide, not monumented due to the liability of destruction by tidal action.
At the point selected for a witness corner,
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 39 ins. diam., bears S. 34 1/2° W., 11.7 ft. dist., mkd. X BT.




18P Found an iron post, 1 in. diam., firmly set, projecting 11 ins. above ground, with brass cap mkd. as shown, from which the remains of the original 1928 bearing tree
A hemlock snag, 15 ins. diam., bears S. 27° W., 18.8 ft. dist., with the scribe mks. WCMC TSIS R68E S6 BT visible in a partially healed blaze.




18D Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 22 ins. diam., bears S. 33 1/2° E., 6.0 ft. dist., mkd. X BT.
A hemlock, 18 ins. diam., bears N. 82 3/4° W., 37.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on uneven ground, among hemlock and spruce, with devil's club, skunk cabbage and wind-fallen trees. The post is set in organic soil.




18K Found an iron post, 2 ins. diam., firmly set, broken flush with the ground, with no cap, from which the original bearing trees
A spruce, 18 ins. diam., bears N. 88 1/4° E., 39.9 ft. dist., with a completely healed blaze. (Record: S. 2 1/2° E., 18.5 ft./28 lks. dist.)
A spruce, 25 ins. diam., bears N. 23° W., 23.6 ft. dist., with a completely healed blaze. (Record: 39.6 ft./60 lks. dist.)
At the corner point,
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown
Deposit a magnet in a white plastic case at the base of the stainless steel post.




18Q Found an alum. post, 2 ins. diam., loosely set, straightened over base to project 6 ins. above ground, with alum. cap mkd. as shown




18E Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on uneven ground, among hemlock and spruce, with berry bushes. The post is set in organic soil.




18L Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which
A spruce, 15 ins. diam., bears S. 3 1/4° E., 33.7 ft. dist., mkd. X BT.
A hemlock, 17 ins. diam., bears N. 89 3/4° W., 14.2 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on moderate NW slope, among hemlock and spruce, with berry bushes and false azalea. The post is set in organic soil.




18R Found an alum. rod, 5/8 in. diam., firmly set, flush with the ground, encircled by a rock collar, 10 ins. diam., with alum. cap mkd. as shown.




18F Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd. as shown, from which
A hemlock, 6 ins. diam., bears N. 73° E., 40.5 ft. dist., mkd. X BT.
A hemlock, 9 ins. diam., bears N. 6° W., 18.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located at toe of steep SE slope, among hemlock and spruce, with berry bushes. The post is set in organic soil.




18S No evidence of the original corner was found.
At the corner point, re-established using the adjusted record angle of the most NE corner of Kootznoowoo Survey No. 100 and intersecting the easterly line of right-of-way of the Kootznoowoo Road.
At the point selected for a witness corner,
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 11 ins. diam., with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on spruce stump, 8 ins. diam., not monumented.



18T Found a stainless steel post, 2 1/2 ins. diam., firmly set, 4 ins. below ground, with brass cap mkd. as shown, from which the original bearing objects
A spruce, 17 ins. diam., bears N. 17 3/4° E., 70.0 ft. dist., with a completely healed blaze.
A corrugated metal pipe, 24 ins. diam., bears S. 82 1/4° W., 30.7 ft. dist., with an X mkd. on top.




18U Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 8 ins. diam., bears S. 21 3/4° E., 43.2 ft. dist., mkd. X BT.
A hemlock, 13 ins. diam., bears S. 75° W., 78.7 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on rolling ground, among spruce, with berry bushes and skunk cabbage, at the ROW corridor of Auk'Tah Lake Road. The post is set in organic soil.



18V Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on gentle E slope, among spruce, with ferns and weeds, near the intersection of Kootznoowoo and Auk'Tah Lake Roads. The post is set in organic soil.



18W Found an iron post, 1 in. diam., firmly set, 4 ins. below asphalt road surface, encased in a monument box in the centerline of Kootznoowoo Road, with brass cap mkd. as shown.




18X Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown, from which the original bearing trees
A spruce, 9 ins. diam., bears S. 71 3/4° E., 43.9 ft. dist., with a completely healed blaze.
A spruce, 20 ins. diam., bears N. 5° W., 110.2 ft. dist., with a completely healed blaze.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, encircled by a rock collar, 24 ins. diam., with brass cap mkd. as shown, from which the original 1990 bearing trees

A spruce, 15 ins. diam., bears N. 30° E., 134.4 ft. dist., with fragmentary scribe mks. visible in a partially healed blaze.

A wind-fallen hemlock, 9 ins. diam., bears N. 62° E., 47.5 ft. dist., with the scribe mks. BT visible in a partially healed blaze.

And the 1998 bearing object


A power pole, 13 ins. diam., bears S. 53° E., 85.0 ft. dist., with no mks.




Found a stainless steel post, 2 1/2 ins. diam., loosely set, straightened over base to project 8 ins. above ground, with brass cap mkd. as shown, from which the original 1990 bearing trees

A spruce, 18 ins. diam., bears N. 7 3/4° E., 23.5 ft. dist., with a completely healed blaze.

A hemlock, 14 ins. diam., bears N. 44 1/4° E., 32.2 ft. dist., with the scribe mks. C3 SIO475 BT visible in a partially healed blaze.



Found a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown, from which

A hemlock, 10 ins. diam., bears N. 17 1/4° E., 55.0 ft. dist., mkd. X BT.

A spruce, 14 ins. diam., bears S. 88 1/4° W., 33.7 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle E slope, in cleared area for road, Kootznooh Road, 16 ft. wide, bears E., 44.5 ft. dist., centerline bears N. 45° E. and S. 45° W. The post is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, encircled by a rock collar, 19 ins. diam., with brass cap mkd. as shown, from which

A hemlock, 12 ins. diam., bears N. 50 1/2° E., 31.7 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears S. 36 1/4° E., 32.8 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on moderate W slope, among hemlock and spruce, with berry bushes. The post is set in excavated rock and organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 17 ins. diam., with brass cap mkd. as shown, from which

A hemlock, 9 ins. diam., bears S. 19° W., 111.3 ft. dist., mkd. X BT.

A hemlock, 6 ins. diam., bears N. 71° W., 13.0 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on level ground, among mountain hemlock and lodgepole pine, with false azalea and berry bushes. The post is set in organic muck.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown, from which

A spruce, 8 ins. diam., bears N. 21 1/4° E., 38.4 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears N. 83 1/4° W., 86.3 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.


Monument is located on moderate W slope, in grass, at edge of hemlock and spruce forest, with alders, Kootznooh Road, 16 ft. wide, bears E., 52.5 ft. dist., centerline bears N. 40° E. and S. 40° W. The post is set in organic soil.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle NW slope, among hemlock and spruce, with berry bushes. The post is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 14 ins. diam., bears S. 53° W., 23.7 ft. dist., mkd. X BT.


A hemlock, 11 ins. diam., bears N. 36° W., 21.3 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on rolling ground, among hemlock, with dense berry bushes. The post is set in organic soil.



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which

A hemlock, 10 ins. diam., bears S. 58 1/4° E., 14.1 ft. dist., mkd. X BT.


A hemlock, 10 ins. diam., bears S. 41 1/4° W., 38.1 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on rolling ground, among hemlock, with berry bushes. The post is set in organic muck.



Found an alum. post, 2 1/2 ins. diam., loosely set, straightened over base to project 7 ins. above ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 19 ins. diam., bears N. 81 1/4° W., 72.4 ft. dist., mkd. X BT.

A hemlock, 9 ins. diam., bears N. 23 1/4° W., 30.0 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.


Monument is located on rolling ground, among hemlock, with skunk cabbage, berry bushes, devil's club and ferns. The post is set in organics over clay.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, among hemlock, with berry bushes, devil's club, skunk cabbage, and ferns. The post is set in organic muck.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 14 ins. diam., bears S. 11 1/4° E., 32.1 ft. dist., mkd. X BT.

A hemlock, 6 ins. diam., bears N. 78 3/4° W., 17.7 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on rolling ground, among hemlock and spruce, with berry bushes, devil's club, ferns and skunk cabbage. The post is set in organic muck.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd. as shown, from which


A hemlock, 16 ins. diam., bears S. 69° E., 6.5 ft. dist., mkd. X BT.

A hemlock, 10 ins. diam., bears S. 32 3/4° W., 43.4 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls in root mass of a hemlock, 19 ins. diam., not monumented due to the liability of destruction by wind-fall aggravated by damaged rootmass.

Monument is located on gentle W slope, among hemlock and spruce. The post is set in organics over mineral soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 18 ins. diam., bears N. 11 1/2° E., 14.5 ft. dist., mkd. X BT.

A hemlock, 14 ins. diam., bears S. 81 1/4° W., 46.6 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle NW slope, among hemlock and spruce, with wind-fallen trees. The post is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 9 ins. diam., bears S. 5 3/4° W., 41.6 ft. dist., mkd. X BT.


A spruce, 13 ins. diam., bears S. 70 1/2° W., 51.9 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on moderate N slope, among hemlock and spruce, with berry bushes and wind-fallen trees. The post is set in mineral soil with gravel.



Found an alum. post, 2 1/2 ins. diam., firmly set, flush with the ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown, from which

A hemlock, 15 ins. diam., bears N. 29 1/2° E., 80.3 ft. dist., mkd. X BT.

A spruce, 23 ins. diam., bears S. 77° E., 47.0 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle NW slope, in grass, on the beach, with cobbles, boulders and muck, near edge of alder-lined spruce and hemlock forest, at the line of mean high tide. The post is set in clay.



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown, from which the original 1928 bearing trees

A spruce stump, 36 ins. diam., bears N. 70 1/2° E., 59.6 ft. dist., with no scribe mks. visible in a rotted blaze.

A spruce stump, 30 ins. diam., bears S. 81 1/2° E., 48.8 ft. dist., with no scribe mks. visible in a rotted blaze.


A hemlock, 18 ins. diam., bears S. 37 3/4° W., 211.8 ft. dist., with the mks. S R68E S6 MC BT visible in a partially healed blaze.

A spruce, 38 ins. diam., bears N. 8 1/4° W., 186.1 ft. dist., with a completely healed blaze.

And the 1999 bearing trees

A hemlock, 7 ins. diam., bears N. 76 1/2° E., 82.1 ft. dist., with scribe mks. visible in a partially healed blaze.

A hemlock, 21 ins. diam., bears S. 64 3/4° E., 58.1 ft. dist., with the mks. T51S R68E S5 BT visible in a partially healed blaze.



Found an iron post, 1 in. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown, from which the original 1928 bearing trees

A spruce, 16 ins. diam., bears S. 83 3/4° E., 23.3 ft. dist., with a completely healed blaze.

A hemlock stump, 21 ins. diam., bears S. 63 3/4° W., 16.7 ft. dist., with no mks. visible.

And the 1999 bearing tree

A hemlock, 14 ins. diam., bears S. 35 1/4° W., 31.6 ft. dist., with the scribe mks. X BT.


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

20A



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, encircled by a rock collar, 17 ins. diam., with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears S. 14 3/4° W., 26.8 ft. dist., mkd. X BT.


A hemlock, 17 ins. diam., bears N. 85 3/4° W., 54.6 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls on beach with cobbles, gravel, erratic boulders, and mud, not monumented due to the liability of destruction by tidal action.

Monument is located on moderate NE slope, in grass, on the edge of alder-lined spruce and hemlock forest, with berry bushes. The post is set in excavated rock with mineral soil and gravel.

20B



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which


A hemlock, 10 ins. diam., bears N. 51 1/2° E., 42.2 ft. dist., mkd. X BT.

A spruce, 14 ins. diam., bears N. 49° W., 36.3 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on rolling ground, among hemlock and spruce, with devil's club and berry bushes. A trail, 3 ft. wide, bears N. 30° E., 22 ft. dist., centerline bears N. 60° E. and S. 60° W. A dry creek bed, 3 ft. wide, bears S. 5 ft. dist., course N. 45° E. The post is set in organic soil.

20C



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which


A hemlock, 3 ins. diam., bears N. 16 1/2° E., 37.5 ft. dist., mkd. X BT.

A spruce, 10 ins. diam., bears S. 54 1/2° W., 9.8 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on moderate NE slope, among hemlock and spruce, with berry bushes. The post is set in organic and mineral soils with gravel.

20D



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. in the ground, supported by a rock mound, 35 ins. at base by 24 ins. high, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears S. 11 1/2° E., 12.5 ft. dist., mkd. X BT.


A hemlock, 3 ins. diam., bears N. 65 1/2° W., 17.2 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls on beach with cobbles, gravel, erratic boulders and mud, not monumented due to the liability of destruction by tidal action.

Monument is located on moderate NE slope, in grass, on the edge of alder-lined spruce and hemlock forest, with berry bushes. The post is set in excavated rock with mineral soil and gravel.

20E




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 16 ins. above ground, supported by a rock mound, 18 ins. diam. by 10 ins. high, with brass cap incorrectly mkd. as shown, from which the original bearing trees

A spruce, 17 ins. diam., bears S. 3 1/2° E., 47.4 ft. dist., with the scribe mks. X BT visible in a partially healed blaze.

A spruce, 11 ins. diam., bears S. 16° W., 24.4 ft. dist., with no scribe mks. visible in a partially healed blaze.

20F



Found an iron post, 2 1/2 ins. diam., loosely set, straightened over base to project 2 ins. above ground, with brass cap mkd. as shown, from which the original 1960 bearing tree

A hemlock snag, 21 ins. diam., bears N. 84 3/4° W., 51.9 ft. dist., with the scribe mks. X BT visible in a partially healed blaze.


And the 1990 bearing objects

An exposed rock, 2 1/4 x 1 x 1/2 ft. high, bears N. 71 1/2° E., 95.8 ft. dist., mkd. with an X on top.

A spruce, 15 ins. diam., bears S. 21° W., 35.7 ft. dist., with a completely healed blaze.

A spruce, 15 ins. diam., bears N. 11° W., 19.8 ft. dist., with a completely healed blaze.

20G




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A hemlock, 14 ins. diam., bears S. 29° E., 42.8 ft. dist., with the scribe mks. C2 BT visible in a partially healed blaze.

A hemlock, 15 ins. diam., bears S. 37° W., 73.4 ft. dist., with the scribe mks. X BT visible in a partially healed blaze.

20H



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the remaining original 1960 bearing tree


A hemlock stump, 21 ins. diam., bears N. 70 1/2° E., 28.0 ft. dist., with no scribe mks. visible. (Record: 44 lks. dist.)

And the 1998 bearing trees

A hemlock, 11 ins. diam., bears S. 12° E., 25.4 ft. dist., with the scribe mks. X BT visible in a partially healed blaze.

A spruce, 19 ins. diam., bears S. 62 1/2° W., 16.1 ft. dist., with a completely healed blaze. (Record: hemlock)

20J




Found a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown, from which the original bearing trees

A hemlock, 8 ins. diam., bears N. 39° E., 13.0 ft. dist., with the scribe mks. X BT visible in a partially healed blaze.

A hemlock, 12 ins. diam., bears N. 52 1/2° W., 12.5 ft. dist., with the scribe mks. X BT visible in a partially healed blaze.

The original 1960 wooden post is visible and buried upside down alongside the stainless steel post.

20K



Found an iron post, 2 1/2 ins. diam., loosely set, straightened over base to project 10 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A hemlock, 8 ins. diam., bears N. 68 1/2° E., 30.8 ft. dist., with a completely healed blaze.


A hemlock stump, 16 ins. diam., bears N. 46 3/4° W., 27.7 ft. dist., with no scribe mks. visible.

And new bearing tree

A hemlock, 11 ins. diam., bears N. 37° W., 28.8 ft. dist., mkd. X BT.

Add the mks. 2006 to the brass cap.

20L



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, from which the original bearing tree

A spruce, 21 ins. diam., bears S. 16 1/2° E., 19.1 ft. dist., with no scribe mks. visible in a partially healed blaze.


The improvements were not verified.

And new bearing tree

A spruce, 12 ins. diam., bears S. 54° W., 57.0 ft. dist., mkd. X BT.

Add the mks. 2006 to the brass cap.

20M




No evidence of the original corner was found. At the corner point, re-established by Grant Boundary adjustment.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 20 ins. diam., with brass cap mkd. as shown

Deposit a magnet in a white plastic case at the base of the stainless steel post.

20N




No evidence of the original corner was found. At the corner point, re-established by Grant Boundary adjustment.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown

Deposit a magnet in a white plastic case at the base of the stainless steel post.

20P



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which


A spruce, 23 ins. diam., bears N. 15 3/4° E., 82.6 ft. dist., mkd. X BT.

A hemlock, 7 ins. diam., bears S. 29° W., 55.7 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle NW slope, in grass, at edge of alder-lined spruce and hemlock forest, on beach of boulders, gravel and mud, at the line of mean high tide. The post is set in muck.

20Q



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which


A hemlock, 5 ins. diam., bears N. 21° E., 11.2 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears N. 51 1/2° W., 18.1 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle NW slope, among spruce and hemlock, with berry bushes, false azaleas and devil's club. The post is set in organic soil.

20R



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown, from which

A hemlock, 6 ins. diam., bears S. 4 1/4° E., 53.4 ft. dist., mkd. X BT.


A spruce, 4 ins. diam., bears N. 86 3/4° W., 50.4 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls on beach with cobbles and bedrock, not monumented due to the liability of destruction by tidal action.

Monument is located on level ground, in grass. The post is set in decomposing bedrock.

20S




No evidence of the original corner was found. At the corner point, re-established by Grant Boundary adjustment.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown

Deposit a magnet in a white plastic case at the base of the stainless steel post.

20T



Found a stainless steel post, 1 in. diam., firmly set, projecting 6 ins. above ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which the original bearing trees

A spruce stump, 18 ins. diam., bears S. 77° E., 16.3 ft. dist., with completely healed blaze. (Record: S. 70° E.)


A spruce, 14 ins. diam., bears N. 34° W., 7.9 ft. dist., with completely healed blaze. (Record: N. 40° W.)

And new bearing tree

A spruce, 27 ins. diam., bears S. 18° W., 49.6 ft. dist., mkd. 1/4 SB BT.

Add the mks. 2007 to the brass cap.

20U




Found an iron rebar, 5/8 in. diam., firmly set, projecting 8 ins. above ground, with a yellow plastic cap mkd. MENZIES 1410S. Rebar is located in a creek, 1 ft. wide, course W.

At the point selected for a witness cor.,

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown

Deposit the rebar along side and a magnet in a white plastic case at the base of the stainless steel post.

20V



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 11 ins. diam., with brass cap mkd. as shown, from which


A hemlock, 11 ins. diam., bears S. 49 3/4° W., 23.0 ft. dist., mkd. X BT.

A hemlock, 6 ins. diam., bears N. 31 1/2° W., 39.8 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on rolling ground, among hemlock, with wind-fallen trees, berry bushes and ferns. The post is set in mineral soil over clay.

20W



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 23 ins. diam., bears S. 37 1/2° W., 25.5 ft. dist., mkd. X BT.

A hemlock, 8 ins. diam., bears N. 65 3/4° W., 20.6 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.


Monument is located on gentle E slope, among hemlock, with berry bushes. The post is set in organic and mineral soils.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)


KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




21A Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown, from which unrecorded bearing trees
A dead hemlock, 6 ins. diam., bears S. 39 1/4° E., 11.2 ft. dist., with the mks. X BT carved with a knife in a partially healed blaze.
A hemlock, 15 ins. diam., bears N. 57 1/2° W., 3.6 ft. dist., with the mks. X BT carved with a knife in a partially healed blaze.




21G Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on gentle NW slope, among hemlock, with berry bushes. The post is set in organic soil.




21N Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, encircled by a rock collar, 18 ins. diam., with alum. cap mkd. as shown.




21B Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls in root mass of a hemlock, 26 ins. diam., not monumented due to the liability of destruction by wind-fall aggravated by damaged rootmass.
Monument is located on gentle NE slope, among hemlock and spruce, with berry bushes. The post is set in organic soil.




21H Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 12 ins. diam., bears S. 9 3/4° E., 65.9 ft. dist., mkd. X BT.
A hemlock, 13 ins. diam., bears S. 54 3/4° W., 57.2 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on rolling ground, among hemlock and spruce, with devil's club and berry bushes. The post is set in organics over mineral soil.




21P Found an iron post, 1 in. diam., loosely set, straightened over base to project 7 ins. above ground, encircled with a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which no evidence of the original bearing trees remain.
And the new bearing objects
A power pole, 11 ins. diam., bears S. 29 3/4° W., 91.1 ft. dist., with a tag mkd. SJI 46 0704 DFP.60 4-45.
A spruce, 19 ins. diam., bears N. 58 3/4° W., 70.0 ft. dist., mkd. X BT.
Add the mks. 2006 to the brass cap.
Now designated as witness cor. to the meander cor. of Tract F, no new additional mks. added.




21C Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd. as shown, from which
A hemlock, 11 ins. diam., bears S. 24 1/4° W., 46.1 ft. dist., mkd. X BT.
A hemlock, 8 ins. diam., bears N. 47° W., 26.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on moderate SW slope, among hemlock and spruce, with berry bushes. The post is set in organics over mineral soil with gravel.




21J Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on disturbed and unstable overburden from the development of rock pit, not monumented due to the liability of destruction by further expansion of pit.
Monument is located on gentle SW slope, among hemlock and spruce, with false azaleas, devil's club and berry bushes. The post is set in excavated bedrock.




21Q Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 16 ins. diam., with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on level ground, in a cleared area, with grass, false azaleas and berry bushes. The centerline of Kootznahoo Road, 16 ft. wide, bears W., 45.5 ft. dist., centerline bears N. 50° W. and S. 50° E. The post is set in organic soil over clay and gravel.




21U Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 11 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 9 ins. diam., bears S. 15 1/2° E., 11.6 ft. dist., mkd. X BT.
A hemlock, 12 ins. diam., bears S. 79 3/4° W., 38.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on rolling ground, among hemlock, with devil's club and berry bushes. The post is set in organic soil over clay.




21D Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which
A hemlock, 16 ins. diam., bears S. 46 3/4° E., 48.6 ft. dist., mkd. X BT.
A hemlock, 7 ins. diam., bears S. 42 1/2° W., 53.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on steep NE slope, among hemlock, with berry bushes and devil's club. The post is set in organics over mineral soil.




21K No evidence of the original corner was found.
True point, re-established at proportionate dist., falls on floor of active rock pit, not monumented due to liability of destruction by continued use of the pit.
At the point selected for a witness corner.
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




21R Found an iron post, 1 in. diam., loosely set and lying 7 ins. below the ground, with brass cap mkd. as shown, from which no original bearing trees remain.
At the corner point,
Reset the original iron post, 1 in. diam., 36 ins. long, straightened over base to project 11 ins. above ground, supported by a rock mound, 24 ins. at base by 12 ins. high, with brass cap mkd. as shown.
And new bearing trees,
A spruce, 16 ins. diam., bears N. 27° E., 16.0 ft. dist., mkd. S2415 TRA C4 BT.
A hemlock, 11 ins. diam., bears S. 47° E., 24.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the iron post.
The post is set in organic muck.
Add the mks. 2007 to the brass cap.



21V Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 24 ins. diam., bears N. 14 1/2° E., 59.0 ft. dist., mkd. X BT.
A hemlock, 8 ins. diam., bears S. 49 1/4° E., 61.2 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on level ground, among hemlock. The post is set in saturated muck.




21E Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd. as shown, from which
A hemlock, 11 ins. diam., bears S. 14 3/4° E., 34.5 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears S. 87 3/4° W., 35.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on steep SE slope, among spruce and hemlock, with wind-fallen trees. The post is set in organics over mineral soil with gravel.




21L Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 16 ins. diam., with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on disturbed and unstable overburden from the development of rock pit, not monumented due to the liability of destruction by further expansion of pit.
Monument is located on gentle NW slope, among slash and debris from a clearcut. The post is set in mineral soil, clay and volcanic ash.




21S Found an alum. post, 2 1/2 ins. diam., loosely set, straightened over base to project 13 ins. above ground, with alum. cap mkd. as shown




21W Found an iron post, 2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. as shown, from which no original bearing trees remain.
And new bearing trees,
A hemlock, 14 ins. diam., bears N. 70 3/4° E., 24.1 ft. dist., mkd. X BT.
A spruce, 13 ins. diam., bears S. 9° W., 12.0 ft. dist., mkd. X BT.
Add the mks. 2007 to the brass cap.
Now designated as witness cor. to a meander cor. of Tract F, no new additional mks. added.




21F Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 17 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 18 ins. diam., bears S. 13 1/2° E., 25.0 ft. dist., mkd. X BT.
A hemlock, 12 ins. diam., bears S. 71° W., 43.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on moderate NE slope, among hemlock, with berry bushes. The post is set in organic soil over clay.




21M Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on moderate SW slope, among spruce and hemlock, with fireweed. An access road, 12 ft. wide, bears N. 42° W., 14 ft. dist., centerline bears N. 48° E. and S. 48° W. Auk Tah Lake Road, 25 ft. wide, bears S. 48° W., 54 ft. dist., centerline bears N. 42° W. and S. 42° E. The post is set in mineral soil.



21T Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which
A spruce, 3 ins. diam., bears S. 87 1/2° E., 8.2 ft. dist., mkd. X BT.
A spruce, 9 ins. diam., bears S. 36 1/2° W., 16.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on level ground, among alder, spruce and hemlock, with nettles and berry bushes. The post is set in organic soil.



21X Found an iron post, 1 in. diam., firmly set, projecting 10 ins. above the ground, encircled with a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which the original bearing trees
A hemlock, 12 ins. diam., bears S. 70° E., 11.5 ft. dist., with a completely healed blaze.
A hemlock, 16 ins. diam., bears S. 26 1/2° W., 20.7 ft. dist., with no scribe mks. visible in a partially healed blaze.



21Y No evidence of the original corner was found.
At the corner point, re-established at proportionate distance.
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 21 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 9 ins. diam., bears S. 62 1/4° W., 49.4 ft. dist., mkd. X BT.
A hemlock, 12 ins. diam., bears N. 24° W., 38.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

Journal 2008-35


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

22A



Found an iron post, 1 in. diam., firmly set, projecting 2 ins. above the ground, encircled with a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which the original 1938 bearing trees

A spruce stump, 17 ins. diam., bears N. 57 3/4° E., 32.1 ft. dist., with a completely healed blaze.

A spruce, 15 ins. diam., bears N. 80 1/2° E., 26.6 ft. dist., with a completely healed blaze.


The 1941 bearing tree was not verified.

And new bearing tree

A hemlock, 11 ins. diam., bears N. 4° E., 68.0 ft. dist., mkd. X BT.

Add the mks. 2007 to the brass cap.

22B



Found an iron post, 1 in. diam., firmly set, projecting 2 ins. above the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown, from which the remaining original bearing tree

A pistol-butt hemlock, 20 ins. diam., bears N. 78° E., 24.0 ft. dist., with a completely healed blaze. (Record: N. 64 1/2° E., 25.4 ft./38 1/2 lks.)

And new bearing tree,

A hemlock, 8 ins. diam., bears N. 47 1/2° W., 10.3 ft. dist., mkd. X BT.

Add the mks. 2007 to the brass cap.

22C



Found an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, encircled by a rock collar, 30 ins. diam., with brass cap mkd. as shown, from which no original bearing trees remain.

And new bearing trees

A spruce, 7 ins. diam., bears N. 83° E., 99.1 ft. dist., mkd. X BT.

A spruce, 12 ins. diam., bears N. 14° W., 30.1 ft. dist., mkd. X BT.

Add the mks. 2007 to the brass cap.

22D



There is no remaining evidence of the original 1929 iron post.

Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. in the ground, with alum. cap mkd. as shown, from which the remaining bearing object


A brass tablet, 3 ins. diam., firmly set, grouted flush with the bedrock, bears S. 88° E., 18.5 ft. dist., with top mkd. 5453-S RM2 WC C-1 18.86 TRC ATSI026 1990.

22E



Found an iron post, 1 in. diam., firmly set, 4 ins. below asphalt road surface, enclosed in a monument box in the centerline of Kootznohoo Road, with brass cap mkd. as shown.

22F



Found an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which the original bearing trees

A spruce, 20 ins. diam., bears S. 27 1/4° W., 38.3 ft. dist., with no scribe mks. visible in a partially healed blaze and an alum. tag mkd. ATSI026 BT C2 TRC.


A spruce, 23 ins. diam., bears N. 25° W., 18.1 ft. dist., with a completely healed blaze and an alum. tag mkd. ATSI026 C2 WC TRC. (Record: N. 58 3/4° W., 16.5 ft./25 lks. dist.)

And new bearing tree,

A spruce, 11 ins. diam., bears N. 62° W., 30.1 ft. dist., mkd. X BT.

Add the mks. 2007 to the brass cap.

22G



Found an iron post, 2 ins. diam., firmly set, projecting 7 ins. above the ground, with brass cap mkd. as shown, from which the remaining original 1938 bearing tree

A rotted hemlock stump, 8 ins. diam., bears N. 66 1/2° W., 96.8 ft. dist., with the mks. L6 CI MC BT visible in a partially healed blaze.

And the 1960 bearing tree


A spruce, 25 ins. diam., bears S. 83 1/4° W., 81.0 ft. dist., with a completely healed blaze. (Record: 82.5 ft./125 lks.)

And new bearing tree

A spruce, 27 ins. diam., bears N. 68° W., 94.2 ft. dist., mkd. X BT.

Add the mks. 2007 to the brass cap.

22H



Found an iron post, 1 in. diam., firmly set, flush with the ground, with brass cap mkd. as shown, from which the original bearing tree


A hemlock, 14 ins. diam., bears N. 9 3/4° W., 17.1 ft. dist., with a completely healed blaze. To verify this bearing tree, plunge cuts were made to remove the tree tissue grown since the original scribing, making the scribe mks. S2416 TRA LOT5 CI MC B visible. The plug was reinserted into the tree. (Record: N. 79 1/2° E.)

And new bearing tree,

A hemlock, 11 ins. diam., bears N. 87° W., 37.1 ft. dist., mkd. X BT.

Add the mks. 2006 to the brass cap.

22J




Found an iron post, 1 in. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A hemlock, 11 ins. diam., bears S. 23 1/2° E., 13.4 ft. dist., with a completely healed blaze.

A hemlock, 11 ins. diam., bears S. 38° W., 13.1 ft. dist., with a completely healed blaze.

22K



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which

A hemlock, 18 ins. diam., bears S. 34° E., 4.1 ft. dist., mkd. X BT.

A spruce, 21 ins. diam., bears S. 60° W., 25.3 ft. dist., mkd. X BT.

A rebar, 5/8 in. diam., projecting 6 ins. above ground, bears S. 79°26' W., 83.15 ft. dist., with a yellow plastic cap mkd. JOHNSON 7570-S.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls in root mass, not monumented.

Monument is located on moderate E slope, among spruce and hemlock, with false azaleas, berry bushes and devil's club. The post is set in organic soil.

22L



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, supported by a rock mound, 18 ins. at base by 12 ins. high, with brass cap mkd. as shown, from which


A hemlock, 5 ins. diam., bears S. 28° W., 33.0 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 42° W., 35.6 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on moderate E slope, among hemlock and spruce, with false azaleas. The post is set in organic soil.

22M



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown, from which


A spruce, 12 ins. diam., bears N. 12 3/4° E., 16.5 ft. dist., mkd. X BT.

A spruce, 15 ins. diam., bears S. 49° W., 4.8 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle SW slope, among spruce and hemlock. A road, 15 ft. wide, bears E., 51.0 ft. dist., centerline bears N. 45° E. and S. 45° W. The post is set in organic soil.

22N



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown, from which


A hemlock, 12 ins. diam., bears N. 82° E., 23.2 ft. dist., mkd. X BT.

A spruce, 15 ins. diam., bears N. 10° W., 16.7 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on moderate SW slope, among hemlock and spruce. The post is set in organic soil.

22P



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 16 ins. diam., with brass cap mkd. as shown, from which

A hemlock, 10 ins. diam., bears S. 7 3/4° E., 11.1 ft. dist., mkd. X BT.


A hemlock, 6 ins. diam., bears S. 67 1/2° W., 8.2 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls in root mass, not monumented.

Monument is located on nearly level ground, among hemlock and spruce. The post is set in organic soil and gravel.

22Q




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls in a cluster of trees, not monumented.

Monument is located on gentle NE slope, among hemlock and spruce, with berry bushes and devil's club. The post is set in organic muck.

22R



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which


A hemlock, 7 ins. diam., bears S. 31 3/4° W., 28.7 ft. dist., mkd. X BT.

A spruce, 13 ins. diam., bears N. 38 1/2° W., 8.6 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on uneven ground, among hemlock and spruce, with berry bushes and devil's club. The post is set in organic muck.

22S



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which


A spruce, 15 ins. diam., bears S. 27° E., 7.0 ft. dist., mkd. X BT.

A hemlock, 9 ins. diam., bears N. 52° W., 15.5 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle NW slope, among spruce and hemlock, with berry bushes. The post is set in organic and mineral soils.

22T



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd. as shown, from which


A spruce, 3 ins. diam., bears S. 5 1/4° E., 31.4 ft. dist., mkd. X BT.

A lodgepole pine, 11 ins. diam., bears N. 71 1/2° W., 28.5 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in grass, among lodgepole pine, spruce and mountain hemlock, with berry bushes. The post is set in organic muck.

22U



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, with brass cap mkd. as shown, from which

A lodgepole pine, 11 ins. diam., bears S. 26° E., 39.9 ft. dist., mkd. X BT.


A spruce, 8 ins. diam., bears S. 63° W., 27.0 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls in beaver pond, not monumented.

Monument is located on rolling ground, at edge of muskeg, among lodgepole pine, spruce and hemlock, with berry bushes. A creek, 3 ft. wide, bears S. 45° E., 25 ft. dist., course S. 60° W. The post is set in organic soil with gravel and clay.

22V



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on moderate NW slope among hemlock, with berry bushes. The post is set in mineral soil with gravel.

22W



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 27 ins. diam., bears S. 41° W., 25.7 ft. dist., mkd. X BT.

A hemlock, 24 ins. diam., bears N. 42 1/4° W., 43.4 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls on mass of rotted stumps, not monumented.


Monument is located on rolling ground, among hemlock and spruce, with berry bushes. The post is set in mineral soil over clay with gravel.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)

KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION



23A Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 18 ins. diam., with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on level ground, among spruce and hemlock, with ferns. The post is set in organic soil.




23B Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 17 ins. diam., with brass cap mkd. as shown, from which

A spruce, 3 ins. diam., bears S. 9 1/2° E., 17.5 ft. dist., mkd. X BT.

A hemlock, 7 ins. diam., bears S. 75° W., 12.8 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.


Monument is located on nearly level ground, among hemlock and spruce, with berry bushes. The post is set in organic soil and muck.



23C Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, encircled by rock collar, 15 ins. diam., with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on level ground, among hemlock and spruce. The post is set in organic soil.




23D Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, supported by a rock mound, 21 ins. at base by 18 ins. high, with brass cap mkd. as shown, from which

A spruce, 28 ins. diam., bears N. 16° E., 32.0 ft. dist., mkd. X BT.


A spruce, 14 ins. diam., bears S. 80° E., 7.6 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on moderate NE slope, among spruce and hemlock. The post is set in organic soil.



23E Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown




23F Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 60 1/2° W., 10.5 ft. dist., mkd. X BT.

A spruce, 30 ins. diam., bears N. 30° W., 38.6 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on steep E slope, among alder and spruce, with devil's club. A creek, 2 ft. wide, bears S. 12 ft. dist., course E. The post is set in organic soil.




23G Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which

A spruce, 18 ins. diam., bears S. 7 3/4° W., 33.5 ft. dist., mkd. X BT.

A hemlock, 7 ins. diam., bears West, 36.4 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.


Monument is located on moderate E slope, among spruce and hemlock, with ferns and berry bushes. The post is set in organic soil.



23H Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 11 ins. above ground, encircled by a rock collar, 20 ins. diam., with brass cap mkd. as shown, from which the original bearing trees

A hemlock, 14 ins. diam., bears S. 54° W., 14.8 ft. dist., with the scribe mks. C1/4 S16 BT visible in a partially healed blaze.

A hemlock, 10 ins. diam., bears N. 9 1/4° W., 36.0 ft. dist., with the scribe mks. C1/4 S16 BT visible in a partially healed blaze.




23J Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 15 ins. diam., bears S. 82 3/4° W., 32.4 ft. dist., mkd. X BT.

A hemlock, 11 ins. diam., bears N. 30 1/2° W., 30.7 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle SE slope, among hemlock and spruce, with devil's club and berry bushes. The post is set in organic muck.




23K Found an iron post, 1 in. diam., loosely set, straightened over base to project 18 ins. above ground, supported by a rock mound, 15 ins. at base by 12 ins. high, with brass cap mkd. as shown, from which the remaining 1928 bearing tree

A hemlock, 14 ins. diam., bears N. 37 1/2° W., 10.6 ft. dist., with a completely healed blaze.

And the 2002 bearing tree


A hemlock, 6 ins. diam., bears S. 59 1/4° W., 18.2 ft. dist., with scribe mks. 1/4 S16 BT visible in a partially healed blaze.



23L Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 21 ins. diam., bears N. 20° E., 41.3 ft. dist., with no scribe mks. visible in a partially healed blaze.


A hemlock, 23 ins. diam., bears N. 53 3/4° W., 10.4 ft. dist., with the mks. X BT visible in a partially healed blaze.



23M Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A hemlock, 14 ins. diam., bears S. 47 1/4° W., 19.4 ft. dist., with the scribe mks. X BT visible in a partially healed blaze.

A hemlock, 15 ins. diam., bears N. 29° W., 9.3 ft. dist., with the scribe mks. X BT visible in a partially healed blaze.




23N Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 7 ins. diam., bears S. 41 1/2° W., 18.3 ft. dist., mkd. X BT.

A hemlock, 9 ins. diam., bears N. 46 3/4° W., 30.8 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on moderate NE slope, among hemlock and spruce, with berry bushes. The post is set in organic soil.




23P Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 12 ins. diam., bears S. 76 1/2° E., 3.8 ft. dist., mkd. X BT.

A hemlock, 6 ins. diam., bears S. 42 1/4° W., 43.7 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, among old growth hemlock and spruce, with devil's club and berry bushes. The post is set in organic soil.




23Q Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which

A hemlock, 6 ins. diam., bears S. 35° E., 30.7 ft. dist., mkd. X BT.

A hemlock, 12 ins. diam., bears N. 4 1/4° W., 19.5 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on moderate S slope, among spruce and hemlock, with devil's club and berry bushes. The post is set in organic soil.



23R Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, with brass cap mkd. as shown, from which


A spruce, 14 ins. diam., bears N. 83° E., 10.9 ft. dist., mkd. X BT.

A hemlock, 12 ins. diam., bears N. 13 1/4° W., 17.5 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls in root wad, not monumented.


Monument is located on gentle SW slope, among second growth hemlock and spruce. The post is set in mineral soil with gravel.



23S Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on moderate W slope, among heavy second growth hemlock and spruce, with wind-fallen trees. The post is set in mineral soil with gravel.




23T Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls in root wad, not monumented.

Monument is located on gentle SW slope, among heavy second growth hemlock and spruce, with wind-fallen trees. The post is set in organic over mineral soil.



23U Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd. as shown, from which


A spruce, 24 ins. diam., bears S. 57° E., 5.8 ft. dist., mkd. X BT.

A hemlock, 5 ins. diam., bears N. 77 1/2° W., 7.1 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls in root mass of a spruce, 25 ins. diam., not monumented due to the liability of destruction by wind-fall aggravated by damaged root mass.

Monument is located on rolling ground of gentle SW slope, among hemlock and spruce, with berry bushes. The post is set in organic over mineral soil.



23V Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd. as shown, from which


A spruce, 14 ins. diam., bears S. 38 1/2° E., 29.2 ft. dist., mkd. X BT.

A lodgepole pine, 8 ins. diam., bears S. 48 1/2° W., 56.7 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls in standing water, not monumented.

Monument is located on level ground, in grass, among lodgepole pine, spruce and crabapple, with devil's club and berry bushes. The post is set in organic muck.



23W Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, with brass cap mkd. as shown, from which


A hemlock, 17 ins. diam., bears N. 73 1/2° E., 17.3 ft. dist., mkd. X BT.

A hemlock, 9 ins. diam., bears N. 24 1/2° W., 39.3 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

True point falls on a hemlock, 16 ins. diam., not monumented.

Monument is located on steep NE slope, among hemlock, with berry bushes. The post is set in organic soil.




23X Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-I, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)


KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, encircled by a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which the original 1928 bearing trees
A hemlock, 20 ins. diam., bears N. 72° E., 23.1 ft. dist., with a completely healed blaze.
A hemlock, 17 ins. diam., bears S. 60° W., 20.5 ft. dist., with a completely healed blaze.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which
A spruce, 11 ins. diam., bears S. 60 1/2° E., 51.2 ft. dist., mkd. X BT.
A hemlock, 6 ins. diam., bears S. 49 1/4° W., 20.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on gentle E slope, among hemlock and spruce, with berry bushes. The post is set in silty mineral soil with gravel.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which the original accessories
A spike, size 60d, projecting 3 ins. from the root of a spruce, 38 ins. diam., bears N. 57 1/4° E., 6.2 ft. dist.
A hemlock, 17 ins. diam., bears S. 22° W., 15.3 ft. dist., with the scribe mks. C1/4 S17 BT visible in a partially healed blaze.
A hemlock, 10 ins. diam., bears N. 19° W., 22.7 ft. dist., with the scribe mks. C1/4 S17 BT visible in a partially healed blaze.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 11 ins. diam., bears S. 22 1/4° E., 38.4 ft. dist., mkd. X BT.
A spruce, 19 ins. diam., bears S. 74 1/4° W., 4.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on moderate NE slope, among hemlock and spruce. The post is set in organics over slate.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which
A hemlock, 8 ins. diam., bears S. 16° E., 12.1 ft. dist., mkd. X BT.
A hemlock, 9 ins. diam., bears S. 73 3/4° W., 46.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on moderate S slope, among hemlock, with blueberry bushes. The post is set in mineral soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 6 ins. diam., bears N. 57 1/2° E., 13.8 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears S. 21 1/2° E., 53.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on moderate W slope, among hemlock and spruce. The post is set in mineral soil with gravel.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 14 ins. diam., bears S. 55° W., 7.5 ft. dist., mkd. X BT.
A spruce, 15 ins. diam., bears N. 25° W., 39.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on gentle SW slope, among hemlock and spruce. The post is set in organic over mineral soil with gravel.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which
A hemlock, 11 ins. diam., bears N. 3° E., 17.3 ft. dist., mkd. X BT.
A hemlock, 9 ins. diam., bears S. 46° E., 4.7 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on W side of a hemlock, 31 ins. diam., among hemlock, with berry bushes and devil's club. The post is set in gravel.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which
A spruce, 13 ins. diam., bears N. 43 1/2° E., 144.4 ft. dist., mkd. X BT.
A pine, 9 ins. diam., bears N. 22 3/4° W., 19.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located in a muskeg, among scattered spruce and pine. The post is set in organic muck.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, encircled by a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 11 ins. diam., bears N. 33 1/2° E., 64.0 ft. dist., mkd. X BT.
A spruce, 10 ins. diam., bears S. 63 1/2° E., 22.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on the N edge of a muskeg, among spruce and hemlock. The post is set in organic muck and peat.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 16 ins. diam., bears S. 41° E., 59.1 ft. dist., mkd. X BT.
A hemlock, 22 ins. diam., bears S. 59 1/4° W., 21.4 ft. dist., mkd. X BT.
Monument is located among hemlock, with berry bushes. The post is set in organic soil with clay.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 15 ins. diam., bears N. 8 1/2° E., 30.9 ft. dist., mkd. X BT.
A spruce, 24 ins. diam., bears N. 83 1/4° E., 44.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on level ground, among hemlock, with berry bushes. The post is set in organic muck over clay.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 12 ins. diam., bears S. 17 1/2° W., 26.4 ft. dist., mkd. X BT.
A hemlock, 18 ins. diam., bears N. 53 3/4° W., 21.7 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on rolling ground, among hemlock, with berry bushes and devil's club. The post is set in organic soil with clay.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 14 ins. in the ground, supported by a rock mound, 13 ins. at base by 13 ins. high, with brass cap mkd. as shown, from which
A hemlock, 15 ins. diam., bears N. 2 1/4° E., 26.8 ft. dist., mkd. X BT.
A spruce, 14 ins. diam., bears S. 41 3/4° E., 11.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on uneven ground, among hemlock and spruce, with berry bushes. The post is set in organic muck.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 9 ins. diam., bears S. 33 1/4° W., 19.3 ft. dist., mkd. X BT.
A hemlock, 14 ins. diam., bears N. 64 1/4° W., 13.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on gentle NW slope, among hemlock, with berry bushes. The post is set in organics over mineral soil.





Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd. as shown, from which
A hemlock, 7 ins. diam., bears N. 60 1/2° E., 34.0 ft. dist., mkd. X BT.
A spruce, 14 ins. diam., bears S. 18° E., 10.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on gentle SE slope, among spruce and hemlock, with wind-fallen trees, devil's club and berry bushes. The post is set in mineral soil.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 13 ins. diam., bears N. 45 1/4° E., 22.8 ft. dist., mkd. X BT.
A hemlock, 5 ins. diam., bears N. 60 1/4° W., 20.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on uneven ground, among hemlock, with berry bushes. The post is set in organic soil.




Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown, from which
A spruce, 12 ins. diam., bears N. 15 1/4° E., 16.0 ft. dist., mkd. X BT.
A spruce, 13 ins. diam., bears S. 60° E., 19.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



True point falls in beach rocks and gravel, not monumented due to the liability of destruction by tidal action.
Monument is located on gentle SW slope, in grass, among spruce, with nettles, along beach with gravel, cobbles and boulders. A vertical rock face, 28 ft. high, bears N. 38° E., 29 ft. dist., rock face bears N. 40° W. and S. 40° E. The post is set in sand with gravel.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown, from which
A spruce, 17 ins. diam., bears S. 18 1/4° E., 37.2 ft. dist., mkd. X BT.
A spruce, 19 ins. diam., bears N. 54 1/4° W., 20.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on gentle SW slope, among spruce and hemlock, with ferns, devil's club and nettles. The post is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which
A spruce, 12 ins. diam., bears N. 85 3/4° W., 33.8 ft. dist., mkd. X BT.
A spruce, 23 ins. diam., bears N. 21 1/4° W., 69.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on gentle SW slope, among spruce, with nettles. The post is set in organics over gravel.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)


KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF Ts. 50 AND 51 S., Rs. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which
A spruce, 13 ins. diam., bears N. 9 1/4° E., 20.0 ft. dist., mkd. X BT.
A spruce, 3 ins. diam., bears S. 83 1/2° E., 16.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on beach with gravel, cobbles and boulders, not monumented due to the liability of destruction by tidal action.
Monument is located on gentle SW slope, in grass, among spruce, with nettles. The post is set in gravel.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which
A spruce, 10 ins. diam., bears N. 68 1/4° E., 16.3 ft. dist., mkd. X BT.
A spruce, 34 ins. diam., bears N. 57 3/4° W., 72.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on a root mass of a cluster of three large spruce trees, not monumented.
Monument is located on gentle SE slope, among spruce and alder. The post is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 21 ins. diam., bears S. 63 1/2° E., 38.1 ft. dist., mkd. X BT.
A spruce, 17 ins. diam., bears S. 20 3/4° W., 5.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls within a hemlock, 8 ins. diam., not monumented.
Monument is located on moderate NE slope, among spruce and hemlock, with berry bushes, ferns and devil's club. A creek, 4 ft. wide, bears N. 75° E., 95 ft. dist., course S. 20° E. The post is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which
A spruce, 13 ins. diam., bears S. 73° W., 36.6 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears N. 34° W., 61.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on beach with gravel, cobbles and boulders, not monumented due to the liability of destruction by tidal action.
Monument is located on gentle SE slope, in grass, among spruce, with nettles. The post is set organic soil over sand.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N. 4 1/2° E., 22.3 ft. dist., mkd. X BT.
A spruce, 9 ins. diam., bears N. 69 1/2° W., 12.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on beach with cobbles, gravel, erratic boulders and mud, not monumented due to the liability of destruction by tidal action.
Monument is located on gentle SE slope, in grass. The post is set in sand and gravel.




Found an iron post, 2 ins. diam., loosely set, straightened over base to project 18 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees
A hemlock snag, 10 ins. diam., bears N. 40 1/2° E., 14.2 ft. dist., with a completely healed blaze.
A hemlock, 20 ins. diam., bears S. 47 3/4° E., 19.9 ft. dist., with a completely healed blaze.
And new bearing tree
A hemlock, 9 ins. diam., bears S. 2 3/4° W., 45.0 ft. dist., mkd. X BT.
Add the mks. 2007 to the brass cap.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which
A hemlock, 8 ins. diam., bears N. 43 1/2° E., 52.8 ft. dist., mkd. X BT.
A spruce, 21 ins. diam., bears N. 70° W., 8.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on gentle SW slope, among spruce and hemlock, with berry bushes. The post is set in organic soil, with sand and gravel.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which
A spruce, 9 ins. diam., bears N. 36 3/4° E., 14.3 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears S. 75 1/2° E., 6.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on beach with gravel, cobbles and boulders, not monumented due to the liability of destruction by tidal action.
Monument is located on gentle SW slope, in grass, among spruce. The post is set in gravel.




Found an iron post, 2 1/2 ins. diam., loosely set, straightened over base to project 6 ins. above ground, encircled by a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which the remaining original 1960 bearing tree
A spruce, 15 ins. diam., bears N. 24 1/4° E., 7.8 ft. dist., with a completely healed blaze.
And new bearing tree
A spruce, 10 ins. diam., bears N. 76 1/2° W., 42.1 ft. dist., mkd. X BT.
Add the mks. 2007 to the brass cap.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which
A spruce, 16 ins. diam., bears S. 77 1/4° E., 11.9 ft. dist., mkd. X BT.
A spruce, 12 ins. diam., bears S. 47° W., 7.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on nearly level ground, among spruce and hemlock, with ferns. The post is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which
A spruce, 25 ins. diam., bears N. 60 1/2° E., 11.2 ft. dist., mkd. X BT.
A hemlock, 18 ins. diam., bears S. 8 1/2° E., 37.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on uneven ground, among spruce and hemlock, with berry bushes and ferns. The post is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears S. 77 1/4° W., 16.9 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 34 1/4° W., 22.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on beach with cobbles, gravel, erratic boulders and mud, not monumented due to the liability of destruction by tidal action.
Monument is located on gentle SE slope, in grass, among spruce. The post is set in sand and gravel over clay.




No evidence of the original corner was found.
The true point, re-established by Grant Boundary adjustment, falls on beach in loose rock and gravel, at the adjusted 1918 record line of mean high tide, not monumented due to the liability of destruction by tidal action.
At the point selected for a witness corner,
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 9 ins. diam., bears S. 27° W., 26.5 ft. dist., mkd. X BT.
A spruce, 30 ins. diam., bears N. 83 1/2° W., 7.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which
A spruce, 21 ins. diam., bears N. 9 3/4° E., 15.5 ft. dist., mkd. X BT.
A spruce, 4 ins. diam., bears N. 83 3/4° W., 39.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on gravel and boulder-strewn beach, not monumented due to the liability of destruction by tidal action.
Monument is located on gentle SE slope, among spruce and alder, with berry bushes and ferns. The post is set in sand and gravel.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which
A spruce, 18 ins. diam., bears N. 62 3/4° E., 36.0 ft. dist., mkd. X BT.
A spruce, 16 ins. diam., bears N. 59 3/4° W., 87.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on beach, with exposed bedrock and muck, not monumented due to the liability of destruction by tidal action.
Monument is located on gentle S slope, in grass and spruce. A creek, 2 ft. wide, bears E., 18 ft. dist., course S. 25° W. The post is set in organic soil over sand.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 11 ins. diam., with brass cap mkd. as shown, from which
A spruce, 13 ins. diam., bears N. 57° E., 21.3 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears S. 6 3/4° E., 9.2 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on gentle SE slope, among spruce, with ferns. A creek, 3 ft. wide, bears N. 34° E., 66 ft. dist., course S. 40° E. The post is set in organic soil.



Found a granite boulder, 7 ft. x 5 ft., projecting 18 ins. above ground, with the mks. + USLM 109 FS chiseled on top, from which the remains of original bearing tree
A rotted spruce stump, 15 ins. diam., bears N. 32 1/2° W., 107.3 ft. dist., with no scribe mks. visible. (Record: 108.2 ft./110 lks.)
And new bearing trees
A spruce, 6 ins. diam., bears N. 4° E., 89.6 ft. dist., mkd. USLM 109 BT.
A spruce, 13 ins. diam., bears S. 77 1/2° W., 47.6 ft. dist., mkd. X BT.
Chisel the mks. 2007 on top of the boulder.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which
A spruce, 14 ins. diam., bears N. 75 1/2° E., 16.0 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears N. 5° W., 31.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
True point falls on beach with exposed bedrock and muck, not monumented due to the liability of destruction by tidal action.
Monument is located on gentle S slope, in grass, among spruce and alder. The post is set in sand and gravel.




Found an iron post, 1 in. diam., loosely set, straightened over base to project 11 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees
A hemlock, 25 ins. diam., bears N. 83° E., 12.8 ft. dist., with the scribe mks. WC MC T50S R68E S31 S32 visible in a partially healed and rotted blaze.
A hemlock snag, 31 ins. diam., bears N. 20° W., 23.3 ft. dist., with fragmented scribe mks. visible in rotted blaze.
And new bearing tree
A hemlock, 15 ins. diam., bears N. 14 3/4° W., 67.6 ft. dist., mkd. X BT.
Add the mks. 2007 to the brass cap.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) TRACTS B, B-1, C THROUGH X, AND Z P.L. 92-203, (85 STAT. 688, 702, 703)


KOOTZNOOWOO, INC. AT ANGOON, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF T's. 50 AND 51 S., R's. 67 AND 68 E., C.R.M.; THE RETRACEMENT OF PORTIONS OF U.S. SURVEY Nos. 1283, 1567, 1613, 1757, 1800, 2416, 2503, 3756, 10475, 10784, 13167; AND THE RETRACEMENT OF NUMEROUS PRIVATE SURVEYS.


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




26A Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown, from which A spruce, 20 ins. diam., bears N. 61 1/2° E., 29.3 ft. dist., mkd. X BT. A NW-facing rock wall, 12 ft. high by 12 ft. long, bears S. 1/2° E., 14.8 ft. dist., mkd. X BO. Deposit a magnet in a white plastic case at the base of the stainless steel post. True point falls on beach of bedrock, boulders and gravel, not monumented due to the liability of destruction by tidal action. Monument is located on gentle W slope, among spruce and hemlock. The post is set in organic soil.




26B Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which A spruce, 11 ins. diam., bears S. 4 1/4° W., 28.4 ft. dist., mkd. X BT. A hemlock, 21 ins. diam., bears N. 60 1/4° W., 28.0 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on nearly level ground, among hemlock and spruce, with ferns. The post is set in organic soil over clay.




26C Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which A spruce, 12 ins. diam., bears N. 40 3/4° E., 14.6 ft. dist., mkd. X BT. A spruce, 18 ins. diam., bears N. 60 1/4° W., 78.0 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on gentle W slope, among hemlock and spruce, with ferns. The post is set in organic soil.




26D Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 11 ins. diam., with brass cap mkd. as shown, from which A spruce, 6 ins. diam., bears N. 8 1/2° E., 9.0 ft. dist., mkd. X BT. A spruce, 10 ins. diam., bears S. 71 1/4° E., 13.2 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. True point falls on beach with bedrock, boulders and muck, not monumented due to the liability of destruction by tidal action. Monument is located on gentle W slope, among spruce. The post is set in organic soil over clay.




26E Found an iron post, 1 in. diam., loosely set, straightened over base to project 10 ins. above ground, supported by a rock mound, 20 ins. at base by 10 ins. high, with brass cap mkd. as shown, from which the original bearing trees A hemlock, 32 ins. diam., bears S. 53° E., 19.6 ft. dist., with no scribe mks. visible in a partially healed and rotted blaze. (Record: S. 47° E.) A hemlock, 23 ins. diam., bears N. 18° W., 18.6 ft. dist., with a completely healed blaze. (Record: N. 4° W.)




26F Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 20 ins. diam., with brass cap mkd. as shown, from which A hemlock, 14 ins. diam., bears N. 85 1/4° E., 34.3 ft. dist., mkd. X BT. A spruce, 15 ins. diam., bears S. 21 1/2° E., 30.1 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. True point falls on beach, with bedrock, boulders, gravel and muck, not monumented due to the liability of destruction by tidal action. Monument is located on gentle NW slope, among spruce, in grass. The post is set in sand with gravel.




26G Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 19 ins. diam., with brass cap mkd. as shown, from which A spruce, 22 ins. diam., bears N. 4 1/2° E., 24.0 ft. dist., mkd. X BT. A hemlock, 10 ins. diam., bears S. 77 1/2° W., 39.6 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on gentle SE slope, among spruce and hemlock, with devil's club. The post is set in organic soil.




26H Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 15 ins. diam., bears N. 3 1/4° E., 21.7 ft. dist., mkd. X BT. A spruce, 7 ins. diam., bears S. 71 1/4° W., 19.6 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on moderate SE slope, among crabapple, alder, spruce and hemlock, with devil's club. The post is set in organic soil.




26J Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 16 ins. in the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown, from which A spruce, 7 ins. diam., bears S. 79 3/4° E., 46.0 ft. dist., mkd. X BT. A spruce, 15 ins. diam., bears S. 2 1/4° W., 44.3 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. True point falls on beach, with bedrock, gravel and muck, not monumented due to the liability of destruction by tidal action. Monument is located on gentle NW slope, in grass. The post is set in gravel.




26K Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 20 ins. diam., bears N. 51° E., 55.6 ft. dist., mkd. X BT. A spruce, 8 ins. diam., bears N. 54° W., 12.0 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. True point falls on grassy beach, with gravel, not monumented due to the liability of destruction by tidal action. Monument is located on level ground, at treeline. The post is set in sand.




26L Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 13 ins. diam., bears N. 73 1/2° E., 33.3 ft. dist., mkd. X BT. The N corner of a protected grey rock face, of a multifaceted vertical spine of a prominent glacial sandstone formation, bears S. 5° E., 34.4 ft. dist., mkd. X BO. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on N facing beach, with exposed bedrock and boulders. A creek, 3 ft. wide, bears N., 32 ft. dist., course S. 55° W. The post is set in clay.




26M Found an iron post, 1 in. diam., lying on side in small rock slide, with brass cap mkd. T50S WC S10 MC S15 R68E 1928, from which the remains of the original bearing tree A hemlock stump, 18 ins. diam., bears S. 71° W., 9.2 ft. dist., with scribe mks. visible in a partially healed blaze. At the corner point, re-established from record bearing and distance from the remaining bearing tree.




26N Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A hemlock, 7 ins. diam., bears S. 79 3/4° E., 28.0 ft. dist., mkd. X BT. A hemlock, 19 ins. diam., bears S. 73 1/2° W., 61.0 ft. dist., mkd. X BT. Deposit the original brass cap along side and a magnet in a white plastic case at the base of the stainless steel post.




26O Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which A spruce, 15 ins. diam., bears N. 9° E., 8.5 ft. dist., mkd. X BT. A spruce, 11 ins. diam., bears S. 59 1/2° E., 7.1 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. True point falls on beach, with exposed bedrock, grass and gravel, not monumented due to the liability of destruction by tidal action. Monument is located on gentle SW slope, among spruce. The post is set in organic soil.




26P Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 23 ins. diam., bears N. 70 3/4° E., 16.6 ft. dist., mkd. X BT. A spruce, 12 ins. diam., bears S. 21 3/4° W., 12.8 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. True point falls on large hole of a spruce, 28 ins. diam., not monumented. Monument is located at base of moderate N slope, among spruce and hemlock. The post is set in organic soil.




26Q Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which A hemlock, 12 ins. diam., bears S. 55 3/4° W., 58.6 ft. dist., mkd. X BT. A hemlock, 5 ins. diam., bears N. 20° W., 29.2 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on nearly level ground, among spruce and hemlock, with berry bushes. The post is set in organic soil.




26R Epoxy a brass tablet, 3 1/2 ins. long, in a drill hole, 1 in. diam., 4 1/2 ins. in exposed bedrock, with brass tablet mkd. as shown, from which A drill hole, 1 in. diam., 5 1/2 ins. deep, 4 1/2 ft. above ground level, in a W-facing rock wall, 15 ft. high, bears N. 50 1/2° E., 17.9 ft. dist. The same W-facing rock wall, with chisel mks., 6 1/4 ft. above ground level, bears S. 57 1/2° E., 25.2 ft. dist., mkd. X BO. A PK nail, bears S. 42 1/2° W., 2.9 ft. dist. Deposit a magnet at the base of the brass tablet. True point falls on beach with boulders, gravel and grass, not monumented due to the liability of destruction by tidal action. Monument is located at treeline in exposed bedrock.




26S Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, within a hole, excavated 13 ins. into decomposing bedrock, bedrock 5 ins. below the ground, encircled by a rock collar, 16 ins. diam., with brass cap mkd. as shown, from which A spruce, 11 ins. diam., bears N. 23 3/4° E., 13.9 ft. dist., mkd. X BT. A hemlock, 16 ins. diam., bears S. 69° E., 12.2 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. True point falls on beach, with exposed bedrock, gravel and grass, not monumented due to the liability of destruction by tidal action. Monument is located at base of steep SW slope, among spruce. The post is set in rock.



26T Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown, from which A hemlock, 13 ins. diam., bears S. 18 1/4° E., 34.2 ft. dist., mkd. X BT. A spruce, 11 ins. diam., bears N. 79 3/4° W., 16.3 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on nearly level ground, among spruce and hemlock, with ferns. The post is set in organic soil over sand.



26U Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which A hemlock, 8 ins. diam., bears N. 87° E., 69.3 ft. dist., mkd. X BT. A hemlock, 12 ins. diam., bears S. 38 1/2° W., 25.5 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on nearly level ground, among spruce and hemlock, with berry bushes and ferns. The post is set in organic soil over sand and gravel.



26V Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which A spruce, 8 ins. diam., bears N. 50 1/2° E., 4.3 ft. dist., mkd. X BT. A spruce, 16 ins. diam., bears S. 35 1/2° E., 7.0 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. True point falls on beach, with exposed bedrock, gravel and grass, not monumented due to the liability of destruction by tidal action. Monument is located on gentle NW slope, among spruce. The post is set in organic soil over sand and gravel.

2008-35 Juneau REC DIST \$145.00 DATE 11/24 2008 TIME 2:12 P M Requested By BLM Address 222 W 7th + B Arch. AK 99513-799

Juneau 2008-35

Juneau 2008-35



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
ALASKA STATE OFFICE
222 W. 7th Avenue, #13
ANCHORAGE, ALASKA 99513-7599

9600 (927)
ANCSA 14(c)
ANGOON

November 13, 2008

JUNEAU RECORDING DISTRICT
P. O. Box 111013
Juneau, AK 99811-1013

Dear District Recorder:

The ANCSA 14(c) plat for KOOTZNOOWOO, INC. at ANGOON, consisting of twenty-six (26) original sheets, transmitted to you by this letter of compliance, portrays a Cadastral Survey conducted to fulfill statutory requirements mandated by the Alaska Native Claims Settlement Act (ANCSA), pursuant to Public Law 92-203 (Stat. 688, 702, 703), and satisfies the federal guidelines and requirements proclaimed for ANCSA 14(c) Surveys.

The plat represents surveyed parcels of land selected for ANCSA 14(c) reconveyances situated on portions of surface estate lands transferred from the United States of America by Public Law 96-487, Section 506 to Kootznoowoo, Inc.

ANCSA 14(c) Surveys have been authorized as federally mandated surveys, under the provisions of Section 13 of ANCSA, 43 U.S.C. Stat. 1612. The authority to execute all federal land surveys in Alaska is delegated by the Secretary of the Interior to the Director, Bureau of Land Management (BLM) and subsequently redelegated to the Deputy State Director for Cadastral Survey, Alaska State Office. Accordingly, BLM requests that this plat be filed with the JUNEAU RECORDING DISTRICT to comply with the federal platting regulations and the agreements set forth between the Bureau of Land Management and the State Recording Authority.

Sincerely,

John Sroufe
FOR John Sroufe
Deputy State Director
for Cadastral Survey, Alaska