

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH P P.L. 92-203 (85 STAT. 688, 702, 703)

BETHEL NATIVE CORPORATION AT BETHEL, ALASKA

This plat contains the entire survey record.

The history of surveys is referenced on sheet 2.

This survey was executed by Gary D. Kowal, Registered Alaska Land Surveyor No. LS-8856, for Orutsararmuit Native Council, September 1, 2001, through March 28, 2002, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated June 4, 1998, approved June 7, 1999, under Contract No. 1422-N660-C98-3061, awarded September 30, 1998 and Notice to Proceed dated September 30, 1998.

Field Assistants were:

- Charles W. Lamb, Party Chief
Ralph J. Sousa, Party Chief
Walter K. Rice, Party Chief
Tony Angaik, Survey Technician
Oscar Gunlik, Survey Technician

Area: 23.57 Acres.

The azimuth was obtained from Global Positioning System (GPS) observations and refers to the true meridian.

The geographic position of corner No. 1, Tract A, identical with the witness corner to the corner of Sections 19 and 24, Township 9 North, Ranges 69 and 70 West, a meander corner, as determined from the record of Township 9 North, Range 70 West, Seward Meridian, Alaska, using the Global Positioning System and static relative positioning techniques, is:

Latitude: 60° 51' 17.16" North (NAD 27)
Longitude: 161° 36' 05.12" West

The corner positions for this survey were determined using GPS Real-Time Kinematic techniques (RTK) and were verified using GPS Rapid Static methodology.

In accordance with the contract, lines of this survey were not brushed or blazed.



Individual tracts or groups of tracts are tied independently to the Rectangular Survey System. See sheets 2 through 7 for tie information.

The mean magnetic declination was computed using the U.S. Geological Survey Geomag software program.

The land is mostly level ground, vegetated with alders and willows and cottonwoods. Numerous improvements fall within Tracts A, C, D, E, F, H, I, J, K, L AND O.


The hydrography depicted on this plat was obtained from a combination of recorded Rectangular Survey plats, and Aerial Photography dated July 31, 1998, and is shown for general information only unless otherwise stated in meander tables.

INDEX DIAGRAM

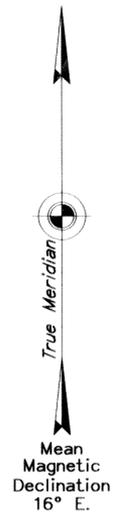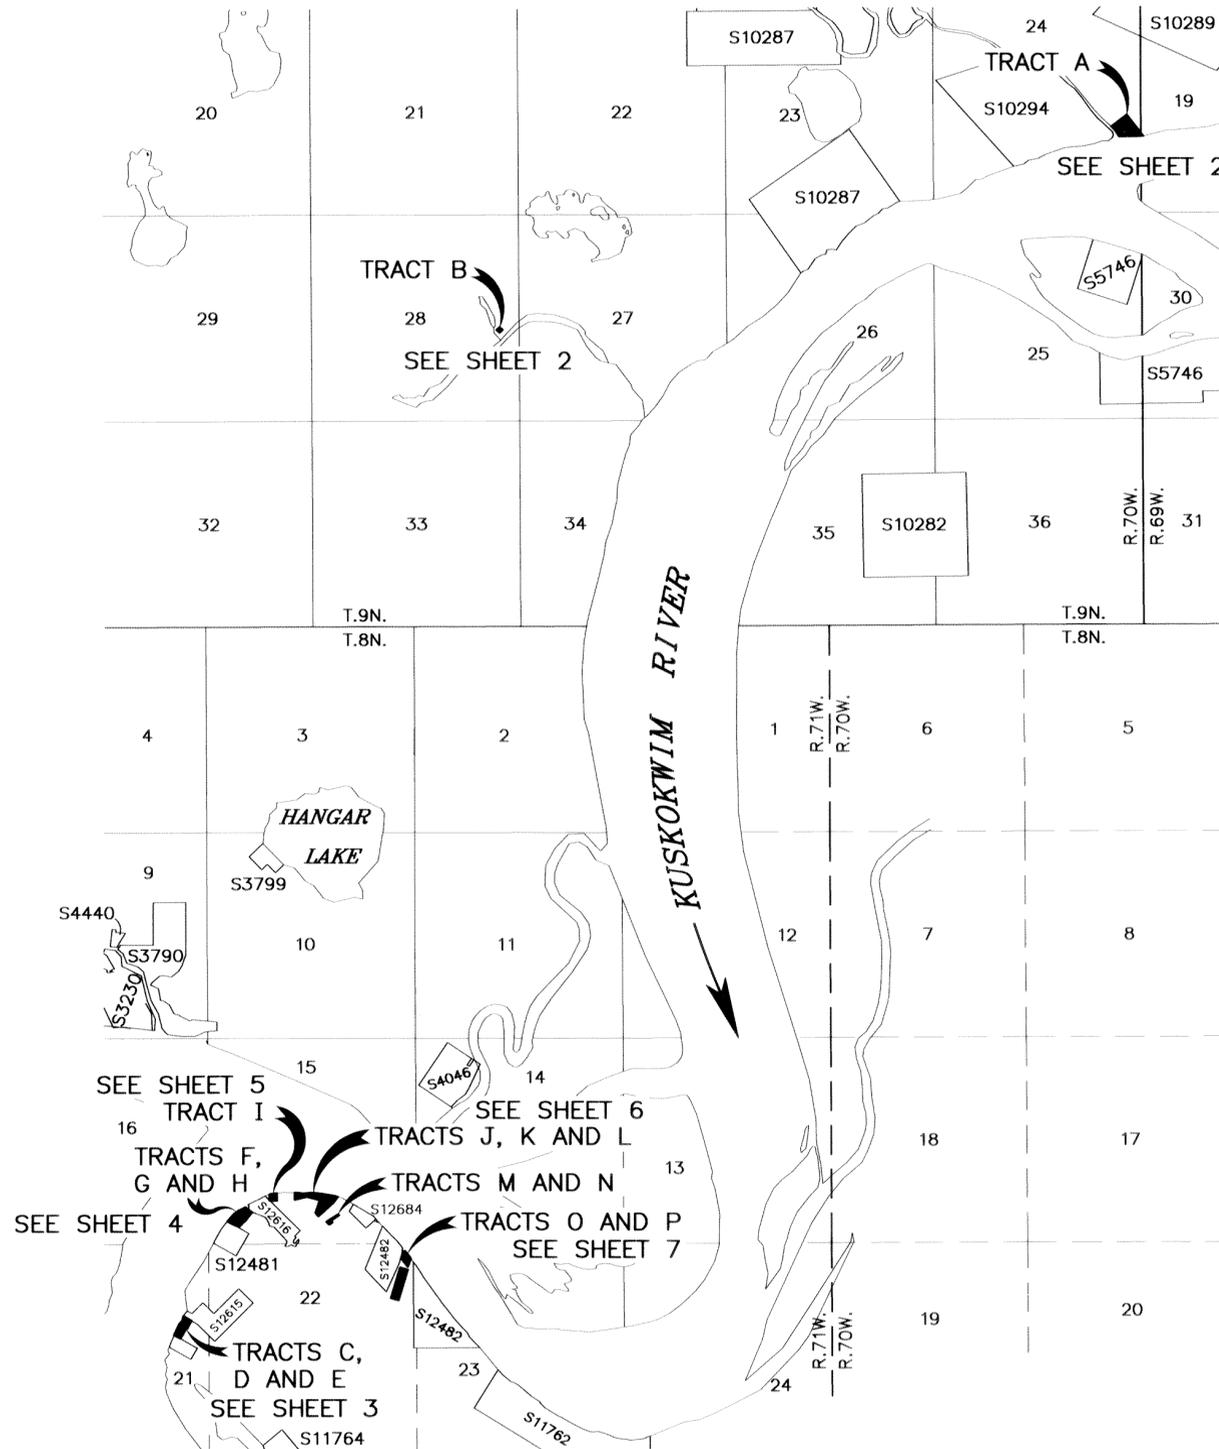

I hereby certify that Tracts A through P, represented on this plat of survey, are on lands Interim Conveyed to Bethel Native Corporation by Interim Conveyance No. 142 and/or Patent No. 50-95-493 issued by the United States of America; said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Bethel Native Corporation Resolution Agreement No. 97-11, and the Bethel ANCSA 14(c) Map of Boundaries accepted December 31, 1997.

01-06-04 [Signature]
Date President
Bethel Native Corporation



I, Gary D. Kowal, Registered Alaska Land Surveyor No. LS-8856, HEREBY CERTIFY, upon honor, that, in pursuance of Special Instructions dated June 4, 1998 and under Contract No. 1422-N660-C98-3061, awarded September 30, 1998, I have executed the survey depicted on this plat in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, 1973, and in the specific manner described on this plat.

11-12-03 [Signature]
Date Registered Land Surveyor



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director
[Signature]
Date

Deputy State Director for Cadastral Survey, Alaska

BETHEL PLAT 2004-1

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A THROUGH P
P.L. 92-203 (85 STAT. 688, 702, 703)

BETHEL NATIVE CORPORATION
AT
BETHEL, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET NO. 1
FOR SURVEY INFORMATION

U.S. Survey No. 2639 was surveyed by F.W. Williamson, Associate Cadastral Engineer, G.L.O., in 1944; the survey has been cancelled by memorandum dated July 7, 1997.

U.S. Survey No. 3230 A & B was surveyed by John M. Short, Cadastral Engineer, in 1952, with additional subdivision performed under Supplemental Platting in 1954.

U.S. Survey No. 3799 was surveyed by Ray Harpin, Cadastral Surveyor, in 1960, with portions retraced and resurveyed by Gary D. Kowal, Registered Alaska Land Surveyor No. 8856, in 2001-2003.

U.S. Survey No. 3790 was surveyed by Edward A. Taylor, Cadastral Surveyor, in 1961.

U.S. Survey No. 4046 was surveyed by Oswald P. Jensen and Edward A. Taylor, Supervisory Cadastral Surveyors, in 1964.

U.S. Survey No. 4440 was surveyed by Tommy G. Banks, Cadastral Surveyor, in 1972, with portions resurveyed by Gary D. Kowal, Registered Alaska Land Surveyor No. 8856, in 2001-2003.

The Second Standard Parallel North, a portion of the south boundary, and a portion of the west boundary of Township 9 North, Range 70 West was surveyed by Edward T. Prendergast, Supervisory Cadastral Surveyor, in 1973.

Portions of the Second Standard Parallel North, along the north boundary, portions of the south boundary, the west boundary, and portions of the subdivisional lines of Township 8 North, Range 71 West, were surveyed by Edward T. Prendergast, Supervisory Cadastral Surveyor, in 1973.

The Seventeenth Guide Meridian West through Township 9 North, the Second Standard Parallel North through Range 69 West, the west boundary, and portions of the subdivisional lines were surveyed by George P. Oviatt, Cadastral Surveyor, in 1976 through 1979.

A portion of the south boundary and west boundary of Township 9 North, Range 70 West was surveyed by George P. Oviatt, Cadastral Surveyor, in 1976 through 1979.

U.S. Survey No. 5746 was surveyed by Michael R. Collie, Cadastral Surveyor, in 1977.

U.S. Surveys Nos. 10282, 10287, 10289 and 10294 were surveyed by Michael H. Schoder, Registered Alaska Land Surveyor No. LS-5368, in 1991.


The hydrography was revised in portions of Township 9 North, Range 70 West, under a segregation survey of miscellaneous U.S. Surveys, and was accepted in 1995.

U.S. Surveys Nos. 11762, 11764, 12481, 12482, 12615, 12616, and 12684, were surveyed by Gary D. Kowal, Registered Alaska Land Surveyor No. LS-8856, in 2000 through 2001.

LEGEND

- ✱ BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEET 8.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.

BETHEL PLAT 2004-1

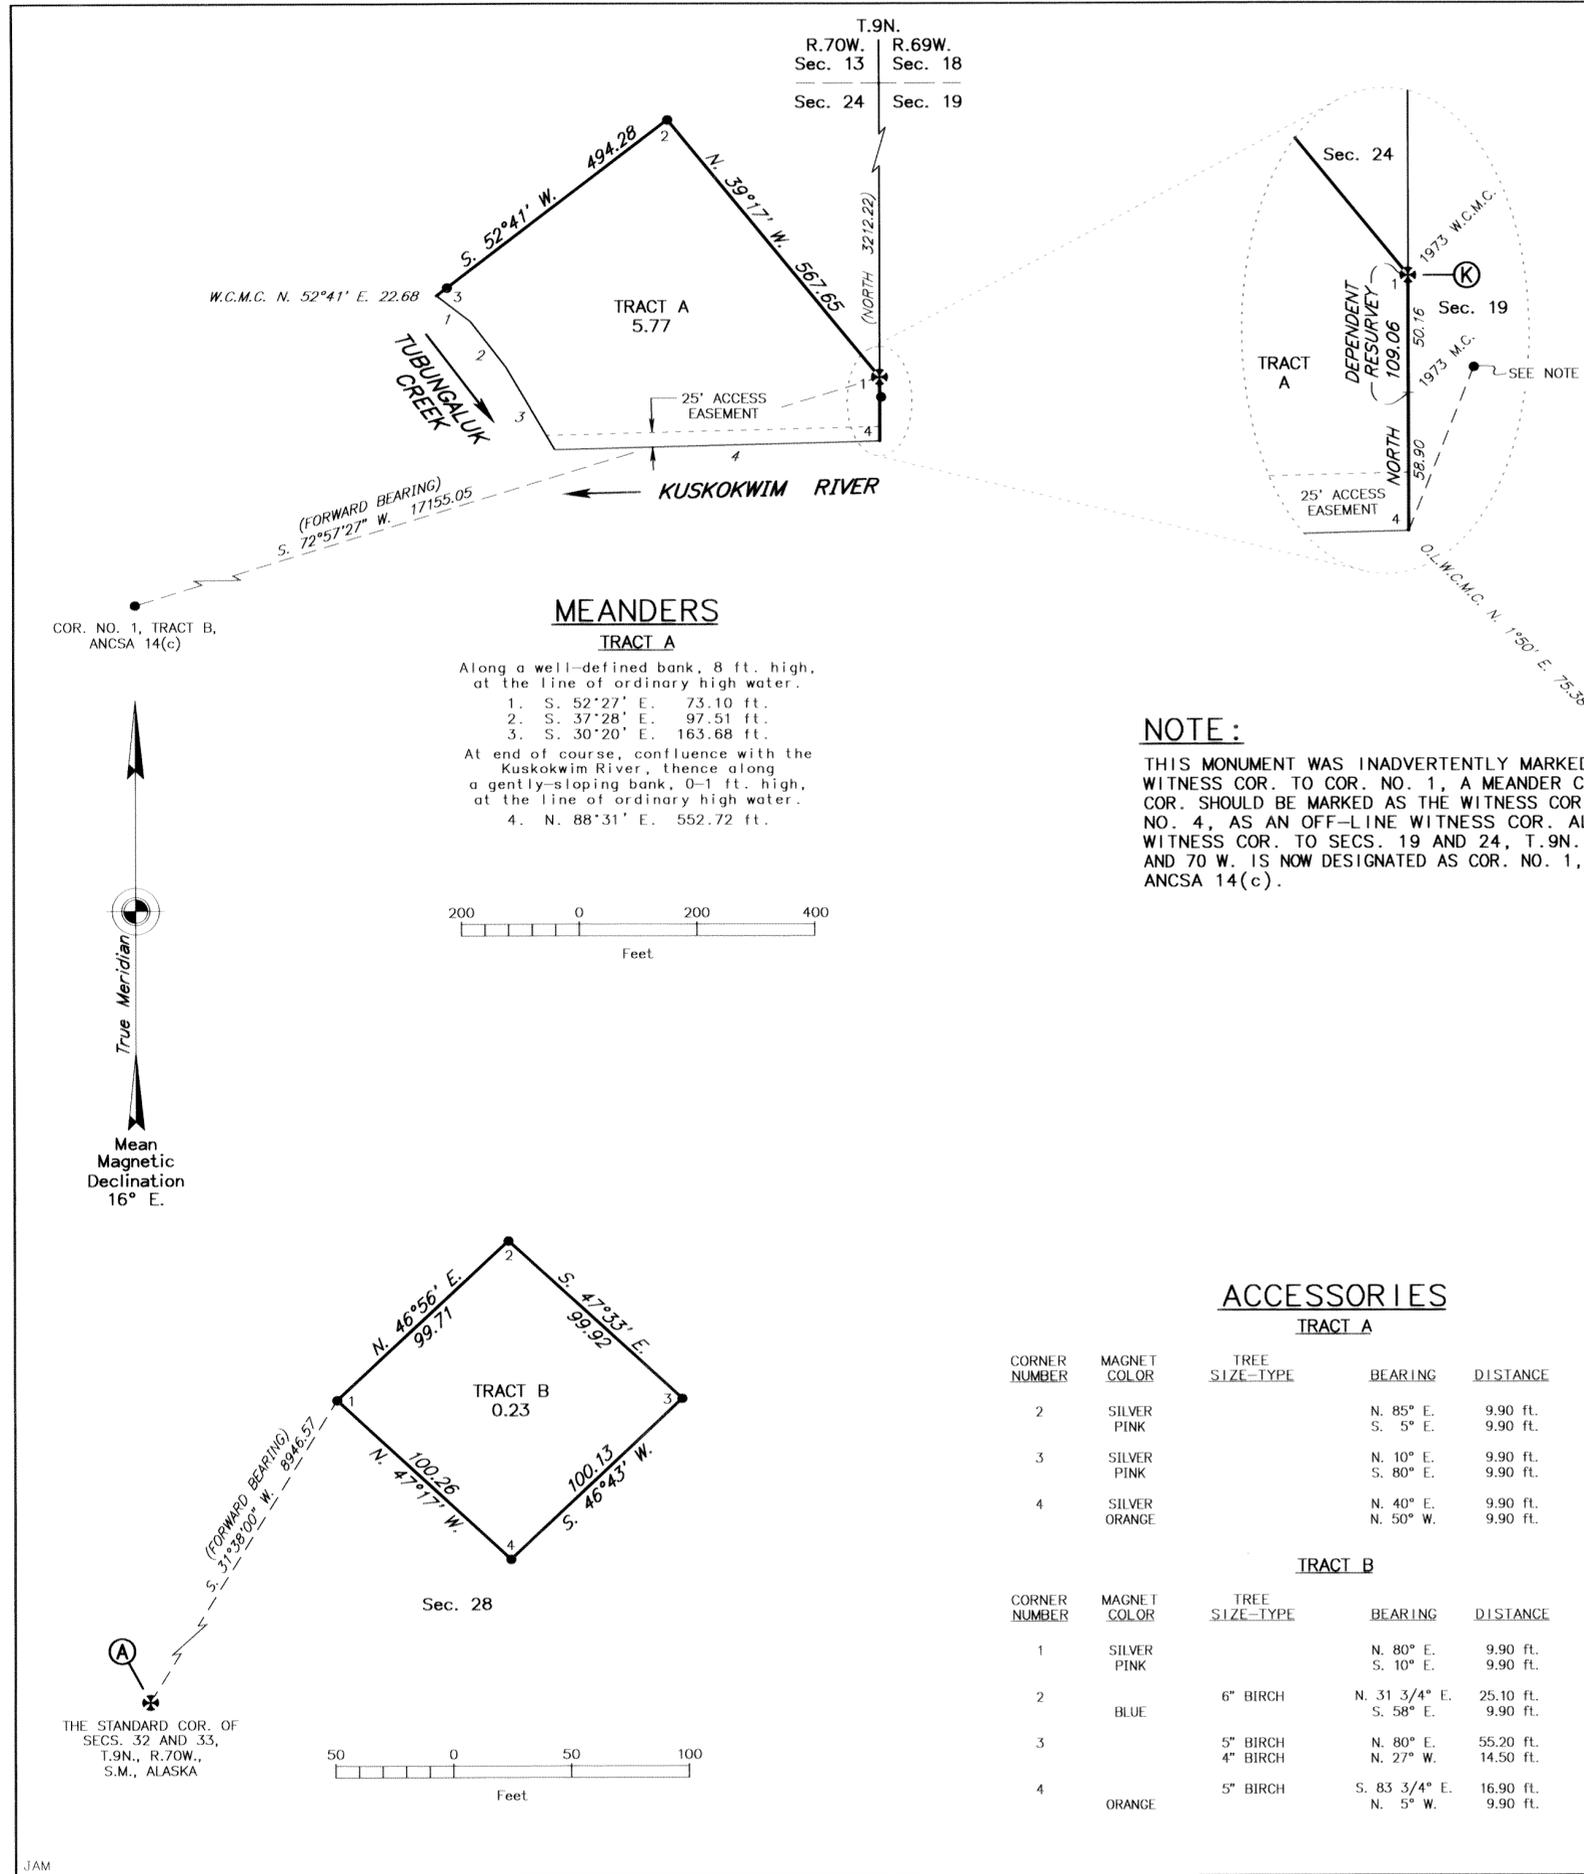

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A THROUGH P
P.L. 92-203 (85 STAT. 688, 702, 703)

BETHEL NATIVE CORPORATION
AT
BETHEL, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET NO. 1
FOR SURVEY INFORMATION

MEANDERS

TRACT C

Along a well-defined bank, 1-3 ft. high,
at the line of mean high tide.
1. N. 24°44' E. 120.19 ft.

TRACT D

Along a well-defined bank, 1-3 ft. high,
at the line of mean high tide.
1. S. 24°27' W. 64.81 ft.
2. S. 24°44' W. 25.88 ft.


TRACT E

Along a well-defined bank, 1-3 ft. high,
at the line of mean high tide.
1. N. 24°27' E. 27.05 ft.
2. N. 38°07' E. 144.71 ft.
3. N. 11°05' E. 99.86 ft.

U.S. SURVEY
NO. 12615
Lot 2

U.S. SURVEY
NO. 12615
Lot 3

U.S. SURVEY
NO. 12615
Lot 1

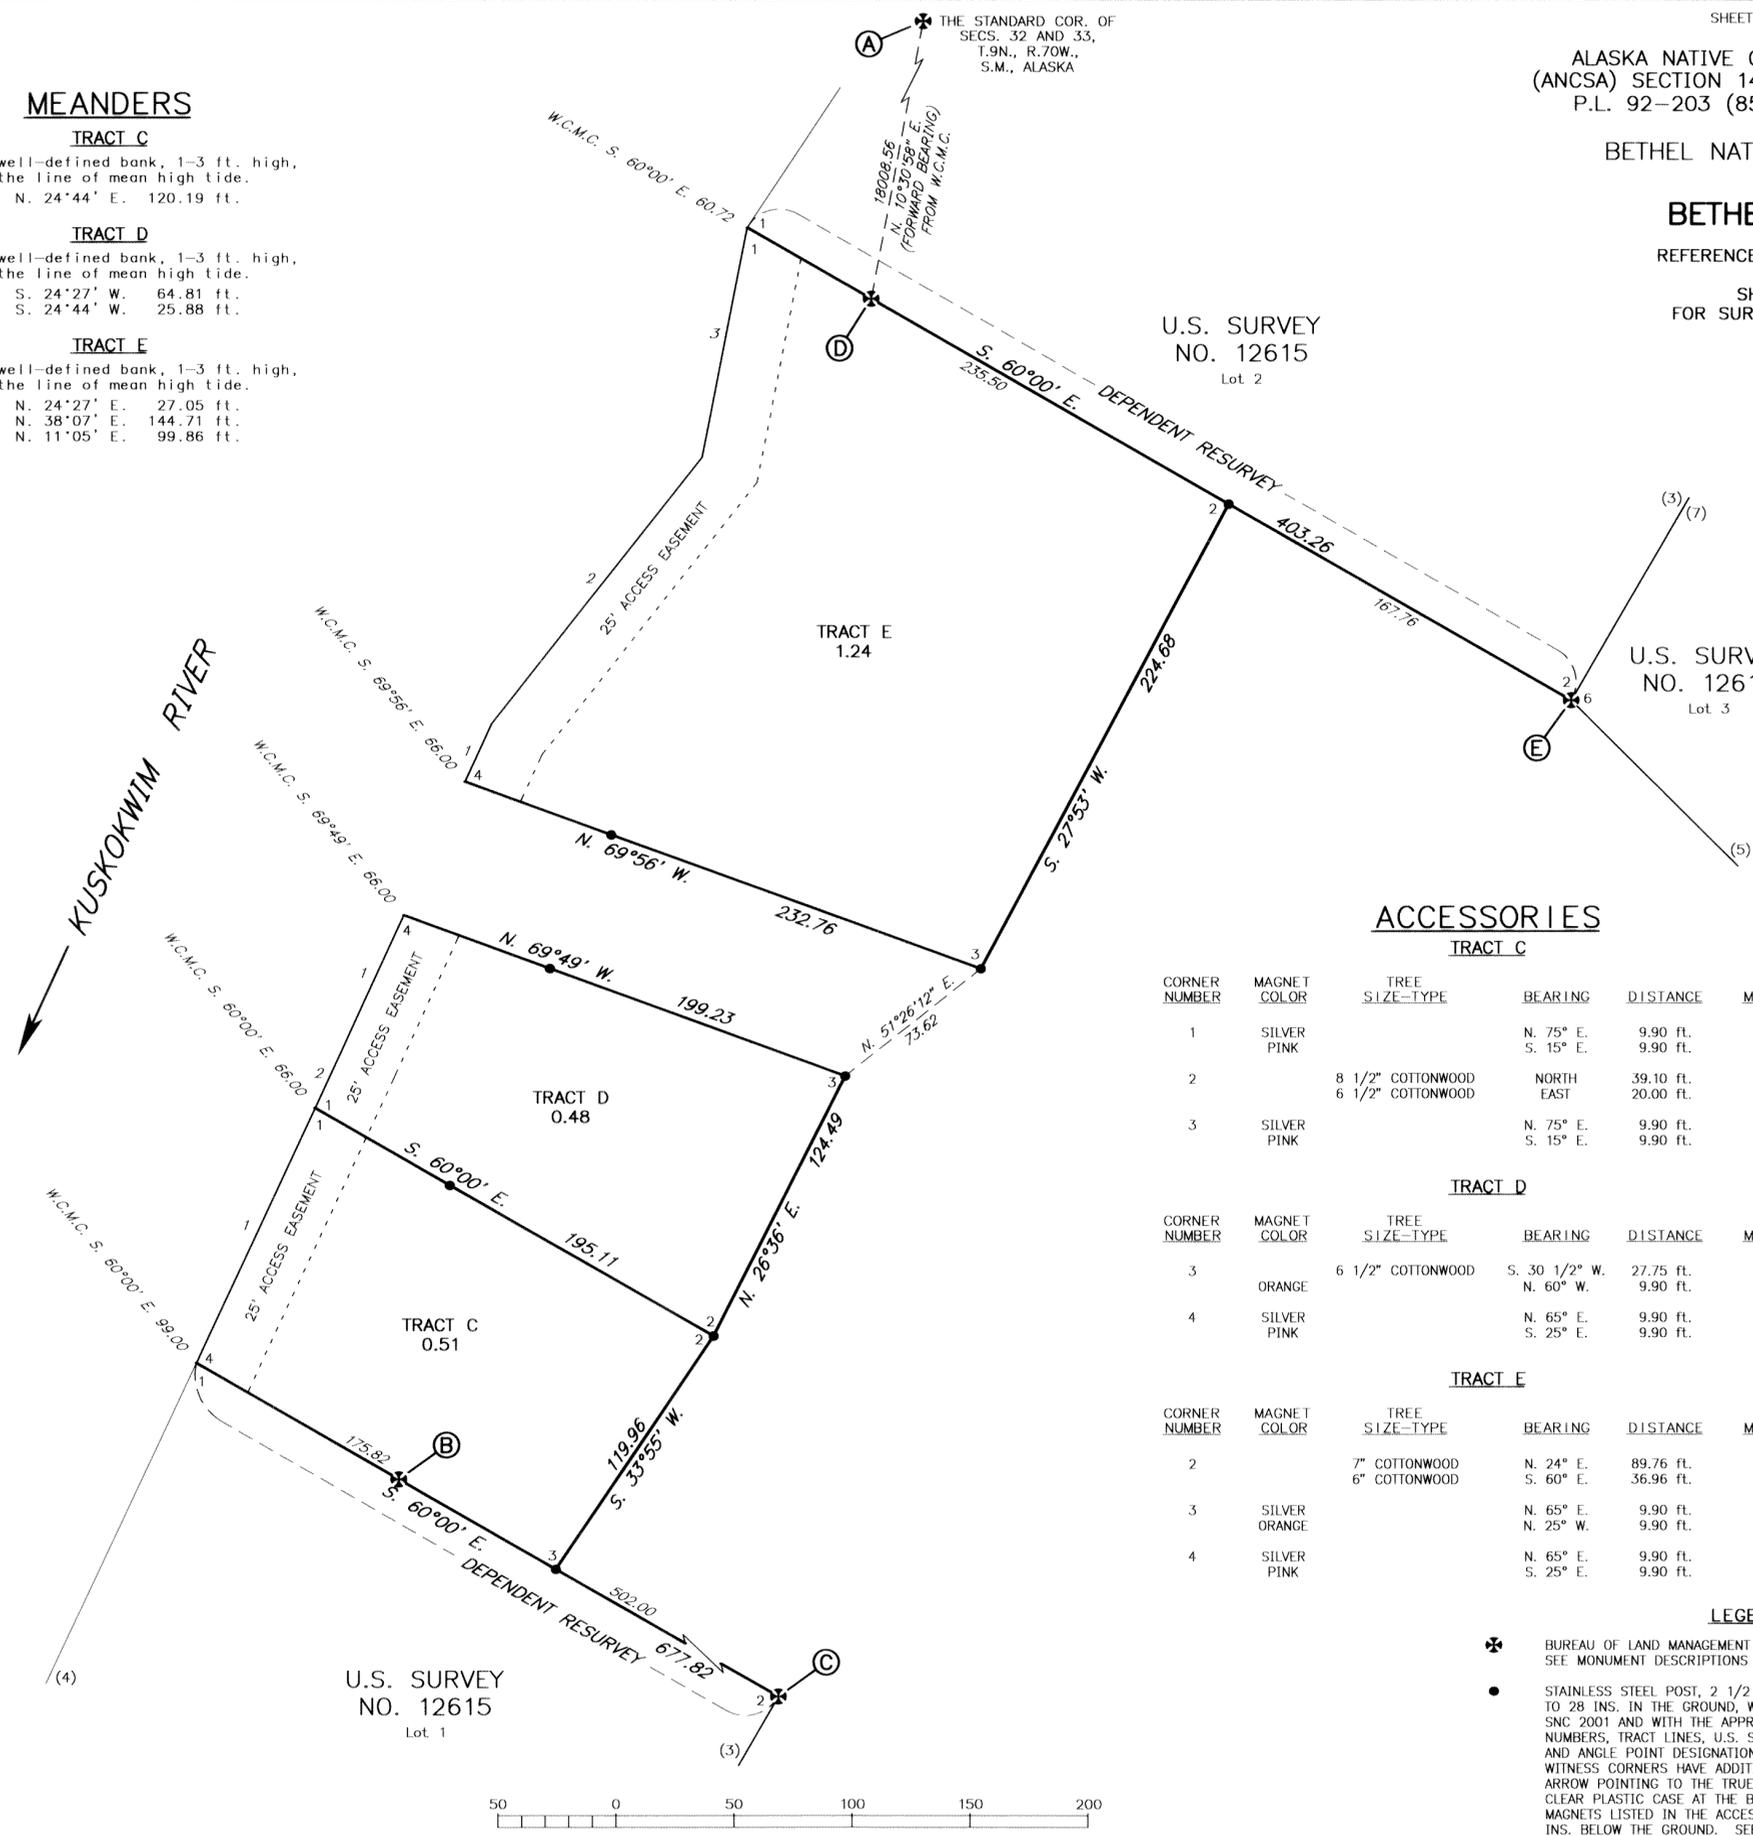

ACCESSORIES

TRACT C					
CORNER NUMBER	MAGNET COLOR	TREE SIZE-TYPE	BEARING	DISTANCE	TREE MARKING
1	SILVER PINK		N. 75° E.	9.90 ft.	
			S. 15° E.	9.90 ft.	
2		8 1/2" COTTONWOOD	NORTH	39.10 ft.	X BT
		6 1/2" COTTONWOOD	EAST	20.00 ft.	X BT
3	SILVER PINK		N. 75° E.	9.90 ft.	
			S. 15° E.	9.90 ft.	
TRACT D					
CORNER NUMBER	MAGNET COLOR	TREE SIZE-TYPE	BEARING	DISTANCE	TREE MARKING
3	ORANGE	6 1/2" COTTONWOOD	S. 30 1/2" W.	27.75 ft.	X BT
			N. 60° W.	9.90 ft.	
4	SILVER PINK		N. 65° E.	9.90 ft.	
			S. 25° E.	9.90 ft.	
TRACT E					
CORNER NUMBER	MAGNET COLOR	TREE SIZE-TYPE	BEARING	DISTANCE	TREE MARKING
2		7" COTTONWOOD	N. 24° E.	89.76 ft.	X BT
			S. 60° E.	36.96 ft.	
3	SILVER ORANGE		N. 65° E.	9.90 ft.	
			N. 25° W.	9.90 ft.	
4	SILVER PINK		N. 65° E.	9.90 ft.	
			S. 25° E.	9.90 ft.	

LEGEND

- ✱ BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEET 8.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.




ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A THROUGH P
P.L. 92-203 (85 STAT. 688, 702, 703)

BETHEL NATIVE CORPORATION
AT
BETHEL, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET NO. 1
FOR SURVEY INFORMATION

MEANDERS

TRACT I
Along a well-defined bank, 3-4 ft. high,
at the line of ordinary high water.
1. S. 84°12' W. 133.06 ft.
2. S. 72°01' W. 52.61 ft.

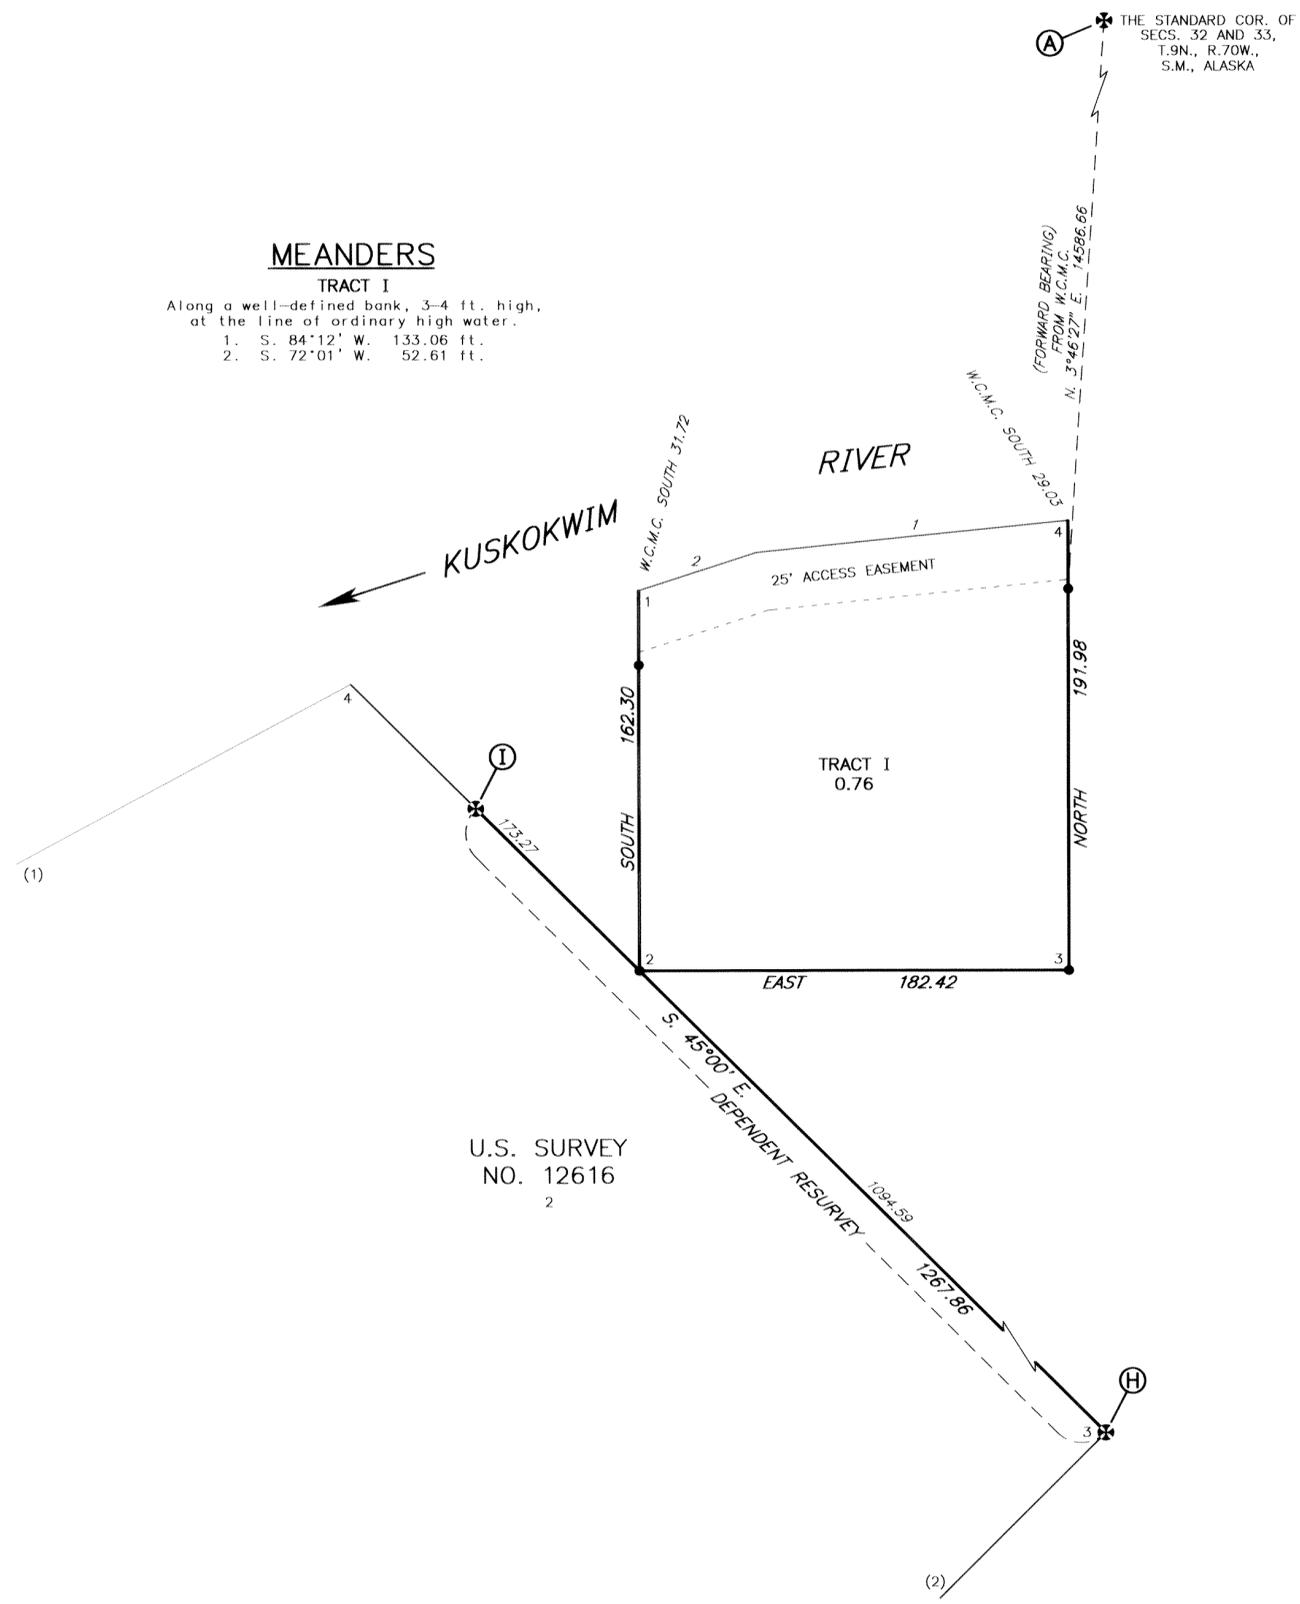


ACCESSORIES

TRACT I

CORNER NUMBER	MAGNET COLOR	TREE SIZE-TYPE	BEARING	DISTANCE	TREE MARKING
1	BLUE	12" COTTONWOOD	S. 17° E.	9.90 ft.	X BT
			S. 78° W.	9.90 ft.	X BT
2		12" COTTONWOOD	N. 50° E.	55.44 ft.	X BT
		6" COTTONWOOD	N. 64° W.	32.70 ft.	X BT
3		4" COTTONWOOD	N. 54° E.	18.48 ft.	X BT
		7" COTTONWOOD	N. 66° W.	62.70 ft.	X BT
4	BLUE	4" COTTONWOOD	S. 10° E.	18.48 ft.	X BT
			S. 80° W.	9.90 ft.	X BT

LEGEND

- ✱ BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEET 8.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.



ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH P P.L. 92-203 (85 STAT. 688, 702, 703)

BETHEL NATIVE CORPORATION AT
BETHEL, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

MEANDERS

TRACT J

Along a well-defined bank, 3-4 ft. high, at the line of ordinary high water.

1. S. 89°18' E. 48.59 ft.
2. S. 82°20' E. 155.02 ft.
3. N. 85°40' E. 103.24 ft.

TRACT K


Along a well-defined bank, 3-4 ft. high, at the line of ordinary high water.

1. N. 81°01' W. 91.04 ft.
2. N. 87°43' W. 178.28 ft.
3. S. 85°40' W. 84.83 ft.

TRACT L

Along a well-defined bank, 3-4 ft. high, at the line of ordinary high water.

1. N. 74°55' W. 81.13 ft.
2. N. 79°51' W. 202.03 ft.
3. N. 81°01' W. 114.04 ft.

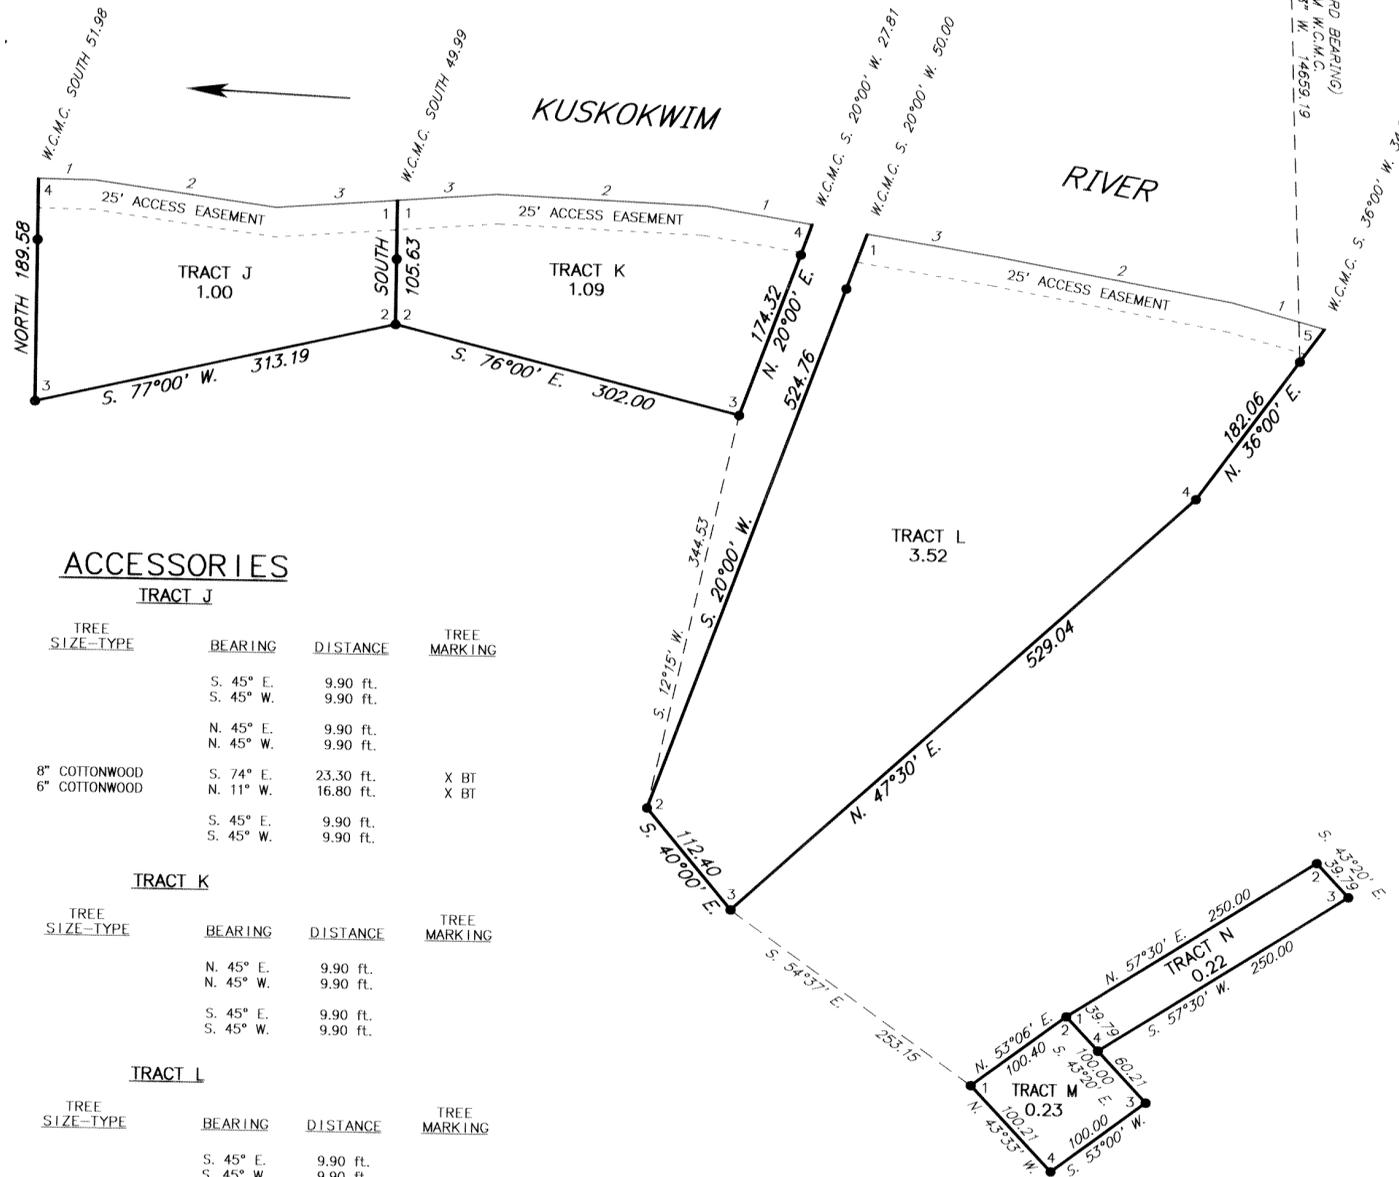

ACCESSORIES

TRACT J

CORNER NUMBER	MAGNET COLOR	TREE SIZE-TYPE	BEARING	DISTANCE	TREE MARKING
1	PINK BLUE		S. 45° E. S. 45° W.	9.90 ft. 9.90 ft.	
2	SILVER ORANGE		N. 45° E. N. 45° W.	9.90 ft. 9.90 ft.	
3		8" COTTONWOOD 6" COTTONWOOD	S. 74° E. N. 11° W.	23.30 ft. 16.80 ft.	X BT X BT
4	PINK BLUE		S. 45° E. S. 45° W.	9.90 ft. 9.90 ft.	

TRACT K

CORNER NUMBER	MAGNET COLOR	TREE SIZE-TYPE	BEARING	DISTANCE	TREE MARKING
3	SILVER ORANGE		N. 45° E. N. 45° W.	9.90 ft. 9.90 ft.	
4	PINK BLUE		S. 45° E. S. 45° W.	9.90 ft. 9.90 ft.	

TRACT L

CORNER NUMBER	MAGNET COLOR	TREE SIZE-TYPE	BEARING	DISTANCE	TREE MARKING
1	PINK BLUE		S. 45° E. S. 45° W.	9.90 ft. 9.90 ft.	
2		5" COTTONWOOD 8" COTTONWOOD	S. 44° W. N. 6° W.	5.70 ft. 42.60 ft.	X BT X BT
3	SILVER ORANGE		N. 60° E. N. 30° W.	9.90 ft. 9.90 ft.	
4	SILVER ORANGE		N. 50° E. N. 40° W.	9.90 ft. 9.90 ft.	
5	PINK BLUE		S. 45° E. S. 45° W.	9.90 ft. 9.90 ft.	

ACCESSORIES

TRACT M


CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER PINK	N. 10° E. S. 80° E.	9.90 ft. 9.90 ft.
2	SILVER PINK	N. 70° E. S. 20° E.	9.90 ft. 9.90 ft.
3	BLUE ORANGE	S. 10° W. N. 80° W.	9.90 ft. 9.90 ft.
4	SILVER ORANGE	N. 55° E. N. 35° W.	9.90 ft. 9.90 ft.

TRACT N

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
2	SILVER PINK	N. 70° E. S. 20° E.	9.90 ft. 9.90 ft.
3	BLUE ORANGE	S. 10° W. N. 80° W.	9.90 ft. 9.90 ft.
4	SILVER ORANGE	N. 35° E. S. 55° E.	9.90 ft. 9.90 ft.

LEGEND

- ✦ BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEET 8.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSEA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.



ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A THROUGH P
P.L. 92-203 (85 STAT. 688, 702, 703)

BETHEL NATIVE CORPORATION
AT
BETHEL, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET NO. 1
FOR SURVEY INFORMATION

ACCESSORIES

TRACT O

CORNER NUMBER	MAGNET COLOR	TREE SIZE-TYPE	BEARING	DISTANCE	TREE MARKING
1	PINK BLUE		S. 84° E. S. 6° W.	9.90 ft. 9.90 ft.	
2		4 1/2" COTTONWOOD 4 1/2" COTTONWOOD	S. 89 1/2° E. N. 1/2° W.	46.95 ft. 26.60 ft.	X BT X BT
3	PINK BLUE		S. 25° E. S. 65° W.	9.90 ft. 9.90 ft.	

TRACT P

CORNER NUMBER	MAGNET COLOR	TREE SIZE-TYPE	BEARING	DISTANCE	TREE MARKING
1	SILVER PINK		N. 52° E. S. 38° E.	9.90 ft. 9.90 ft.	
2	SILVER ORANGE		N. 62° E. N. 28° W.	9.90 ft. 9.90 ft.	
3	BLUE	5" COTTONWOOD	S. 47° E. S. 45° W.	35.64 ft. 9.90 ft.	X BT
4	SILVER PINK		N. 62° E. S. 28° E.	9.90 ft. 9.90 ft.	



U.S. SURVEY
NO. 12482
1

U.S. SURVEY
NO. 12482
2

MEANDERS

TRACT O

- Along a well-defined bank, 1-4 ft. high, at the line of ordinary high water.
1. N. 34°35' W. 121.90 ft.
 2. N. 41°15' W. 136.81 ft.
- At end of course, confluence with an unnamed slough, thence along a well-defined bank, 1-4 ft. high, at the line of ordinary high water.
3. S. 45°13' W. 50.37 ft.
 4. S. 12°34' W. 178.29 ft.

LEGEND

- ✱ BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEET 8.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.




BETHEL PLAT 2004-1


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A THROUGH P
P.L. 92-203 (85 STAT. 688, 702, 703)

BETHEL NATIVE CORPORATION
AT
BETHEL, ALASKA


REFERENCE SHOULD BE MADE
TO
SHEET NO. 1
FOR SURVEY INFORMATION




Recovered an iron pipe, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown.
Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.
Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.
Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.
Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.
Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.
Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.
Accessories not searched for.




Recovered a stainless steel post, 28 ins. long, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as shown, from which
A cottonwood, 9 ins. diam., bears S. 79° W., 65 lks. dist., mkd. X BT.
A cottonwood, 6 ins. diam., bears N. 24° W., 81 lks. dist., mkd. X BT.



Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.
Accessories not searched for.



Recovered a copperweld monument, firmly set, projecting 17 ins. above ground, with cap mkd. as shown.
Accessories not searched for.



Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.
Accessories not searched for.

2004-1
Bethel REC DIST 55
DATE JAN. 20 2004
TIME 1:46 PM
Requested By ASA/OLM
Address



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
ALASKA STATE OFFICE
222 W. 7th Avenue, #13
ANCHORAGE, ALASKA 99513-7599



9600 (927)
ANCSA 14(c)
BETHEL

January 14, 2004

BETHEL RECORDING DISTRICT
Box 426
Bethel, Alaska 99559

Dear District Recorder:

The Alaska Native Claims Settlement Act (ANCSA) Section 14(c) plat for Bethel, Tracts A Through P, consisting of eight (8) original sheets, transmitted to you by this letter of compliance, portrays a Cadastral Survey conducted to fulfill statutory requirements mandated by ANCSA, pursuant to Public Law 92-203 (Stat. 688, 702, 703), and satisfies the federal guidelines and requirements proclaimed for ANCSA 14(c) Surveys.

The plat represents surveyed parcels of land selected for ANCSA 14(c) reconveyances situated on portions of surface estate lands transferred from the United States of America by Interim Conveyance No. 142 and Patent No. 50-95-0493, both to Bethel Native Corporation.

ANCSA 14(c) Surveys have been authorized as federally mandated surveys, under the provisions of Section 13 of ANCSA, 43 U.S.C. Stat. 1612. The authority to execute all federal land surveys in Alaska is delegated by the Secretary of the Interior to the Director, Bureau of Land Management (BLM) and subsequently redelegated to the Deputy State Director for Cadastral Survey and Geomatics, Alaska State Office. Accordingly, BLM requests that this plat be filed with the BETHEL RECORDING DISTRICT to comply with the federal platting regulations and the agreements set forth between the Bureau of Land Management and the State Recording Authority.

Sincerely,

Gust C. Panos
Acting Deputy State Director
for Cadastral Survey
and Geomatics, Alaska