

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c) TRACTS
 A THROUGH I
 P.L. 92-203, (85 STAT. 688, 702, 703)
 CHIGNIK LAGOON NATIVE CORPORATION
 AT
 CHIGNIK LAGOON, ALASKA
 AND THE
 DEPENDENT RESURVEY
 OF PORTIONS OF
 U.S. SURVEY Nos. 2183, 2715 AND 11188
 This plat contains the entire survey record.

U.S. Survey No. 2183 was surveyed by Charles E. Hubbell, U.S. Deputy Surveyor, in 1933.

U.S. Survey No. 2715 was surveyed by Harold H. Waller, U.S. Deputy Surveyor, in 1946.

U.S. Survey No. 11188 was surveyed by John A. Pex, Cadastral Surveyor, in 1993.

The Eleventh Standard Parallel South along a portion of the south boundary of Township 44 South, Range 59 West, and a portion of the subdivisional lines of Township 43 South, Range 60 West, Seward Meridian, were surveyed by Andrew Potts, Land Surveyor No. LS-3514, under contract No. YA-553-CTO-37, in 1980, under Special Instructions for Group No. 228, the plat has not been accepted as of this date.

This survey was executed by John A. Pex, Cadastral Surveyor, August 4 through September 2, 1993, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions approved April 19, 1993, the Chignik Lagoon ANCSA 14(c) Map of Boundaries approved February 22, 1992, and Assignment Instructions dated April 19, 1993.

Field assistants were:

Kent W. Harder, Surveying Technician
 Otto R. Thiele III, Student Trainee (LS)

Area: 17.30 Acres.

The azimuth was obtained from direct observations of the sun and refers to the true meridian.

The geographic position of corner No. 2, Lot 3, identical with corner No. 2, Lot 4, Block 1, Tract A, as determined from a tie to the witness corner to the meander corner of section 33 only, Township 44 South, Range 59 West, Seward Meridian, Alaska, is:

Latitude: 56° 19' 18.53" North NAD 27
 Longitude: 158° 35' 13.01" West

The mean magnetic declination was obtained from U.S. Geological Survey quadrangle maps "CHIGNIK (B-2)," Alaska, 1963 edition, with minor revisions in 1973, and "CHIGNIK (B-3)," Alaska, 1963 edition.

This survey is situated on the northwesterly shore of Chignik Lagoon. Tracts A through F are within Township 44 South, Range 59 West and Township 45 South, Range 60 West. Tracts G and H are within Township 43 South, Range 60 West. Tract I is within Township 44 South, Range 60 West, Seward Meridian, Alaska.


The land is gently rolling tundra, with native grasses and scattered patches of alders.

UNITED STATES DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT
 Anchorage, Alaska

The survey represented by this plat, sheets 1 - 5, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.


For the Director

Jerry A. Pinkerton FEB. 07, 1995
 Deputy State Director for Cadastral Survey, Alaska

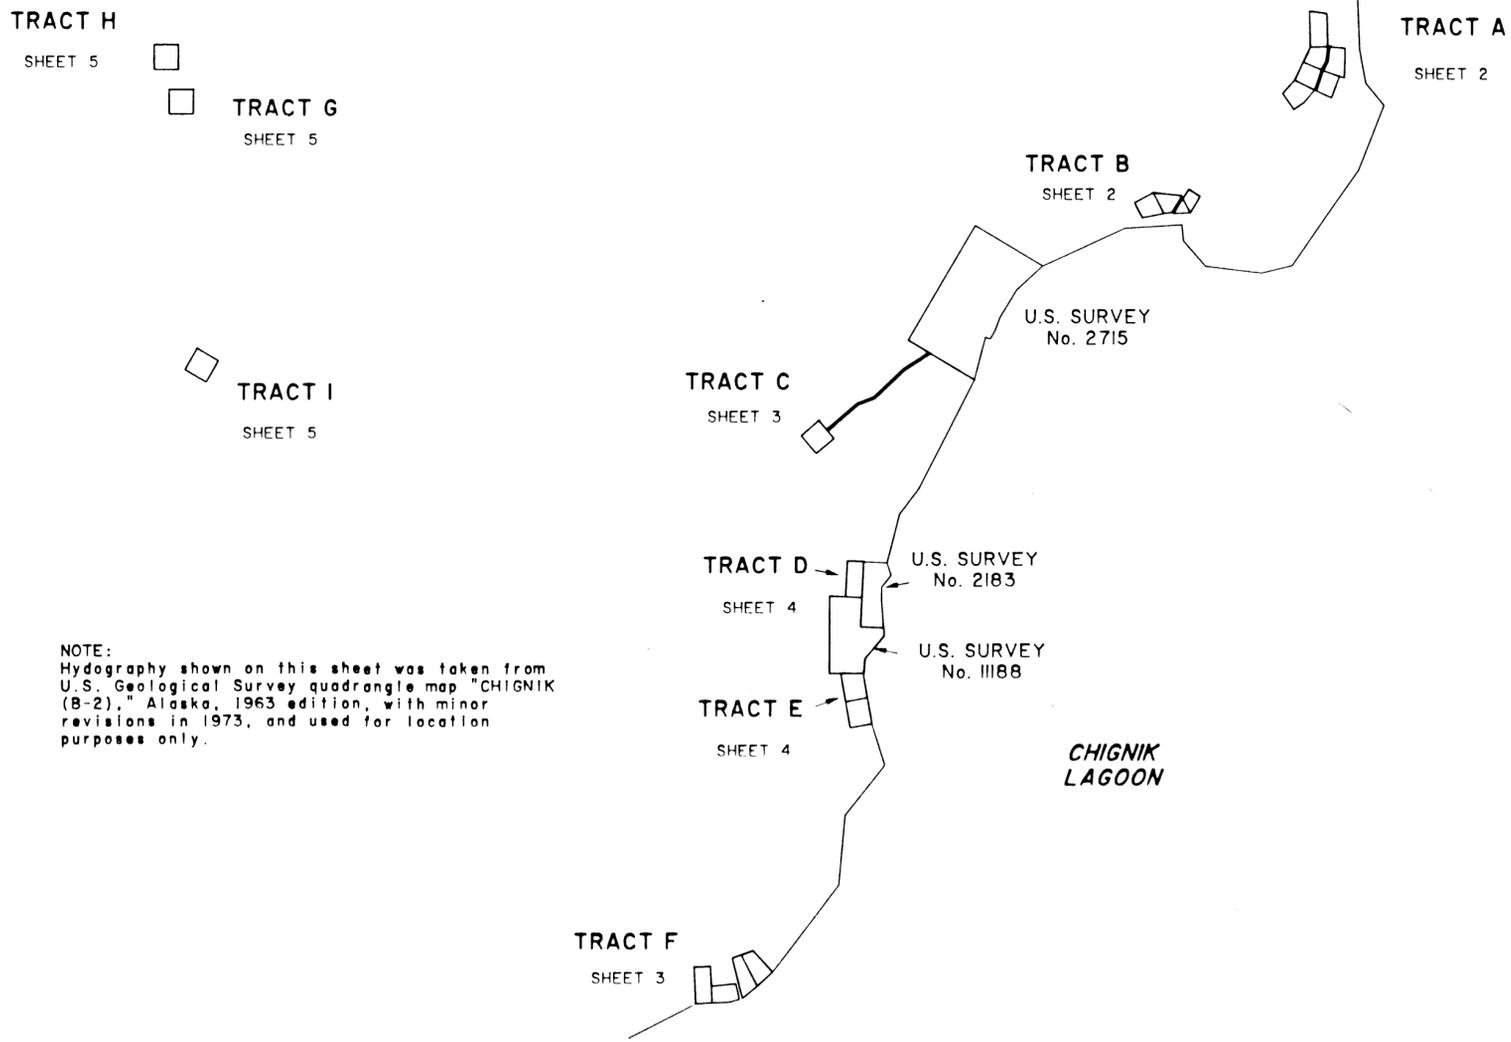

NOTE:
 Hydrography shown on this sheet was taken from U.S. Geological Survey quadrangle map "CHIGNIK (B-2)," Alaska, 1963 edition, with minor revisions in 1973, and used for location purposes only.

True Meridian
 Mean Magnetic Declination
 19 1/2° E.



Village Corporation President Certificate:

I hereby certify that Tracts A through I, represented on this plat of survey are on lands Interim Conveyed and patented to Chignik Lagoon Native Corporation by Interim Conveyance No. 083 issued by the United States of America; said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by the Chignik Lagoon Native Corporation, and the Chignik Lagoon ANCSA 14(c) map of boundaries, approved February 22, 1992.

I, John A. Pex Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 through 5, in conformity with the Special Instructions approved April 19, 1993, the principles of survey described in the Manual of Instruction for the Survey of the Public Lands of the United States, 1973, and in the specific manner described on this plat.

JANUARY 3, 1995
 Date
John A. Pex
 Cadastral Surveyor

1/23/95
 Date


Rhonda Stepano
 President, Chignik Lagoon Native Corporation

95-3 Aleutian Islands
 Recording District
 COPY

1-120

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c) TRACTS
A THROUGH I
P.L. 92-203, (85 STAT. 688, 702, 703)
CHIGNIK LAGOON NATIVE CORPORATION
AT
CHIGNIK LAGOON, ALASKA



REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

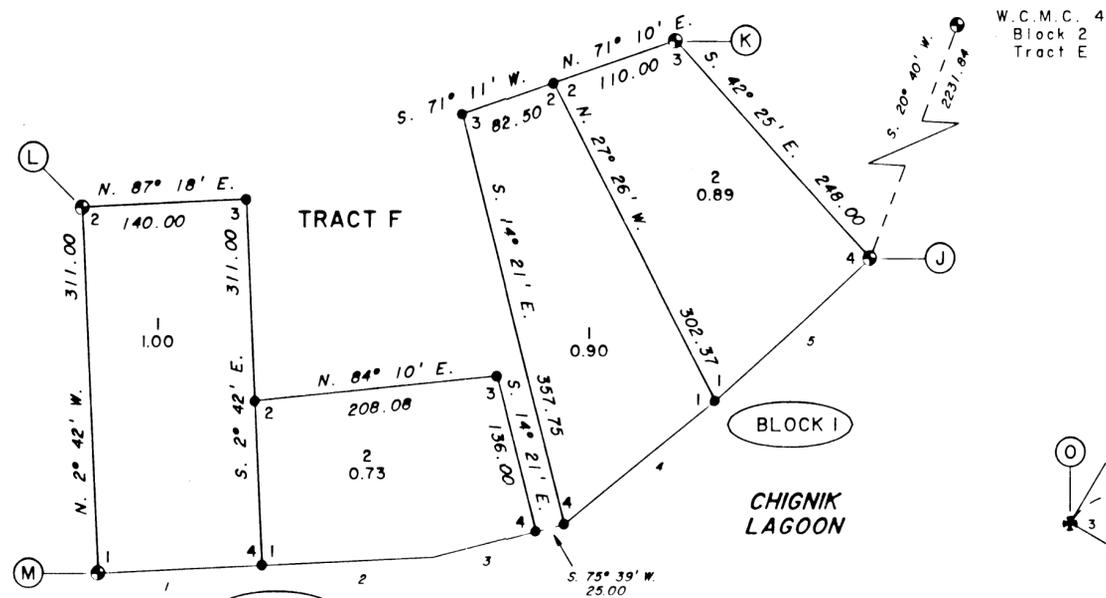

MEANDERS OF TRACT F

At the line of mean high tide.

1. N. 87° 18' E., 140.00 ft.
2. N. 87° 18' E., 146.00 ft.
3. N. 75° 39' E., 91.00 ft.
4. S. 50° 49' W., 166.00 ft.
5. S. 47° 35' W., 179.00 ft.

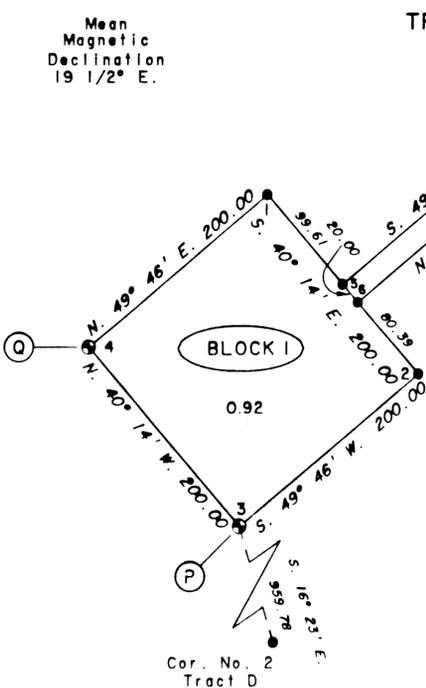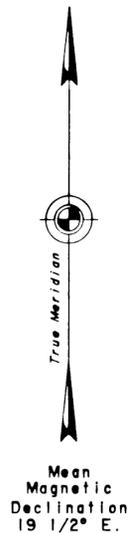


MONUMENT LEGEND

- SET STAINLESS STEEL POST AS DESCRIBED
- ⊕ RECOVERED BLM MONUMENT AS DESCRIBED
- SET A REBAR, 30 INS. LONG, BETWEEN 20 AND 29 INS. IN THE GROUND, WITH ALUM. CAP, MKD. ANCSA 14C CLC AND WITH THE APPROPRIATE TRACT, BLOCK AND LOT NUMBERS, AND LOT LINES.



W.C.M.C. 4
Block 2
Tract E




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown.

A magnet in a silver plastic case, bears N. 10° E., 3 1/4 ft. dist., 18 ins. below ground.

A magnet in an orange plastic case, bears N. 80° W., 3 1/4 ft. dist., 18 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown.

A magnet in a pink plastic case, bears S. 45° E., 3 1/4 ft. dist., 18 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 3 1/4 ft. dist., 18 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown.

A magnet in a pink plastic case, bears S. 45° E., 3 1/4 ft. dist., 18 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 3 1/4 ft. dist., 18 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown.

A magnet in a silver plastic case, bears N. 45° E., 3 1/4 ft. dist., 18 ins. below ground.


A magnet in an orange plastic case, bears N. 45° W., 3 1/4 ft. dist., 18 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.



Found an iron post, 3 ins. diam., firmly set, projecting 18 ins. above ground, mkd. S2175 COR NO 4 WC, on the NE side of the pipe and MC on the SE side of pipe.

No evidence of original pits.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown.

A magnet in a pink plastic case, bears S. 45° E., 3 1/4 ft. dist., 18 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 3 1/4 ft. dist., 18 ins. below ground.


Bury a magnet in a clear plastic case at the base of the stainless steel post.



Found an iron post, 3 ins. diam., firmly set, projecting 18 ins. above ground, mkd. S2175 COR NO 3, on the E side of the pipe.

A pit, 18 X 18 X 12 ins., on the SE of monument, 3 ft. dist.

No evidence of original NE pit.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.





A magnet in a silver plastic case, bears N. 45° E., 3 1/4 ft. dist., 18 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 3 1/4 ft. dist., 18 ins. below ground.


Bury a magnet in a clear plastic case at the base of the stainless steel post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c) TRACTS
 A THROUGH I
 P.L. 92-203, (85 STAT. 688, 702, 703)
 CHIGNIK LAGOON NATIVE CORPORATION
 AT
 CHIGNIK LAGOON, ALASKA


REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

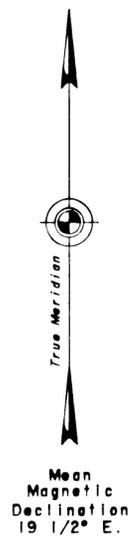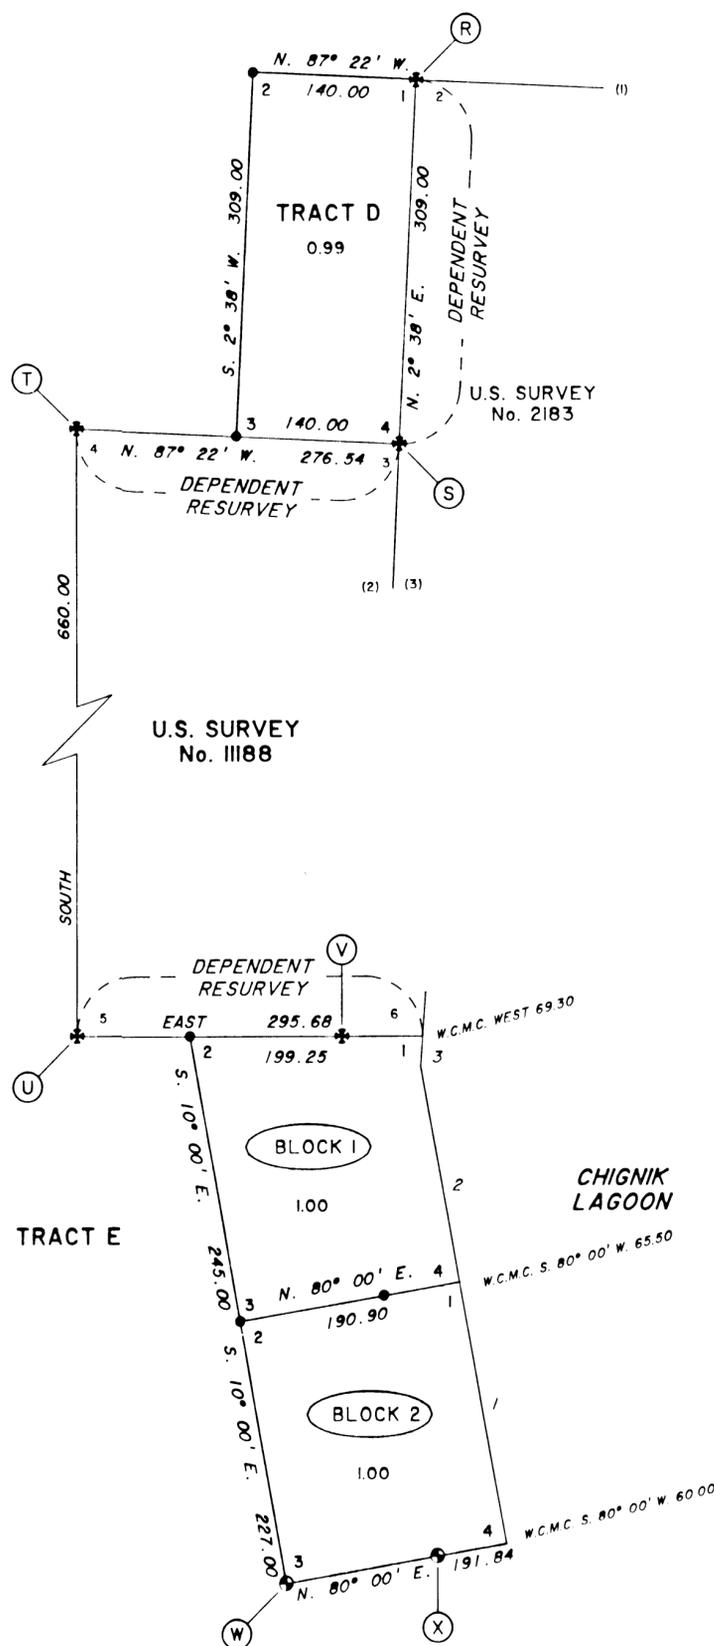


Found an iron post, 3 ins. diam., firmly set, projecting 18 ins. above ground, mkd. S2183 COR 2, on the SE side of the pipe, with a screw on cap mkd. as shown
 Pits, 18 X 18 X 12 ins., on line easterly and southerly of monument, 6 ft. dist.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown
 Pits, 18 X 18 X 12 ins., on line southerly and westerly of monument, 3 ft. dist.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 ins. above ground, with brass cap mkd. as shown
 Pits, 18 X 18 X 12 ins., on line easterly and southerly of monument, 3 ft. dist.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 ins. above ground, with brass cap mkd. as shown



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 A magnet in a pink plastic case, bears S. 45° E., 3 1/4 ft. dist., 12 ins. below ground.
 A magnet in a blue plastic case, bears S. 45° W., 3 1/4 ft. dist., 12 ins. below ground.
 Bury a magnet in a clear plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown
 A magnet in a blue plastic case, bears S. 45° W., 3 1/4 ft. dist., 12 ins. below ground.
 A magnet in an orange plastic case, bears N. 45° W., 3 1/4 ft. dist., 12 ins. below ground.
 Bury a magnet in a clear plastic case at the base of the stainless steel post.

MEANDERS OF TRACT E

- At the line of mean high tide.
1. N. 10° 14' W., 227.00 ft.
 2. N. 10° 14' W., 186.34 ft.
 3. N. 4° 13' E., 24.82 ft.

MONUMENT LEGEND

- SET STAINLESS STEEL POST AS DESCRIBED
- ⊕ RECOVERED BLM MONUMENT AS DESCRIBED
- SET A REBAR, 30 INS. LONG, BETWEEN 20 AND 29 INS. IN THE GROUND, WITH ALUM. CAP, MKD. ANCSA 14C CLC AND WITH THE APPROPRIATE TRACT, BLOCK AND LOT NUMBERS, AND LOT LINES.


95-3 Aleutian Islands
 COPY Recording District

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c) TRACTS
A THROUGH I
P.L. 92-203, (85 STAT. 688, 702, 703)
CHIGNIK LAGOON NATIVE CORPORATION
AT
CHIGNIK LAGOON, ALASKA


REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

MONUMENT LEGEND


- SET STAINLESS STEEL POST AS DESCRIBED
- ⊕ RECOVERED BLM MONUMENT AS DESCRIBED
- SET A REBAR, 30 INS. LONG, BETWEEN 20 AND 29 INS. IN THE GROUND, WITH ALUM. CAP, MKD. ANCSA 14C CLC AND WITH THE APPROPRIATE TRACT, BLOCK AND LOT NUMBERS, AND LOT LINES.

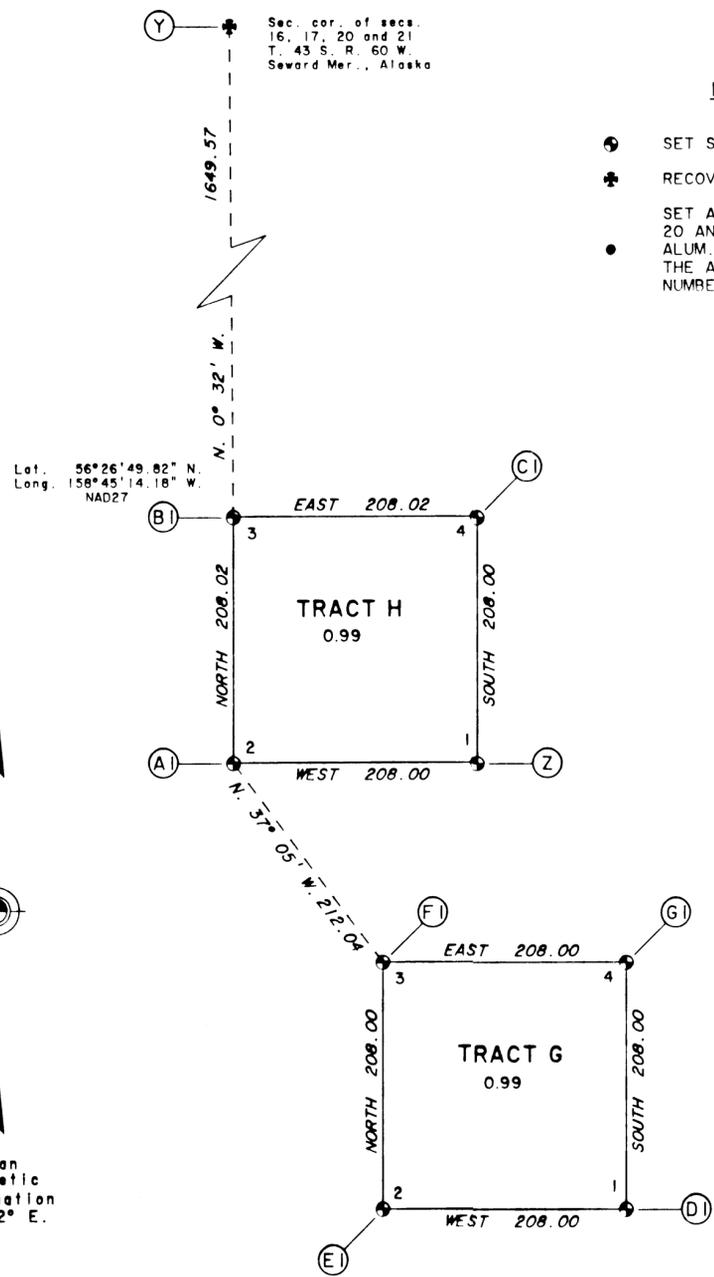

Lat. 56° 26' 49.82" N.
Long. 158° 45' 14.18" W.
NAD27

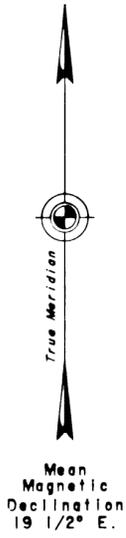


95-3
RECORDED - FILED 410
Aleutian Islands
DATE 2/22/95
TIME 11:00 A.M.
Represented by BLM
Address

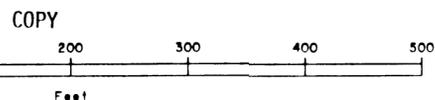


NOTE:
The approximate geodetic position of cor. No. 4, Tract I, was determined by an aircraft GPS system.

Lat. 56° 22' 02" N.
Long. 158° 43' 56" W.
NAD27



Found an alum. rod, 5/8 in. diam., firmly set, projecting 20 ins. above ground, with an alum. cap mkd. as shown

An alum. rod, 5/8 in. diam., firmly set, bent to the south, projecting 18 ins. above ground, bears West, 6 1/2 ft. dist.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown

A magnet in a silver plastic case, bears N. 45° E., 3 1/4 ft. dist., 12 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 3 1/4 ft. dist., 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown

A magnet in a silver plastic case, bears N. 45° E., 3 1/4 ft. dist., 12 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 3 1/4 ft. dist., 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown

A magnet in a pink plastic case, bears S. 45° E., 3 1/4 ft. dist., 18 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 3 1/4 ft. dist., 18 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown

A magnet in a pink plastic case, bears S. 45° E., 3 1/4 ft. dist., 18 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 3 1/4 ft. dist., 18 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

A magnet in a silver plastic case, bears N. 45° E., 3 1/4 ft. dist., 12 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 3 1/4 ft. dist., 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

A magnet in a silver plastic case, bears N. 45° E., 3 1/4 ft. dist., 12 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 3 1/4 ft. dist., 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

A magnet in a pink plastic case, bears S. 45° E., 3 1/4 ft. dist., 12 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 3 1/4 ft. dist., 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

A magnet in a pink plastic case, bears S. 45° E., 3 1/4 ft. dist., 12 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 3 1/4 ft. dist., 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

A magnet in a silver plastic case, bears N. 45° E., 3 1/4 ft. dist., 12 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 3 1/4 ft. dist., 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown

A magnet in a silver plastic case, bears N. 45° E., 3 1/4 ft. dist., 12 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 3 1/4 ft. dist., 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

A magnet in a silver plastic case, bears N. 45° E., 3 1/4 ft. dist., 12 ins. below ground.

A magnet in a pink plastic case, bears S. 45° E., 3 1/4 ft. dist., 18 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

A magnet in a pink plastic case, bears S. 45° E., 3 1/4 ft. dist., 12 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 3 1/4 ft. dist., 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (c) TRACTS
 J THROUGH V
 P.L. 92-203 (85 STAT. 688, 702, 703)
 CHIGNIK LAGOON NATIVE CORPORATION
 AT
 CHIGNIK LAGOON, ALASKA
 AND THE DEPENDENT RESURVEY
 OF PORTIONS OF
 U.S. SURVEYS Nos. 4898, 1062 AND 2715,
 PORTIONS OF THE 1993
 CHIGNIK LAGOON 14 (c),
 AND THE EAST BOUNDARY OF
 T. 45 S., R. 61 W., SEWARD MERIDIAN

This plat contains the entire survey record.

The east boundary of Township 45 South, Range 61 West, Seward Meridian, Alaska was surveyed by Andrew Potts, Land Surveyor, under contract No. YA-553-CTO-37, in 1980, under Special Instructions for Group No. 228; the plat has not been accepted as of this date.

U.S. Survey No. 1062 was surveyed by Wm. A. Hesse, U.S. Deputy Surveyor, in 1911.

U.S. Survey Nos. 1222 and 1223 were surveyed by Harold H. Waller, U.S. Deputy Surveyor, in 1916.

U.S. Survey No. 2180 was surveyed by Charles S. Hubbell, U.S. Deputy Surveyor, in 1933.

U.S. Survey No. 2715 was surveyed by Harold H. Waller, Deputy Surveyor, G.L.O., in 1946.

U.S. Survey No. 4898 was surveyed by Edward D. Conklin, Cadastral Surveyor, in 1968.

The Chignik Lagoon 14 (c) Tracts A through I were surveyed in 1993 by John A. Pex, Cadastral Surveyor, and recorded in the Aleutians Recording District, Plat No. 95-3, on February 22, 1995.

This survey was executed by John A. Pex, Cadastral Surveyor, June 16, 1997 through July 8, 1997, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated February 25, 1997, approved March 3, 1997, Amended Special Instruction dated April 9, 1997, approved April 14, 1997 and Assignment Instructions dated April 19, 1997.

Field assistants were:
 Steven D. Cinelli, Contract Laborer
 Vance E. Marsten, Contract Laborer

Area: 121.09 Acres.

The azimuth was obtained from direct observations of the sun and retracements of existing surveys and refers to the true meridian.

The mean magnetic declination was obtained from U.S. Geological Survey quadrangle maps "CHIGNIK (B-2)," Alaska, 1963 edition with minor revisions in 1973 and "CHIGNIK (B-3)," Alaska, 1963 edition.

This survey is situated on the shores of Chignik Lagoon, Tracts J, U and V are within Township 45 South, Range 59 West, Tracts K through O and Tracts Q through T, W and the southerly portion of P are in Township 45 South, Range 60 West, the northerly portion of Tract P is in Township 44 South Range 59 West, Seward Meridian, Alaska.



The land is gently rolling tundra, with native grasses and scattered patches of alder.

UNITED STATES DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT
 Anchorage, Alaska

The survey represented by this plat, sheets 1-7, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director
Must C. Pano 1 April 1999
 (ACTING) Date
 Deputy State Director for Cadastral Survey, Alaska

NOTE:
 Hydrography shown on this sheet was taken from U.S. Geological Survey quadrangle map "CHIGNIK (B-2)," ALASKA, 1963 edition, with minor revisions in 1973, and used for location purposes only.

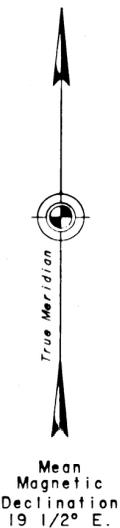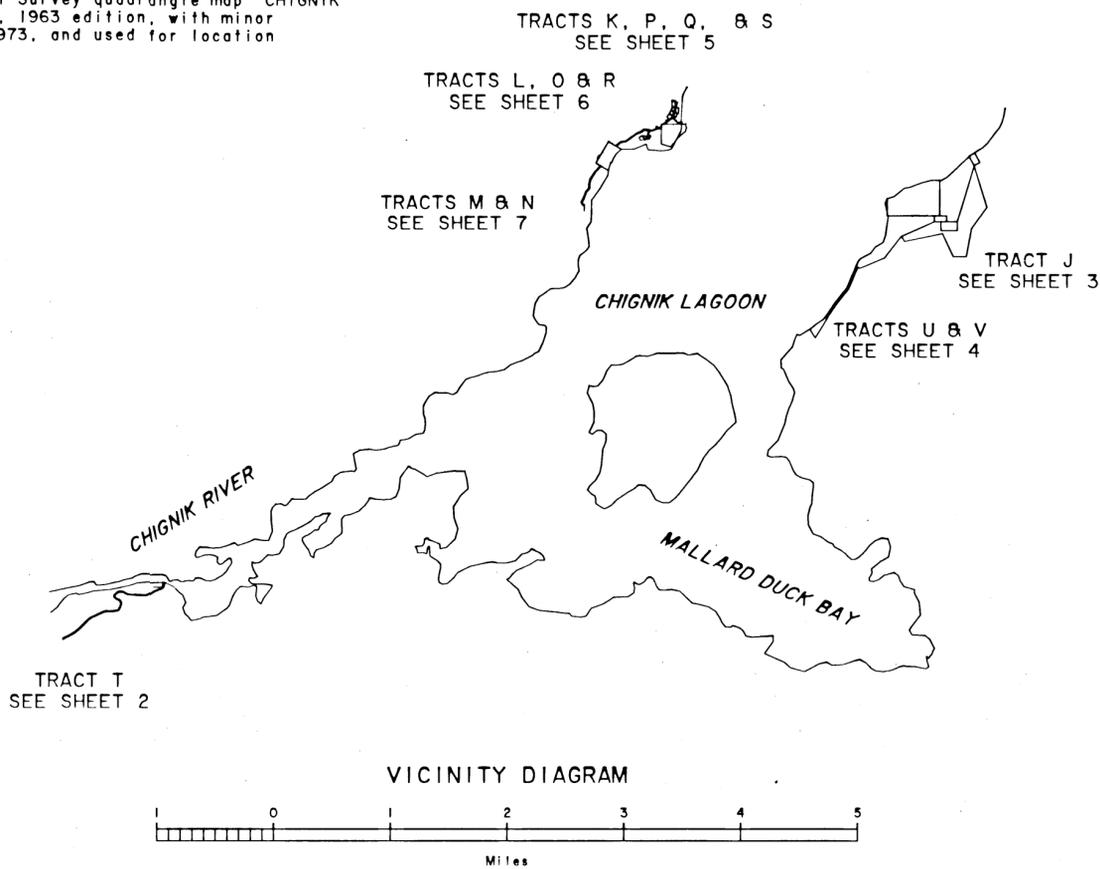

Village Corporation President Certificate:

I hereby certify that Tracts J through W, represented on this plat of survey are on lands Interim Conveyed to Chignik Lagoon Native Corporation by IC No. 083 issued by the United States of America; said tracts also fulfill all entitlements under the provisions of ANCSA 14 (c) as requested by the Chignik Lagoon Native Corporation Resolution Agreement No. 95-1 and the Chignik Lagoon ANCSA 14(c)(3) map of boundaries, accepted September 26, 1995.

4/1/99
 Date

Rhonda Ferguson Pres
 President, Chignik Lagoon Native Corporation

I, John A. Pex, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 through 7, in conformity with the Special Instructions dated February 26, 1997, Amended Special Instructions dated April 9, 1997, the principles of survey described in the Manual of Instruction for the Survey of the Public Lands of the United States, 1973, and in the specific manner described on this plat.

MARCH 30, 1999
 Date

John A. Pex
 Cadastral Surveyor

COPY

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (c) TRACTS
 J THROUGH V
 P.L. 92-203 (85 STAT. 688, 702, 703)
 CHIGNIK LAGOON NATIVE CORPORATION
 AT
 CHIGNIK LAGOON, ALASKA


REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

NOTE
 Tract T consists of a 60 ft. wide right of way,
 30 ft. on either side of the surveyed centerline.
 This road was surveyed along the apparent centerline
 of the existing roadbed and monumented accordingly.
 The acreage returned for Tract T was computed using
 the aforementioned centerline traverse information.

MONUMENT LEGEND


- Set stainless steel post as described.
- ✱ Recovered monument as described.
- Set a rebar, 30 ins. long, 6 to 8 ins. below ground, with alum. cap mkd. ANCSA 14C CLNC2 and with the appropriate Tract, Block and Lot numbers.

CLXX Represents a centerline corner.

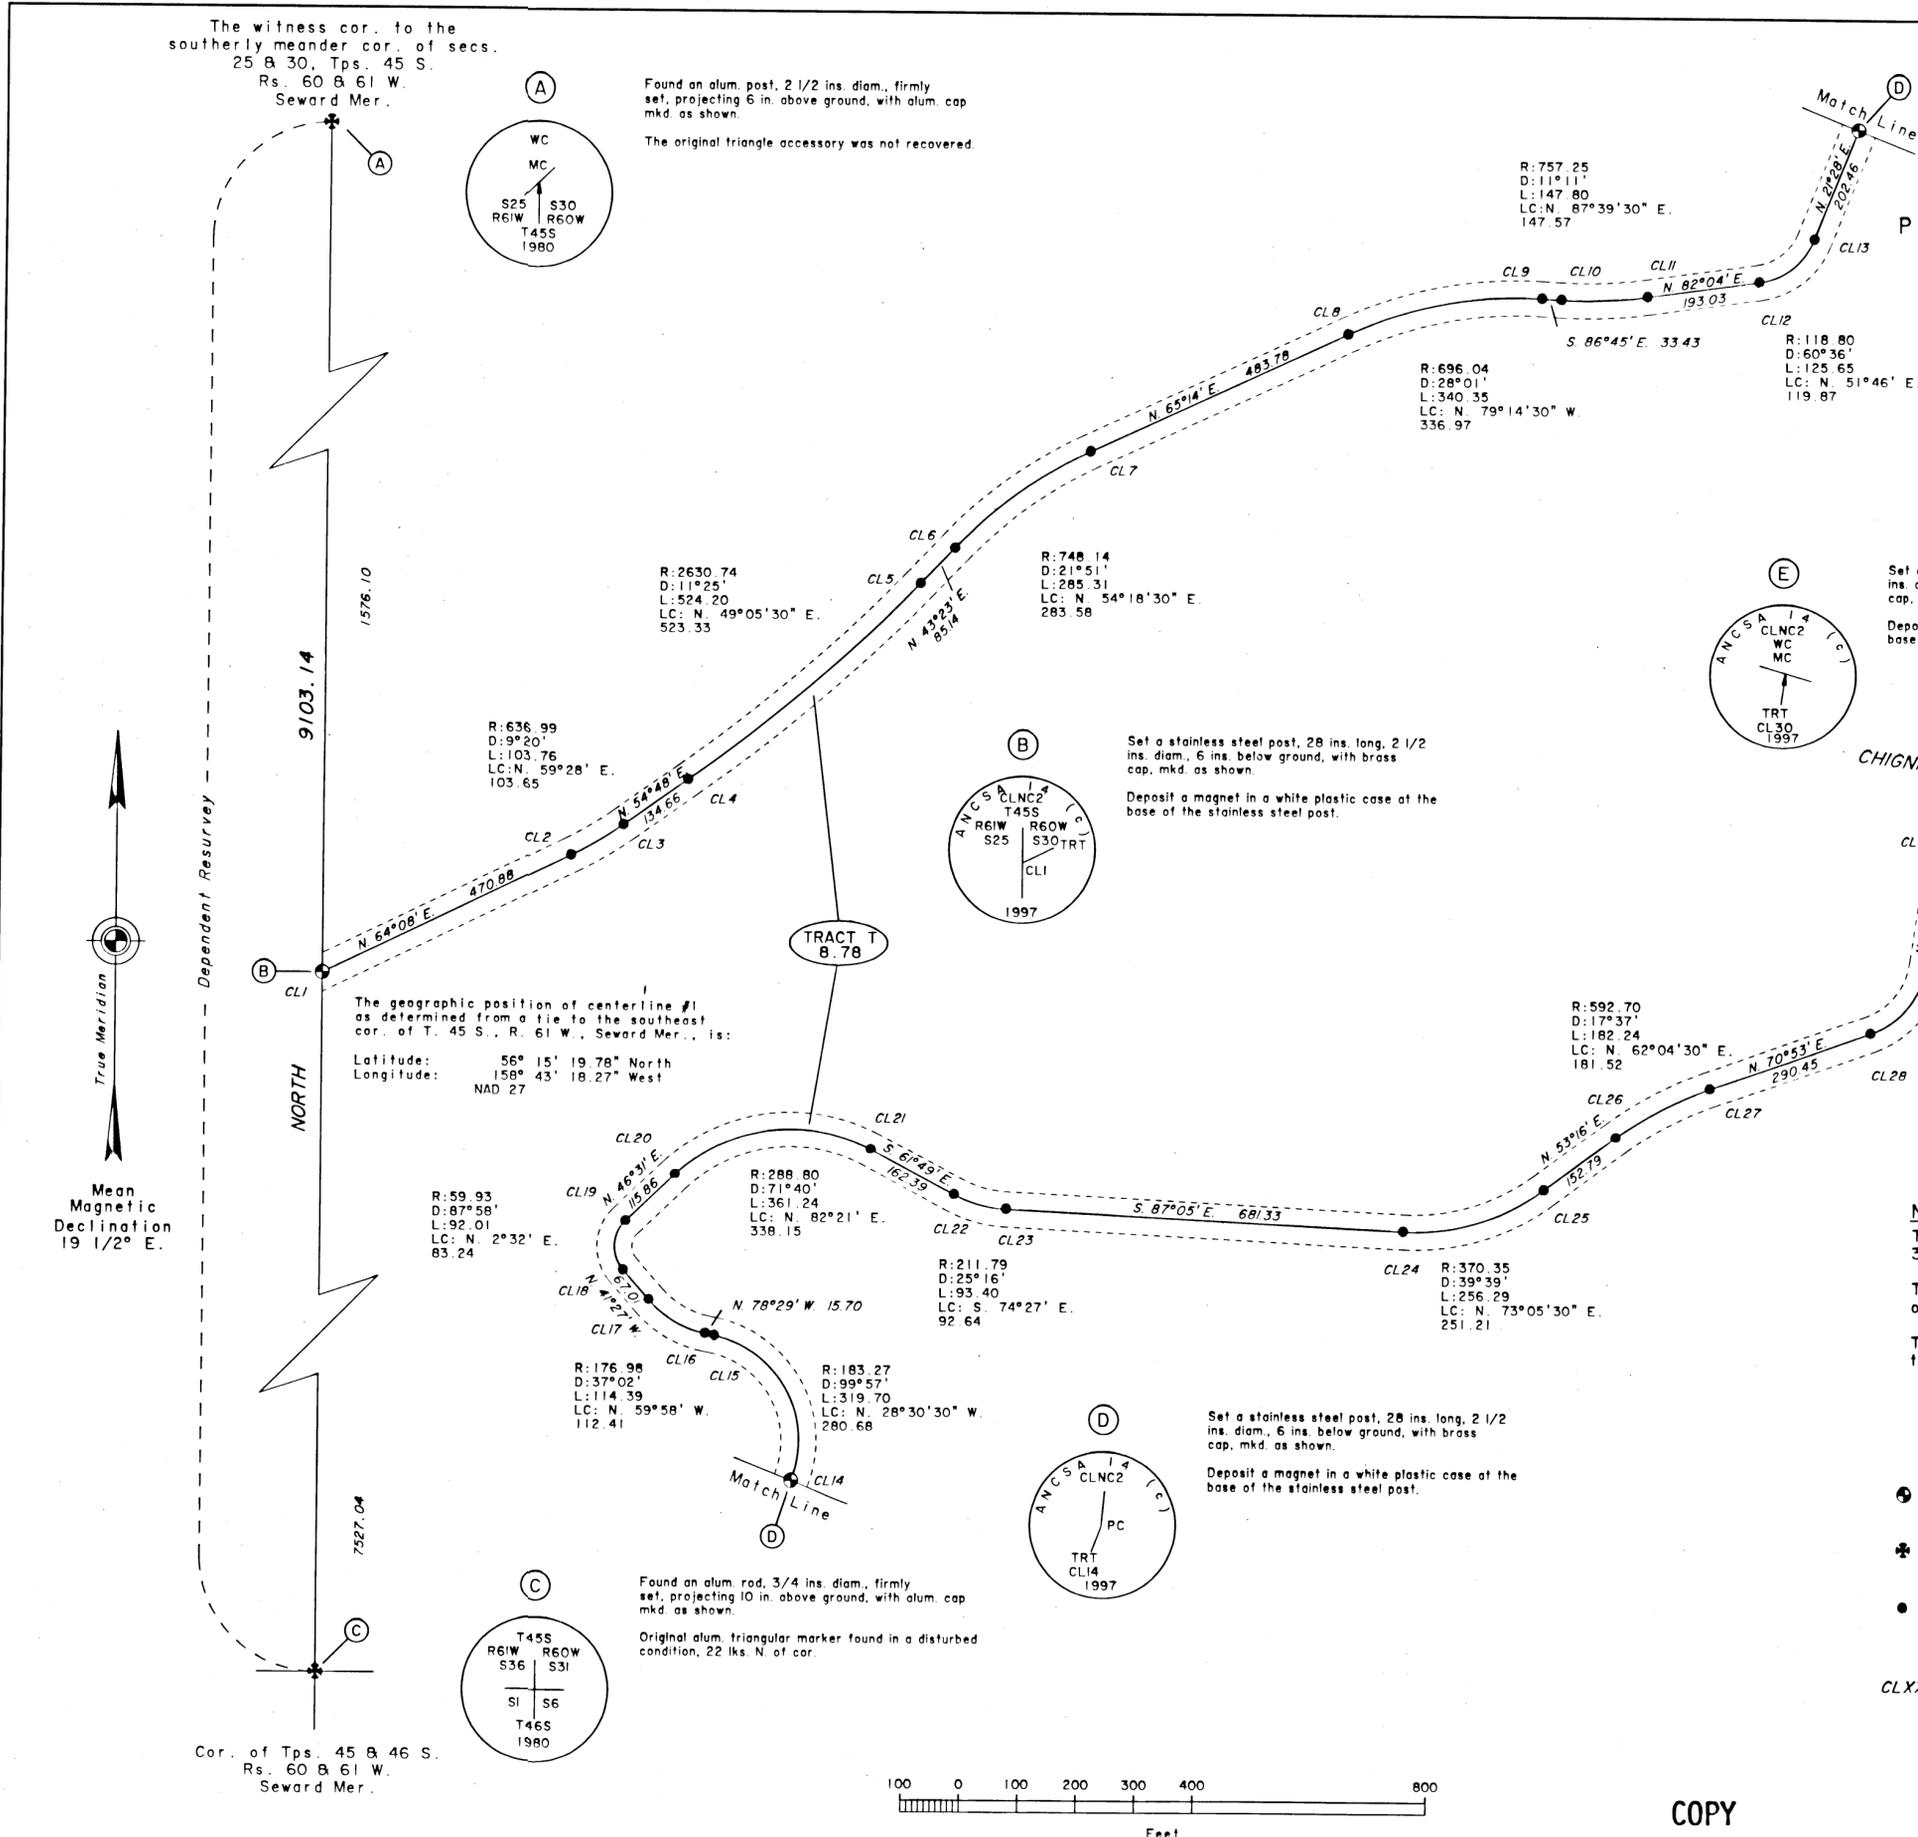


The witness cor. to the southerly meander cor. of secs. 25 & 30, Tps. 45 S., Rs. 60 & 61 W., Seward Mer.

Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 in. above ground, with alum. cap mkd. as shown.
 The original triangle accessory was not recovered.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below ground, with brass cap, mkd. as shown.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




The geographic position of centerline #1 as determined from a tie to the southeast cor. of T. 45 S., R. 61 W., Seward Mer., is:
 Latitude: 56° 15' 19.78" North
 Longitude: 158° 43' 18.27" West
 NAD 27


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below ground, with brass cap, mkd. as shown.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.



Found an alum. rod, 3/4 ins. diam., firmly set, projecting 10 in. above ground, with alum. cap mkd. as shown.
 Original alum. triangular marker found in a disturbed condition, 22 lks. N. of cor.



Cor. of Tps. 45 & 46 S., Rs. 60 & 61 W., Seward Mer.



COPY


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (c) TRACTS
J THROUGH V
P.L. 92-203 (85 STAT. 688, 702, 703)
CHIGNIK LAGOON NATIVE CORPORATION
AT
CHIGNIK LAGOON, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION


The approximate geographic position
of cor. No. 1, Tract J, identical with
cor. No. 2, Block 10, U.S. Survey
No. 4898 and cor. No. 2, U.S. Survey
No. 2180, as determined from the record
of U.S. Survey No. 4898, is:

Latitude: 56° 18' 9" North
Longitude: NAD 27 158° 31' 2" West


J
Set a stainless steel post, 28 ins. long, 2 1/2
ins. diam., 26 ins. in the ground, with brass
cap, mkd. as shown.
Dig pits, 18 X 18 X 12 ins. easterly and
northwesterly, on line, 3 ft. dist.
Deposit a magnet in a white plastic case at the
base of the stainless steel post.




K
Set a stainless steel post, 28 ins. long, 2 1/2
ins. diam., 24 ins. in the ground, with brass
cap, mkd. as shown.
Dig pits, 18 X 18 X 12 ins. southeasterly and
southwesterly, on line, 3 ft. dist.
Deposit a magnet in a white plastic case at the
base of the stainless steel post.




F
Found a galvanized iron post, 3 ins. diam.,
firmly set, projecting 12 in. above ground,
pipe is mkd. S 2180 COR 2 on northeast side,
and S 4898 C2 on the westerly side, a screw
on cap is mkd. as shown.
There is no remaining evidence of the record pits.



G
Set a stainless steel post, 28 ins. long, 2 1/2
ins. diam., 26 ins. in the ground, with brass
cap, mkd. as shown.
Dig pits, 18 X 18 X 12 ins. southeasterly and
northwesterly, on line, 3 ft. dist.
Deposit a magnet in a white plastic case at the
base of the stainless steel post.




H
Set a stainless steel post, 28 ins. long, 2 1/2
ins. diam., 25 ins. in the ground, in a collar
of stone, 24 ins. diam., with brass cap, mkd.
as shown.
Dig pits, 18 X 18 X 12 ins. northeasterly and
southwesterly, on line, 3 ft. dist.
Deposit a magnet in a white plastic case at the
base of the stainless steel post.





I
Set a stainless steel post, 28 ins. long, 2 1/2
ins. diam., 27 ins. in the ground, with brass
cap, mkd. as shown.
Dig pits, 18 X 18 X 12 ins. northeasterly and
westerly, on line, 3 ft. dist.
Deposit a magnet in a white plastic case at the
base of the stainless steel post.



MONUMENT LEGEND
⊕ Set stainless steel post as described.
⊗ Recovered monument as described.




COPY

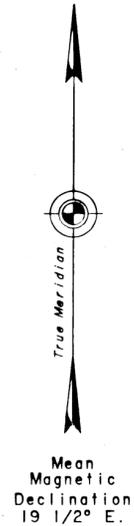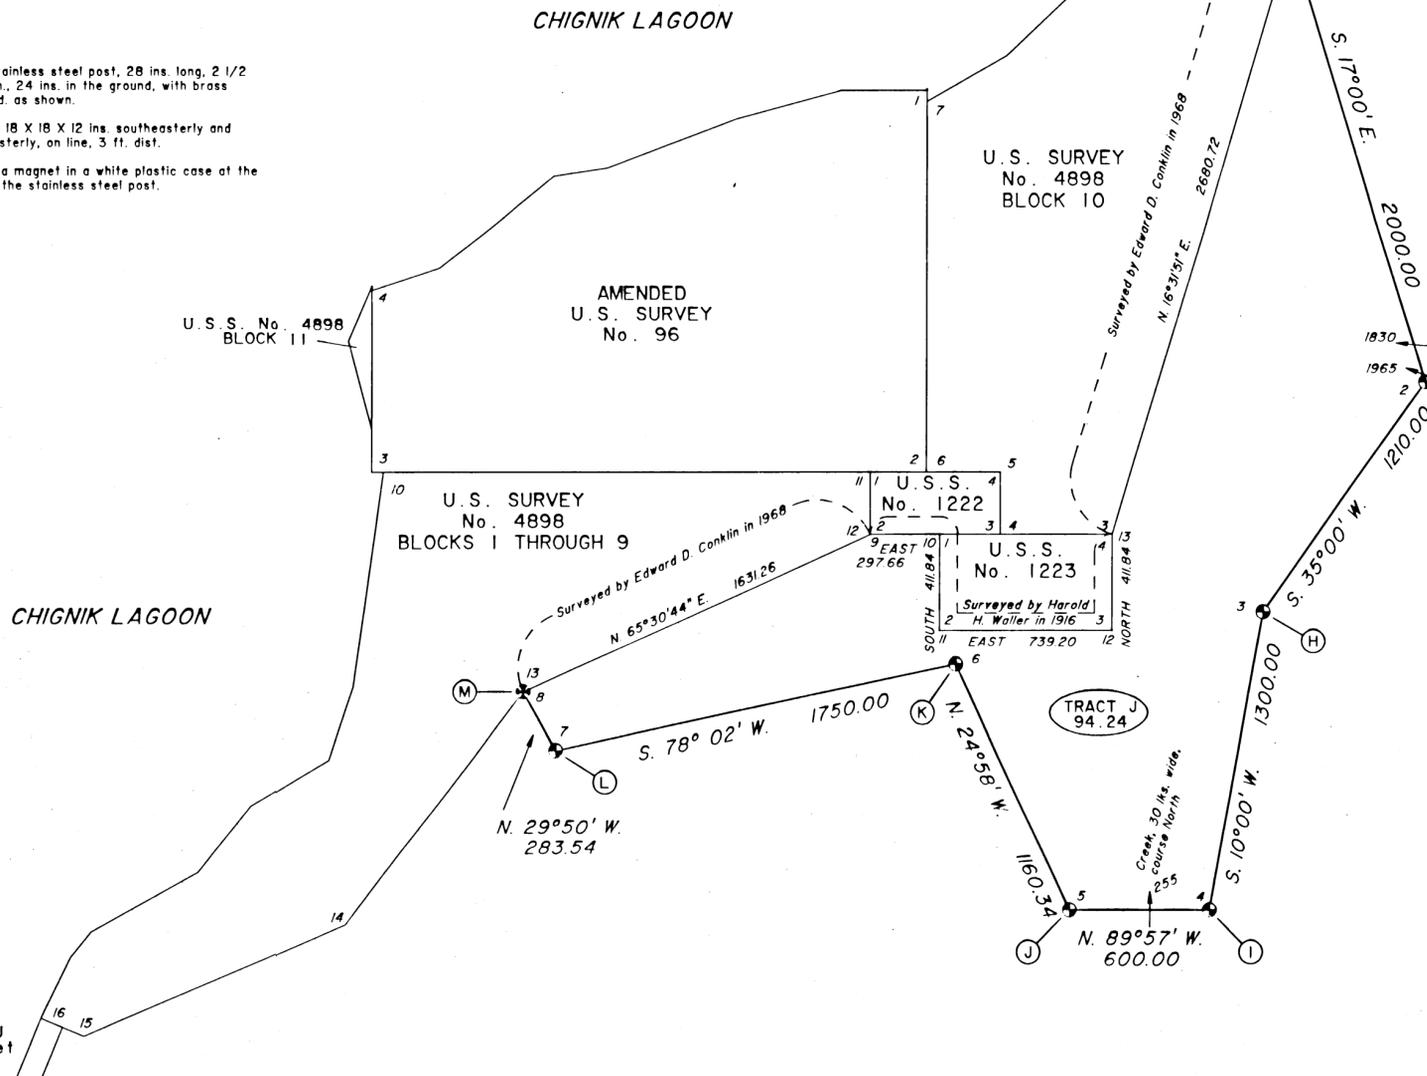


TRACT U
See Sheet
No. 4

L
Set a stainless steel post, 28 ins. long, 2 1/2
ins. diam., 20 ins. in the ground, in a collar
of stone, 24 ins. diam., with brass cap, mkd.
as shown.
Dig pits, 18 X 18 X 12 ins. southeasterly and
southwesterly, on line, 3 ft. dist.
Deposit a magnet in a white plastic case at the
base of the stainless steel post.




M
Found an iron post, 2 1/2 ins. diam.,
firmly set, projecting 4 ins. above ground,
with brass cap mkd. as shown.
There is no remaining evidence of the record pits.




ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (c) TRACTS
 J THROUGH V
 P.L. 92-203 (85 STAT. 688, 702, 703)
 CHIGNIK LAGOON NATIVE CORPORATION
 AT
 CHIGNIK LAGOON, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 in. above ground, with brass cap mkd. as shown.
 There is no remaining evidence of the record pits.



The witness cor. to cor. No. 16, U.S. Survey No. 4898, a meander cor., is determined of record bearing and distance from the original accessories.
 The most southerly cor. of the foundation of a plywood warehouse bears N. 64°30' E., 14.52 ft.
 The most westerly cor. of the foundation of a plywood warehouse bears N. 11°12' W., 15.55 ft.
 At the witness cor. Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap, mkd. as shown.

The approximate geographic position of the witness cor. to meander cor. No. 16, U.S. Survey No. 4898, as determined from the record of U.S. Survey No. 4898
 Latitude: 56° 18.1' North
 Longitude: 158° 32.7' West
 NAD 27

U.S. SURVEY No. 4898 BLOCK 9 See Sheet No. 3

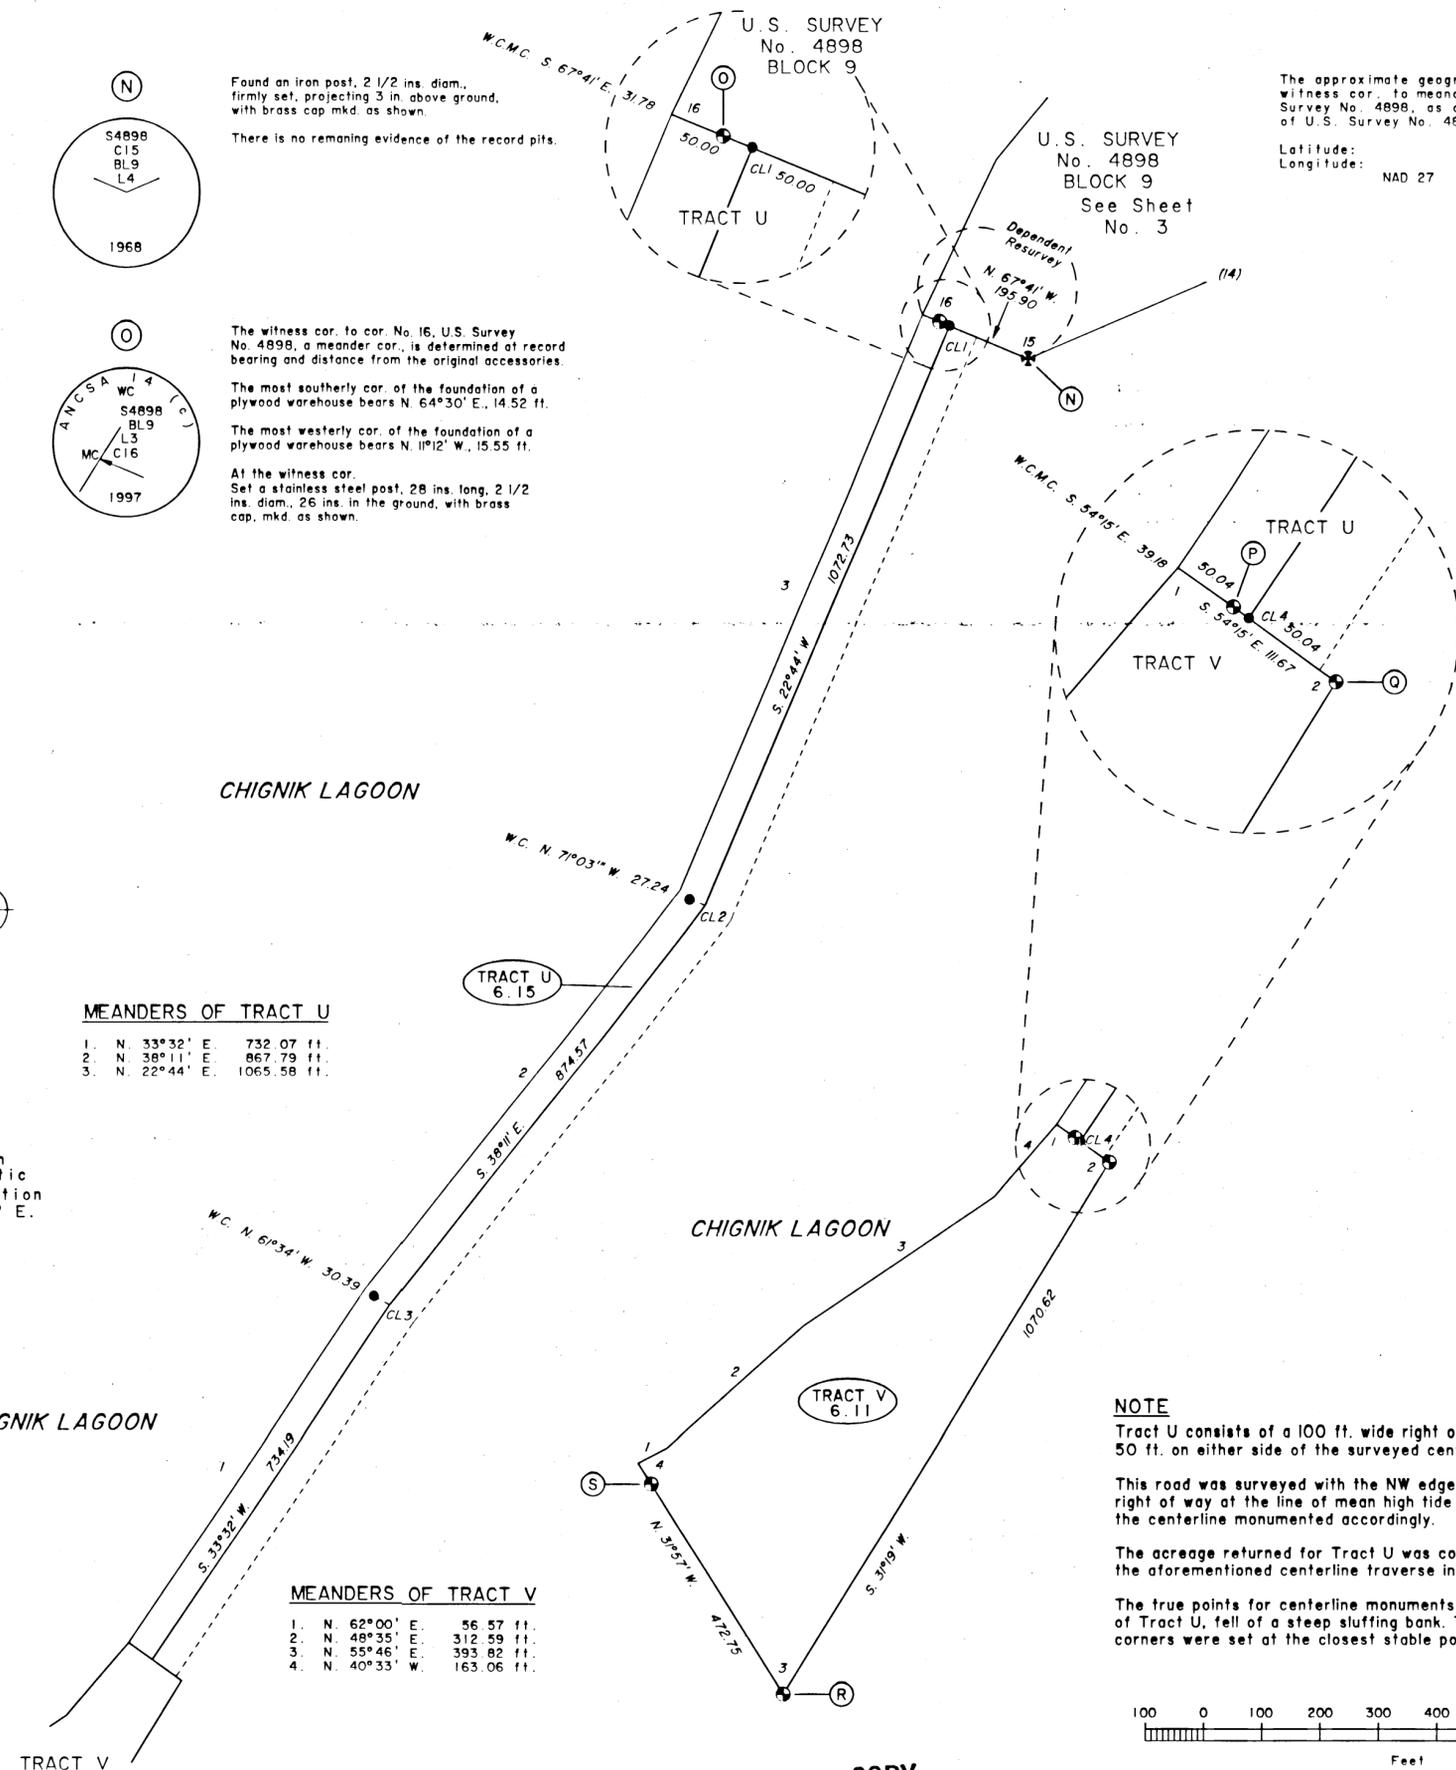

MEANDERS OF TRACT U

- N. 33°32' E. 732.07 ft.
- N. 38°11' E. 867.79 ft.
- N. 22°44' E. 1065.58 ft.

MEANDERS OF TRACT V

- N. 62°00' E. 56.57 ft.
- N. 48°35' E. 312.59 ft.
- N. 55°46' E. 393.82 ft.
- N. 40°33' W. 163.06 ft.

Monument P: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap, mkd. as shown.
 Dig pits, 18 X 18 X 12 ins. southeasterly, on line, 3 ft. and 6 ft. dist.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument Q: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap, mkd. as shown.
 Build a mound of stone, 3 ft. diam., southwesterly alongside the stainless steel post.

Monument R: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in a collar of stone, 18 ins. diam., with brass cap, mkd. as shown.
 Build a mound of stone, 3 ft. diam., northeasterly, alongside the stainless steel post.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.



Monument S: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap, mkd. as shown.
 Dig pits, 18 X 18 X 12 ins. southeasterly, on line, 3 ft. and 6 ft. dist.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.

MONUMENT LEGEND

- Set stainless steel post as described.
- ⊕ Recovered monument as described.
- Set a rebar, 30 ins. long, 6 to 8 ins. below ground, with alum. cap mkd. ANCSA 14C CLNC2 and with the appropriate Tract, Block and Lot numbers.


CLXX Represents a centerline corner.

NOTE
 Tract U consists of a 100 ft. wide right of way, 50 ft. on either side of the surveyed centerline.
 This road was surveyed with the NW edge of the right of way at the line of mean high tide and the centerline monumented accordingly.
 The acreage returned for Tract U was computed using the aforementioned centerline traverse information.
 The true points for centerline monuments Nos. 2 and 3 of Tract U, fell of a steep sluffing bank. The witness corners were set at the closest stable point available.

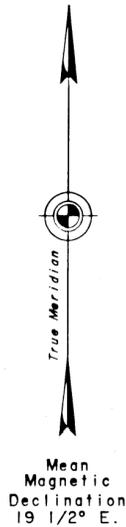

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (c) TRACTS
 J THROUGH V
 P.L. 92-203 (85 STAT. 688, 702, 703)
 CHIGNIK LAGOON NATIVE CORPORATION
 AT
 CHIGNIK LAGOON, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

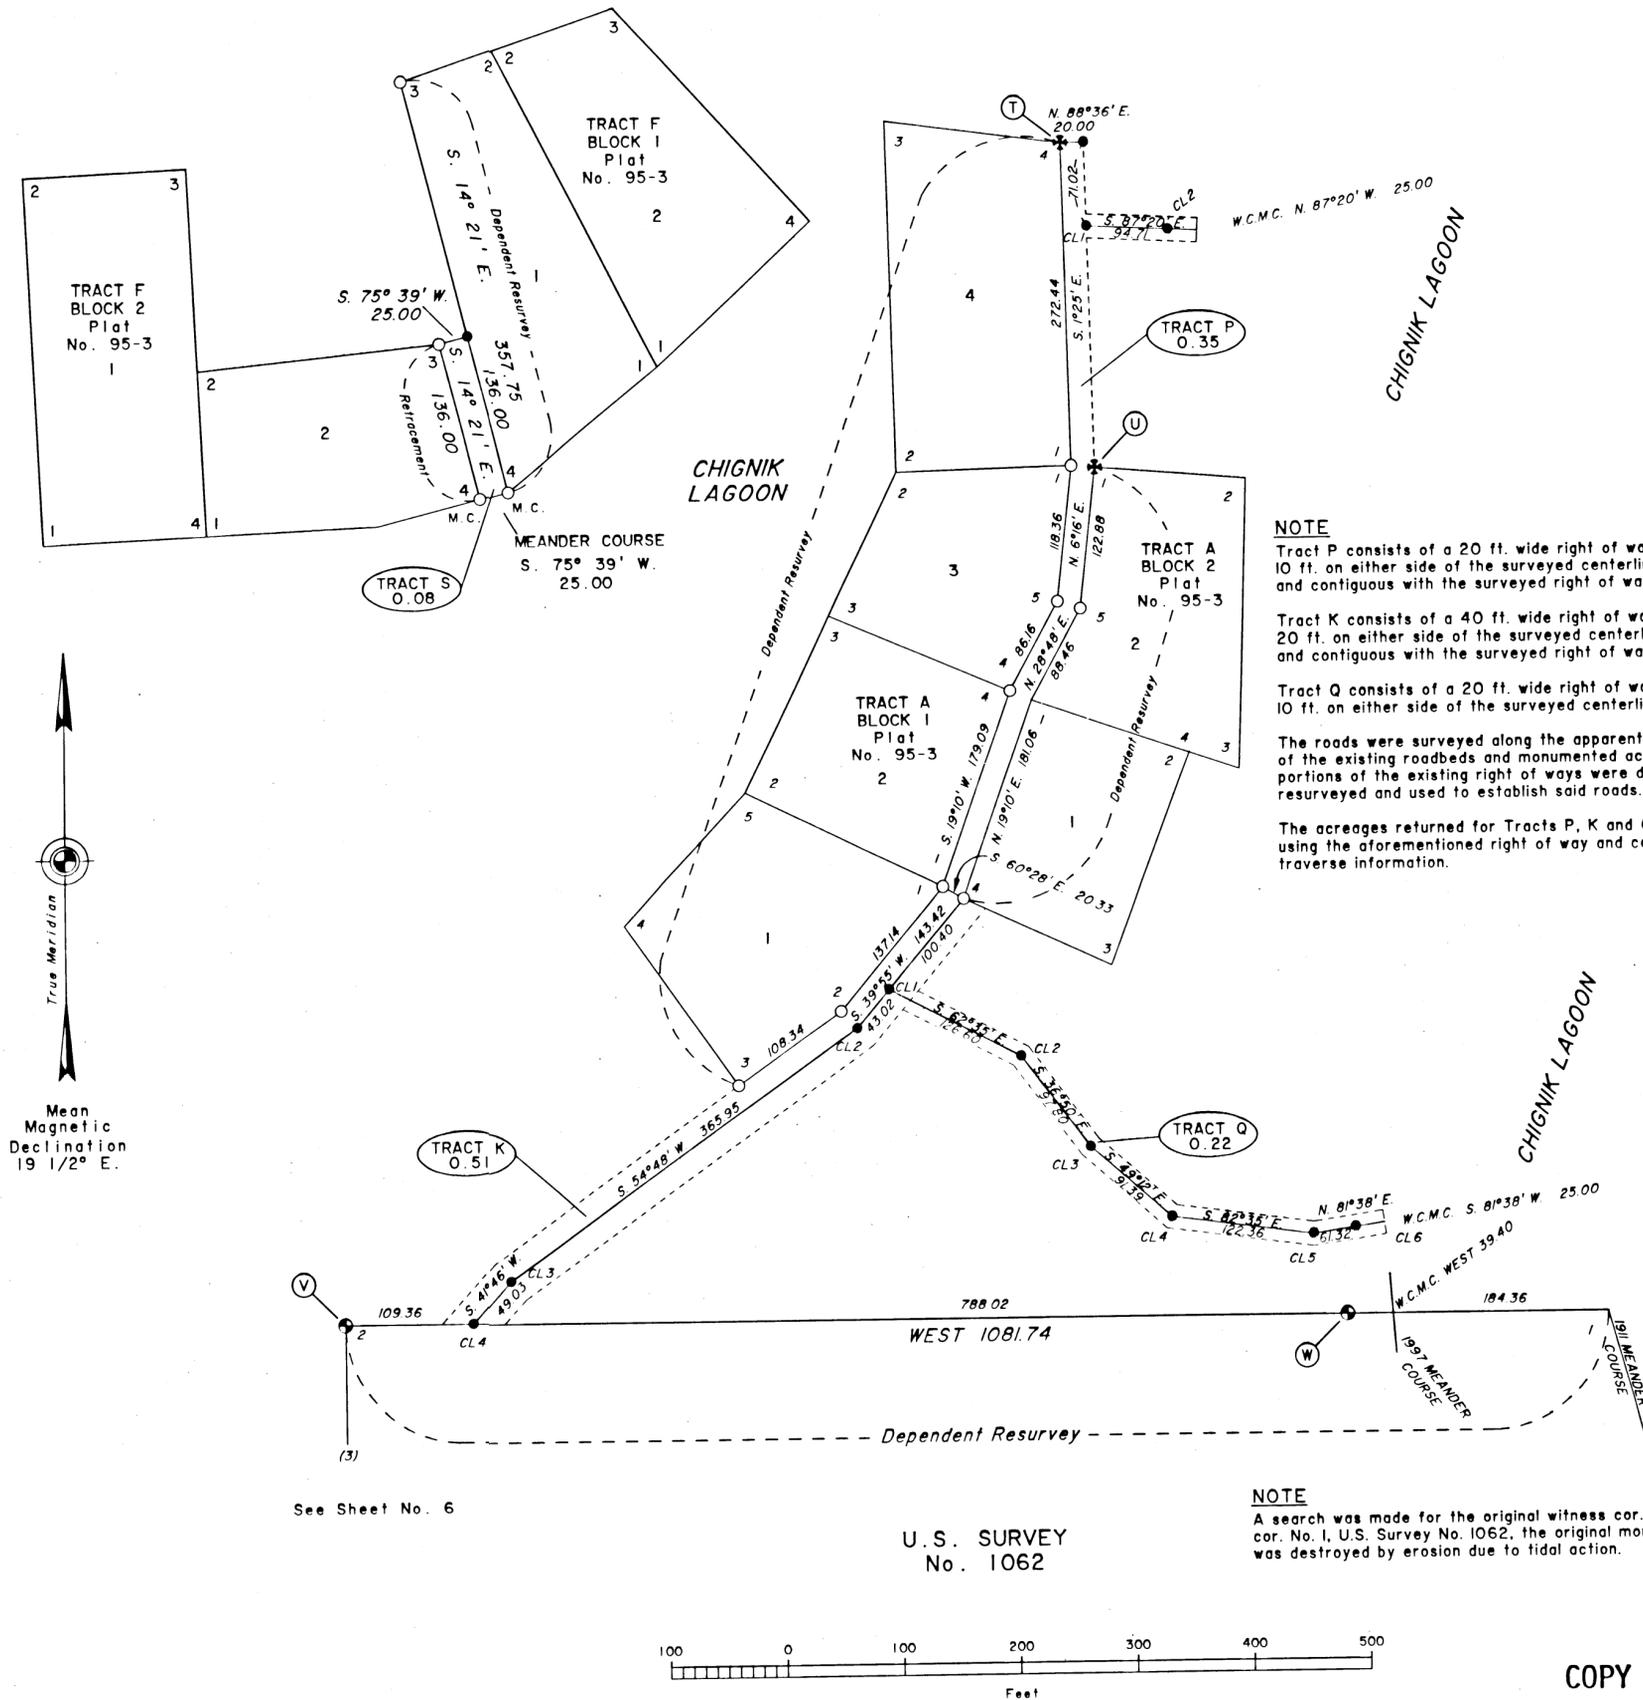

NOTE
 Tract P consists of a 20 ft. wide right of way, 10 ft. on either side of the surveyed centerline, and contiguous with the surveyed right of way.
 Tract K consists of a 40 ft. wide right of way, 20 ft. on either side of the surveyed centerline, and contiguous with the surveyed right of way.
 Tract Q consists of a 20 ft. wide right of way, 10 ft. on either side of the surveyed centerline.
 The roads were surveyed along the apparent centerline of the existing roadbeds and monumented accordingly, portions of the existing right of ways were dependently resurveyed and used to establish said roads.
 The acreages returned for Tracts P, K and Q were computed using the aforementioned right of way and centerline traverse information.

NOTE
 A search was made for the original witness cor. to cor. No. 1, U.S. Survey No. 1062, the original monument was destroyed by erosion due to tidal action.

- (T) Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 ins. above ground, with brass cap, mkd. as shown.
 The original magnet accessories were not searched for.
- (U) Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 ins. above ground, with brass cap, mkd. as shown.
 The original magnet accessories were not searched for.
- (V) Cor. No. 2, U.S. Survey No. 1062 is determined at record bearing and dist. from the witness cor. to cor. No. 3, U.S. Survey No. 1062, a meander cor. There is no remaining evidence of the record pits and mound of earth. The original iron post, 3 ins. diam., 3 ft. long, with a beveled top and mkd. S1062 COR 2 on its side was recovered in a disturbed condition NE 1/2 dist.
 At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap, mkd. as shown.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.
 Set original post inverted alongside stainless steel post.
- (W) Cor. No. 1, U.S. Survey No. 1062 is determined at record bearing from cor. No. 2, U.S. Survey No. 1062. There is no remaining evidence of the original witness cor. or its accessories.
 On record bearing from cor. No. 2, U.S. Survey No. 1062, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap, mkd. as shown.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.
 Build a mound of stone, 3 ft. base, 2 ft. high, 3 ft. west of stainless steel post.

- MONUMENT LEGEND**
- Set stainless steel post as described.
 - ✱ Recovered monument as described.
 - Set a rebar, 30 ins. long, 6 to 8 ins. below ground, with alum. cap mkd. ANCSA 14C CLNC2 and with the appropriate Tract, Block and Lot numbers.
 - Found a rebar, with alum. cap, mkd. ANCSA 14C CLC and with the appropriate Tract, Block and Lot numbers.
- CLXX Represents a centerline corner.

COPY

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (c) TRACTS
J THROUGH V
P.L. 92-203 (85 STAT. 688, 702, 703)
CHIGNIK LAGOON NATIVE CORPORATION
AT
CHIGNIK LAGOON, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

(1) See Sheet No. 5

U.S. SURVEY
No. 1062

(X) Found a galvanized iron post, 3 ins. diam.,
firmly set, projecting 12 in. above ground,
pipe is mkd. S 2715 COR 2 on south side.
There is no remaining evidence of the record pits.

(Y) Found a galvanized iron post, 3 ins. diam.,
firmly set, projecting 12 in. above ground,
pipe is mkd. S 2715 COR 1 WC on southwest side.
There is no remaining evidence of the record pits.

(Z) Found an iron post, 3 ins. diam., firmly set,
rusted off at ground level, at this point
Set a stainless steel post, 28 ins. long, 2 1/2
ins. diam., 24 ins. in the ground, with brass
cap, mkd. as shown.




Deposit a magnet in a white plastic case at the
base of the stainless steel post.
Set rusted lower 20 ins. of original post
inverted alongside stainless steel post.

There is no remaining evidence of the record pits
or mound of earth.

Dig pits, 18 X 18 X 12 ins. north, on line,
3 ft. and 6 ft. dist.

Found a stainless steel post, 2 1/2 ins. diam.,
firmly set, projecting 2 ins. above ground,
with brass cap, mkd. as shown

The original magnet accessories were not searched for.



U.S. SURVEY
No. 2715

NOTE


Tract L consists of a 40 ft. wide right of way,
20 ft. on either side of the surveyed centerline.

Tract O consists of a 20 ft. wide right of way,
10 ft. on either side of the surveyed centerline.

Tract R consists of a 20 ft. wide right of way,
10 ft. on either side of the surveyed centerline,
except where noted by the bearings and distances
on the plat and contiguous with the surveyed
right of way.


The roads were surveyed along the apparent centerline
of the existing roadbeds and monumented accordingly,
portions of the existing road right of way were
dependently resurveyed and used to establish said roads.

The acreages returned for Tracts L, O and R were computed
using the aforementioned right of way and centerline
traverse information.

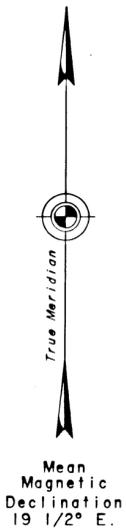

MONUMENT LEGEND

- Set stainless steel post as described
- ⊕ Recovered monument as described
- Set a rebar, 30 ins. long, 6 to 8 ins. below ground, with alum. cap mkd. ANCSA 14C CLNC2 and with the appropriate Tract, Block and Lot numbers
- Found a rebar, with alum. cap, mkd. ANCSA 14C CLC and with the appropriate Tract, Block and Lot numbers.
- CLXX Represents a centerline corner.




COPY

Alutian Islands Pt-2

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (c) TRACTS
 J THROUGH V
 P.L. 92-203 (85 STAT. 688, 702, 703)
 CHIGNIK LAGOON NATIVE CORPORATION
 AT
 CHIGNIK LAGOON, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

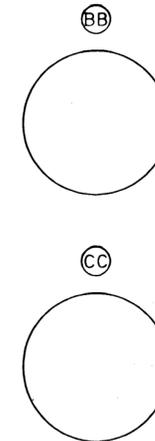


BB Found a galvanized iron post, 3 ins. diam., firmly set, projecting 12 in. above ground, pipe is mkd. S 2715 COR 3 on east side.

CC Found a galvanized iron post, 3 ins. diam., firmly set, projecting 12 in. above ground, pipe is mkd. S 2715 COR NO. 4 WC on northeast side.

99-2
 RECORDED FILE 501C
 Aleutian IIs
 4-1-92
 2:40 P
 BLM

MONUMENT LEGEND


- ✱ Recovered monument as described.
- Set a rebar, 30 ins. long, 6 to 8 ins. below ground, with alum. cap mkd. ANCSA 14C CLNC2 and with the appropriate Tract, Block and Lot numbers.
- Found a rebar, with alum. cap, mkd. ANCSA 14C CLC and with the appropriate Tract, Block and Lot numbers.
- CLXX Represents a centerline corner.

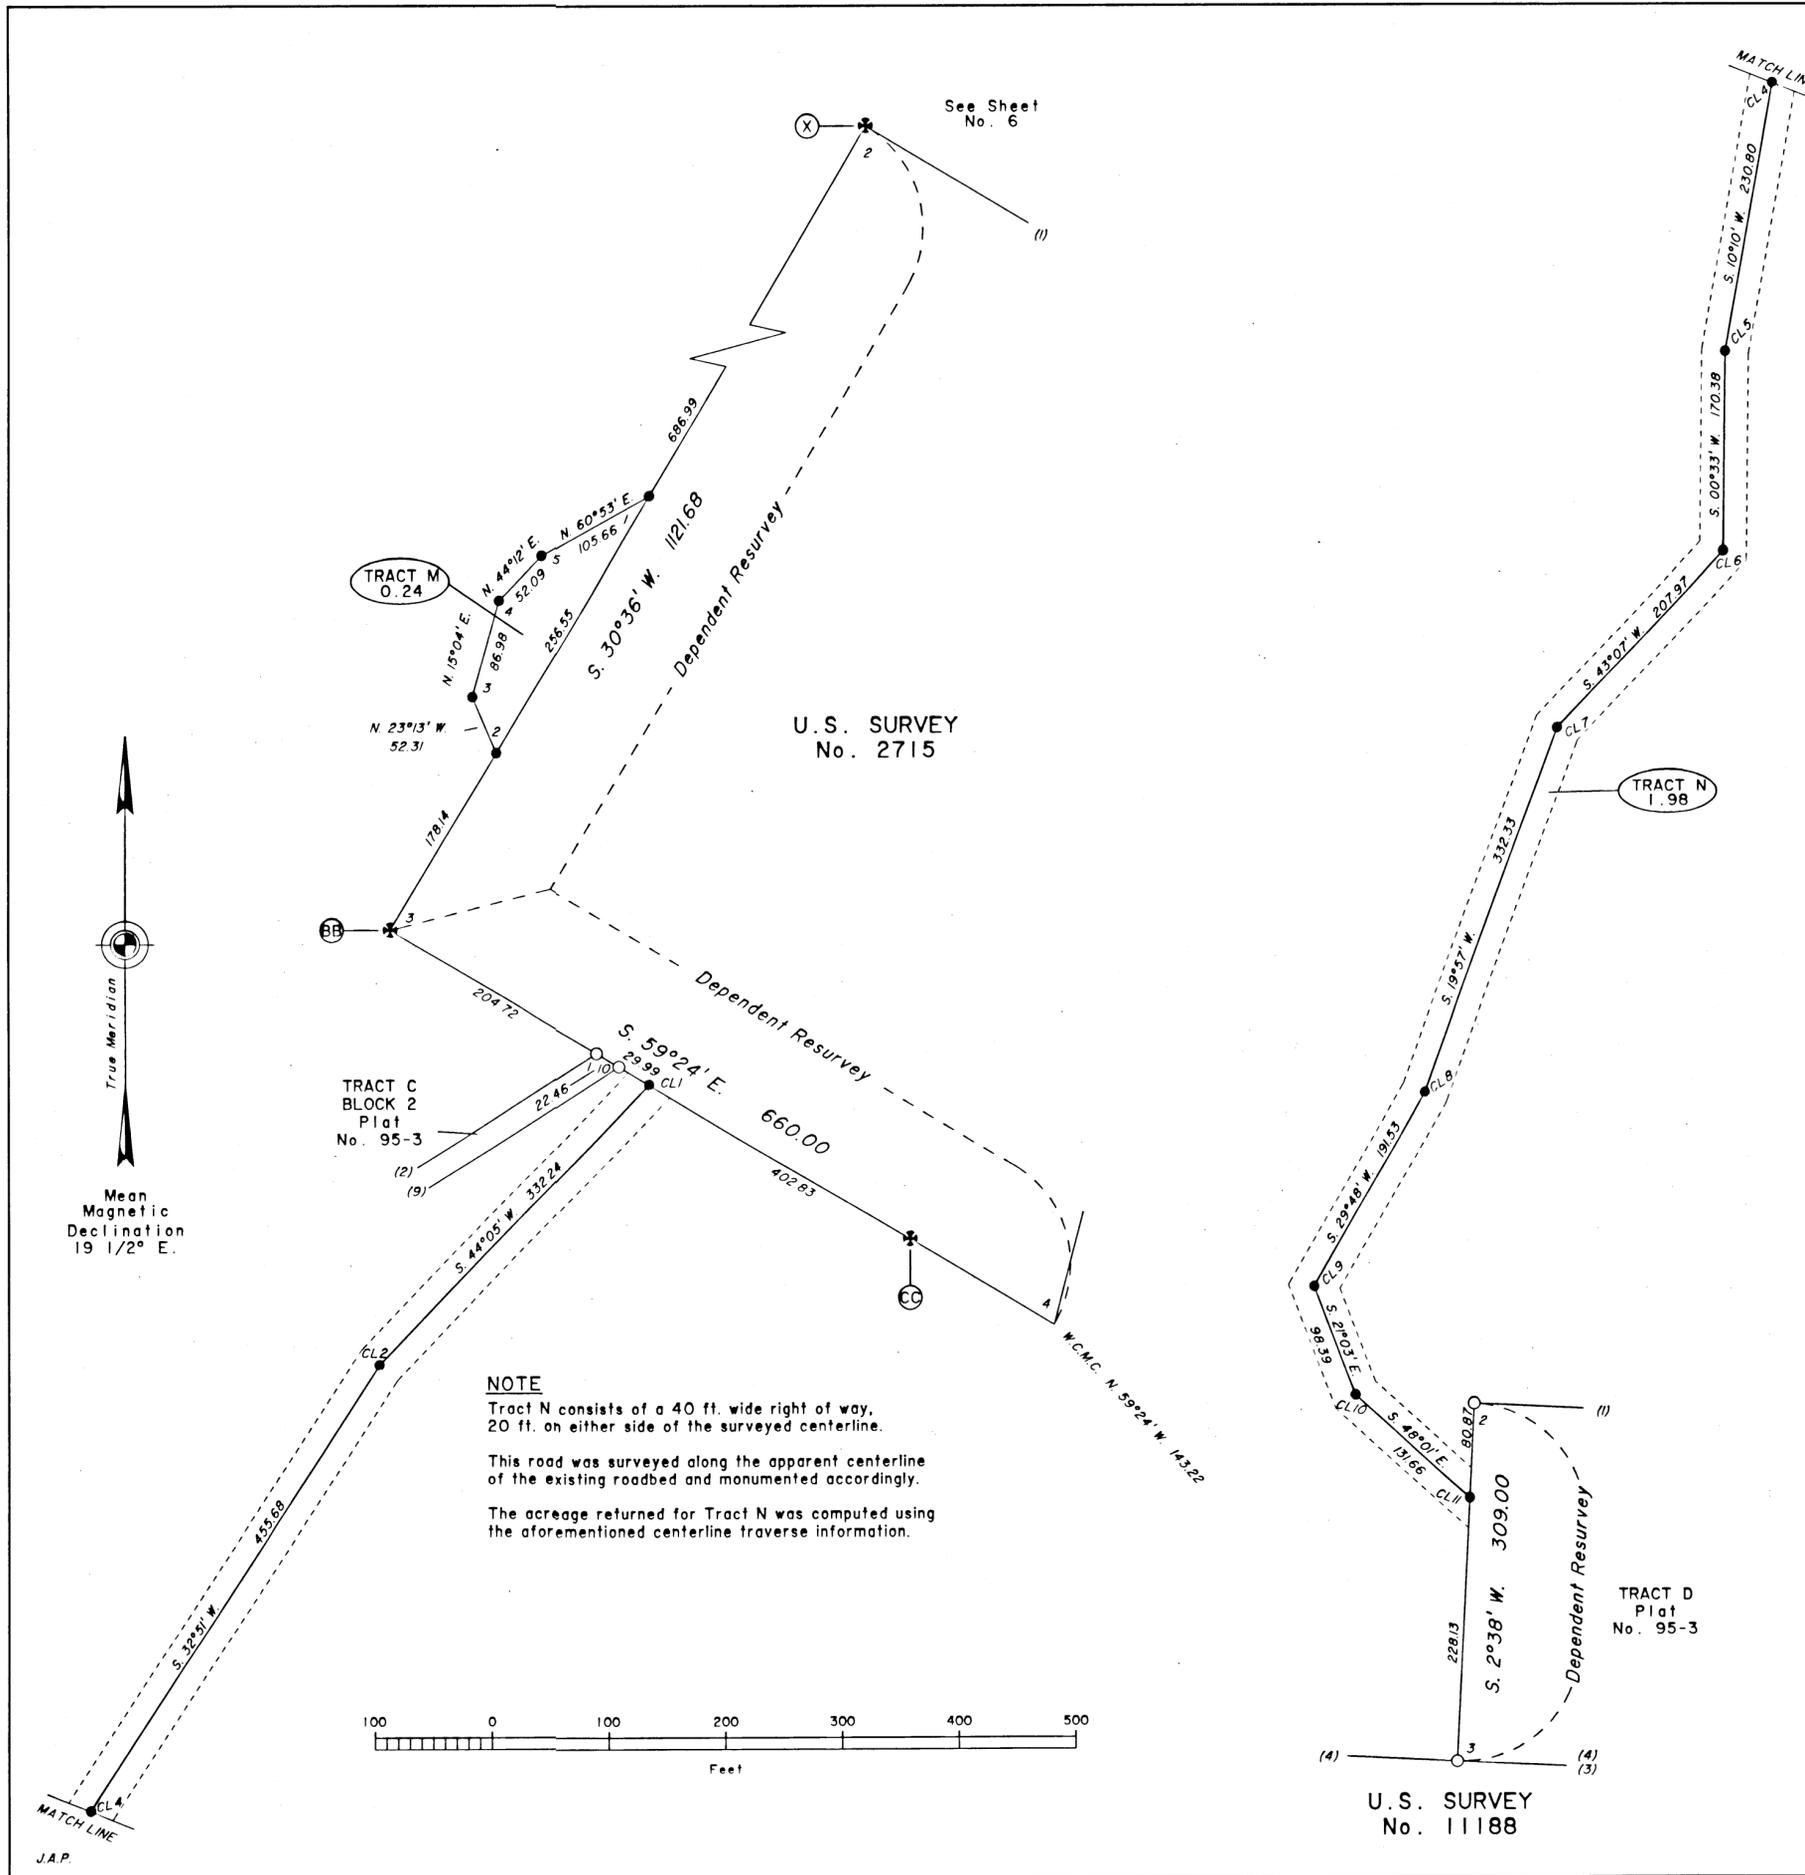

U.S. SURVEY
 No. 2715

U.S. SURVEY
 No. 11188

NOTE
 Tract N consists of a 40 ft. wide right of way, 20 ft. on either side of the surveyed centerline.
 This road was surveyed along the apparent centerline of the existing roadbed and monumented accordingly.
 The acreage returned for Tract N was computed using the aforementioned centerline traverse information.



COPY

J.A.P.