


Copy of Plat transmitted to Chitina Recording District
and recorded on June 16, 1995 as Plat # 95-9

DUPLICATE ORIGINAL

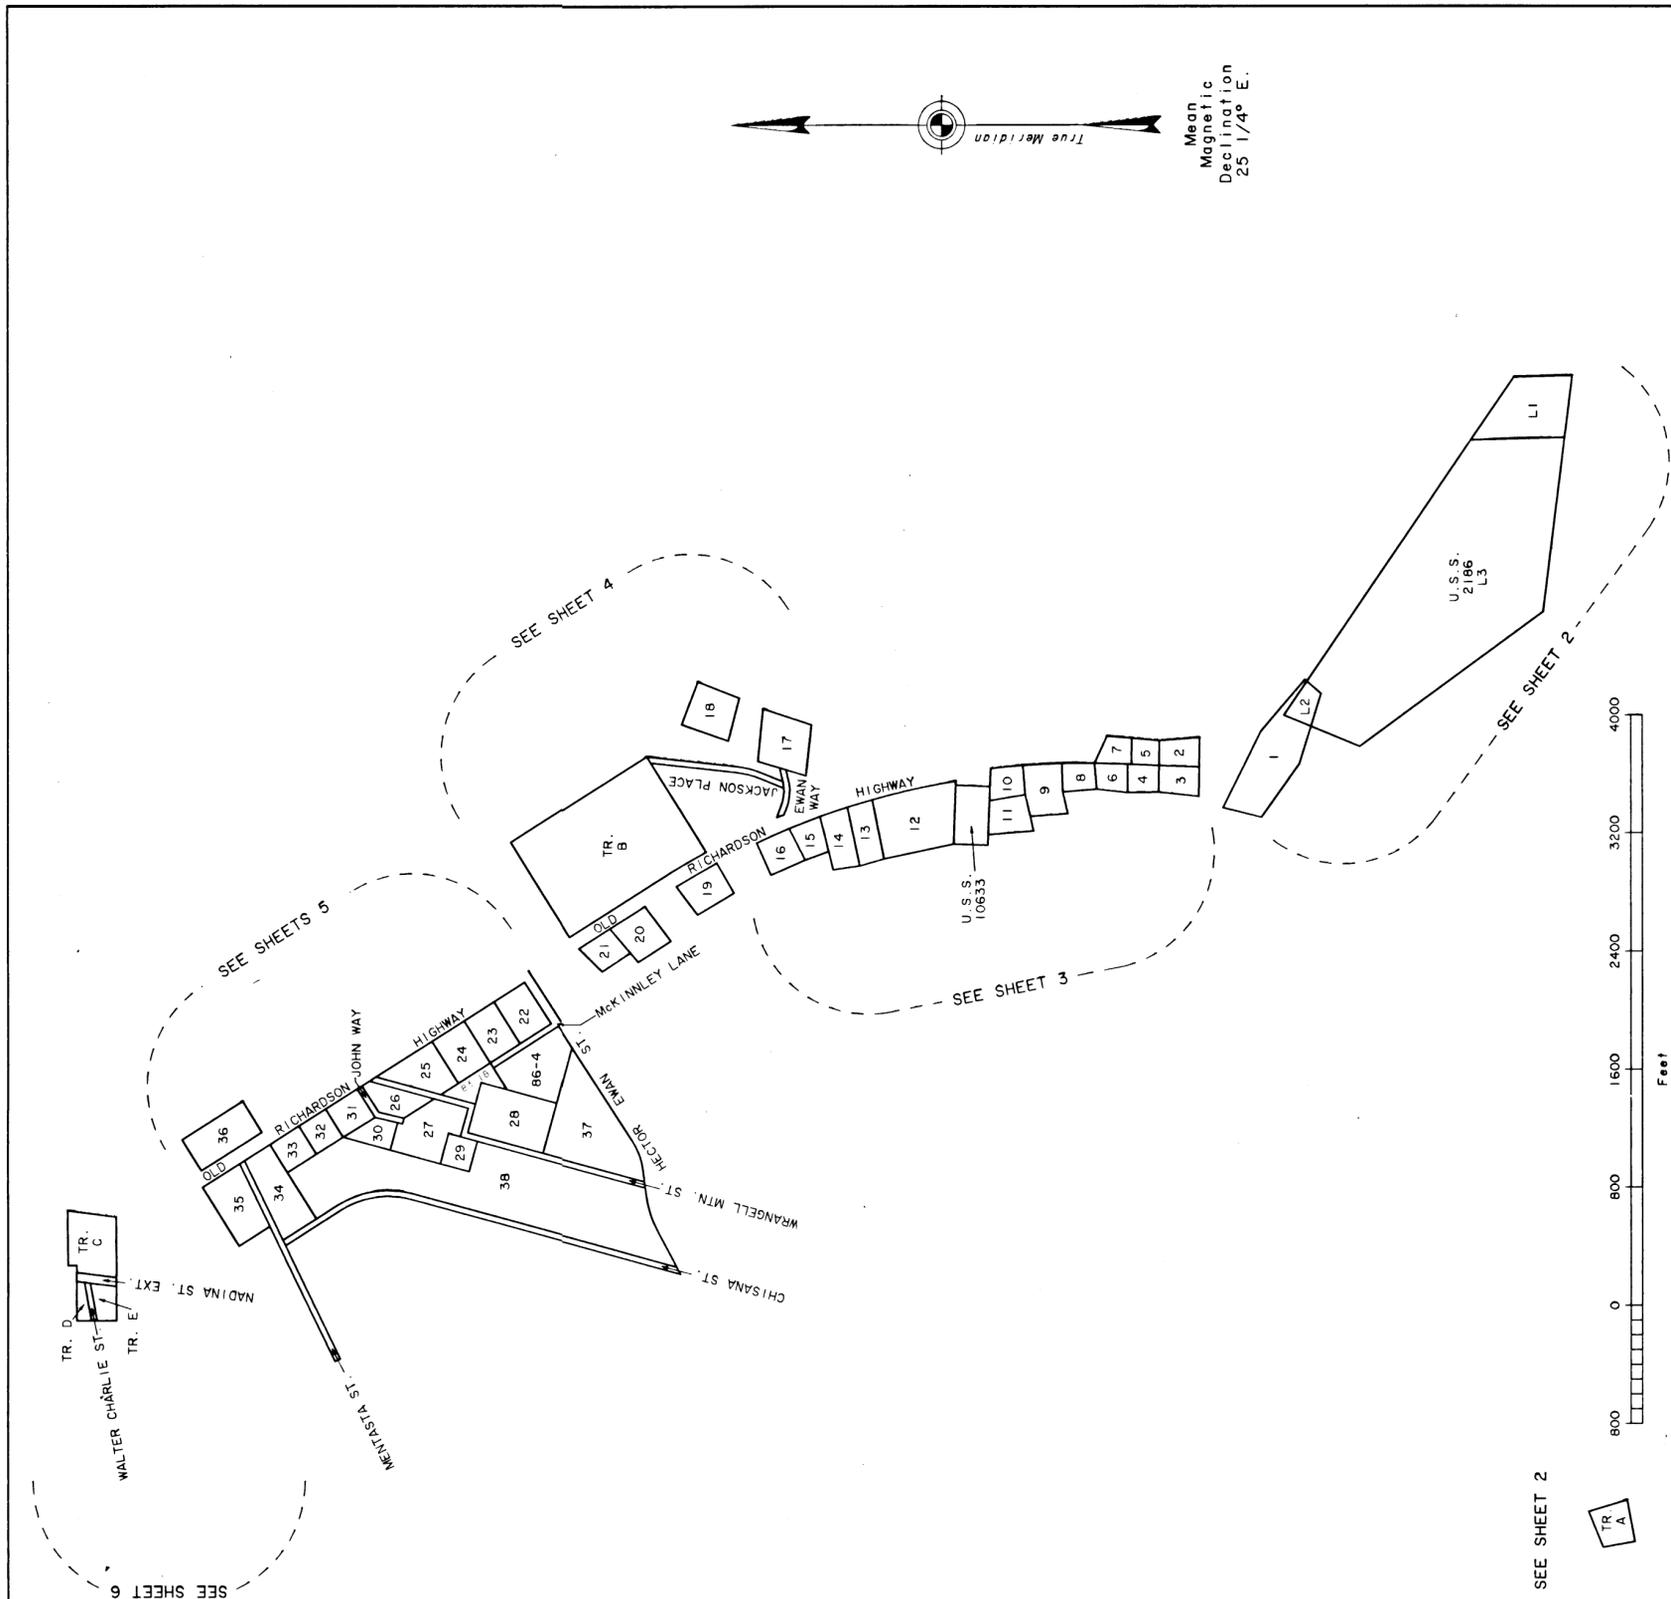

Sheet 1 of 13
ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38
AND TRACTS A, B, C, D, AND E
P.L. 92-203 (85 STAT. 688, 702, 703)
AHTNA, INC.
AT
COPPER CENTER, ALASKA
AND
THE SUBDIVISION OF U.S. SURVEY NO. 2186
AND
THE RETRACEMENT OF U.S. SURVEY NO. 10633
WITHIN
TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST
COPPER RIVER MERIDIAN, ALASKA

This plat contains the entire survey record.

The Principal Meridian through Townships Nos. 1 through 12 North, between Ranges 1 East and 1 West, of the Copper River Base and Meridian, Alaska, was surveyed by Alfred B. Lewis, U.S. Deputy Surveyor in 1905.

The resurvey of the Principal Meridian through Townships No. 2 North, Ranges 1 East and 1 West, of the Copper River Base and Meridian, Alaska, was surveyed by J. Frank Warner, U.S. Surveyor and F. Wilson Williamson, U.S. Transitman in 1911.

U.S. Survey No. 2186 was surveyed by Leonard M. Berlin, Public Land Surveyor, in 1935.

U.S. Survey No. 10633 was surveyed by Charles E. Akin, Jr., Registered Alaska Land Surveyor No. LS-5131, in 1992.

A partial subdivision of Kluti-Kaah Corporation Property was surveyed in 1979 by George R. Budka, Alaska Registered Land Surveyor No. 3437, and recorded in the Chitna Recording District, Plat No. 79-21, on October 24, 1979.

Ahtna Subdivision was surveyed in 1982 by George R. Budka, Alaska Registered Land Surveyor No. 3437, and recorded in the Chitna Recording District, Plat No. 83-15, on April 14, 1983.

Copper Basin Housing Authority, V. Sabon Property was surveyed in 1982 by George R. Budka, Alaska Registered Land Surveyor No. 3437, and recorded in the Chitna Recording District, Plat No. 83-18, on April 14, 1983.

Copper Basin Housing Authority, Roy S. Ewan/Ahtna Inc. Property was surveyed in 1985 by Robert O. Eder, Alaska Registered Land Surveyor No. 3105, and recorded in the Chitna Recording District, Plat No. 86-4, on February 21, 1986.

This survey was executed by Paul L. Moss, Cadastral Surveyor, September 2 through September 29, 1993, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated July 13, 1993, approved September 1, 1993, and Assignment Instructions dated September 2, 1993.

Field assistants were:
Christopher D. Wiita, Land Surveyor
Gregory R. Schwarz, Land Surveyor
Jerome R. Schwarz, Land Surveyor

Area: 182.09 Acres.

The azimuth was obtained from direct observations of the sun, using the hour angle method, and refers to the true meridian.

The geographic position of the corner No. 3, Lot 3, U.S. Survey No. 2186, identical to corner No. 1, U.S. Survey No. 2186, and identical with the corner of sections 7, 12, 13 and 18, Townships 2 North, Ranges 1 East and 1 West, Copper River Meridian, Alaska, as determined from record data is:
Latitude: 61° 57' 50.86" North Longitude: 145° 18' 41.75" West
NAD 27

The observed mean magnetic declination is 25 1/4° East.

This survey is situated along the Richardson Highway, approximately 1 1/2 miles northwesterly of Copper Center, Alaska, within Townships 2 North, Ranges 1 East and 1 West, Copper River Meridian, Alaska.

The land is mostly level, at a general elevation of 1150 to 1200 feet above mean sea level. The vegetation consists of scattered areas of spruce and aspen. The undergrowth consists of alder and willow brush. The soil is sandy clay loam. Access to the survey was by motor vehicle.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, sheets 1 - 13, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director
Jerry A. Pinkerton MAY 23, 1995
Date
Acting Deputy State Director for Cadastral Survey,
Alaska

I hereby certify that Lots 1 through 38, and Tracts A, B, C, D, and E, Lots 1 and 2 of U.S. Survey No. 2186 represented on this plat of survey are on lands Interim Conveyed to the Kluti-Kaah Corporation, by Interim Conveyance No. 346 issued by the United States of America, and on lands patented to Kluti-Kaah Corporation, Patent No. 50-80-0108, and on lands patented to AHTNA, Inc., Patent No. 50-83-0055 from the United States of America, said lots and tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by the ATHNA, Inc., Resolution Agreement Nos. 92-1, 92-4, 92-2, 93-7, and the Copper Center ANCSA 14(c) Map of Boundaries approved May 14, 1993.

5/19/95
Date
Ray G. ...
President, ATHNA, Inc.

I, Paul L. Moss, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 - 13, in conformity with the Special Instructions approved September 1, 1993, the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.

APRIL 17, 1995
Date
Paul L. Moss
Cadastral Surveyor

457

Copy of Plat transmitted to Chitina Recording District
and Recorded on June 16, 1995 as Plat # 95-9.

DUPLICATE

ORIGINAL



Sheet 2 of 13

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38
AND TRACTS A, B, C, D, AND E
P.L. 92-203 (85 STAT. 688, 702, 703)
AHTNA, INC.

AT
COPPER CENTER, ALASKA

AND
THE SUBDIVISION OF U.S. SURVEY NO. 2186
AND
THE RETRACEMENT OF U.S. SURVEY NO. 10633
WITHIN
TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST
COPPER RIVER MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET Nos. 1 AND 7
FOR SURVEY INFORMATION


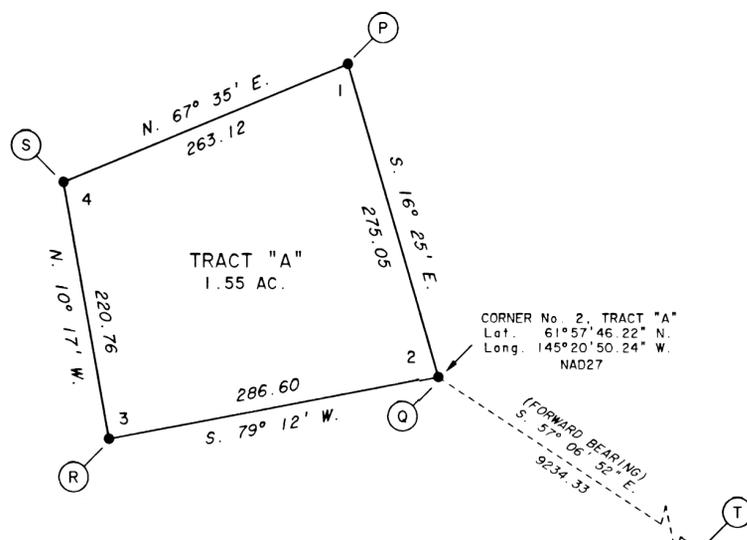


N. G. S. "KLUTINA"
Lat. 61° 56' 56.826" N.
Long. 145° 18' 08.125" W.
NAD27




SEE SHEET No. 3

LEGEND

- STAINLESS STEEL POST SET THIS SURVEY.
- RAILROAD SPIKE SET THIS SURVEY.
- ⊗ BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY.

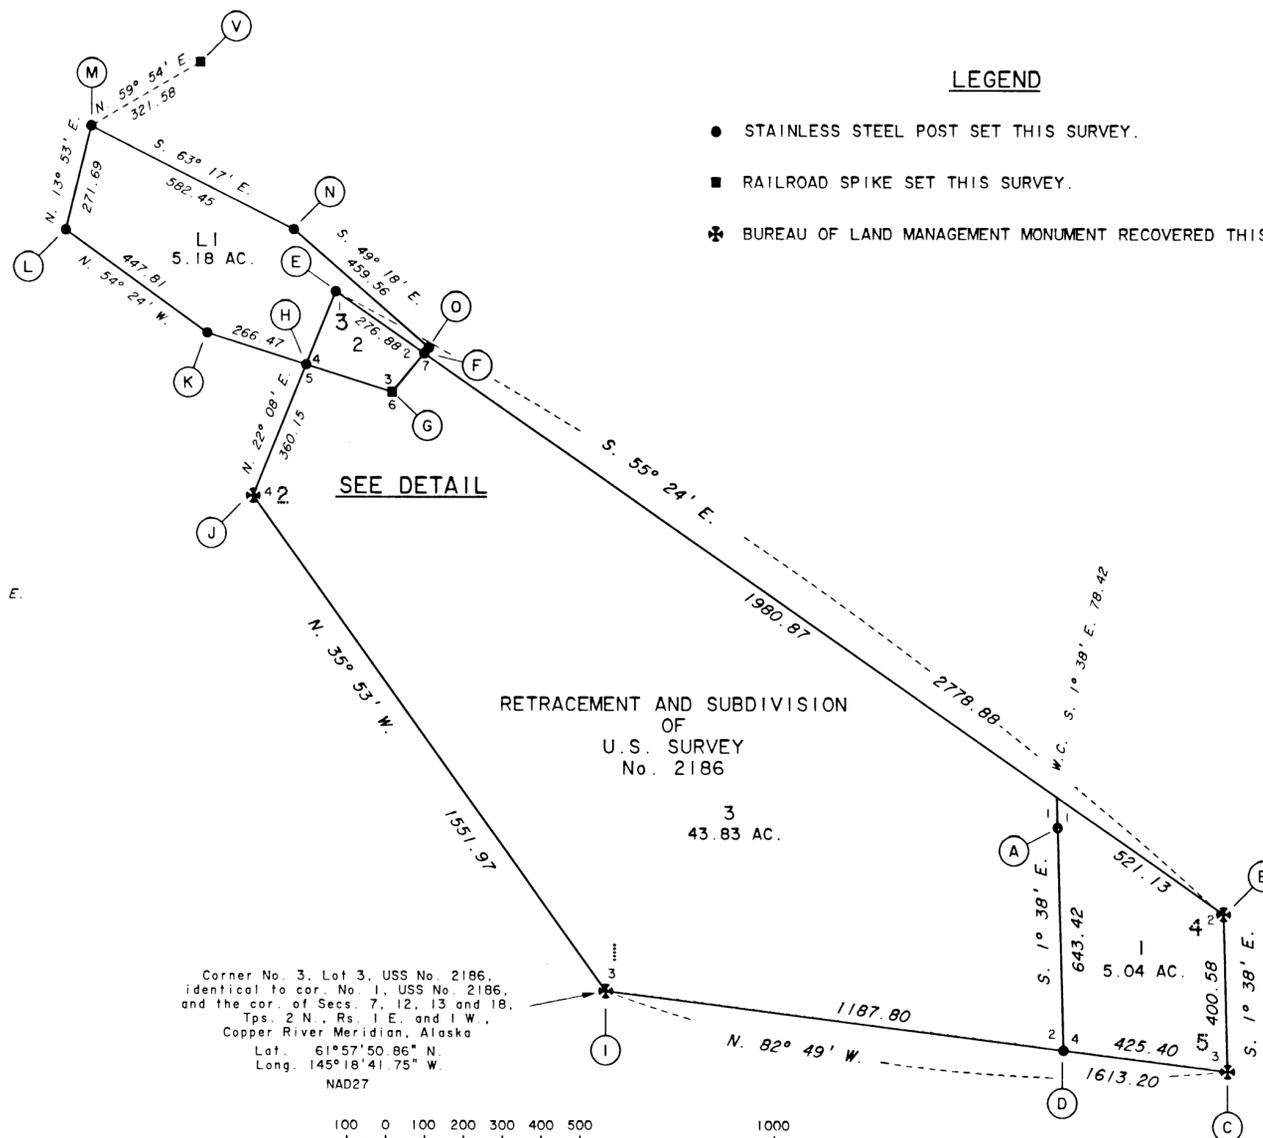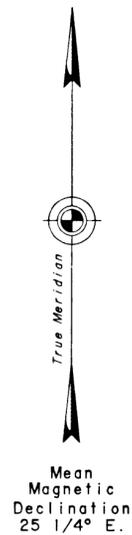

DETAIL

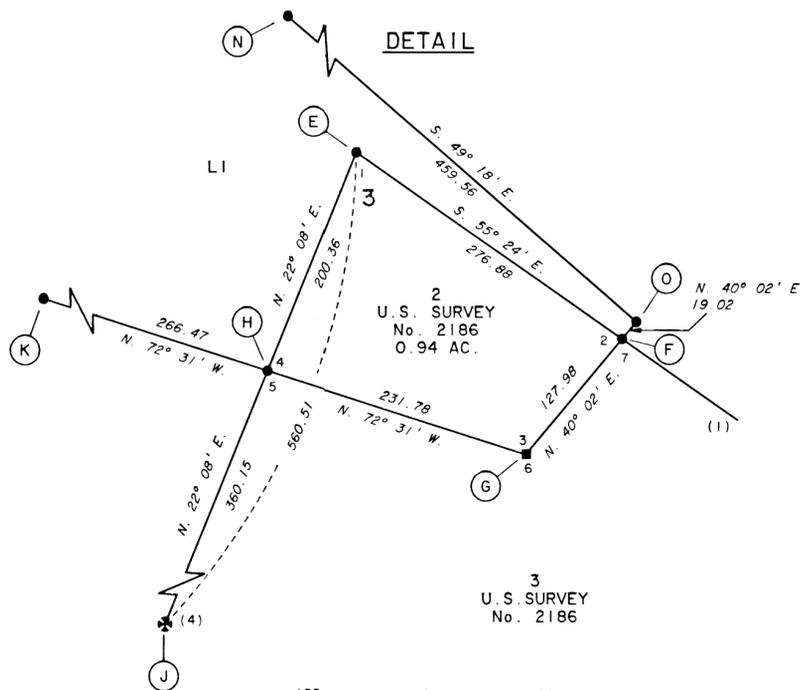

Copy of Plat transmitted to Chitina Recording District and recorded on June 16, 1995 as Plat #95-9.

DUPLICATE ORIGINAL

Sheet 3 of 13

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38
 AND TRACTS A, B, C, D, AND E
 P.L. 92-203 (85 STAT. 688, 702, 703)
 AHTNA, INC.
 AT
COPPER CENTER, ALASKA
 AND
 THE SUBDIVISION OF U.S. SURVEY NO. 2186
 AND
 THE RETRACEMENT OF U.S. SURVEY NO. 10633
 WITHIN
 TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST
 COPPER RIVER MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET Nos. 1, 7, 8 AND 9
 FOR SURVEY INFORMATION

CURVE TABLE

(C-1)	(R) = 5399.08 (LC) = N. 1°31' E. (L) = 123.40	(R) = 5349.08 (LC) = N. 1°31' E. (L) = 123.40	(R) = 5349.08 (LC) = N. 1°31' E. (L) = 123.40
(C-2)	(R) = 5399.08 (LC) = N. 0°19' W. (L) = 222.00	(R) = 5349.08 (LC) = N. 0°19' W. (L) = 222.00	(R) = 5349.08 (LC) = N. 0°19' W. (L) = 222.00
(C-3)	(R) = 5399.08 (LC) = N. 2°55' W. (L) = 268.30	(R) = 5349.08 (LC) = N. 2°55' W. (L) = 268.27	(R) = 5349.08 (LC) = N. 2°55' W. (L) = 268.27
(C-4)	(R) = 5399.08 (LC) = N. 5°31' W. (L) = 222.98	(R) = 5349.08 (LC) = N. 5°31' W. (L) = 222.96	(R) = 5349.08 (LC) = N. 5°31' W. (L) = 222.96
(C-5)	(R) = 5349.08 (LC) = N. 12°29' W. (L) = 587.82	(R) = 5349.08 (LC) = N. 12°29' W. (L) = 587.52	(R) = 5349.08 (LC) = N. 12°29' W. (L) = 587.52
(C-6)	(R) = 5349.08 (LC) = N. 16°36' W. (L) = 177.93	(R) = 5349.08 (LC) = N. 16°36' W. (L) = 177.92	(R) = 5349.08 (LC) = N. 16°36' W. (L) = 177.92
(C-7)	(R) = 5349.08 (LC) = N. 18°37' W. (L) = 198.30	(R) = 5349.08 (LC) = N. 18°37' W. (L) = 198.30	(R) = 5349.08 (LC) = N. 18°37' W. (L) = 198.30
(C-8)	(R) = 5349.08 (LC) = N. 20°53' W. (L) = 226.73	(R) = 5349.08 (LC) = N. 20°53' W. (L) = 226.73	(R) = 5349.08 (LC) = N. 20°53' W. (L) = 226.73
(C-9)	(R) = 5349.08 (LC) = N. 23°24' W. (L) = 243.31	(R) = 5349.08 (LC) = N. 23°24' W. (L) = 243.31	(R) = 5349.08 (LC) = N. 23°24' W. (L) = 243.31


LEGEND

- STAINLESS STEEL POST SET THIS SURVEY.
- RAILROAD SPIKE SET THIS SURVEY.
- ✱ BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY.

LINE TABLE

(L1)	N. 2° 11' E., 188.61
(L2)	N. 2° 11' E., 27.08
(L3)	N. 2° 11' E., 103.76
(L4)	S. 76° 53' W., 100.08
(L5)	N. 87° 53' W., 121.66
(L6)	N. 87° 53' W., 28.92

SEE SHEET No. 4

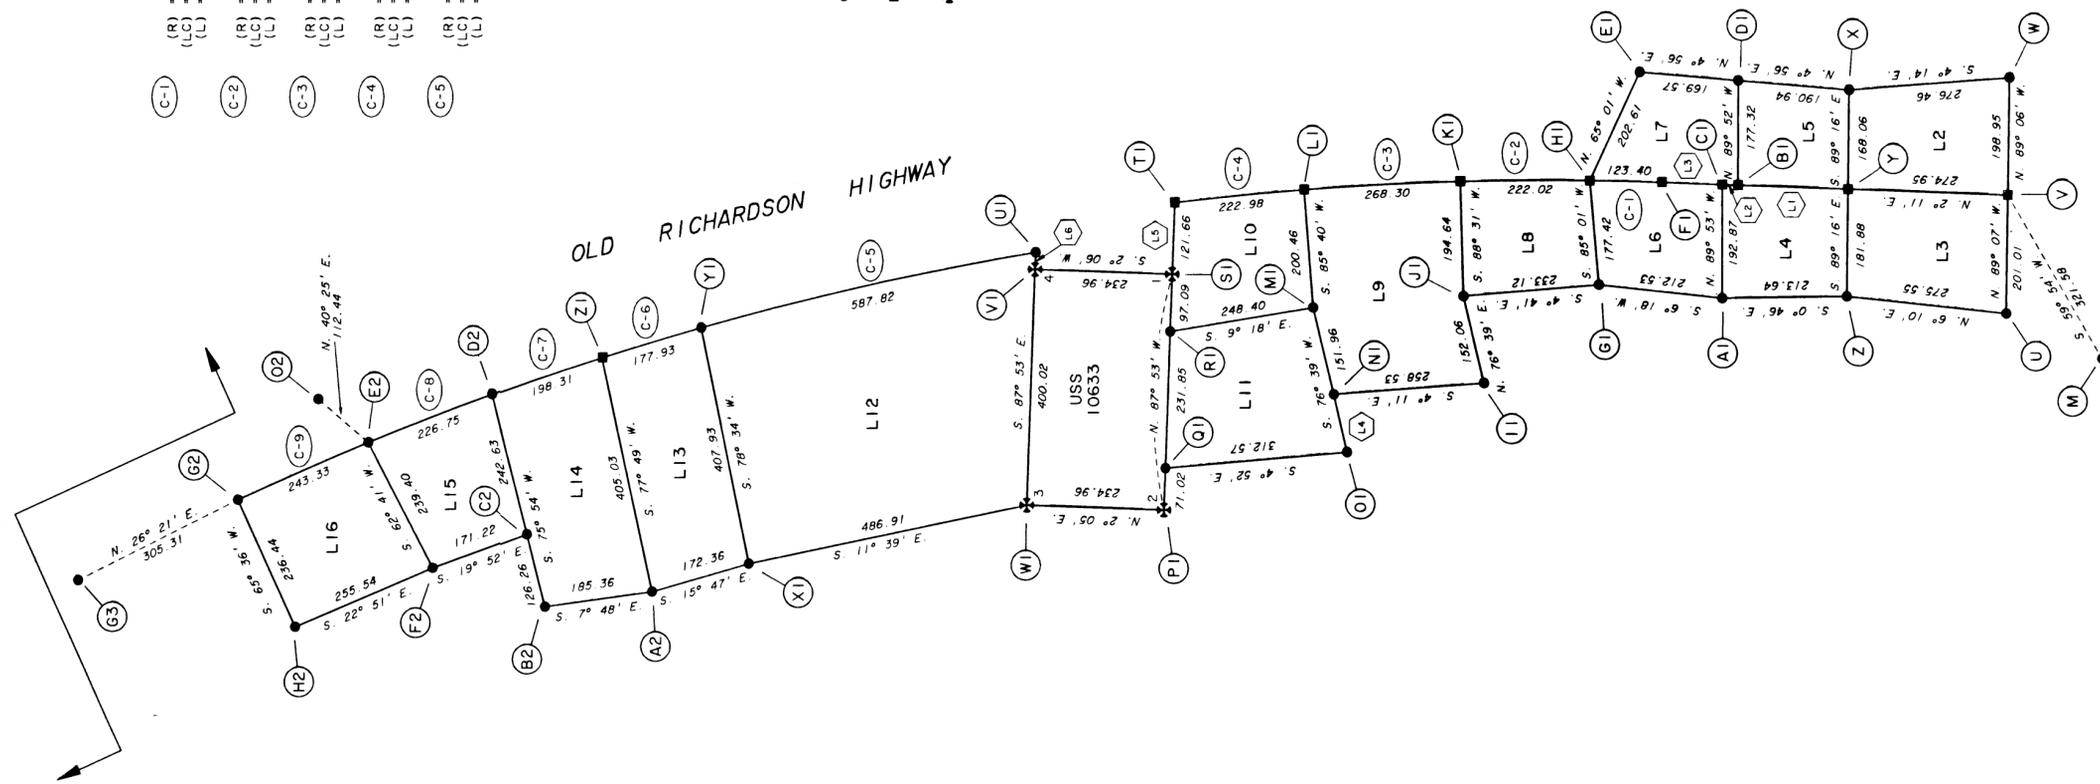


AREA TABLE

L2	1.16 ACRES
L3	1.21 ACRES
L4	0.92 ACRES
L5	0.75 ACRES
L7	0.89 ACRES
L8	0.97 ACRES
L9	2.09 ACRES
L10	1.13 ACRES
L11	1.54 ACRES
L12	5.15 ACRES
L13	1.63 ACRES
L14	1.10 ACRES
L15	1.10 ACRES
L16	1.37 ACRES



Mean
Magnetic
Declination
25 1/4° E.

SEE SHEET No. 2



Copy of Plat transmitted to Chitina Recording District
and recorded on June 16, 1995 as Plat # 95-9.

DUPLICATE ORIGINAL

Sheet 4 of 13

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38
AND TRACTS A, B, C, D, AND E
P.L. 92-203 (85 STAT. 688, 702, 703)
AHTNA, INC.

AT
COPPER CENTER, ALASKA

AND
THE SUBDIVISION OF U.S. SURVEY NO. 2186
AND
THE RETRACEMENT OF U.S. SURVEY NO. 10633
WITHIN
TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST
COPPER RIVER MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET Nos. 1, 9 AND 10
FOR SURVEY INFORMATION

LINE TABLE

L7	N. 16° 22' E., 46.01
L8	N. 76° 45' E., 70.64
L9	N. 69° 20' W., 53.47
L10	S. 69° 20' E., 90.80
L11	N. 76° 45' E., 93.38
L12	S. 21° 50' W., 142.38
L13	N. 21° 50' E., 165.79
L14	S. 57° 48' W., 51.04
L15	S. 49° 18' W., 83.31

AREA TABLE

L17	- 2.74 ACRES
L18	- 2.24 ACRES
L19	- 1.66 ACRES
L20	- 1.85 ACRES
L21	- 1.19 ACRES

LEGEND


- STAINLESS STEEL POST SET THIS SURVEY.
- RAILROAD SPIKE SET THIS SURVEY.
- ⊗ BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY.
- ▨ UTILITY EASEMENT 35 FEET WIDE.

RIGHTS-OF-WAY


EWAN WAY RIGHT-OF-WAY, 40 FT. WIDE, ENCOMPASSES 0.31 ACRES.
JACKSON PLACE RIGHT-OF-WAY, 40 FT. WIDE, ENCOMPASSES 0.87 ACRES.

CURVE TABLE

C-10	(R) = 320.00 (LC) = N 86°18' W. 186.68 (L) = 189.43	C-14	(R) = 680.00 (LC) = N 14°01' E. 184.65 (L) = 185.22
C-11	(R) = 5449.08 (LC) = N 22°21' W. 54.71 (L) = 54.71	C-15	(R) = 720.00 (LC) = N 14°01' E. 195.51 (L) = 196.12
C-12	(R) = 280.00 (LC) = S 81°33' E. 118.46 (L) = 119.36	C-16	(R) = 5349.08 (LC) = N 29°41' W. 319.24 (L) = 319.29
C-13	(R) = 280.00 (LC) = N 81°30' E. 46.34 (L) = 46.39	C-17	(R) = 5449.08 (LC) = N 30°15' W. 371.70 (L) = 371.78

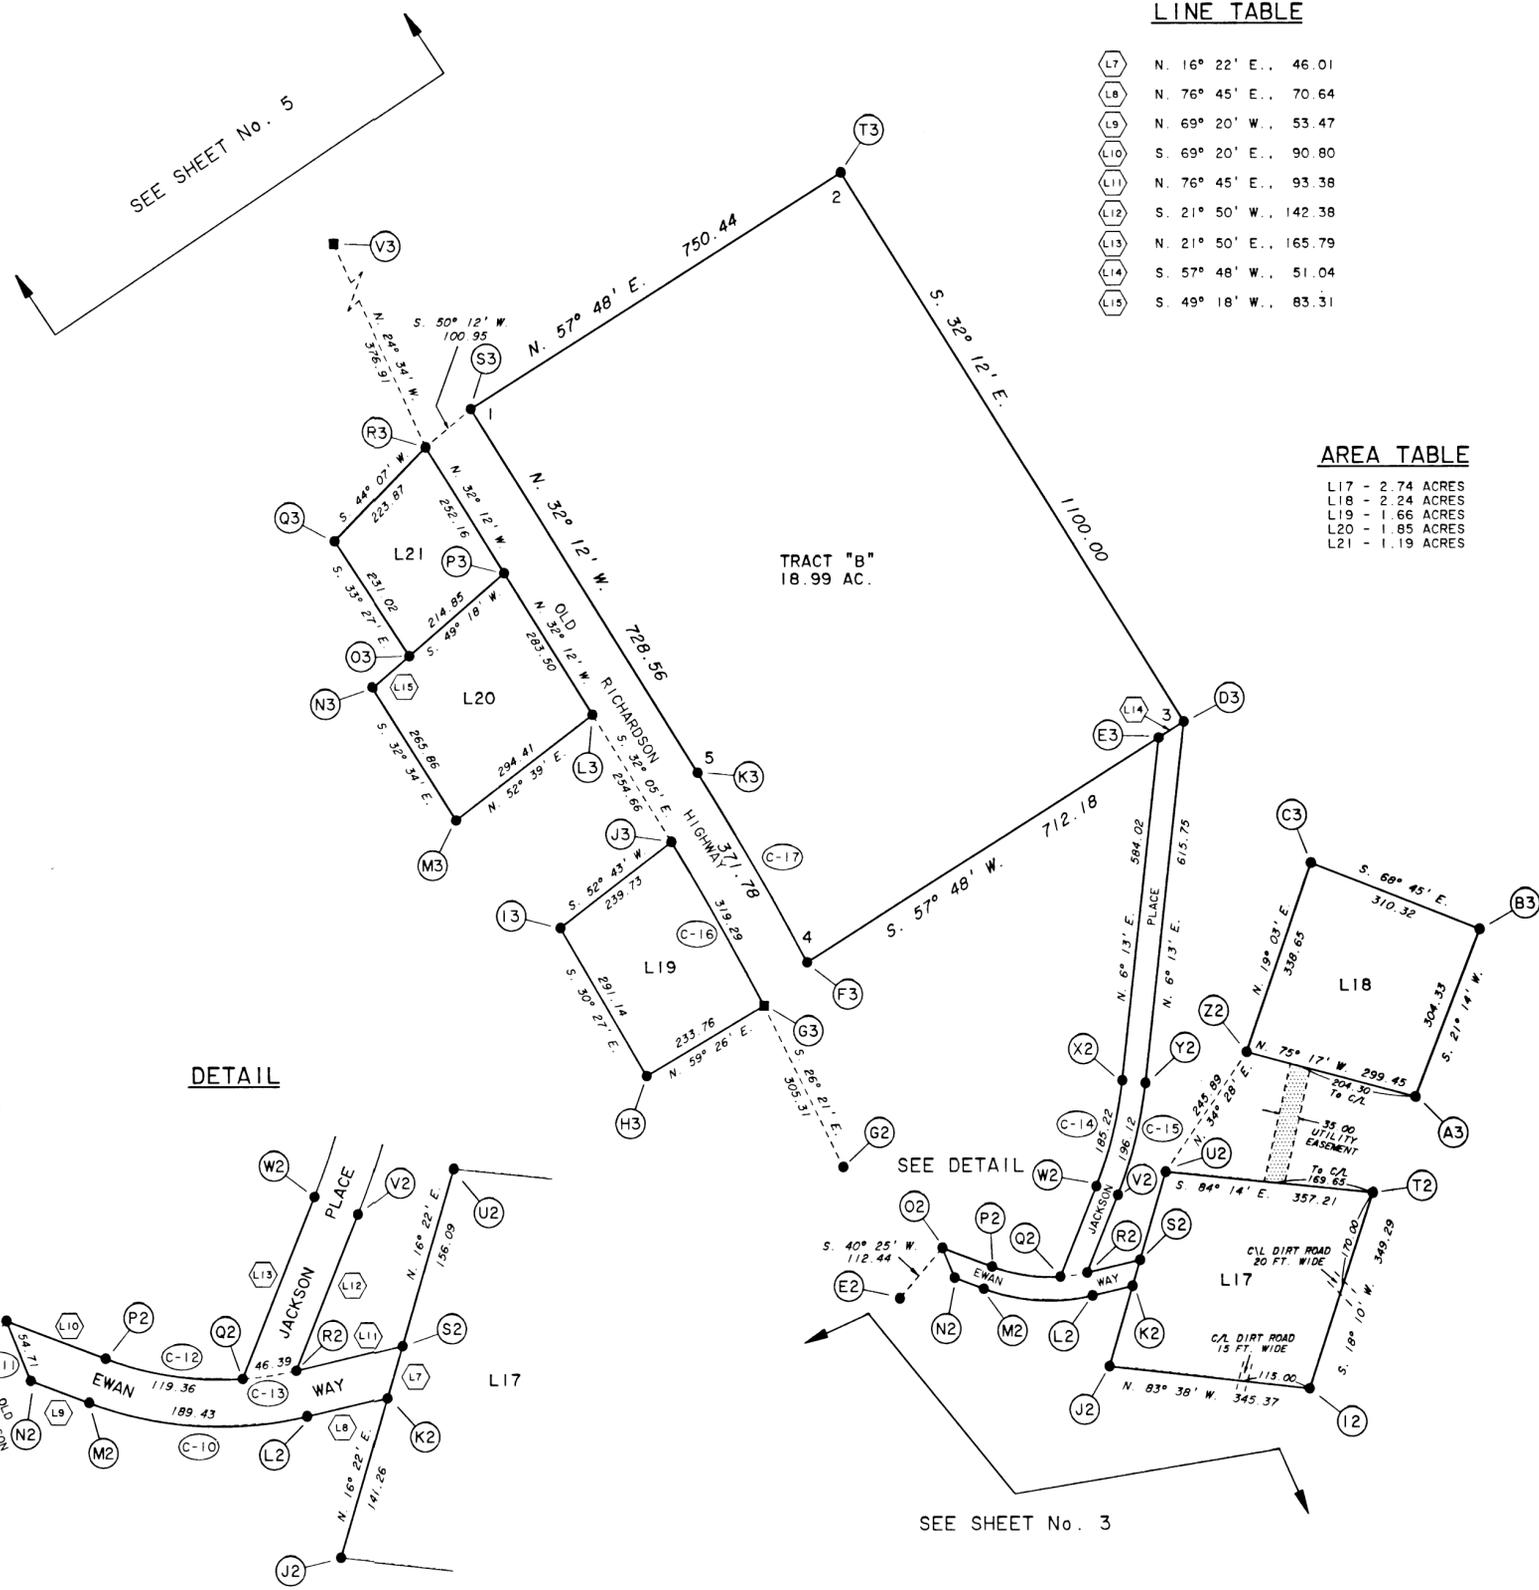

DETAIL

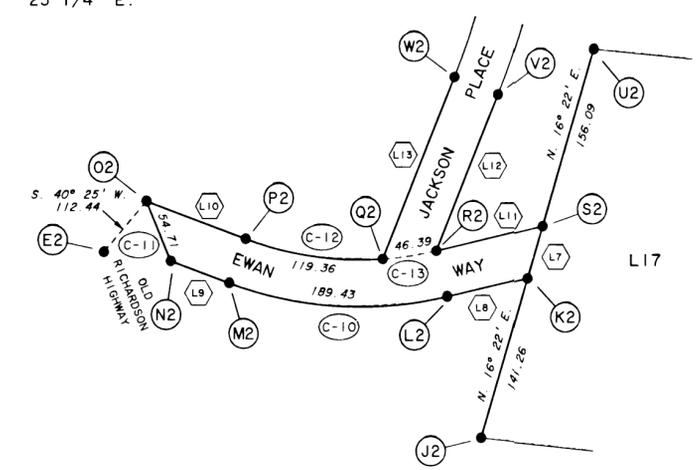

Copy of Plat transmitted to Chitina Recording District and recorded on June 16, 1995 as Plat #95-9.

DUPLICATE ORIGINAL

Sheet 5 of 13

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38 AND TRACTS A, B, C, D, AND E P.L. 92-203 (85 STAT. 688, 702, 703) AHTNA, INC.

AT COPPER CENTER, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 2186 AND THE RETRACEMENT OF U.S. SURVEY NO. 10633 WITHIN TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST COPPER RIVER MERIDIAN, ALASKA


REFERENCE SHOULD BE MADE TO SHEET Nos. 1, 10, 11, 12 AND 13 FOR SURVEY INFORMATION

LINE TABLE

19	N. 24° 34' W.,	376.91	N. 13° 27' E.,	34.17
20	N. 70° 07' W.,	81.50	S. 76° 33' E.,	40.00
21	N. 56° 59' E.,	334.47	S. 13° 27' W.,	177.29
22	N. 57° 31' E.,	168.36	S. 57° 14' W.,	211.96
23	N. 82° 33' E.,	83.29	N. 32° 12' W.,	54.35
24	N. 82° 33' E.,	43.34	N. 32° 12' W.,	59.61
25	N. 82° 33' E.,	57.05	N. 32° 12' W.,	40.00
26	N. 61° 44' E.,	55.12	N. 57° 14' E.,	228.43
27	N. 57° 34' E.,	176.97	N. 31° 28' W.,	256.19
28	N. 15° 10' E.,	184.98	N. 13° 27' E.,	159.19
29	N. 57° 34' E.,	40.00	S. 74° 49' E.,	191.09
30	N. 15° 11' E.,	245.94	S. 57° 48' W.,	225.00
31	N. 15° 11' E.,	242.48	S. 57° 48' W.,	225.00
32	S. 74° 49' E.,	200.00	N. 32° 12' W.,	40.23
33	S. 15° 11' W.,	85.27	N. 64° 00' E.,	40.23
34	S. 15° 11' W.,	119.73	S. 26° 00' E.,	40.00
35	N. 74° 49' W.,	212.57		



Mean Magnetic Declination 25 1/4° E.

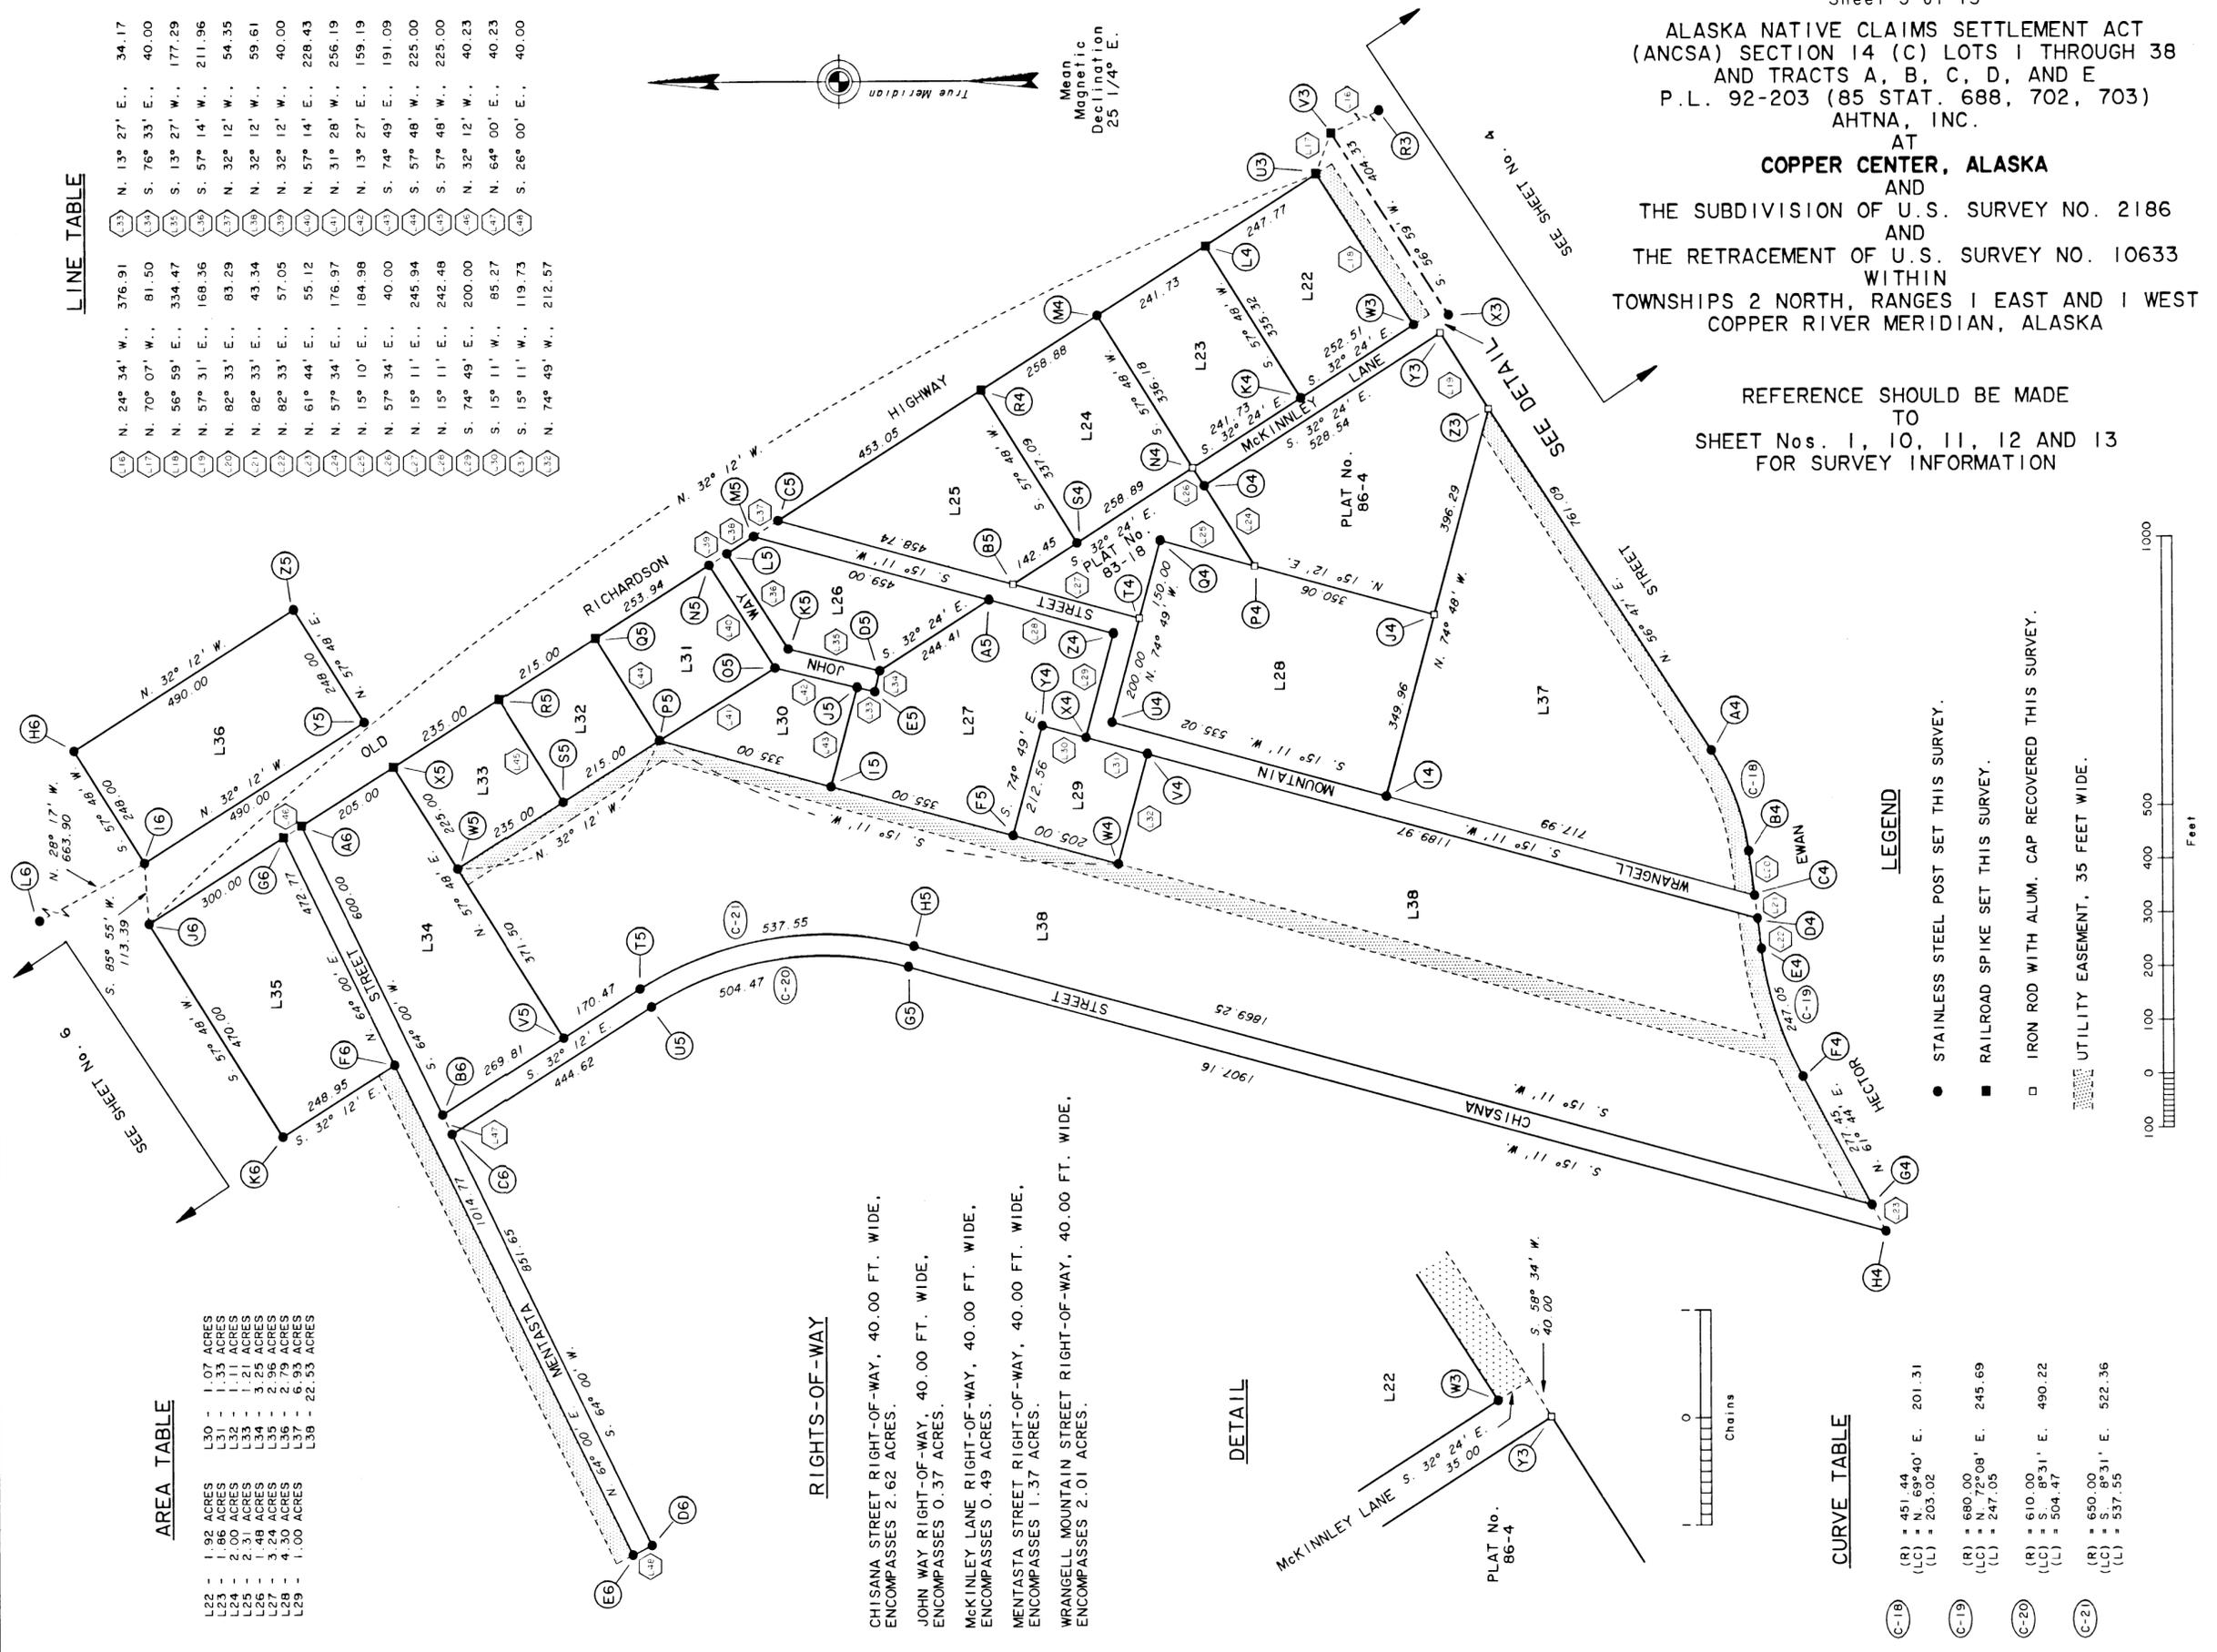



AREA TABLE

L22	1.92 ACRES
L23	1.33 ACRES
L24	2.00 ACRES
L25	2.31 ACRES
L26	1.48 ACRES
L27	3.24 ACRES
L28	4.30 ACRES
L29	1.00 ACRES
L30	1.07 ACRES
L31	1.33 ACRES
L32	1.11 ACRES
L33	1.21 ACRES
L34	3.25 ACRES
L35	2.96 ACRES
L36	2.79 ACRES
L37	6.93 ACRES
L38	22.53 ACRES

RIGHTS-OF-WAY

- CHISANA STREET RIGHT-OF-WAY, 40.00 FT. WIDE, ENCOMPASSES 2.62 ACRES.
- JOHN WAY RIGHT-OF-WAY, 40.00 FT. WIDE, ENCOMPASSES 0.37 ACRES.
- McKINLEY LANE RIGHT-OF-WAY, 40.00 FT. WIDE, ENCOMPASSES 0.49 ACRES.
- MENTASTA STREET RIGHT-OF-WAY, 40.00 FT. WIDE, ENCOMPASSES 1.37 ACRES.
- WRANGELL MOUNTAIN STREET RIGHT-OF-WAY, 40.00 FT. WIDE, ENCOMPASSES 2.01 ACRES.

DETAIL

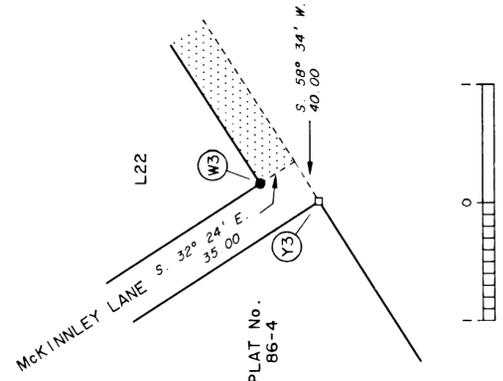


CURVE TABLE

C-1B	(R) = 451.44	(LC) = 693.40	(L) = 203.02	E. 201.31
C-19	(R) = 680.00	(LC) = N. 72° 08' E.	(L) = 247.05	E. 245.69
C-20	(R) = 610.00	(LC) = S. 8° 31' E.	(L) = 504.47	E. 490.22
C-21	(R) = 550.00	(LC) = S. 8° 31' E.	(L) = 537.55	E. 522.36

LEGEND

- STAINLESS STEEL POST SET THIS SURVEY.
- RAILROAD SPIKE SET THIS SURVEY.
- IRON ROD WITH ALUM. CAP RECOVERED THIS SURVEY.
- ▨ UTILITY EASEMENT, 35 FEET WIDE.



Copy of Plat transmitted to Chitina Recording District
and recorded on June 16, 1995 as Plat #95-9.

DUPLICATE ORIGINAL

Sheet 6 of 13


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38
AND TRACTS A, B, C, D, AND E
P.L. 92-203 (85 STAT. 688, 702, 703)
AHTNA, INC.

AT
COPPER CENTER, ALASKA

AND
THE SUBDIVISION OF U.S. SURVEY NO. 2186
AND
THE RETRACEMENT OF U.S. SURVEY NO. 10633
WITHIN
TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST
COPPER RIVER MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET Nos. 1 AND 13
FOR SURVEY INFORMATION

DETAIL

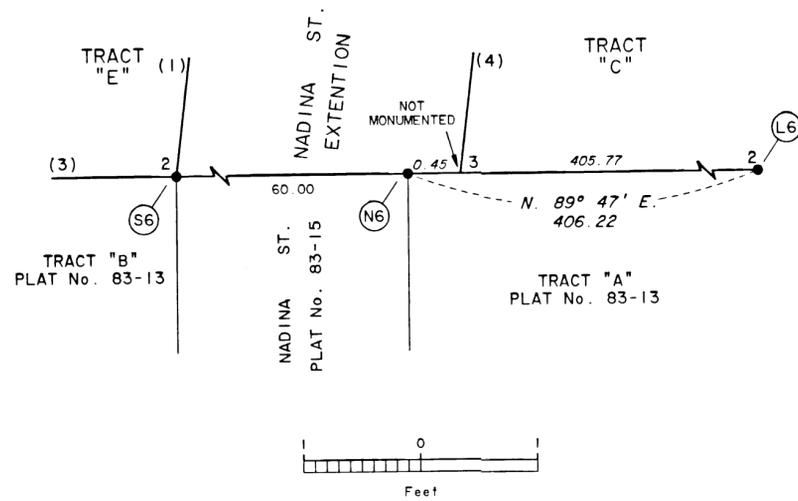

RIGHTS-OF-WAY




NADINA STREET EXTENTION RIGHT-OF-WAY, 60.00 FT. WIDE,
ENCOMPASSES 0.38 ACRES.

WALTER CHARLIE STREET RIGHT-OF-WAY, 40.00 FT. WIDE,
ENCOMPASSES 0.24 ACRES.

LEGEND

- STAINLESS STEEL POST SET THIS SURVEY.
- IRON ROD WITH ALUM. CAP RECOVERED THIS SURVEY.

REMAINDER KLUTI-KAAH CORPORATION
PROPERTY PLAT No. 79-21 FILED 10-24-1979
IN THE CHITINA RECORDING DISTRICT, ALASKA

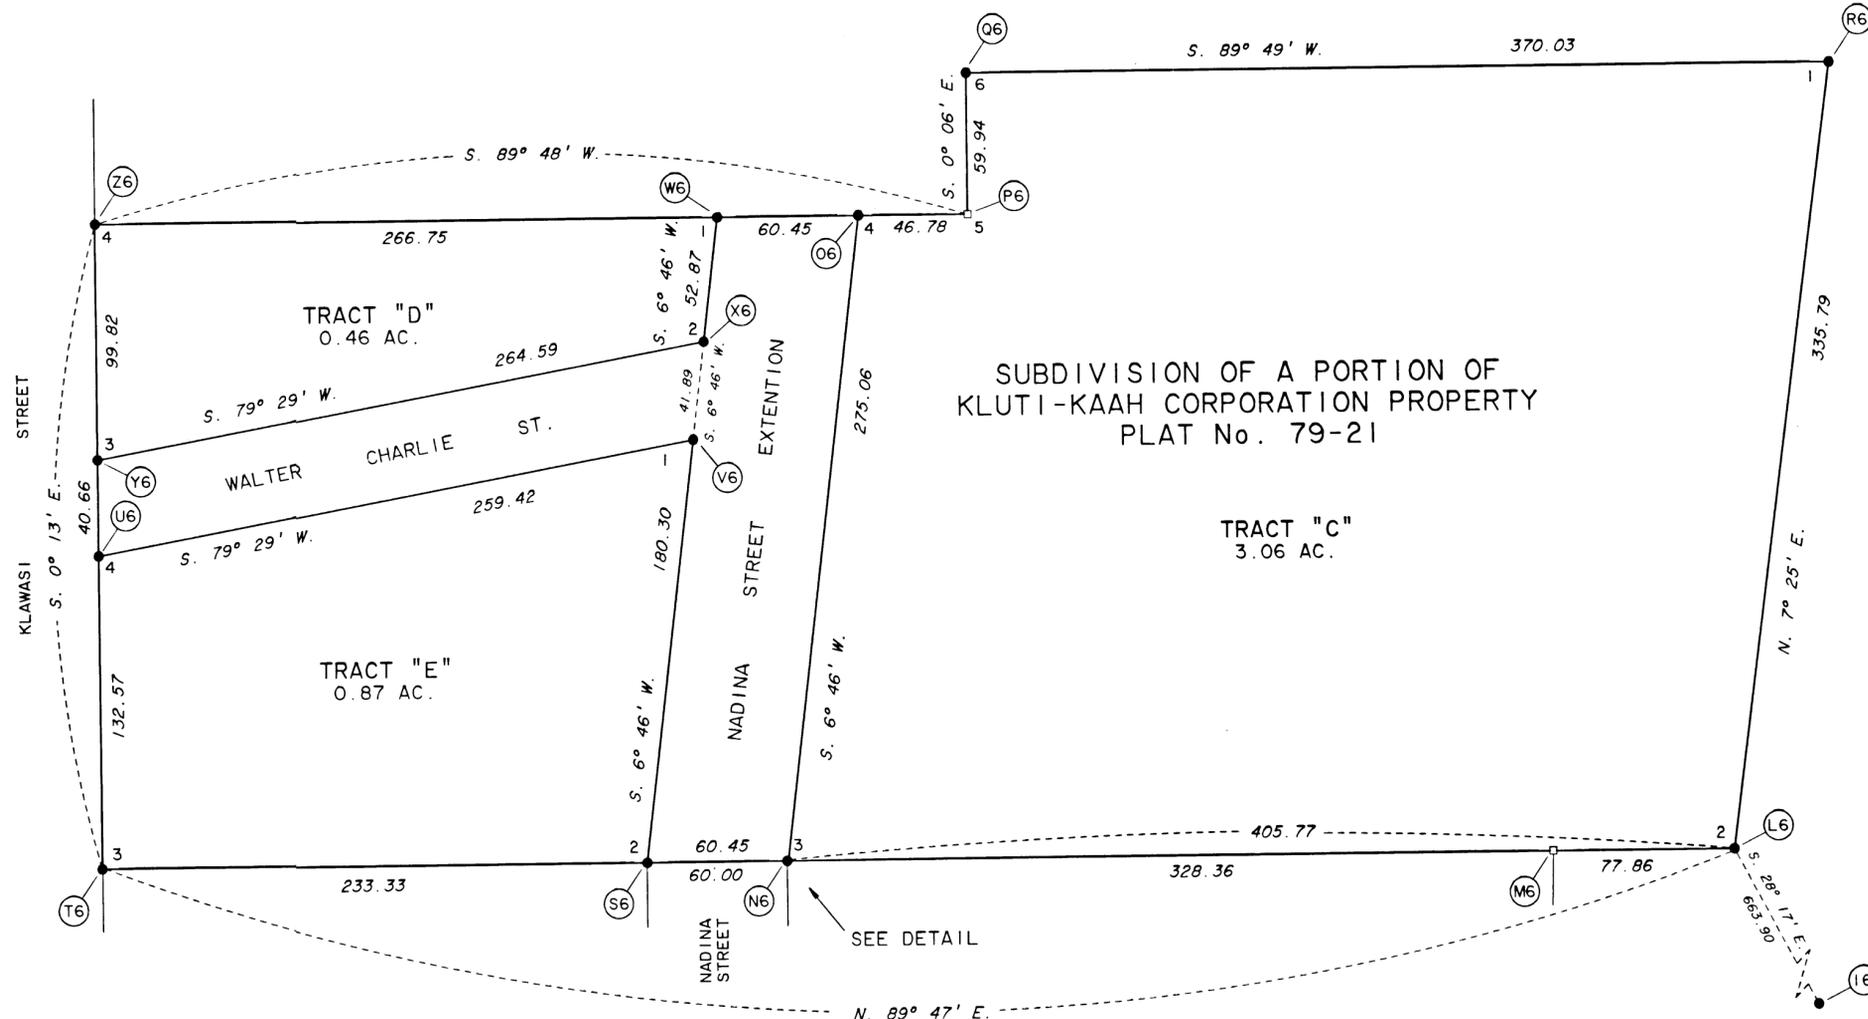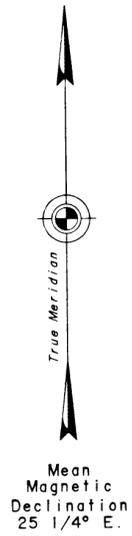


SEE SHEET No. 5


Copy of Plat transmitted to Chitina Recording District and recorded on June 16, 1995 as Plat #95-9.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38 AND TRACTS A, B, C, D, AND E P.L. 92-203 (85 STAT. 688, 702, 703) AHTNA, INC.


AT COPPER CENTER, ALASKA AND THE SUBDIVISION OF U.S. SURVEY NO. 2186 AND THE RETRACEMENT OF U.S. SURVEY NO. 10633 WITHIN TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST COPPER RIVER MERIDIAN, ALASKA




Set a stainless steel post, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
 A spruce, 6 ins. diam., bears S. 27 1/2° E., 40.5 ft. dist., mkd. X BT.
 A spruce, 5 ins. diam., bears N. 73° W., 25.2 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.
 True point falls in a swamp, not practical to monument.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
 A spruce, 6 ins. diam., bears S. 17 3/4° E., 29.8 ft. dist., mkd. X BT.
 A spruce, 14 ins. diam., bears S. 48° W., 15.6 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
 A spruce, 9 ins. diam., bears S. 87° E., 27.8 ft. dist., mkd. X BT.
 A spruce, 7 ins. diam., bears N. 4 3/4° W., 22.6 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron post, 2 ins. diam., projecting 12 ins. above the ground, firmly set, with brass cap mkd. as shown, from which
 The original SW cor. of a wood barn, 36 X 42 ft., bears S. 48 1/2° E., 289.0 ft. dist., long side extends N. 74° E. (Record S. 51° 15' E., 256.7 ft.)
 A original spruce stump, 8 ins. diam., bears S. 89 1/2° W., 159.5 ft. dist., with partial marks visible on open blaze. (Record N. 89° 15' W., 157.7 ft.)
 The NW cor. of the same wood barn, 36 X 42 ft., bears S. 52 1/4° E., 256.1 ft. dist., long side extends N. 74° E.
 This cor. is now designated as cor. No. 2, Lot 1, USS No. 2186, no marks were added to brass cap.




Recovered a granite stone, 6 X 8 ins., firmly set, projecting 5 ins. above the ground, with chit marks S2186 on SE face, C2 on NE face, 4 hacks on S face, 2 hacks on N face, and with X on top, from which
 An original bearing tree, a spruce, 9 ins. diam., bears N. 19° 56' E., 52.14 ft. dist., with marks T2N RIE S7 BT and C1 S2186 BT visible on open blazes.
 An original bearing tree, a spruce, 14 ins. diam., bears S. 78° 58' E., 8.58 ft. dist., with fragmentary marks visible on partially healed blazes.
 An original bearing tree, a spruce stump, 5 ins. diam., bears S. 69 1/4° W., 18.3 ft. dist., with marks T2N RIW S13 BT visible on rotted face.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
 A spruce, 10 ins. diam., bears S. 53 3/4° E., 28.6 ft. dist., mkd. X BT.
 A spruce, 11 ins. diam., bears N. 13 1/2° W., 26.1 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron post, 2 ins. diam., projecting 12 ins. above the ground, firmly set, with brass cap mkd. as shown, from which
 The NW cor. of a dilapidated wood frame building, 30 X 40 ft., bears N. 20 3/4° E., 100.6 ft. dist., long side extends S. 18° E.
 This cor. is now designated as cor. No. 3, Lot 1, USS No. 2186, no marks were added to brass cap.




Recovered an iron post, 2 ins. diam., projecting 12 ins. above the ground, firmly set, with brass cap mkd. as shown, from which
 An original bearing tree, an aspen stump, 9 ins. diam., bears N. 45° 00' E., 158.1 ft., no marks visible. Record dist. 155.76 ft.
 An original bearing tree, an aspen, 9 ins. diam., bears N. 10° 45' W., 33.66 ft. dist., with healed blazes.
 This cor. is now designated as cor. No. 4, Lot 3, USS No. 2186, no marks were added to brass cap.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
 A spruce, 6 ins. diam., bears N. 11 1/2° E., 22.6 ft. dist., mkd. X BT.
 A spruce, 9 ins. diam., bears N. 82 1/4° W., 27.6 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which
 A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 26 ins. in the ground, for a reference monument, bears S. 89° 06' E., 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L2 30.00 FT 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.
 A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 26 ins. in the ground, for a reference monument, bears N. 89° 06' W., 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L3 30.00 FT 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
 A spruce, 9 ins. diam., bears S. 48 1/2° W., 12.4 ft. dist., mkd. X BT.
 A spruce, 7 ins. diam., bears N. 38 1/2° W., 24.8 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 7 ins. diam., bears N. 69 1/2° E., 26.7 ft. dist., mkd. X BT.
 A spruce, 9 ins. diam., bears N. 28 3/4° W., 19.5 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
 A spruce, 8 ins. diam., bears N. 32° E., 30.6 ft. dist., mkd. X BT.
 A spruce, 6 ins. diam., bears N. 47° W., 38.2 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
 A spruce, 9 ins. diam., bears N. 75° E., 24.1 ft. dist., mkd. X BT.
 A spruce, 7 ins. diam., bears S. 37 1/2° E., 51.7 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
 The original aspen stump, 10 ins. diam., bears N. 36° E., 79.2 ft. dist., flat blaze, no visible marks.
 The original NE cor. of a log cabin, 16 X 20 ft., bears N. 67 1/2° W., 63.4 ft. dist., long side bears N. 68° W.
 The NE corner of a log cabin, 16 X 28 ft., bears N. 57 1/4° W., 2.5 ft. dist., long side extends N. 60° W.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 7 ins. diam., bears N. 81 3/4° E., 12.4 ft. dist., mkd. X BT.
 A spruce, 10 ins. diam., bears S. 14 1/4° E., 36.9 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
 A spruce, 5 ins. diam., bears N. 88 1/2° E., 61.7 ft. dist., mkd. X BT.
 A spruce, 6 ins. diam., bears S. 17° W., 44.5 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
 A spruce, 6 ins. diam., bears S. 68 3/4° W., 17.5 ft. dist., mkd. X BT.
 A spruce, 5 ins. diam., bears N. 31 1/2° W., 10.6 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 No suitable accessories available.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 5 ins. diam., bears S. 21° E., 19.4 ft. dist., mkd. X BT.
 A spruce, 7 ins. diam., bears S. 73 3/4° W., 18.8 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered a standard brass triangulation disk firmly set in a 12 X 12 in. concrete block, projecting 1 in. above the ground, brass disk mkd. as shown and witnessed per the public record.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which
 A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 26 ins. in the ground, for a reference monument, bears S. 89° 16' E., 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L5 30.00 FT L2 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.
 A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 26 ins. in the ground, for a reference monument, bears N. 89° 16' W., 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L4 30.00 FT L3 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which
 A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 26 ins. in the ground, for a reference monument, bears N. 83° 48' E., 85.95 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM C3L2 S2186 85.95 FT C6L3 S2186 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.
 A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 26 ins. in the ground, for a reference monument, bears S. 0° 44' W., 97.49 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM C3L2 S2186 97.49 FT C6L3 S2186 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 9 ins. diam., bears S. 41 1/2° W., 26.7 ft. dist., mkd. X BT.
 A spruce, 6 ins. diam., bears N. 47 1/2° W., 51.9 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
 A spruce, 4 ins. diam., bears N. 7 3/4° E., 22.0 ft. dist., mkd. X BT.
 A spruce, 4 ins. diam., bears S. 52 3/4° W., 21.5 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
 A spruce, 4 ins. diam., bears S. 36° W., 17.8 ft. dist., mkd. X BT.
 A spruce, 5 ins. diam., bears N. 22° W., 25.8 ft. dist., mkd. X BT.
 Deposit a magnet in a white plastic case at the base of the stainless steel post.


Copy of Plat transmitted to Chitina Recording District and recorded on June 16, 1995 as Plat #95-9.

DUPLICATE ORIGINAL

Sheet 8 of 13

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38
AND TRACTS A, B, C, D, AND E
P.L. 92-203 (85 STAT. 688, 702, 703)
AHTNA, INC.

AT
COPPER CENTER, ALASKA
AND
THE SUBDIVISION OF U.S. SURVEY NO. 2186
AND
THE RETRACEMENT OF U.S. SURVEY NO. 10633
WITHIN
TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST
COPPER RIVER MERIDIAN, ALASKA




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears S. 28 3/4° E., 17.9 ft. dist., mkd. X BT.


A spruce, 7 ins. diam., bears S. 64 1/2° W., 77.6 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 89° 52' E., 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L7 30.00 FT L5 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.



Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground, for a reference monument, bears N. 89° 53' W., 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L6 30.00 FT L4 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears N. 37° E., 26.2 ft. dist., mkd. X BT.

A spruce, 5 ins. diam., bears S. 34 1/4° E., 30.2 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A spruce, 4 ins. diam., bears S. 20 1/2° E., 20.9 ft. dist., mkd. X BT.


A spruce, 8 ins. diam., bears S. 55° W., 17.9 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.



Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears West, 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L6 PC L7 30.00 FT L6 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 64 3/4° W., 41.2 ft. dist., mkd. X BT.

A spruce, 6 ins. diam., bears N. 49 1/4° W., 16.6 ft. dist., mkd. X BT.


Deposit a magnet in a white plastic case at the base of the stainless steel post.



Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 65° 01' E., 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM 30.00 FT L7 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 85° 01' W., 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L8 30.00 FT L6 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears S. 5 1/2° E., 45.7 ft. dist., mkd. X BT.

A spruce, 10 ins. diam., bears N. 57 1/4° W., 40.4 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears S. 8° E., 27.2 ft. dist., mkd. X BT.

A spruce, 10 ins. diam., bears S. 71 3/4° W., 24.5 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 88° 31' W., 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L9 30.00 FT L8 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A power pole, 10 ins. diam., bears N. 79 3/4° W., 53.1 ft. dist. to a 50d spike protruding 1 in. out of power pole, 12 ins. above the ground on the northerly side. Powerline, 4 strands, extends S 10° W. and N. 14° W.

The SE cor. of log house, 28 x 34 ft., bears N. 58 1/4° W., 224.9 ft. dist., long side extends W




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which

The SE cor. of log house, 28 x 34 ft., bears N. 58 1/4° W., 224.9 ft. dist., long side extends W.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 85° 40' W., 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L10 30.00 FT L9 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

The SE cor. of log garage, 18 x 20 ft., bears N. 47 1/2° W., 131.6 ft. dist., long side extends S. 75° W




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which

A quaking asp. 6 ins. diam., bears N. 60° E., 14.3 ft. dist., mkd. X BT.

A spruce, 5 ins. diam., bears N. 57° W., 30.9 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which

A spruce, 11 ins. diam., bears S. 40 3/4° W., 53.1 ft. dist., mkd. X BT.

A spruce, 5 ins. diam., bears N. 59° W., 29.1 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears S. 84 1/4° E., 31.8 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 1 1/2° W., 19.2 ft. dist., mkd. X BT.


Deposit a magnet in a white plastic case at the base of the stainless steel post.



Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as shown, from which

The original NE bearing tree, a spruce, 7 ins. diam., bears N. 64° E., 34.98 ft. dist., with marks C2 S10633 BT visible on open blaze.

The original NW bearing tree, a spruce, 8 ins. diam., bears N. 84 1/2° W., 62.04 ft. dist., with marks X BT visible on open blaze.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears S. 37 1/4° W., 45.1 ft. dist., mkd. X BT.

A spruce, 5 ins. diam., bears N. 53 1/2° W., 21.9 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

The NE cor. of a log building, 44 x 59 ft., bears S. 65° W., 72.5 ft. dist., long side extends W

The SW cor. of wood frame school house, bears N. 43 1/2° W., 69.9 ft. dist.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set 5 ins. beneath the surface of the ground, with brass cap mkd. as shown, from which

The original well casing, 6 ins. diam., 3 ft. high, bears S. 78 1/2° E., 36.96 ft. dist.

The original power pole, 10 ins. diam., bears S. 15 1/4° E., 67.96 ft. dist. Record 88.77 ft.


The original NE cor. of a wood frame house, 24 x 32 ft., bears S. 45° W., 43.56 ft. dist., long side extends S.

The original SE cor. of the school house, bears N. 50° 36' W., 101.31 ft. dist.



Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which


A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 2 ins. below the ground, for a reference monument, bears N. 87° 53' W., 30.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM 30.00 FT L10 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown

No accessories taken.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown, from which

The original SE cor. of the school house bears S. 27° W., 191.40 ft. dist.

The original NE cor. of a wood frame shed, 18 x 24 ft., bears S. 73° W., 198.00 ft. dist., long side extends S. 83° W.


The original power pole, 10 ins. diam., bears N. 34 1/4° W., 144.54 ft. dist.



Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as shown, from which

The original SW bearing tree, a spruce, 6 ins. diam., bears S. 28 1/2° W., 22.77 ft. dist., with marks X BT visible on open blaze.

The original NW bearing tree, a spruce, 5 ins. diam., bears N. 42° W., 46.20 ft. dist., with marks X BT visible on open blaze.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears S. 44 1/4° E., 23.4 ft. dist., mkd. X BT.


A spruce, 6 ins. diam., bears N. 83° W., 32.8 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A power pole, 9 ins. diam., bears S. 47 1/2° W., 88.5 ft. dist. to a 50d spike protruding 1 in. out of power pole, 12 ins. above the ground.



Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 77° 49' W., 5.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L14 5.00 FT L13 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A spruce, 11 ins. diam., bears S. 66 1/2° W., 170.8 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears N. 89 1/2° W., 140.6 ft. dist., mkd. X BT.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

Copy of Plat transmitted to Chitina Recording District
and recorded on June 16, 1995 as Plat # 95-9.


DUPLICATE ORIGINAL

Sheet 9 of 13


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38
AND TRACTS A, B, C, D, AND E
P.L. 92-203 (85 STAT. 688, 702, 703)
AHTNA, INC.
AT
COPPER CENTER, ALASKA
AND
THE SUBDIVISION OF U.S. SURVEY NO. 2186
AND
THE RETRACEMENT OF U.S. SURVEY NO. 10633
WITHIN
TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST
COPPER RIVER MERIDIAN, ALASKA




Set a stainless steel post, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears S. 43 1/4° E., 8.3 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears S. 79 1/4° W., 22.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 4 ins. diam., bears S. 60° E., 44.6 ft. dist., mkd. X BT.
A quaking asp., 6 ins. diam., bears S. 18 3/4° W., 22.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A quaking asp., 9 ins. diam., bears S. 39 3/4° E., 33.8 ft. dist., mkd. X BT.
A quaking asp., 8 ins. diam., bears S. 64 1/4° W., 34.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears N. 86 1/2° E., 29.8 ft. dist., mkd. X BT.
A spruce, 10 ins. diam., bears N. 14° W., 4.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A quaking asp., 8 ins. diam., bears N. 30° E., 13.0 ft. dist., mkd. X BT.
A quaking asp., 9 ins. diam., bears N. 82° W., 21.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground with brass cap mkd. as shown, from which
A spruce, 10 ins. diam., bears N. 78 3/4° E., 13.2 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears S. 22° W., 27.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 9 ins. diam., bears N. 3 1/2° E., 31.4 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears N. 38° W., 61.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears N. 83 1/2° E., 32.2 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears S. 24 1/2° E., 32.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 1 in. below the ground, with brass cap mkd. as shown, from which
A power pole, 9 ins. diam., with a 50d spike driven 4 ins. into the pole, 12 ins. above the ground bears S. 51° W., 42.95 ft. dist.
The SE. cor. of a log cabin, 25 X 27 ft., bears N. 16° W., 108.7 ft., long side extends N. 79° W.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground encircled by a rock collar, 1 1/2 ft. diam., 5 ins. high, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
The SE. cor. of a log cabin, 19 X 22 ft., bears N. 67° W., 90.8 ft. dist., long side extends S. 70° W.
A power pole, 12 ins. diam., with a 50d spike driven 4 ins. into the pole, 12 ins. above the ground bears N. 27 1/2° W., 10.9 ft. dist.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground encircled by a rock collar, 1 1/2 ft. diam., to top of brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears N. 60 1/2° E., 20.0 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 35° W., 13.7 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 4 ins. diam., bears S. 86° W., 45.3 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears N. 16 3/4° W., 59.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears S. 55 1/2° W., 21.0 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears N. 21° W., 15.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears N. 87° E., 22.2 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears S. 27 3/4° E., 31.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears S. 27° W., 69.8 ft. dist., mkd. X BT.
A double spruce, 4 ins. diam., bears N. 70° W., 84.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground encircled by a rock collar, 2 ft. diam., to top of brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 4 ins. diam., bears S. 40 3/4° E., 28.6 ft. dist., mkd. X BT.
A spruce, 10 ins. diam., bears S. 69° W., 16.7 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears S. 76° E., 16.4 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 16 1/2° W., 43.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

Copy of Plat transmitted to Chitina Recording District and recorded on June 16, 1995 as Plat #95-9.

DUPLICATE ORIGINAL

Sheet 10 of 13


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38
AND TRACTS A, B, C, D, AND E
P.L. 92-203 (85 STAT. 688, 702, 703)
AHTNA, INC.
AT
COPPER CENTER, ALASKA
AND
THE SUBDIVISION OF U.S. SURVEY NO. 2186
AND
THE RETRACEMENT OF U.S. SURVEY NO. 10633
WITHIN
TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST
COPPER RIVER MERIDIAN, ALASKA




Set a stainless steel post, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears N 10 1/4° E., 27.1 ft. dist., mkd. X BT.
A double spruce, 4 ins. diam., bears West, 20.2 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears N 79° W., 16.5 ft. dist., mkd. X BT.
A spruce, 4 ins. diam., bears N 22 1/2° W., 30.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A quaking asp, 3 ins. diam., bears N 24 1/2° E., 31.4 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N 56 1/4° W., 12.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 13 ins. diam., bears S 20 1/4° E., 21.6 ft. dist., mkd. X BT.
A spruce, 10 ins. diam., bears S 58 3/4° W., 29.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
A spruce, 9 ins. diam., bears S 79° E., 13.6 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears S 43 3/4° W., 19.7 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A quaking asp, 4 ins. diam., bears S 48 3/4° W., 25.1 ft. dist., mkd. X BT.
A quaking asp, 5 ins. diam., bears N 66° W., 72.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 4 ins. diam., bears N 31° E., 21.3 ft. dist., mkd. X BT.
A spruce, 10 ins. diam., bears S 53 1/2° E., 3.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground with brass cap mkd. as shown, from which
A power pole, 8 ins. diam., with a 50d spike driven 4 ins. into the pole, 12 ins. above the ground bears S 42° W., 4.60 ft. dist.
A spruce, 6 ins. diam., bears S 8° W., 53.7 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N 74° E., 59.2 ft. dist., mkd. X BT.
A spruce, 3 ins. diam., bears S 39 1/2° W., 14.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which
A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground, for a reference monument, bears S 33° 36' W., 84.03 ft. dist., with brass cap mkd. ANCSA 14C A1-1 RM 84.03 FT 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.
This monument marks the position for the centerline intersection of Hector Ewan Street and the Old Richardson Highway.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N 29 1/2° E., 14.4 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears N 7° W., 55.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears N 8° E., 37.0 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears S 61 1/4° E., 105.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 9 ins. diam., bears S 32 1/2° W., 89.7 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears S 74 1/4° W., 64.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears N 1° E., 50.0 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N 44° E., 15.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears S 22 1/2° W., 58.7 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears S 69 3/4° W., 47.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears N 16° E., 44.8 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears S 64 1/2° E., 49.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
This monument marks the position for the centerline intersection of Hector Ewan Street and McKinney Lane.




Set a stainless steel post, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N 16 1/2° E., 87.6 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N 81 1/4° E., 167.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with brass cap mkd. as shown, from which
A spruce, 4 ins. diam., bears N 37° E., 53.8 ft. dist., mkd. X BT.
A quaking asp, 5 ins. diam., bears N 54 3/4° W., 18.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears S 83 1/2° E., 16.5 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears S 39 3/4° W., 21.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron rod 5/8 in. diam. firmly set, flush with the ground, with an alum. cap mkd. as shown, from which new bearing trees
A quaking asp, 6 ins. diam., bears S 71 3/4° W., 40.0 ft. dist., mkd. X BT.
A spruce, 3 ins. diam., bears N 43 1/4° W., 57.5 dist., mkd. X BT.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which
A quaking asp, 10 ins. diam., bears S 25° W., 44.5 ft. dist., mkd. X BT.
A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S 59° 26' W., 5.00 ft. dist., with brass cap mkd. ANCSA 14C A1-1 RM L19 5.00 FT 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.
A spruce, 11 ins. diam., bears N 74 3/4° W., 57.2 ft. dist., mkd. X BT.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears N 76 1/2° E., 12.4 ft. dist., mkd. X BT.
A quaking asp, 5 ins. diam., bears N 0 1/2° W., 25.2 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which
A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 27 ins. in the ground, for a reference monument, bears S 56° 19' W., 5.00 ft. dist., with brass cap mkd. ANCSA 14C A1-1 RM L22 5.00 FT 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.
A spruce, 6 ins. diam., bears S 68° W., 47.9 ft. dist., mkd. X BT.
A quaking asp, 7 ins. diam., bears N 73 1/4° W., 66.0 ft. dist., mkd. X BT.



Recovered an iron rod 5/8 in. diam. firmly set, projecting 2 ins. above the ground, with an alum. cap mkd. as shown, from which new bearing trees
A spruce, 5 ins. diam., bears N 47 1/4° E., 52.2 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears N 62° W., 34.5 dist., mkd. X BT.


Copy of Plat transmitted to Chitina Recording District
and recorded on June 16, 1995 as Plat #95-9,

DUPLICATE


ORIGINAL

Sheet 11 of 13


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38
AND TRACTS A, B, C, D, AND E
P.L. 92-203 (85 STAT. 688, 702, 703)
AHTNA, INC.
AT
COPPER CENTER, ALASKA
AND
THE SUBDIVISION OF U.S. SURVEY NO. 2186
AND
THE RETRACEMENT OF U.S. SURVEY NO. 10633
WITHIN
TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST
COPPER RIVER MERIDIAN, ALASKA




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A double spruce, 5 ins. diam., bears N. 31 3/4° E., 18.6 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears N. 77° W., 11.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 8 ins. diam., bears N. 56 1/2° E., 15.7 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears N. 39° W., 33.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown.
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears N. 32 1/2° E., 35.9 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears N. 63 1/2° W., 16.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N. 20° E., 43.5 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears S. 44 1/2° E., 17.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, an alum. cap mkd. as shown, from which new bearing trees
A spruce, 7 ins. diam., bears S. 44 3/4° W., 14.7 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 26 1/4° W., 6.7 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N. 31 1/2° E., 49.5 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 26 1/4° W., 29.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron rod, 5/8 in. diam., firmly set, projecting 1 in. above the ground, an alum. cap mkd. as shown, from which new bearing trees
A spruce, 4 ins. diam., bears N. 18° E., 10.9 ft. dist., mkd. X BT.
A spruce, 4 ins. diam., bears N. 83 1/2° W., 30.8 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 8 ins. diam., bears N. 53 1/4° E., 22.2 ft. dist., mkd. X BT.
A quaking asp., 8 ins. diam., bears S. 4° E., 36.4 ft. dist., mkd. X BT.
Bury the original loose iron rod, 5/8 in. diam., with an alum. cap alongside the stainless steel post.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears S. 39 1/4° W., 157.7 ft. dist., mkd. X BT.
A spruce, 10 ins. diam., bears N. 35 1/4° W., 118.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 4 ins. diam., bears N. 36 1/4° E., 23.3 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 48 3/4° W., 17.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground with brass cap mkd. as shown, from which
A quaking asp., 7 ins. diam., bears N. 54 1/4° E., 27.3 ft. dist., mkd. X BT.
A spruce, 4 ins. diam., bears S. 69 1/2° E., 18.2 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which
A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 57° 48' W., 5.00 ft. dist., with brass cap mkd. ANCSA 14C A1-1 RM L25 L24 5.00 FT 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.
A spruce, 5 ins. diam., bears S. 83° W., 48.7 ft. dist., mkd. X BT.
A quaking asp., 4 ins. diam., bears N. 62 1/4° W., 46.0 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 3 ins. below the ground, with brass cap mkd. as shown
A spruce, 5 ins. diam., bears N. 75° E., 13.3 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 16° W., 14.2 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N. 20 1/2° E., 53.1 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears N. 68 1/2° W., 38.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which
A spruce, 5 ins. diam., bears S. 37 1/2° W., 44.1 ft. dist., mkd. X BT.
A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 57° 48' W., 5.00 ft. dist., with brass cap mkd. ANCSA 14C A1-1 RM L23 L22 5.00 FT 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.
A spruce, 7 ins. diam., bears N. 65° W., 69.1 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 4 ins. diam., bears N. 50 1/2° E., 28.4 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears S. 76° E., 28.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 3 ins. below the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N. 41 3/4° E., 99.0 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears N. 59 1/4° W., 97.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
A spruce, 8 ins. diam., bears S. 37 3/4° W., 50.8 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 70 1/4° W., 62.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron rod, 5/8 in. diam., firmly set, flush with the ground, an alum. cap mkd. as shown, from which new bearing trees
A spruce, 8 ins. diam., bears N. 56 3/4° E., 38.3 ft. dist., mkd. X BT.
A spruce, 3 ins. diam., bears S. 53 1/4° E., 63.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears N. 34 3/4° E., 80.4 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears N. 65 1/2° W., 42.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Recovered an iron rod, 5/8 in. diam., firmly set, projecting 5 ins. above the ground, an alum. cap mkd. as shown, from which new bearing trees
A quaking asp., 5 ins. diam., bears N. 78 3/4° E., 13.9 ft. dist., mkd. X BT.
A quaking asp., 6 ins. diam., bears S. 25 1/4° E., 7.2 ft. dist., mkd. X BT.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A power pole, 10 ins. diam., with a 50d spike driven 4 ins. into the power pole, 6 ins. above the ground, bears N. 53 1/2° E., 54.6 ft. dist.
A spruce, 3 ins. diam., bears S. 33° E., 24.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 1 in. below the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

Copy of Plat transmitted to Chitina Recording District
and recorded on June 16, 1995 as Plat #95-9.

DUPLICATE


ORIGINAL

Sheet 12 of 13


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38
AND TRACTS A, B, C, D, AND E
P.L. 92-203 (85 STAT. 688, 702, 703)
AHTNA, INC.

AT
COPPER CENTER, ALASKA


AND
THE SUBDIVISION OF U.S. SURVEY NO. 2186
AND
THE RETRACEMENT OF U.S. SURVEY NO. 10633
WITHIN
TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST
COPPER RIVER MERIDIAN, ALASKA




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears N. 84° W., 7.1 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears N. 4° W., 20.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 4 ins. diam., bears S. 84° E., 7.3 ft. dist., mkd. X BT.
A spruce, 3 ins. diam., bears S. 5 3/4° E., 14.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron rod, 5/8 in. diam., firmly set, projecting 5 ins. above the ground, with an alum. cap mkd. as shown, from which new bearing trees
A spruce, 5 ins. diam., bears N. 0 1/4° E., 17.7 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 75 1/4° E., 6.5 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears N. 23 1/2° E., 40.3 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears N. 56° W., 36.7 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 8 ins. diam., bears N. 77 3/4° E., 18.4 ft. dist., mkd. X BT.
A spruce, 9 ins. diam., bears S. 23° E., 30.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 1 in. below the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears S. 6 3/4° W., 77.2 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears S. 57 3/4° W., 71.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which
A spruce, 6 ins. diam., bears S. 6 1/2° W., 58.5 ft. dist., mkd. X BT.
A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set 2 ins. below the ground, for a reference monument, bears S. 57° 48' W., 5.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L32 5.00 FT L31 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N. 54 1/2° E., 45.5 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears N. 43 3/4° W., 52.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which
A spruce, 10 ins. diam., bears N. 71 1/4° E., 69.9 ft. dist., mkd. X BT.
A power pole, 10 ins. diam., with a 50d spike driven 4 ins. into the power pole, 6 ins. above the ground, bears S. 10 1/4° E., 15.3 ft. dist.
A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 57° 48' W., 5.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L33 5.00 FT L32 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 10 ins. diam., bears N. 82 3/4° E., 55.6 ft. dist., mkd. X BT.
A spruce, 9 ins. diam., bears S. 12° W., 31.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears S. 36 1/4° E., 13.2 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears S. 75 1/4° W., 13.2 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which
A spruce, 16 ins. diam., bears S. 30 3/4° W., 105.4 ft. dist., mkd. X BT.
A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 57° 48' W., 5.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L34 5.00 FT L33 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears N. 37° E., 30.5 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears N. 23° W., 56.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 1 in. below the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 8 ins. diam., bears S. 87 1/4° E., 18.8 ft. dist., mkd. X BT.
A quaking asp., 7 ins. diam., bears N. 22 1/4° W., 18.5 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears N. 5 1/4° E., 42.9 ft. dist., mkd. X BT.
A quaking asp., 7 ins. diam., bears N. 57 1/2° E., 40.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears S. 77 1/2° W., 10.2 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 23 1/4° W., 9.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown
No accessories taken.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 4 ins. diam., bears S. 23 1/2° W., 8.2 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 39° W., 15.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears S. 66 1/4° W., 10.1 ft. dist., mkd. X BT.
A quaking asp., 5 ins. diam., bears N. 26° W., 20.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.


Copy of Plat transmitted to Chitina Recording District
and recorded on June 16, 1995 as Plat # 95-9.

DUPLICATE ORIGINAL

Sheet 13 of 13

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 38
AND TRACTS A, B, C, D, AND E
P.L. 92-203 (85 STAT. 688, 702, 703)
AHTNA, INC.

AT
COPPER CENTER, ALASKA
AND
THE SUBDIVISION OF U.S. SURVEY NO. 2186
AND
THE RETRACEMENT OF U.S. SURVEY NO. 10633
WITHIN
TOWNSHIPS 2 NORTH, RANGES 1 EAST AND 1 WEST
COPPER RIVER MERIDIAN, ALASKA




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which

A power pole, 10 ins. diam., with a 50d spike driven 4 ins. into the power pole, 12 ins. above the ground, bears S. 1 1/4° W., 10.6 ft. dist.

A spruce, 7 ins. diam., bears S. 28 1/4° W., 64.4 ft. dist., mkd. X BT.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 64° 00' W., 5.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM 5.00 FT L34 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears N. 26 1/4° E., 51.6 ft. dist., mkd. X BT.

A black cottonwood, 11 ins. diam., bears N. 46 1/2° W., 52.8 ft. dist., mkd. X BT.


Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown

No accessories taken.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 13 ins. diam., bears S. 54 3/4° E., 6.9 ft. dist., mkd. X BT.

A spruce, 11 ins. diam., bears S. 69 3/4° W., 27.3 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 13 ins. diam., bears S. 23° W., 23.0 ft. dist., mkd. X BT.

A spruce, 13 ins. diam., bears N. 66° W., 69.5 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A poplar, 10 ins. diam., bears S. 21 1/4° W., 52.6 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears N. 77° W., 69.7 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Drive a railroad spike, 6 ins. long, flush with asphalt surface, with a chiseled X on top, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., set flush with the ground, for a reference monument, bears S. 64° 00' W., 5.00 ft. dist., with brass cap mkd. ANCSA 14C AI-1 RM L35 5.00 FT 1993 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A spruce, 6 ins. diam., bears S. 73 1/4° W., 38.4 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 69° W., 69.7 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 18 1/2° W., 24.1 ft. dist., mkd. X BT.

A spruce, 6 ins. diam., bears N. 29 1/2° W., 27.6 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 56 3/4° E., 32.9 ft. dist., mkd. X BT.

A spruce, 6 ins. diam., bears S. 55 1/4° E., 55.9 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A quaking asp, 6 ins. diam., bears S. 33° W., 57.9 ft. dist., mkd. X BT.

A quaking asp, 8 ins. diam., bears S. 79 1/2° W., 55.4 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears S. 53° E., 46.5 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears S. 15 3/4° E., 52.6 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron rod, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, no cap on rod.

At the corner point


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, encircled in a collar of stone, 12 ins. diam., to top of brass cap mkd. as shown

Bury the original monument alongside the stainless steel post.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron rod, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, with an alum. cap mkd. as shown



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. below the ground, with brass cap mkd. as shown

No accessories taken.


Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, encircled in a collar of stone, 12 ins. diam., to top of brass cap mkd. as shown

No accessories taken.

Deposit a magnet in a white plastic case at the base of the stainless steel post.



Recovered an iron rod, 5/8 in. diam., firmly set, 3 ins. below the ground, no cap on rod.




Recovered an iron rod, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, no cap on rod.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, encircled in a collar of stone, 12 ins. diam., with brass cap mkd. as shown

Bury the original monument alongside the stainless steel post.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron rod, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, no cap on rod.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, encircled in a collar of stone, 12 ins. diam., to top of brass cap mkd. as shown

Bury the original monument alongside the stainless steel post.


Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown

No accessories taken.

Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron rod, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, no cap on rod.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, encircled in a collar of stone, 12 ins. diam., with brass cap mkd. as shown

Bury the original monument alongside the stainless steel post.


Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the ground, with brass cap mkd. as shown

No accessories taken.


Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the ground, with brass cap mkd. as shown

No accessories taken.


Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

No accessories taken.


Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the ground, with brass cap mkd. as shown

No accessories taken.


Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the ground, with brass cap mkd. as shown

No accessories taken.

Deposit a magnet in a white plastic case at the base of the stainless steel post.



Recovered an iron rod, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, no cap on rod.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, encircled in a collar of stone, 12 ins. diam., to top of brass cap mkd. as shown

Bury the original monument alongside the stainless steel post.

Deposit a magnet in a white plastic case at the base of the stainless steel post.