

99-3 Nome Recording District

Sheet 1 of 10

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(C), LOTS 1 THROUGH 28 (P.L. 92-203, 85 STAT. 686, 702, 703) COUNCIL NATIVE CORPORATION.

AT COUNCIL, ALASKA

THE RETRACEMENT OF PORTIONS OF U.S. SURVEY NO'S. 8877 AND 8979 THE DEPENDENT RESURVEY AND RETRACEMENT OF PORTIONS OF MINERAL SURVEY NO'S. 1152 AND 2317 AND THE REMAINDERS OF A PORTION OF THE MEANDERS OF THE NIUKLUK RIVER

This plat contains the entire survey record.

Mineral Survey No. 1152, including the establishment of U.S. Location Monument No. 1152, was surveyed by Arthur G. Blake, U.S. Mineral Surveyor, in 1914. That portion of Mineral Survey No. 1152 easterly of the right bank of the Niukluk River was cancelled in 1919, amending the Sunnyside Fraction, J. E. Miller, and L. and A. Placers.

Mineral Survey No. 2317, including the remonumentation of U.S. Location Monument No. 1152, was surveyed by Maurice P. Oswald, Mineral Surveyor, in 1977.

The monumentation of the exterior boundaries of Township 7 South, Range 25 West, Kateel River Meridian, was established by John H. Herring, for Bell, Herring and Associates, in 1979, under Contract No. YA-512-CT9-117 and Special Instructions for Group No. 170, Alaska.

The Council Airport Property Plan, which was used to determine a portion of the southwesterly boundary of Lot 1, was approved by the State of Alaska, Department of Transportation and Public Facilities, in 1986, and revised in 1987.

U.S. Survey No. 8877, comprising 4 lots, was surveyed by Leo von Scheben, Jr., Registered Land Surveyor No. 3203, Alaska, in 1986.

U.S. Survey No. 8979, comprising 2 lots, was surveyed by Michael D. Wilson, Cadastral Surveyor, in 1986.

U.S. Survey No. 9993, comprising 2 lots, was surveyed by Christopher D. Wiita, Cadastral Surveyor, in 1989.

U.S. Survey No. 9994 was surveyed by Paul L. Moss, Cadastral Surveyor, in 1989.

This survey was executed by Christopher D. Wiita, Cadastral Surveyor, September 4 through October 1, 1989, in accordance with the principals set forth in the Manual of Surveying Instructions, 1973, Special Instructions approved September 11, 1989, and Assignment Instructions dated September 3, 1989.

Field assistants were:

- Randy J. Deanes, Land Surveyor
Robert H. Einarsen, Jr., Land Surveyor
Paul L. Moss, Land Surveyor
Steven G. Schmitt, Land Surveyor
Billy E. Carroll, Surveying Technician

Area: 257.82 Acres.

The azimuth was obtained from direct observations of the sun, using the hour angle method, and refers to the true meridian.

The geographic position of U.S. Location Monument No. 1152, as computed from the record of U.S. Survey No. 9993, is:

Latitude: 64° 53' 24.69" North

NAD 27

Longitude: 163° 39' 47.38" West

The mean magnetic declination was obtained from U.S. Geological Survey quadrangle map "SOLOMON (D-4)," Alaska, 1950 edition, with minor revisions in 1973.

This survey is situated on both banks of the Niukluk River, at the village of Council, within Township 7 South, Range 25 West, Kateel River Meridian, Alaska.

The southerly portion is generally level, open tundra, with some alder, willow, and spruce growth found along the Niukluk River. Northerly of the river, the land ascends a spruce timbered, southeasterly slope, rising to an elevation of 250 ft. above sea level (175 ft. above the level of the Niukluk River) at cor. No. 12, Lot 1. Soil in the lower areas was found to be sandy gravel and loam, while in the upland and tundra covered areas clayey loams were predominate, frozen from 6 to 8 ins. below the surface at the time of survey.

The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT Anchorage, Alaska

The survey represented by this plat, sheets 1 - 10, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.


For the Director

Must C. Parnes (ACTING)

March 18, 1999 Date

Deputy State Director for Cadastral Survey, Alaska

COPY

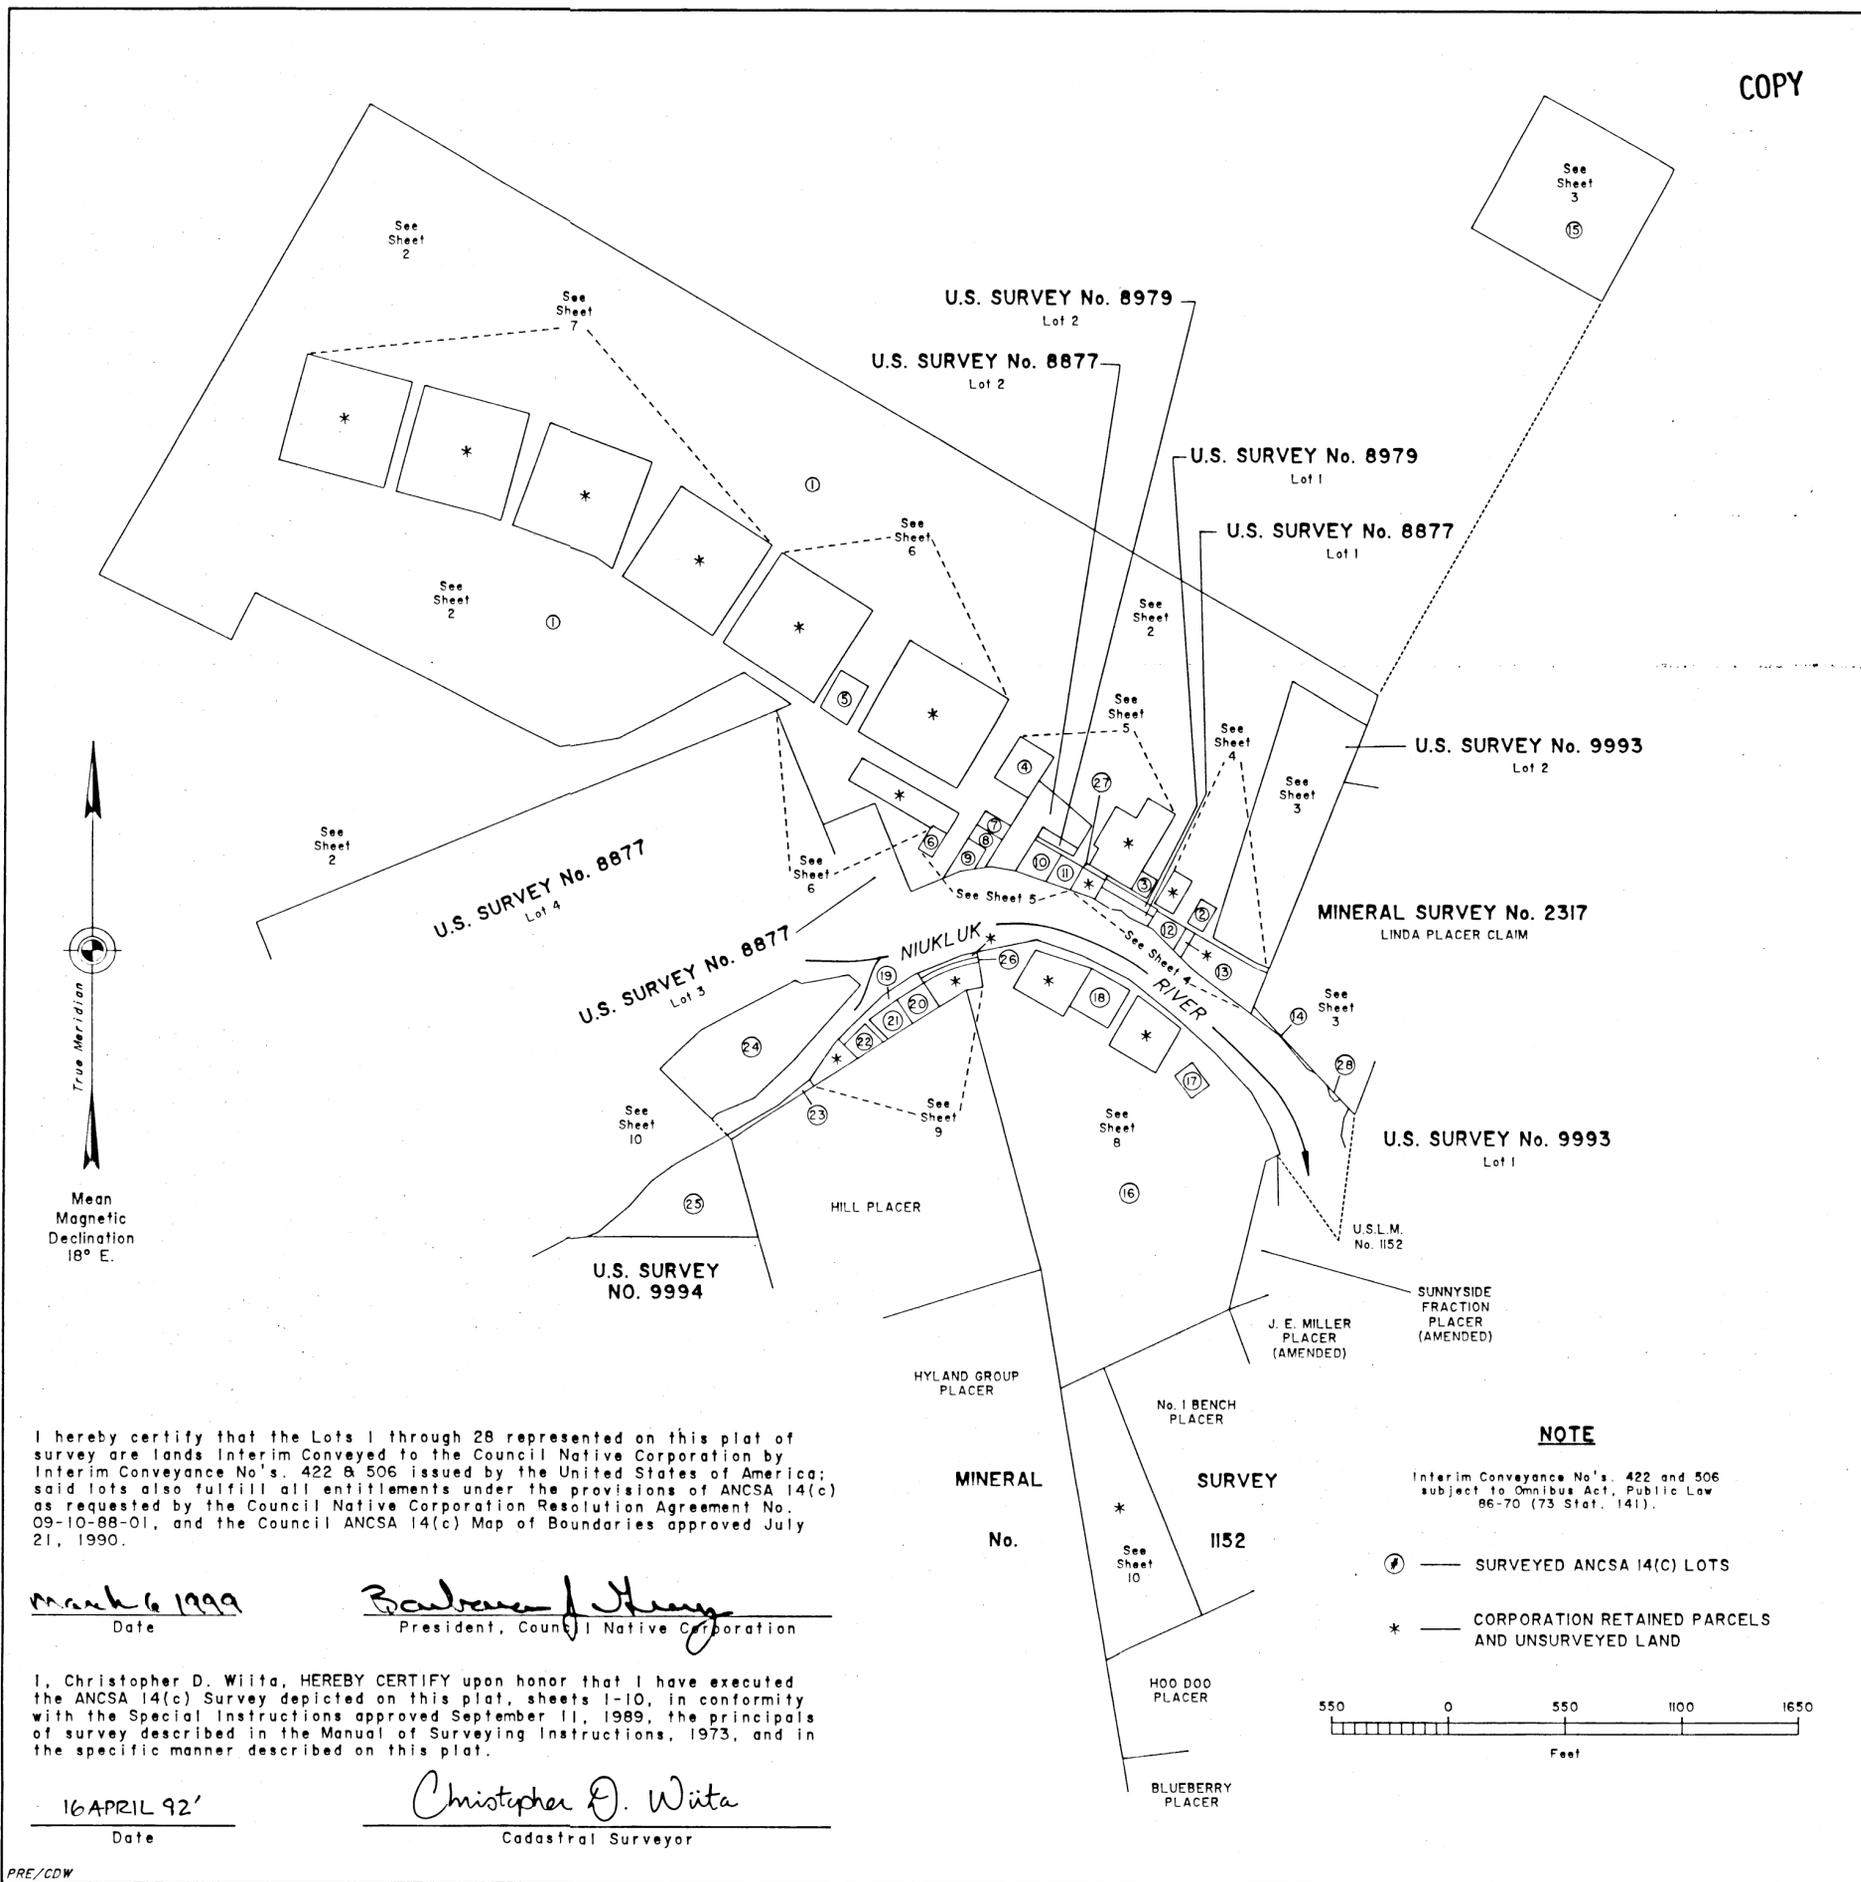

I hereby certify that the Lots 1 through 28 represented on this plat of survey are lands Interim Conveyed to the Council Native Corporation by Interim Conveyance No's. 422 & 506 issued by the United States of America; said lots also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by the Council Native Corporation Resolution Agreement No. 09-10-88-01, and the Council ANCSA 14(c) Map of Boundaries approved July 21, 1990.

March 6, 1999 Date
Barbara J. Henry President, Council Native Corporation


I, Christopher D. Wiita, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-10, in conformity with the Special Instructions approved September 11, 1989, the principals of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.

16 APRIL 92' Date
Christopher D. Wiita Cadastral Surveyor

NOTE

Interim Conveyance No's. 422 and 506 subject to Omnibus Act, Public Law 96-70 (73 Stat. 141).

- ⊙ SURVEYED ANCSA 14(C) LOTS
* CORPORATION RETAINED PARCELS AND UNSURVEYED LAND



99-3 Nome Recording District

Sheet 2 of 10

COPY

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(C), LOTS 1 THROUGH 28 (P.L. 92-203, 85 STAT. 688, 702, 703) COUNCIL NATIVE CORPORATION. AT COUNCIL, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

From cor. No. 12, Lot 1.

A spruce, 8 ins. diam., bears S 9° E., 171 1/2 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears S 80 1/4° W., 112 ft. dist., mkd. X BT.

From the witness point on line 12-13, Lot 1.

A spruce, 8 ins. diam., bears S 66 1/4° W., 25 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears N 17 1/4° W., 41 ft. dist., mkd. X BT.

From cor. No. 13, Lot 1.

A spruce, 6 ins. diam., bears S 68 3/4° W., 112 ft. dist., mkd. X BT.



From cor. No. 3, Lot 4, U.S. Survey No. 8877

A spruce, 4 ins. diam., bears N 7 1/4° E., 88 1/2 ft. dist., with scribe mark X visible on an open blaze. (Record, N. 16° E.)
A spruce, 6 ins. diam., bears S 76 3/4° E., 37 ft. dist., with scribe marks X BT visible on an open blaze. (Record, S. 74° E.)
A spruce, 5 ins. diam., bears S 3 1/2° E., 105 ft. dist., with scribe marks X BT visible on an open blaze. (Record, S. 50° W., 107 ft. dist.)
A spruce, 6 ins. diam., bears S 87 1/4° W., 82 ft. dist., with scribe marks X BT visible on an open blaze. (Record, N. 89° W.)

LEGEND

Unless otherwise shown:

- Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet at the base of the stainless steel post. No accessories taken.
- Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet at the base of the iron post. No accessories taken.
- Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 to 8 ins. above the ground, with alum. cap mkd. and referenced as described in the official record.
- Found an iron rebar or nail, 1/4 to 1/2 ins. diam., firmly set, projecting 1 to 2 ins. above the ground.



9A-3 Name Recording District

Sheet 3 of 10

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(C), LOTS 1 THROUGH 28 (P.L. 92-203, 85 STAT. 688, 702, 703) COUNCIL NATIVE CORPORATION.

AT COUNCIL, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION


COPY

MEANDERS


Along a sloping, sandy bank, with willow and grass growth to waters edge, of the line of mean high water.

- Lot 28: 1. S. 58°09' W., 26.16 FT.; 2. N. 42°49' W., 40.26 FT.; 3. N. 12°14' W., 49.09 FT.; Lot 14: 4. N. 61°53' W., 47.92 FT.; 5. N. 40°12' W., 204.60 FT.; 6. N. 52°55' W., 168.60 FT.

At end of course, begin along the base of a steep, bedrock bluff, 5 to 30 ft. high.

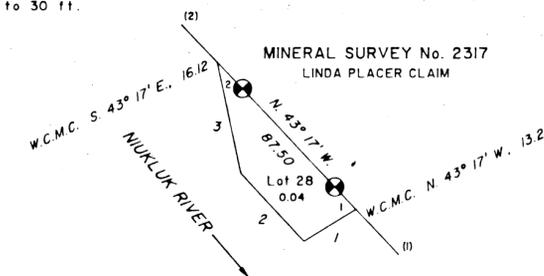

ENLARGED DIAGRAM A



MINERAL SURVEY No. 2317 LINDA PLACER CLAIM

NIUKLUK RIVER

RIVER

SEE ENLARGED DIAGRAM A


MEL SING CREEK

U.S. SURVEY No. 9993 Lot 1

U.S.L.M. No. 1152

The witness cor. to cor. No. 1, Lot 16, a meander cor., identical with cor. No. 4, Sunnyside Fraction Placer (Amended), Mineral Survey No. 1152.

See Sheet 8




LEGEND

Unless otherwise shown:

- Stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet at the base of the stainless steel post. No accessories taken.
Found an iron post, 2 1/2 ins. diam., firmly set, projecting 1 to 3 ins. above the ground, with brass cap mkd. and referenced as described in the official record.
Found an alum. post, 2 ins. diam., firmly set, projecting 2 to 6 ins. above the ground, with alum. cap mkd. and referenced as described in the official record.
Drive an alum. rod, 3 to 6 ft. long, 3/4 ins. diam., 3 to 6 ft. in the ground, with alum. cap mkd. CNC ANCSA 14(c), the appropriate lot and cor. numbers, and the date. Bury a clear DEEP-1 magnet alongside the alum. rod, 12 to 18 ins. below the surface. No accessories taken.

U.S. SURVEY No. 9993 Lot 2

MINERAL SURVEY No. 2317 LINDA PLACER CLAIM

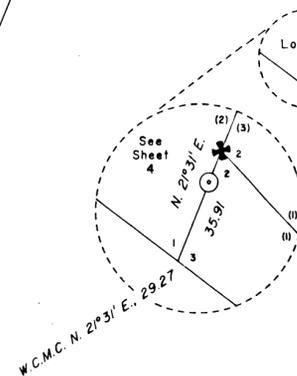

W.C.M.C. N. 2°31' E., 29.27

N. 43°17' W.

W.C.M.C. N. 43°17' W., 26.43

699.87

71.83

61.39




7.26

40.92

S. 7°10' W.

586.74

432.24



Mean Magnetic Declination 18° E.

From cor. No. 3, Lot 15. A spruce, 6 ins. diam., bears S. 63 1/4° W., 28 ft. dist., mkd. X BT. A spruce, 7 ins. diam., bears N. 15° W., 37 ft. dist., mkd. X BT.

From cor. No. 4, Lot 15. A spruce, 12 ins. diam., bears N. 47 3/4° E., 8 ft. dist., mkd. X BT. A spruce, 6 ins. diam., bears N. 86° W., 31 ft. dist., mkd. X BT.

From cor. No. 2, Lot 15. A spruce, 8 ins. diam., bears S. 30 1/4° E., 33 1/2 ft. dist., mkd. X BT. A spruce, 10 ins. diam., bears S. 75 3/4° W., 58 ft. dist., mkd. X BT.

From cor. No. 1, Lot 15. A spruce, 4 ins. diam., bears S. 8 1/4° E., 20 1/2 ft. dist., mkd. X BT. A spruce, 6 ins. diam., bears N. 65 1/2° W., 5 1/2 ft. dist., mkd. X BT.

See Sheet 2

See Sheet 4

See Sheet 2

See Sheet 4

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(C), LOTS 1 THROUGH 28 (P.L. 92-203, 85 STAT. 688, 702, 703) COUNCIL NATIVE CORPORATION.

AT COUNCIL, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

COPY

Lot I See Sheet 2

MEANDERS

Along the base of a steep, bedrock bluff, 5 to 30 ft. high, at the line of mean high water.

- Lot 13
- 7. N. 52°55' W., 137.64 FT.
- 8. N. 51°59' W., 214.50 FT.
- 9. N. 44°33' W., 76.32 FT.

Corporation Retained Parcel

- 10. N. 44°33' W., 49.96 FT.

Lot 12


- 11. N. 44°33' W., 142.34 FT.
- 12. N. 64°37' W., 25.81 FT.

Reminders of Lot 1, U.S. Survey No. 8877

- 13. N. 64°37' W., 97.94 FT.
- 14. N. 46°41' W., 46.86 FT.
- 15. N. 83°35' W., 50.16 FT.
- 16. N. 58°08' W., 89.49 FT.

Corporation Retained Parcel

- 17. N. 58°08' W., 16.11 FT. At end of course, begin along a gently sloping silt and gravel beach.
- 18. N. 71°00' W., 109.18 FT.

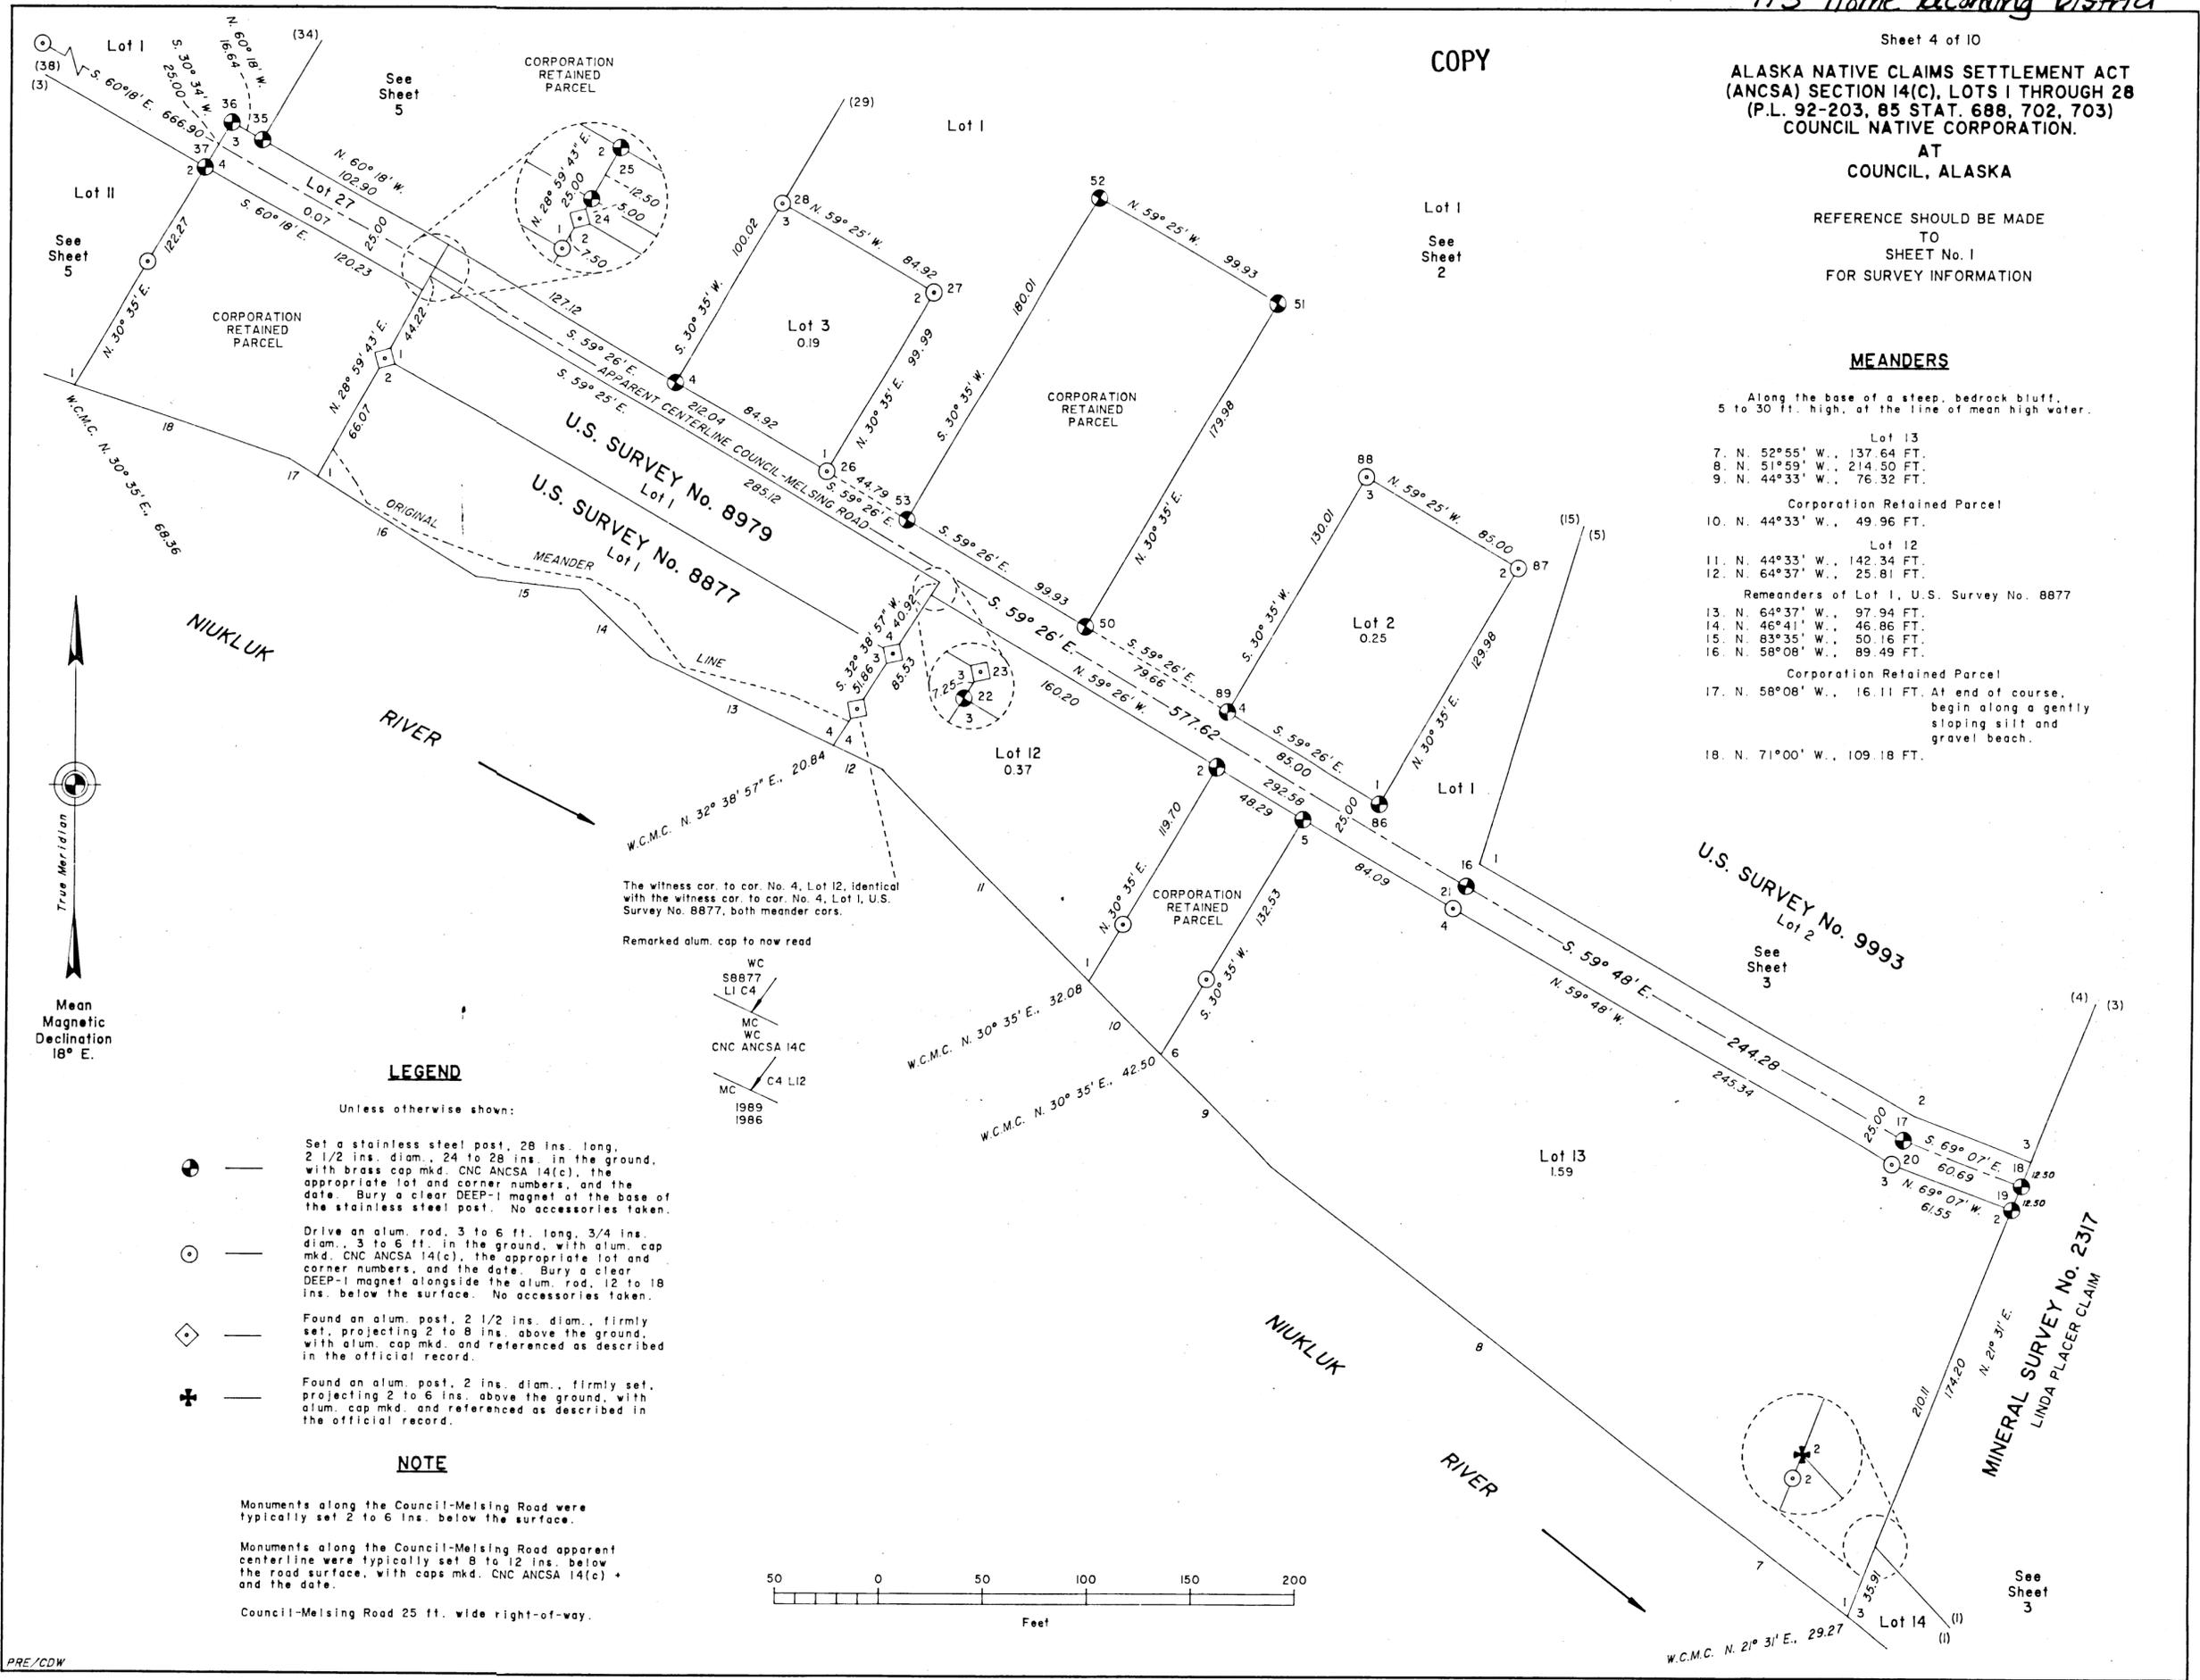

Mean Magnetic Declination 18° E.

LEGEND

Unless otherwise shown:


- — Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet at the base of the stainless steel post. No accessories taken.
- — Drive an alum. rod, 3 to 6 ft. long, 3/4 ins. diam., 3 to 6 ft. in the ground, with alum. cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet alongside the alum. rod, 12 to 18 ins. below the surface. No accessories taken.
- ◇ — Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 to 8 ins. above the ground, with alum. cap mkd. and referenced as described in the official record.
- ⊕ — Found an alum. post, 2 ins. diam., firmly set, projecting 2 to 6 ins. above the ground, with alum. cap mkd. and referenced as described in the official record.

NOTE

Monuments along the Council-Melsing Road were typically set 2 to 6 ins. below the surface.

Monuments along the Council-Melsing Road apparent centerline were typically set 8 to 12 ins. below the road surface, with caps mkd. CNC ANCSA 14(c) + and the date.

Council-Melsing Road 25 ft. wide right-of-way.



ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(C), LOTS 1 THROUGH 28 (P.L. 92-203, 85 STAT. 688, 702, 703) COUNCIL NATIVE CORPORATION. AT COUNCIL, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

COPY

Lot 1

See Sheet 2

From cor. No. 29, Lot 1. A spruce, 8 ins. diam., bears S. 75 1/4° E., 18 ft. dist., mkd. X BT. A spruce, 6 ins. diam., bears N. 29 1/4° W., 51 ft. dist., mkd. X BT.

From cor. No. 30, Lot 1. A spruce, 5 ins. diam., bears S. 65 1/2° E., 40 ft. dist., mkd. X BT. A spruce, 7 ins. diam., bears S. 1° W., 14 1/2 ft. dist., mkd. X BT.


LEGEND

Unless otherwise shown:

- Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet at the base of the stainless steel post. No accessories taken. Drive an alum. rod, 3 to 6 ft. long, 3/4 ins. diam., 3 to 6 ft. in the ground, with alum. cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet alongside the alum. rod, 12 to 18 ins. below the surface. No accessories taken. Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 to 8 ins. above the ground, with alum. cap mkd. and referenced as described in the official record.

NOTE

Monuments along the Nome-Council Omnibus, Council-Ophir Creek Omnibus, and Council-Melsing Roads were typically set 2 to 6 ins. below the surface. Monuments along the Nome-Council Omnibus, Council-Ophir Creek Omnibus, and Council-Melsing Road apparent centerlines were typically set 8 to 12 ins. below the road surface, with caps mkd. CNC ANCSA 14(c) + and the date. Nome-Council Omnibus Road 200 ft. wide right-of-way. Council-Ophir Creek Omnibus Road 100 ft. wide right-of-way. Council-Melsing Road 25 ft. wide right-of-way.

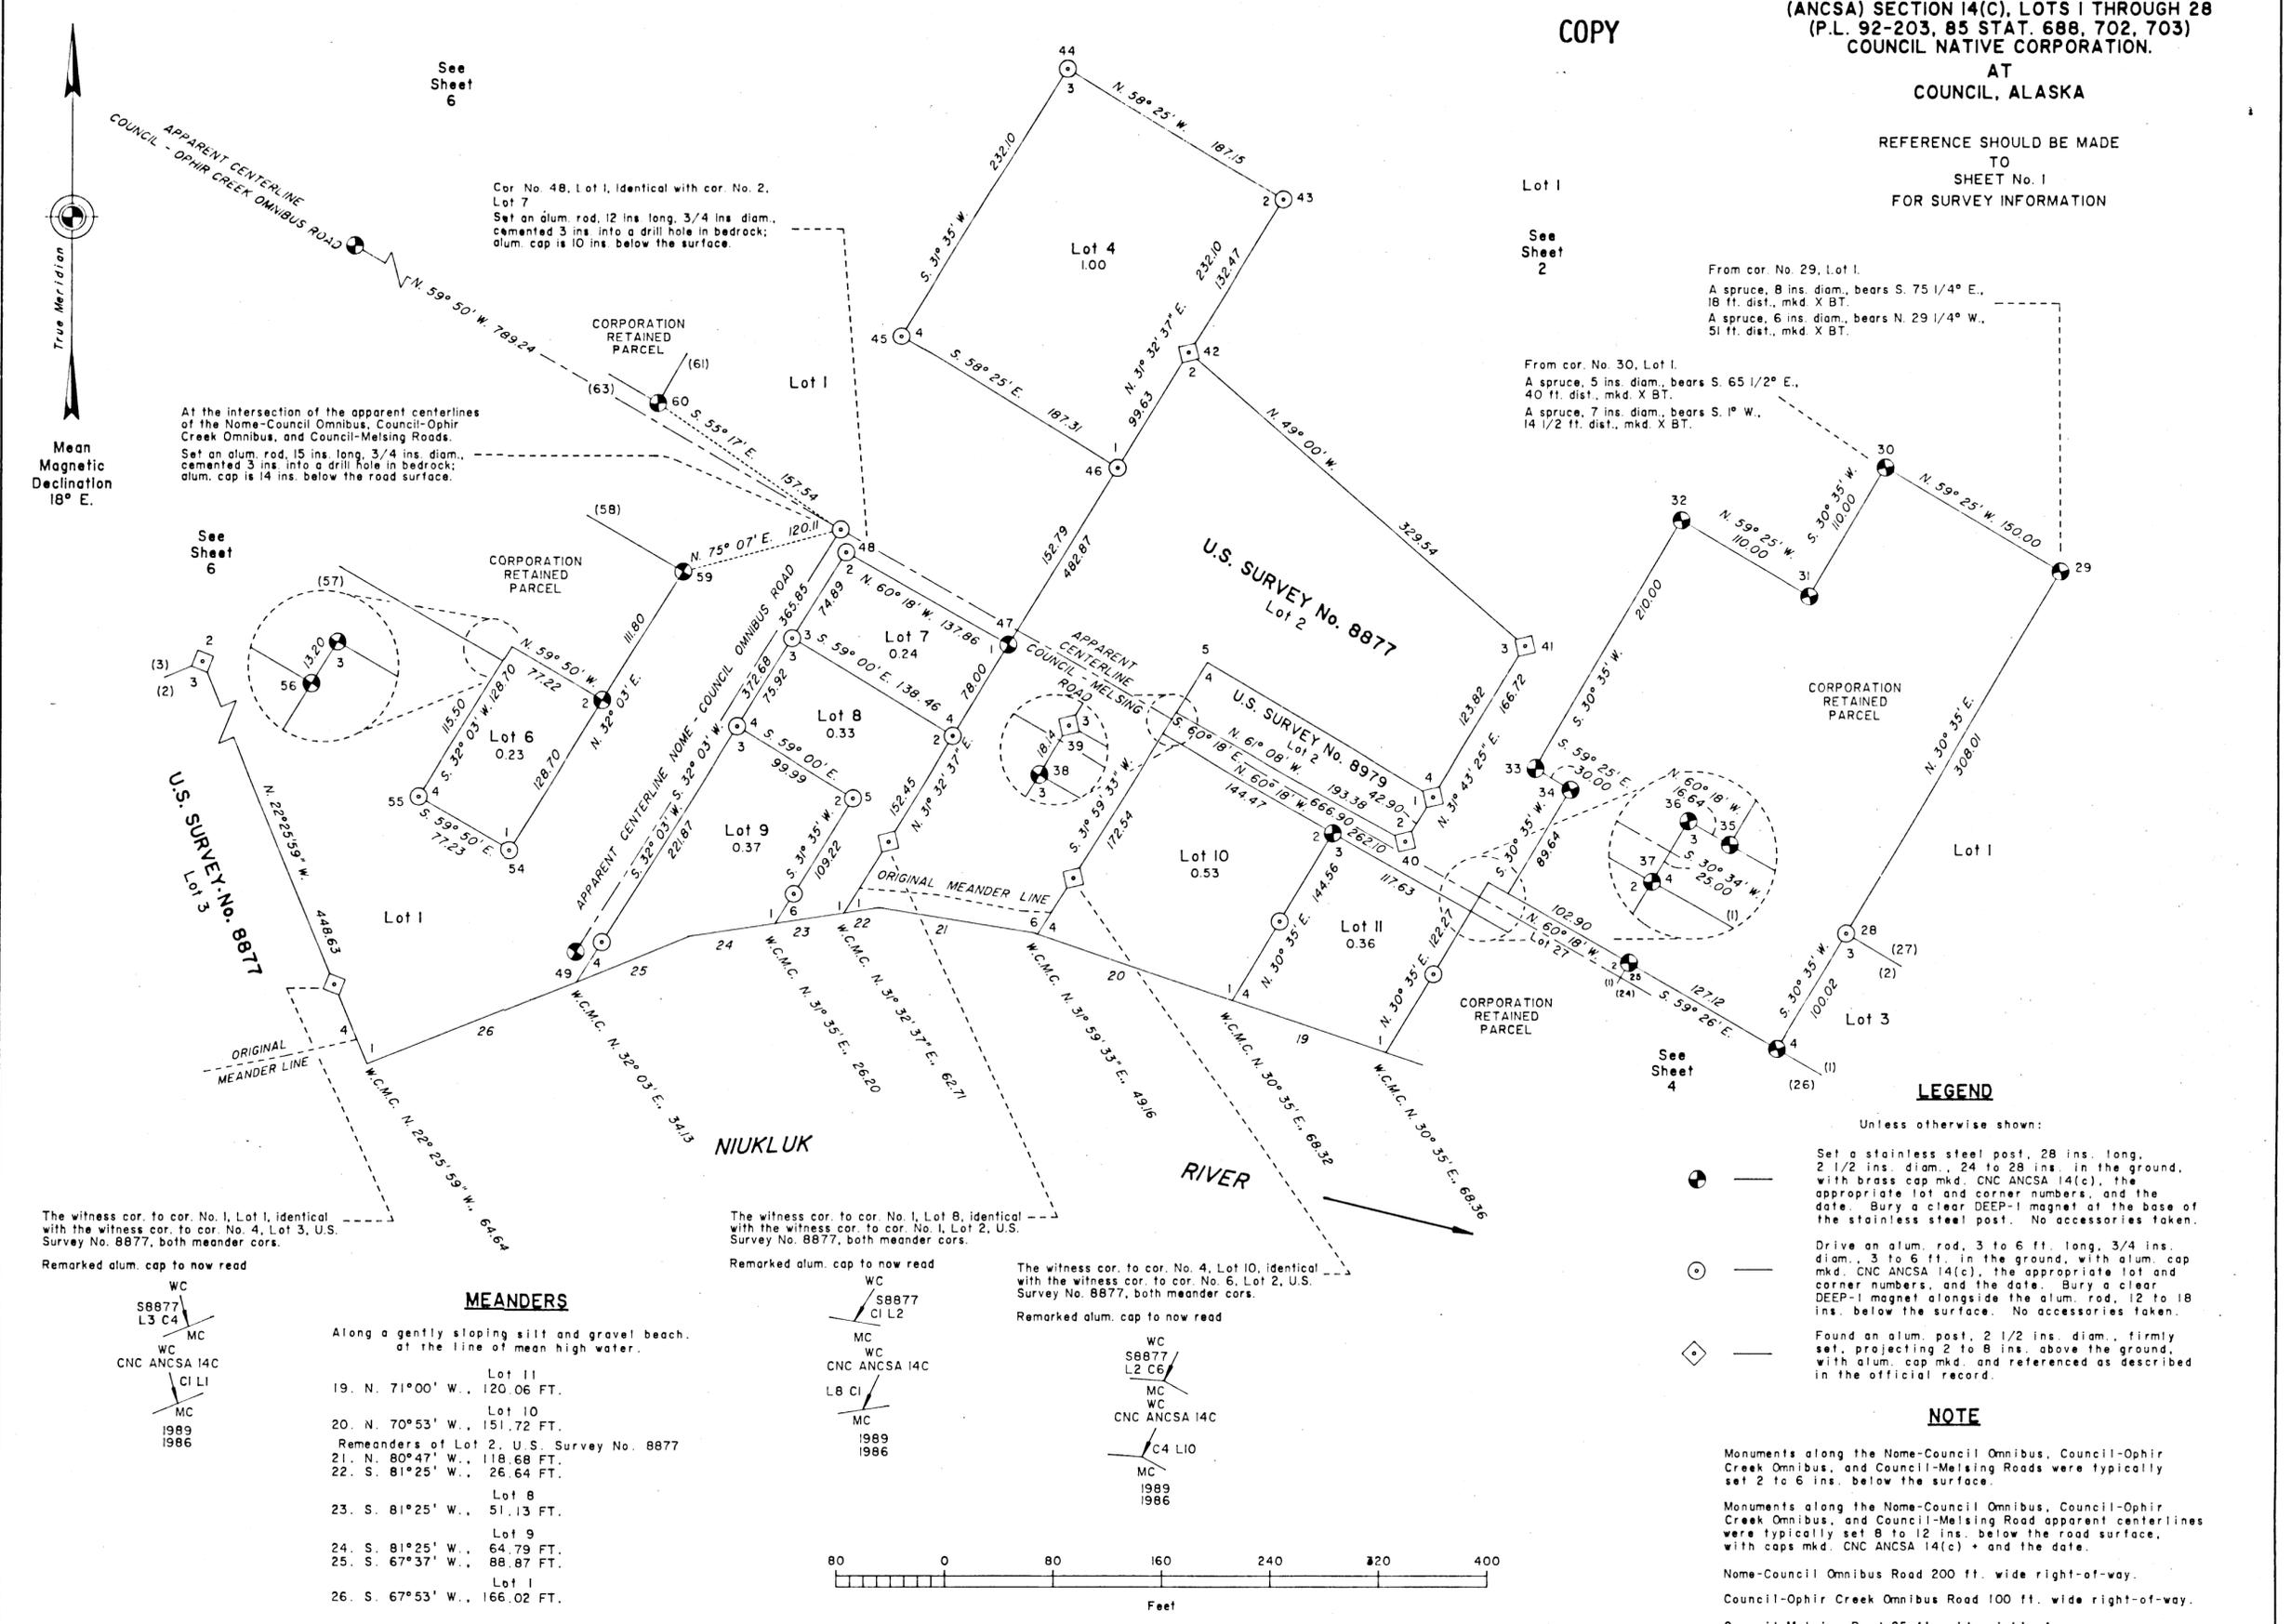

See Sheet 6

Cor. No. 48, Lot 1, identical with cor. No. 2, Lot 7. Set an alum. rod, 12 ins. long, 3/4 ins. diam., cemented 3 ins. into a drill hole in bedrock; alum. cap is 10 ins. below the surface.

At the intersection of the apparent centerlines of the Nome-Council Omnibus, Council-Ophir Creek Omnibus, and Council-Melsing Roads. Set an alum. rod, 15 ins. long, 3/4 ins. diam., cemented 3 ins. into a drill hole in bedrock; alum. cap is 14 ins. below the road surface.

See Sheet 6

CORPORATION RETAINED PARCEL

CORPORATION RETAINED PARCEL


CORPORATION RETAINED PARCEL

CORPORATION RETAINED PARCEL

True Meridian
Mean Magnetic Declination 18° E.

The witness cor. to cor. No. 1, Lot 1, identical with the witness cor. to cor. No. 4, Lot 3, U.S. Survey No. 8877, both meander cors.

Remarked alum. cap to now read




MEANDERS

Along a gently sloping silt and gravel beach, at the line of mean high water.

- 19. N. 71°00' W., 120.06 FT. Lot 11
20. N. 70°53' W., 151.72 FT. Lot 10
Remanders of Lot 2, U.S. Survey No. 8877
21. N. 80°47' W., 118.68 FT.
22. S. 81°25' W., 26.64 FT.
23. S. 81°25' W., 51.13 FT. Lot 8
24. S. 81°25' W., 64.79 FT. Lot 9
25. S. 67°37' W., 88.87 FT.
26. S. 67°53' W., 166.02 FT. Lot 1



The witness cor. to cor. No. 1, Lot 8, identical with the witness cor. to cor. No. 1, Lot 2, U.S. Survey No. 8877, both meander cors.

Remarked alum. cap to now read



The witness cor. to cor. No. 4, Lot 10, identical with the witness cor. to cor. No. 6, Lot 2, U.S. Survey No. 8877, both meander cors.

Remarked alum. cap to now read



99.3 Nome Boarding District



Sheet 6 of 10

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(C), LOTS 1 THROUGH 28 (P.L. 92-203, 85 STAT. 688, 702, 703) COUNCIL NATIVE CORPORATION.

AT COUNCIL, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

COPY

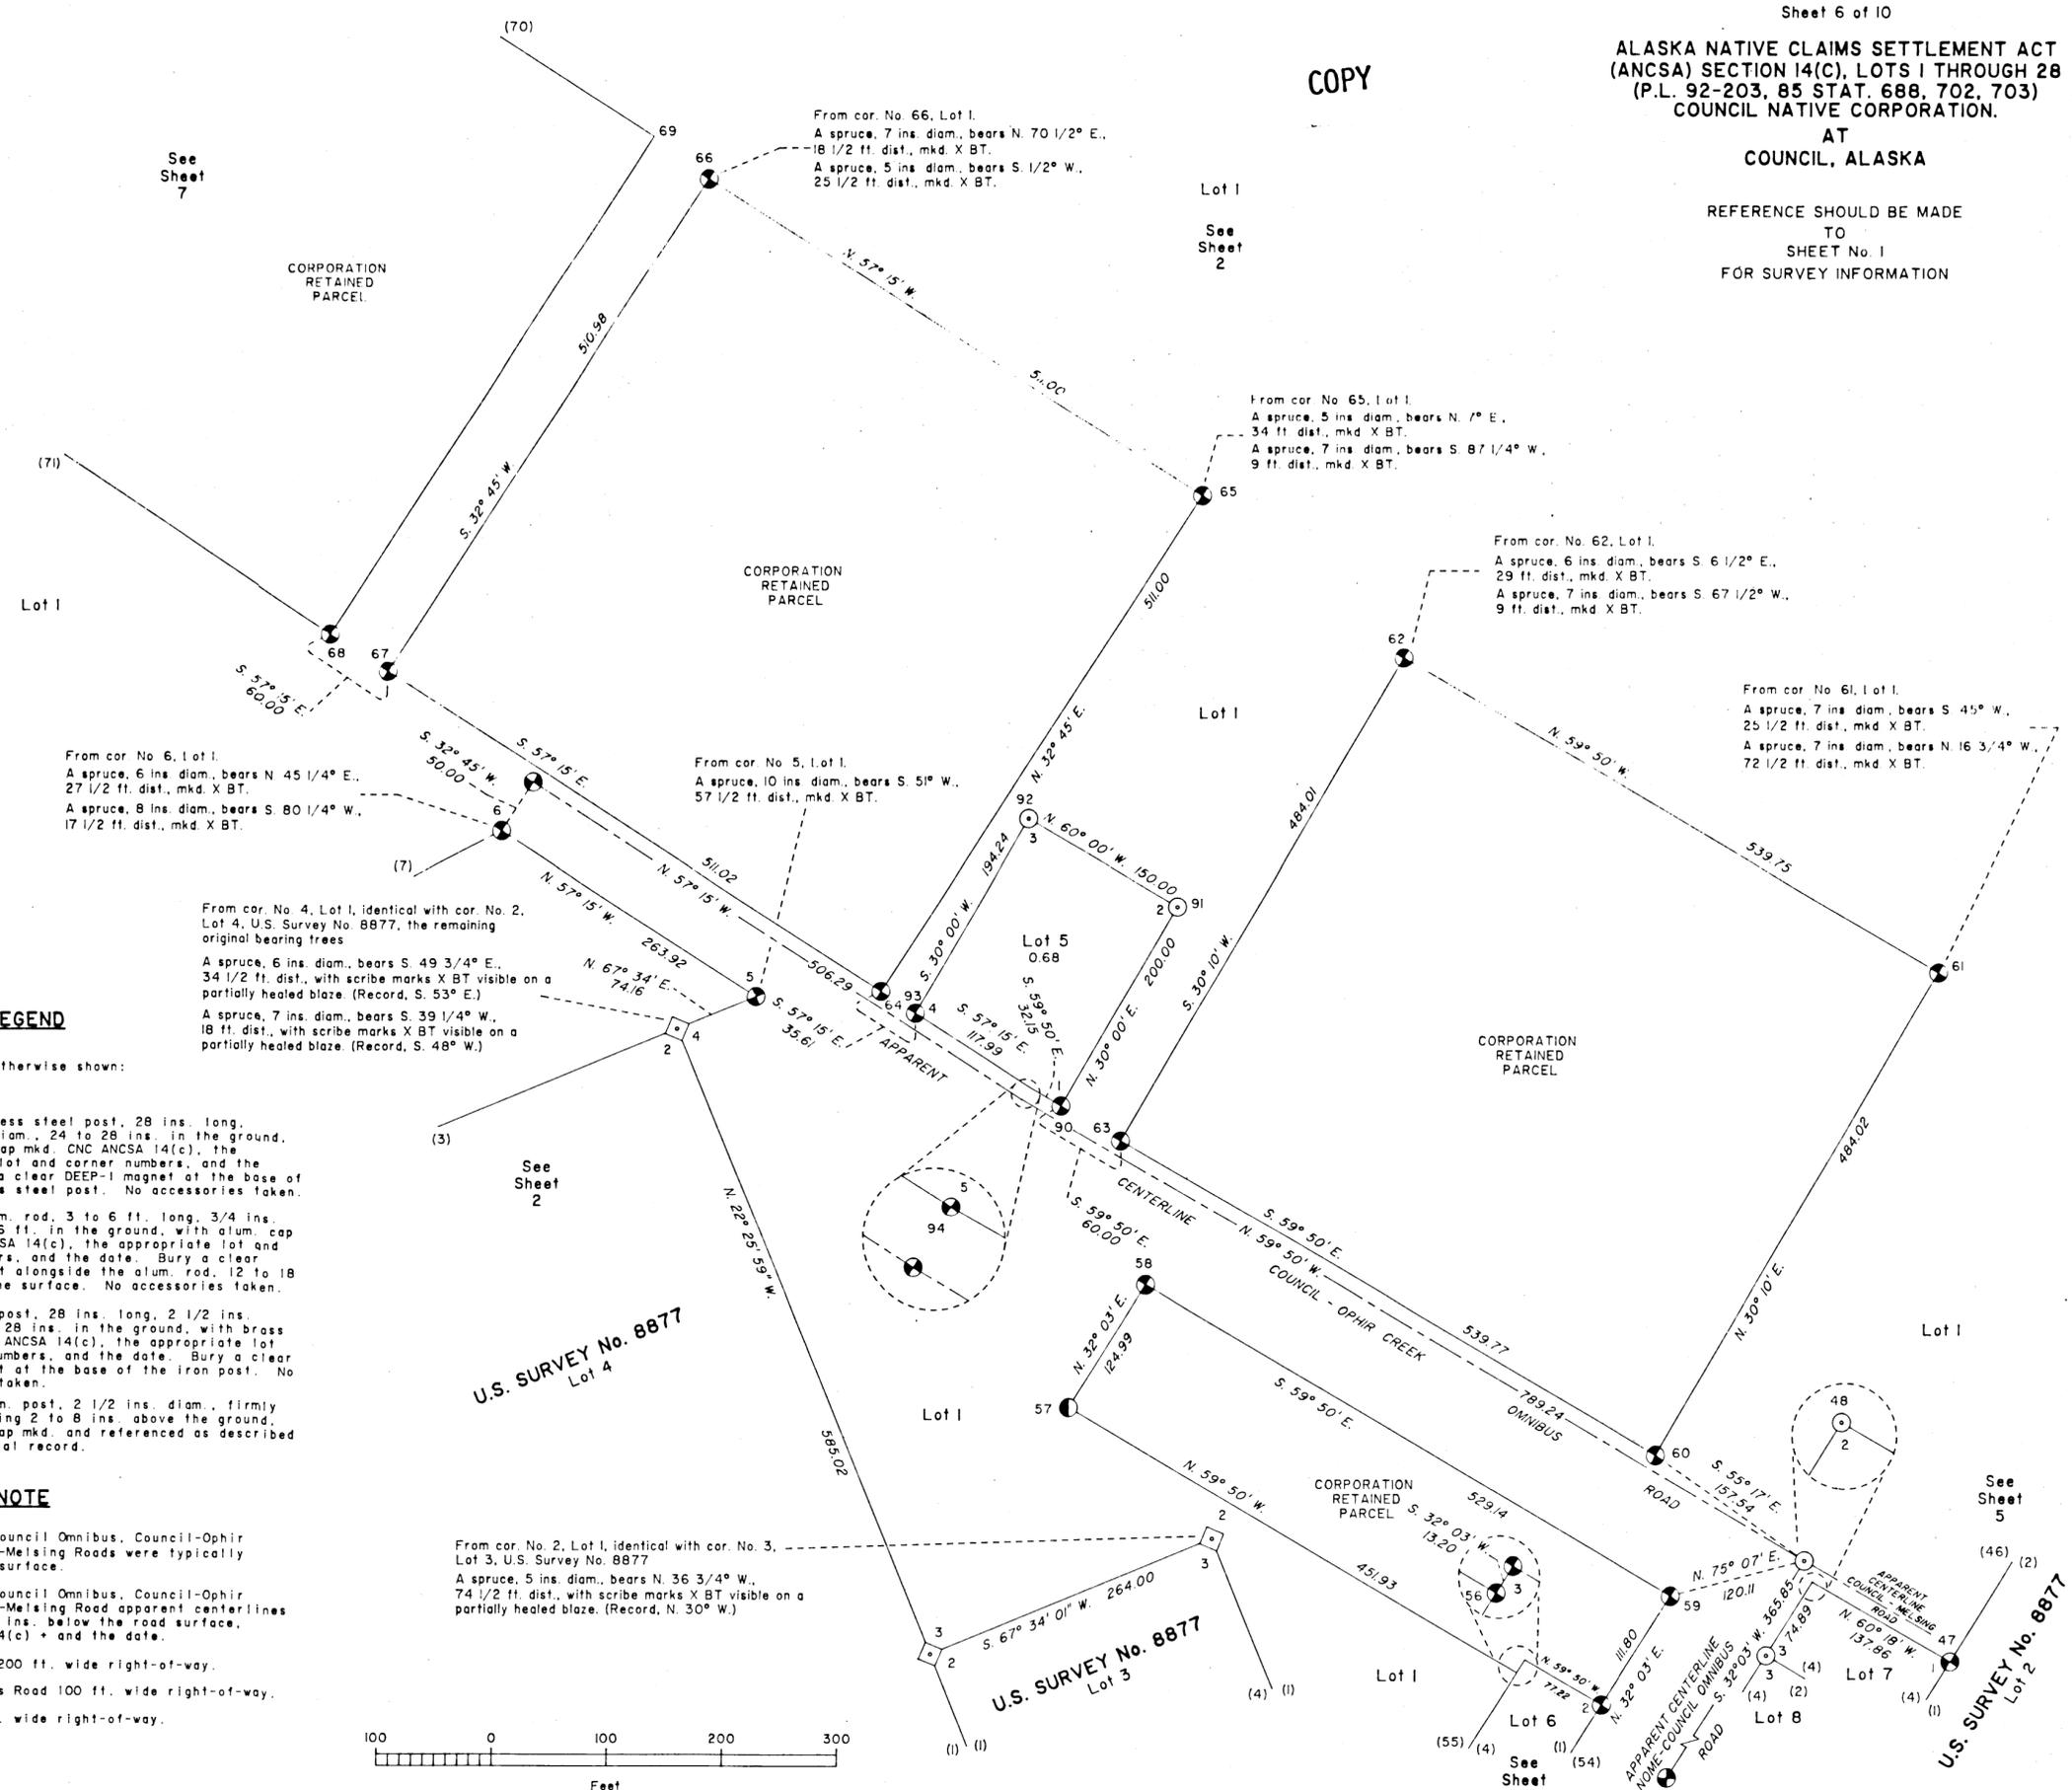

LEGEND

Unless otherwise shown:


- — Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet at the base of the stainless steel post. No accessories taken.
- — Drive an alum. rod, 3 to 6 ft. long, 3/4 ins. diam., 3 to 6 ft. in the ground, with alum. cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet alongside the alum. rod, 12 to 18 ins. below the surface. No accessories taken.
- — Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet at the base of the iron post. No accessories taken.
- ◇ — Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 to 8 ins. above the ground, with alum. cap mkd. and referenced as described in the official record.

NOTE

Monuments along the Nome-Council Omnibus, Council-Ophir Creek Omnibus, and Council-Melsing Roads were typically set 2 to 6 ins. below the surface.

Monuments along the Nome-Council Omnibus, Council-Ophir Creek Omnibus, and Council-Melsing Road apparent centerlines were typically set 8 to 12 ins. below the road surface, with caps mkd. CNC ANCSA 14(c) and the date.

Nome-Council Omnibus Road 200 ft. wide right-of-way.
 Council-Ophir Creek Omnibus Road 100 ft. wide right-of-way.
 Council-Melsing Road 25 ft. wide right-of-way.



99-3 Name Recording District

Sheet 7 of 10

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(C), LOTS 1 THROUGH 28 (P.L. 92-203, 85 STAT. 688, 702, 703) COUNCIL NATIVE CORPORATION.

AT COUNCIL, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

COPY




LEGEND

Unless otherwise shown:

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet at the base of the stainless steel post. No accessories taken.

NOTE

Council-Ophir Creek Omnibus Road 100 ft. wide right-of-way.

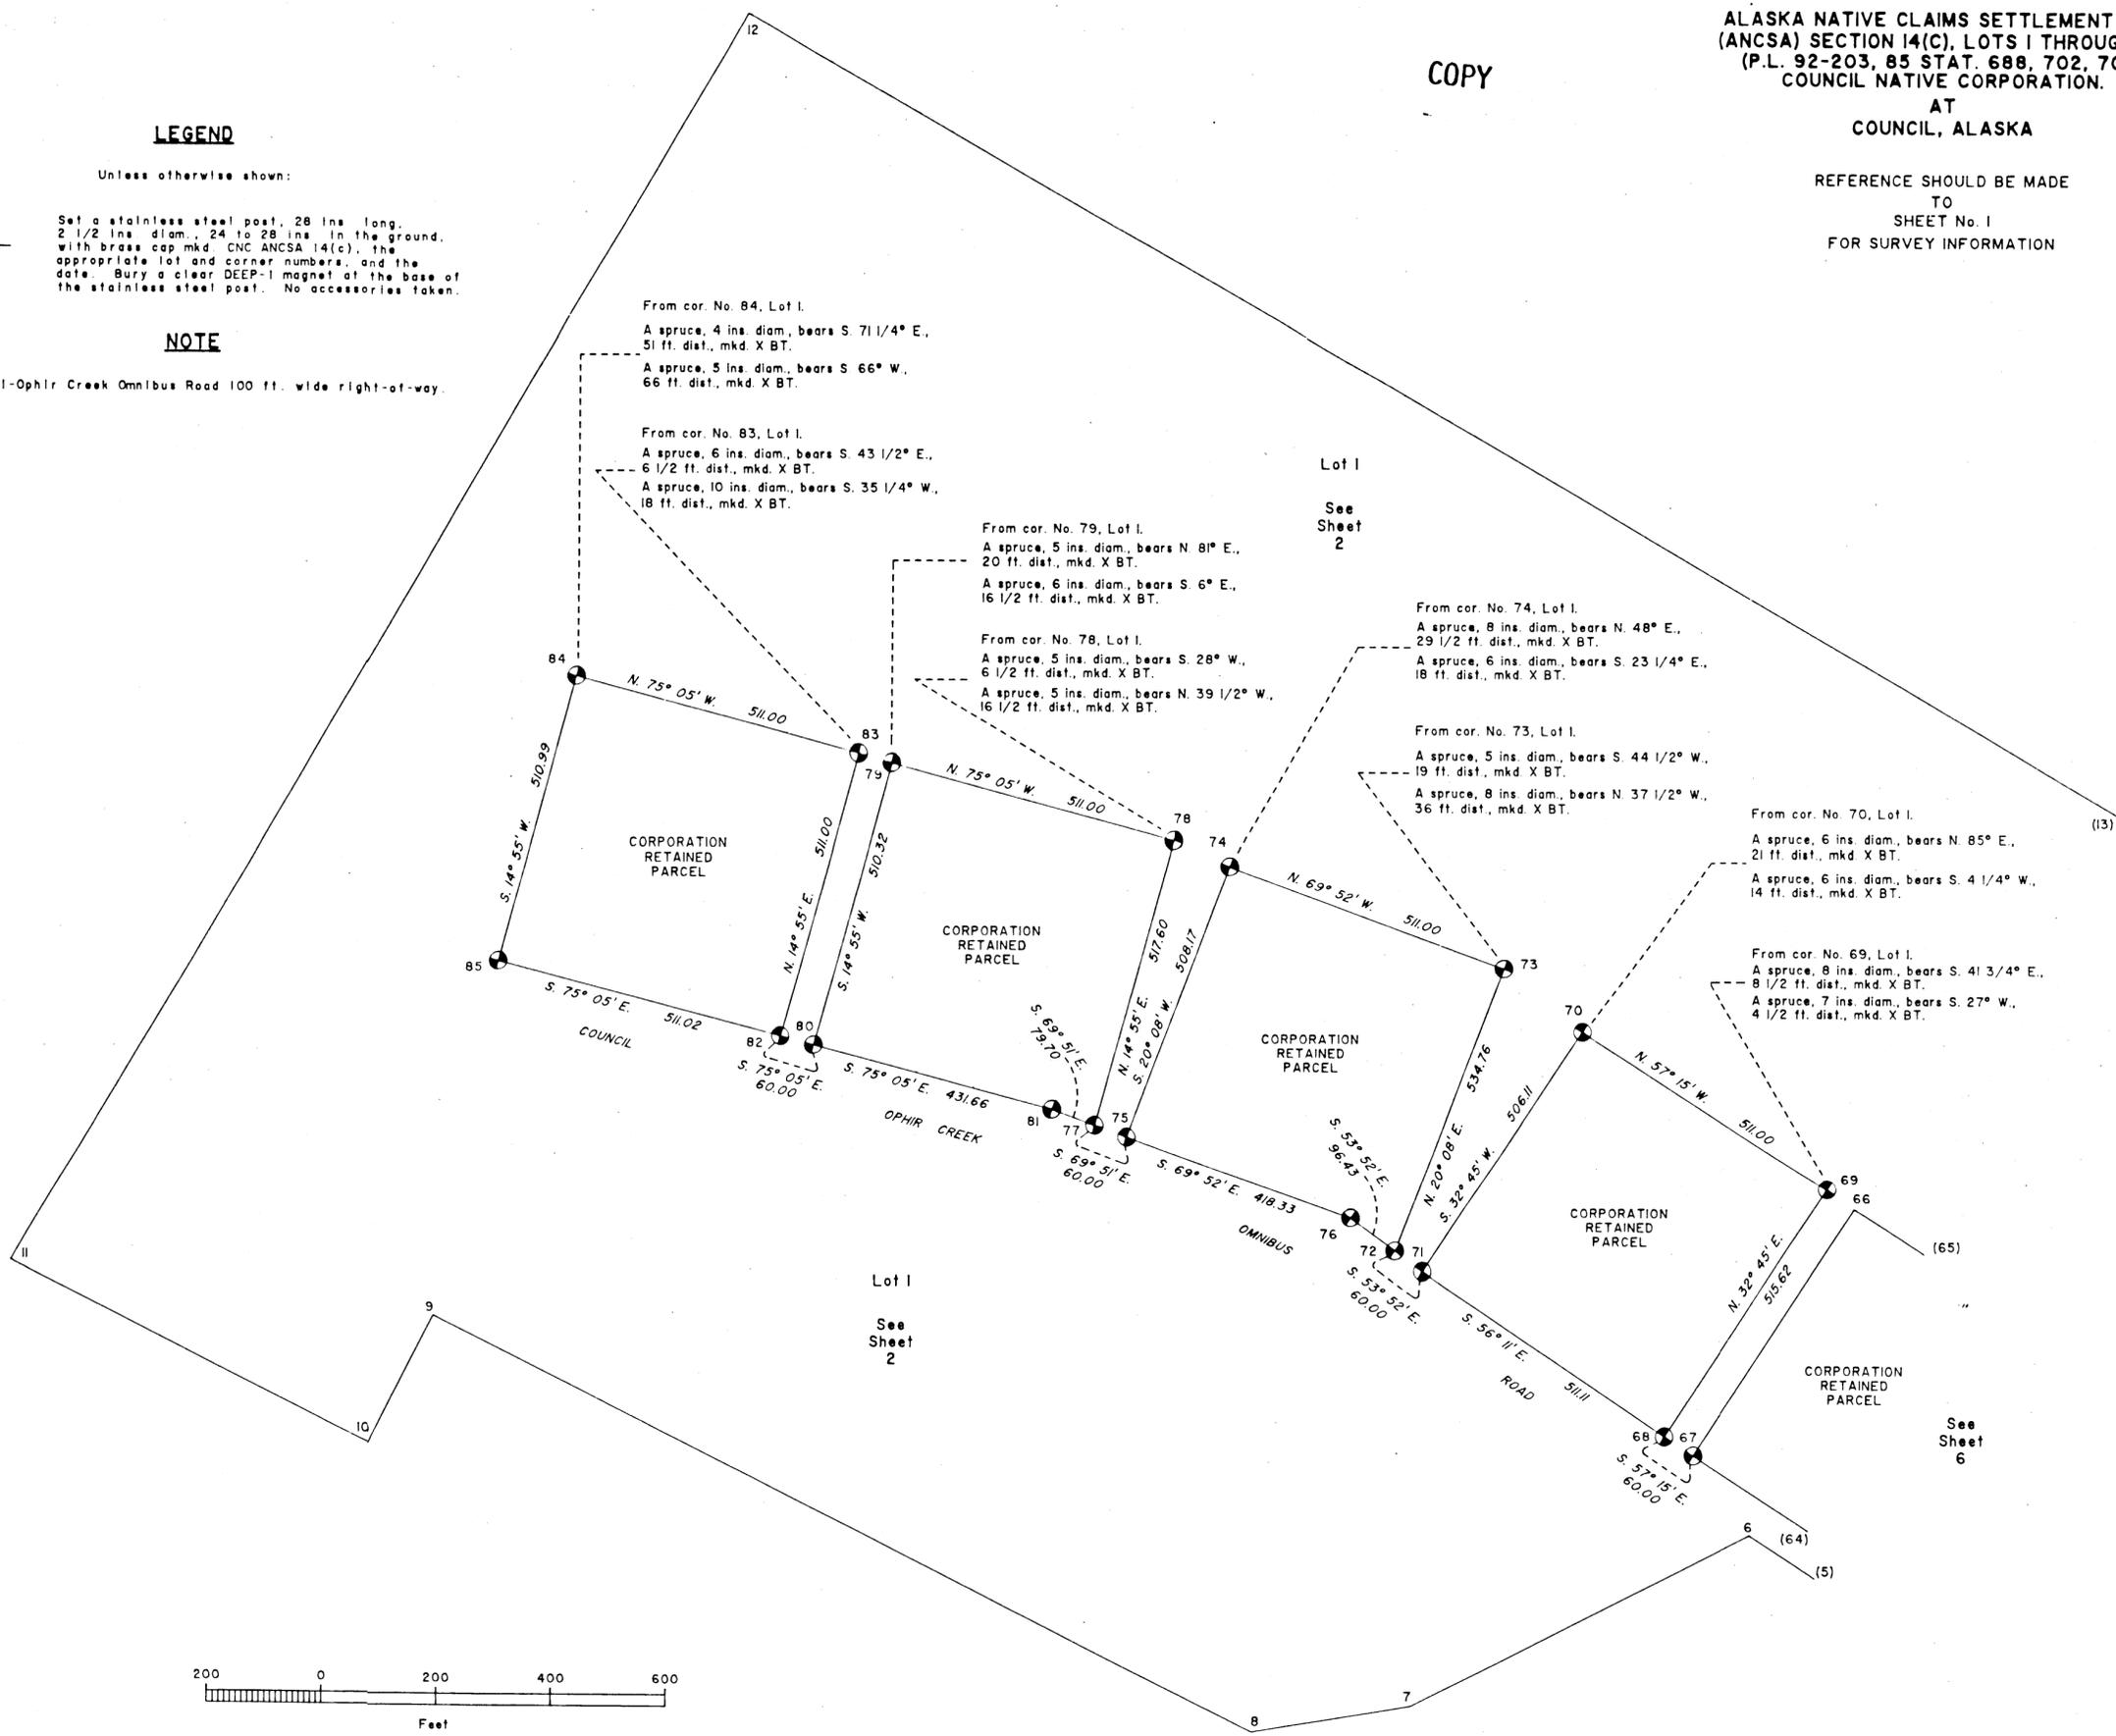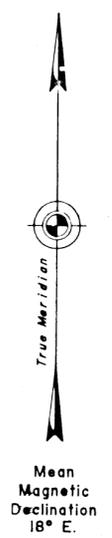


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(C), LOTS 1 THROUGH 28 (P.L. 92-203, 85 STAT. 688, 702, 703) COUNCIL NATIVE CORPORATION.


AT COUNCIL, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

COPY

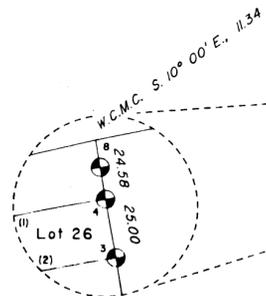

Cor. No. 6, Lot 16, identical with cor. No. 4, Hill Placer, Mineral Survey No. 1152. Found the badly decomposed remains of the original spruce post, 4 x 4 ins., standing upright and rotted off at ground level, with no marks visible; No evidence was found of the original earth mound accessory. Brass cap mkd. to read as shown. Bury the remains of the original spruce post, 16 ins. long, with a hewn point at the base, inverted along side the stainless steel post.



From cor. No. 7, Lot 16. A spruce, 6 ins. diam., bears N. 20 1/4° W., 41 ft. dist., mkd. X BT.


MEANDERS

Along a gently sloping silt and gravel bank, with willow growth to waters edge, at the line of mean high water.


- Lot 16
1. N. 18° 52' W., 109.72 FT.
2. N. 28° 48' W., 205.92 FT.
3. N. 42° 54' W., 242.88 FT.
4. N. 47° 40' W., 237.60 FT.
5. N. 50° 30' W., 308.88 FT.
6. N. 62° 55' W., 249.48 FT.
7. N. 70° 42' W., 229.02 FT.
8. S. 78° 22' W., 287.37 FT.

MINERAL SURVEY No. 1152 HILL PLACER

Cor. No. 5, Lot 16, identical with cor. No. 1, Hill Placer, and cor. No. 1, Hyland Group Placer, Mineral Survey No. 1152. Found the badly decomposed remains of the original spruce post, 4 x 4 ins., lying over and overgrown, with illegible scribe marks visible on 2 faces; No evidence was found of the original earth mound accessory. Brass cap mkd. to read as shown. Bury the remains of the original spruce post, 3 1/2 ft. long, with a hewn point at the base, inverted along side the stainless steel post.



The witness cor. to cor. No. 1, Lot 16, a meander cor., identical with cor. No. 4, Sunnyside Fraction Placer (Amended), Mineral Survey No. 1152. This cor. point was called for in the record of Mineral Survey No. 1152, but was not monumented. Position determined using record interior angle and distance from cor. No. 3, Sunnyside Fraction Placer (Amended), Mineral Survey No. 1152, identical with cor. No. 2, Lot 16. Brass cap mkd. to read as shown.




Cor. No. 2, Lot 16, identical with cor. No. 3, Sunnyside Fraction Placer (Amended), Mineral Survey No. 1152. No evidence was found of the original cor. or accessories; Position determined using record exterior angle and distance from cor. No. 2, Sunnyside Fraction Placer (Amended), identical with cor. No. 5, J. E. Miller Placer (Amended), and cor. No. 1, No. 1 Bench Placer, Mineral Survey No. 1152, and cor. No. 3, Lot 16. Brass cap mkd. to read as shown.



MINERAL SURVEY No. 1152 SUNNYSIDE FRACTION PLACER (AMENDED)


Cor. No. 3, Lot 16, identical with cor. No. 2, Sunnyside Fraction Placer (Amended), cor. No. 5, J. E. Miller Placer (Amended), and cor. No. 1, No. 1 Bench Placer, Mineral Survey No. 1152. Found the badly decomposed remains of the original spruce post, 4 x 4 ins., standing upright and rotted off at ground level, with no marks visible; No evidence was found of the original earth mound accessory. Brass cap mkd. to read as shown. Bury the remains of the original spruce post, 18 ins. long, with a hewn point at the base, inverted along side the stainless steel post.



MINERAL SURVEY No. 1152 J. E. MILLER PLACER (AMENDED)


Cor. No. 4, No. 1 Bench Placer, Mineral Survey No. 1152, on line 3-4, Lot 16.

Found the badly decomposed remains of the original spruce post, 4 x 4 ins., leaning over and rotted off at ground level; Lying beside, the top section, 24 ins. long, with faint scribe marks 4 - 1152 visible on 2 opposing faces; No evidence was found of the original earth mound accessory. Brass cap mkd. to read as shown. Bury the remains of the original spruce post, (below ground section) 18 ins. long, with a hewn point at the base, inverted along side the stainless steel post.



MINERAL SURVEY No. 1152 No. 1 BENCH PLACER


UNSURVEYED LAND See Sheet 10



LEGEND

Unless otherwise shown:

- Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet at the base of the stainless steel post. No accessories taken.
Found an alum. post, 2 ins. diam., firmly set, projecting 2 to 6 ins. above the ground, with alum. cap mkd. and referenced as described in the official record.



ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(C), LOTS 1 THROUGH 28 (P.L. 92-203, 85 STAT. 688, 702, 703) COUNCIL NATIVE CORPORATION.

AT COUNCIL, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

See Sheet 8

COPY

LEGEND


Unless otherwise shown:

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap mkt. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet at the base of the stainless steel post. No accessories taken.

NOTE


Monuments along that portion of the Nome-Council Omnibus Road southerly of the Niukluk River were typically set 2 to 10 ins. below the surface.

Nome-Council Omnibus Road 200 ft. wide right-of-way.



The witness cor. to cor. No. 8, Lot 19, a meander cor.
Set a stainless steel post, shortened to 16 ins. long, 2 1/2 ins. diam., flush with the surface of the ground to bedrock.

Lot 23
(3)
See Sheet 10

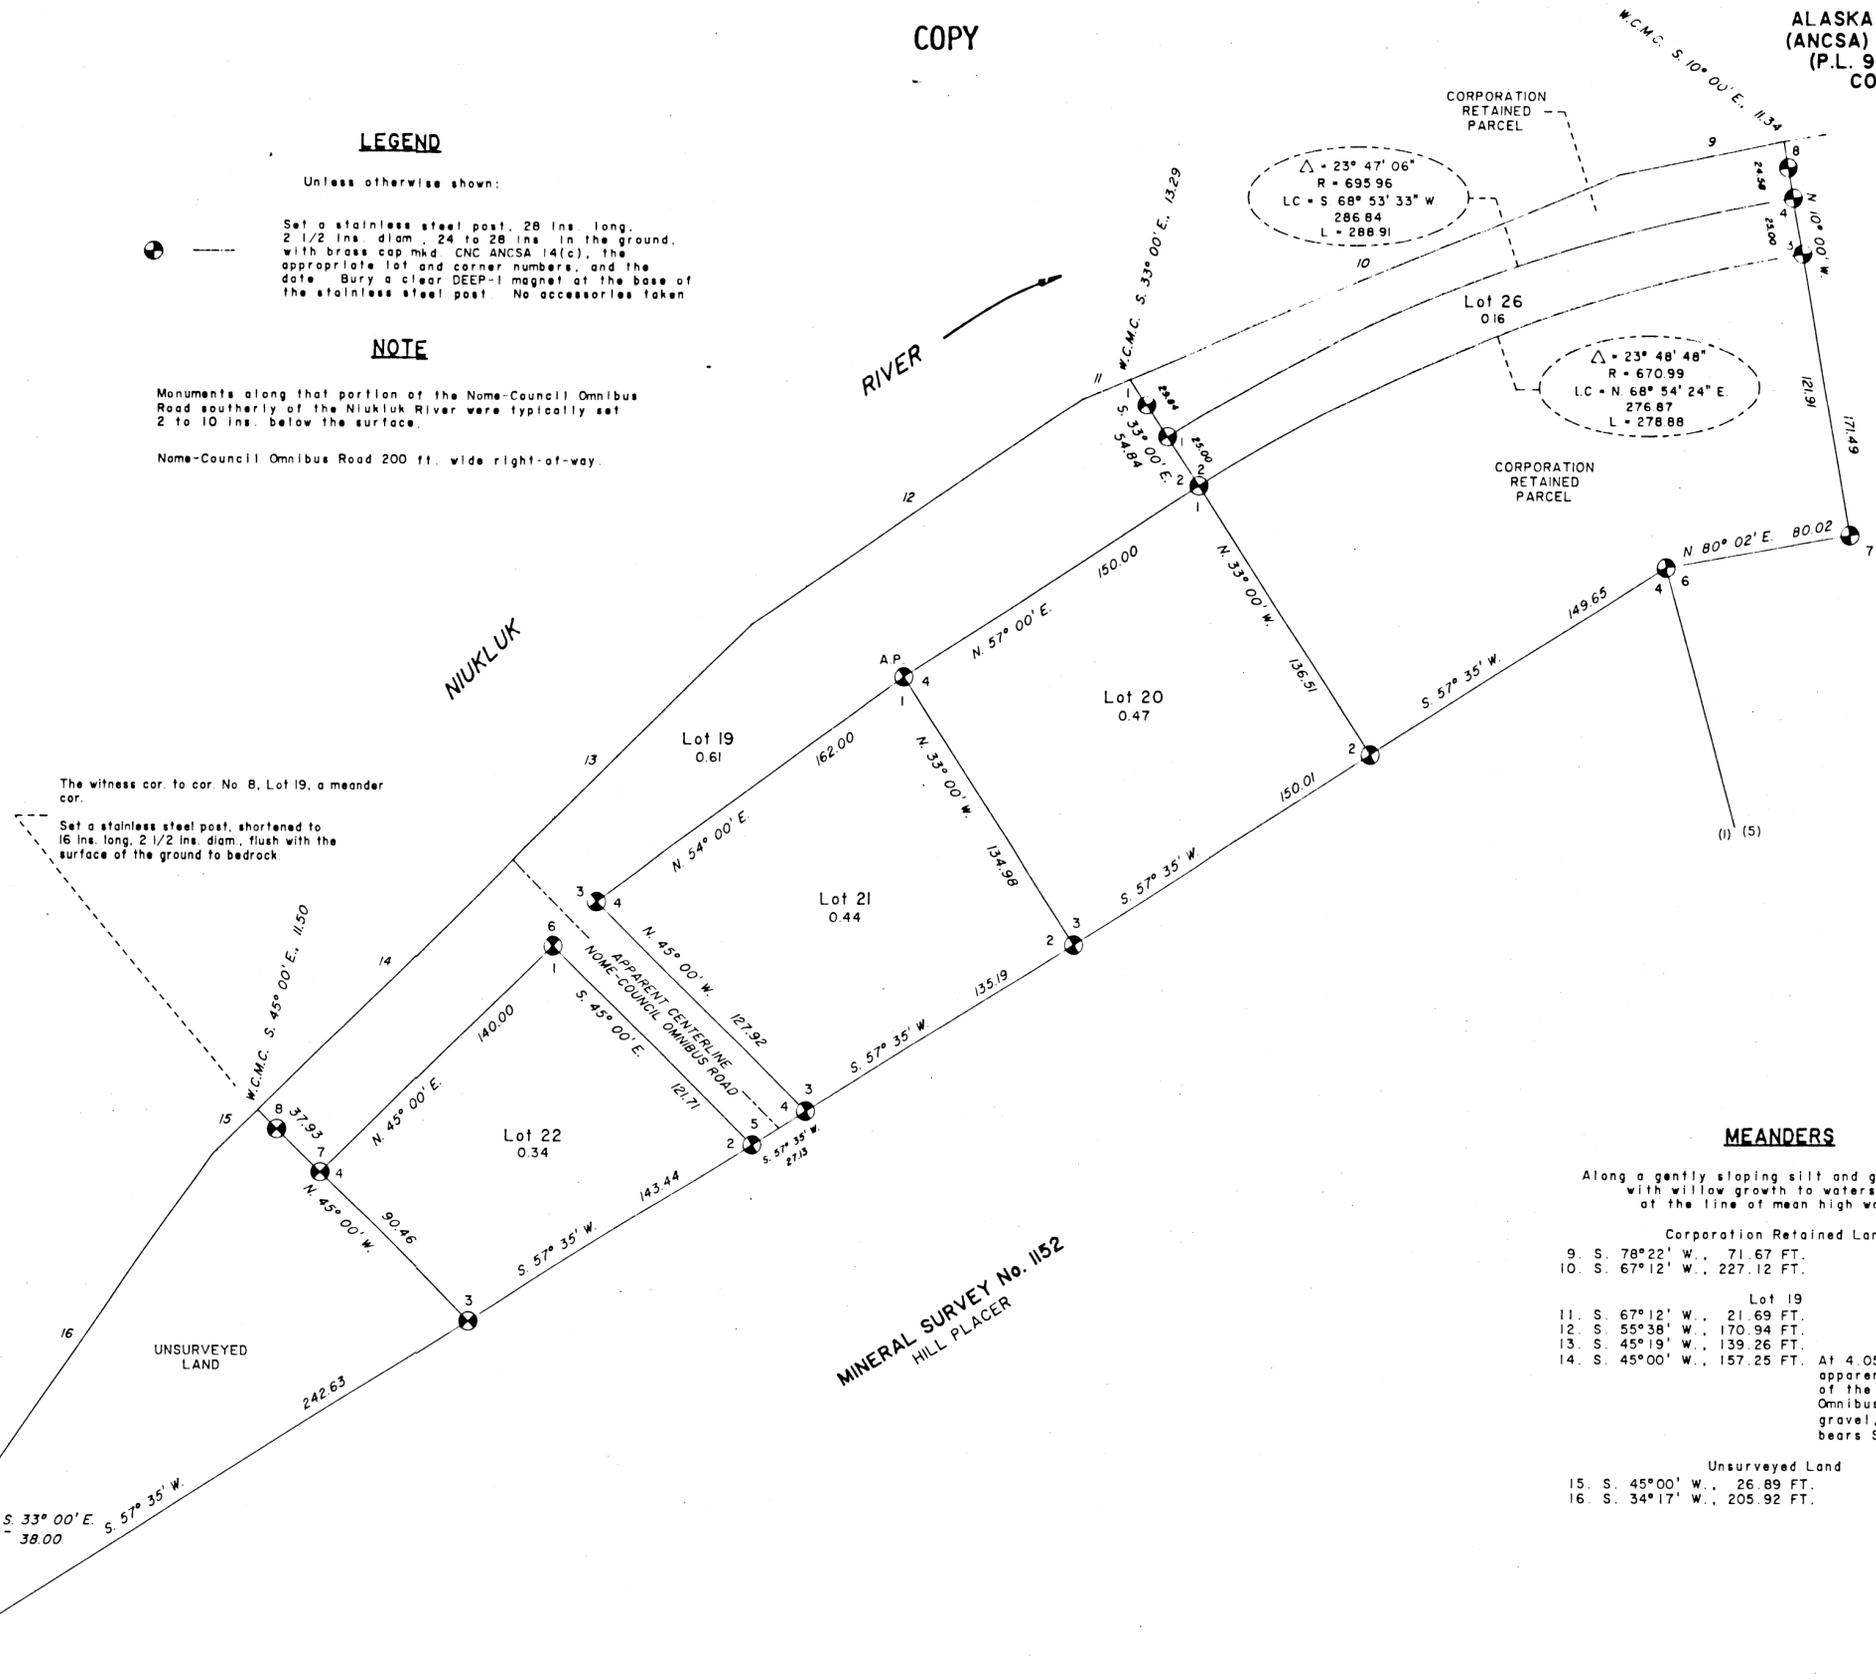

MINERAL SURVEY No. 1152
HILL PLACER

MEANDERS


Along a gently sloping silt and gravel bank, with willow growth to waters edge, of the line of mean high water.

Corporation Retained Land
9. S. 78°22' W., 71.67 FT.
10. S. 67°12' W., 227.12 FT.

Lot 19
11. S. 67°12' W., 21.69 FT.
12. S. 55°38' W., 170.94 FT.
13. S. 45°19' W., 139.26 FT.
14. S. 45°00' W., 157.25 FT.

At 4.05 ft., apparent centerline of the Nome-Council Omnibus Road, graded gravel, 25 ft. wide, bears S. 45° E.

Unsurveyed Land
15. S. 45°00' W., 26.89 FT.
16. S. 34°17' W., 205.92 FT.



ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(C), LOTS 1 THROUGH 28 (P.L. 92-203, 85 STAT. 688, 702, 703) COUNCIL NATIVE CORPORATION.

AT COUNCIL, ALASKA REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

COPY

MEANDERS


Along a gently sloping silt and gravel bank, with willow growth to waters edge, at the line of mean high water.

Around the northeasterly end of an unnamed island, along a gently sloping gravel beach with willow growth to waters edge, at the line of mean high water.

Lot 23 17. S. 50°09' W., 195.36 FT. 18. S. 60°04' W., 204.60 FT. 19. S. 61°08' W., 67.79 FT.

Lot 25 20. S. 61°00' W., 287.44 FT. 21. S. 54°08' W., 132.00 FT. 22. S. 41°18' W., 152.46 FT. 23. S. 50°36' W., 190.74 FT. 24. S. 69°20' W., 56.02 FT.

Lot 24 1. N. 46°53' E., 266.18 FT. 2. N. 61°55' E., 501.60 FT. 3. S. 64°57' E., 34.98 FT. 4. N. 79°20' E., 223.08 FT. 5. S. 49°44' E., 75.90 FT. 6. S. 41°23' W., 470.58 FT. 7. S. 46°04' W., 263.34 FT. 8. S. 67°11' W., 188.10 FT. 9. S. 41°55' W., 35.28 FT.

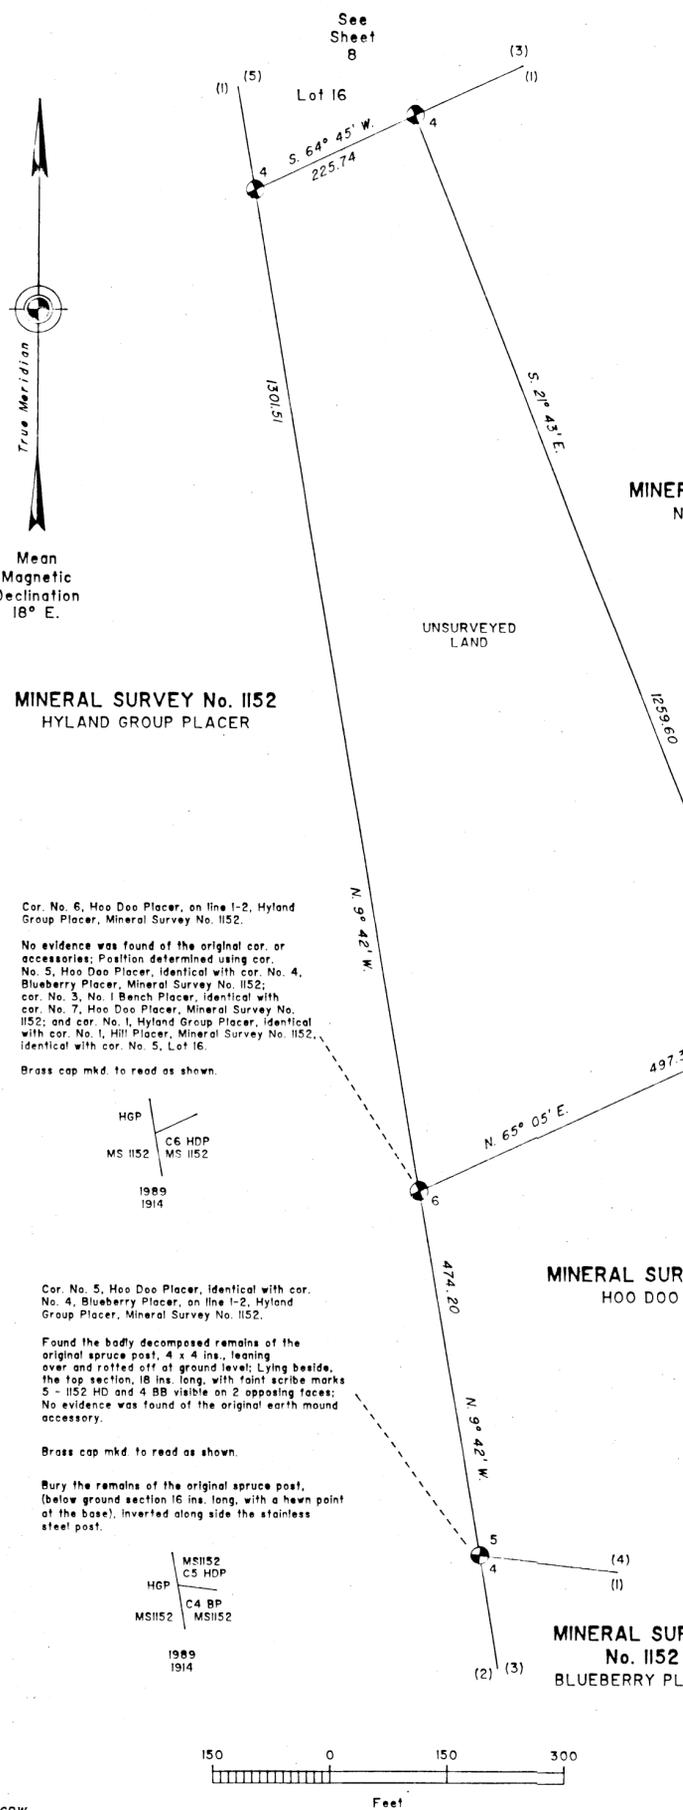

Cor. No. 3, No. 1 Bench Placer, identical with cor. No. 7, Hoo Doo Placer, Mineral Survey No. 1152.

Found the badly decomposed remains of the original spruce post, 4 x 4 ins., leaning over and rotted off at ground level, with no marks visible; No evidence was found of the original earth mound accessory.

Brass cap mkd. to read as shown.


Bury the remains of the original spruce post, 16 ins. long, with a hewn point at the base, inverted along side the stainless steel post.



Cor. No. 6, Hoo Doo Placer, on line 1-2, Hyland Group Placer, Mineral Survey No. 1152.

No evidence was found of the original cor. or accessories; Position determined using cor. No. 5, Hoo Doo Placer, identical with cor. No. 4, Blueberry Placer, Mineral Survey No. 1152; cor. No. 3, No. 1 Bench Placer, identical with cor. No. 7, Hoo Doo Placer, Mineral Survey No. 1152; and cor. No. 1, Hyland Group Placer, identical with cor. No. 1, Hill Placer, Mineral Survey No. 1152, identical with cor. No. 5, Lot 16.

Brass cap mkd. to read as shown.





Cor. No. 5, Hoo Doo Placer, identical with cor. No. 4, Blueberry Placer, on line 1-2, Hyland Group Placer, Mineral Survey No. 1152.

Found the badly decomposed remains of the original spruce post, 4 x 4 ins., leaning over and rotted off at ground level; Lying beside, the top section, 18 ins. long, with faint scribe marks S-1152 HD and 4 BB visible on 2 opposing faces; No evidence was found of the original earth mound accessory.

Brass cap mkd. to read as shown.

Bury the remains of the original spruce post, (below ground section 16 ins. long, with a hewn point at the base), inverted along side the stainless steel post.

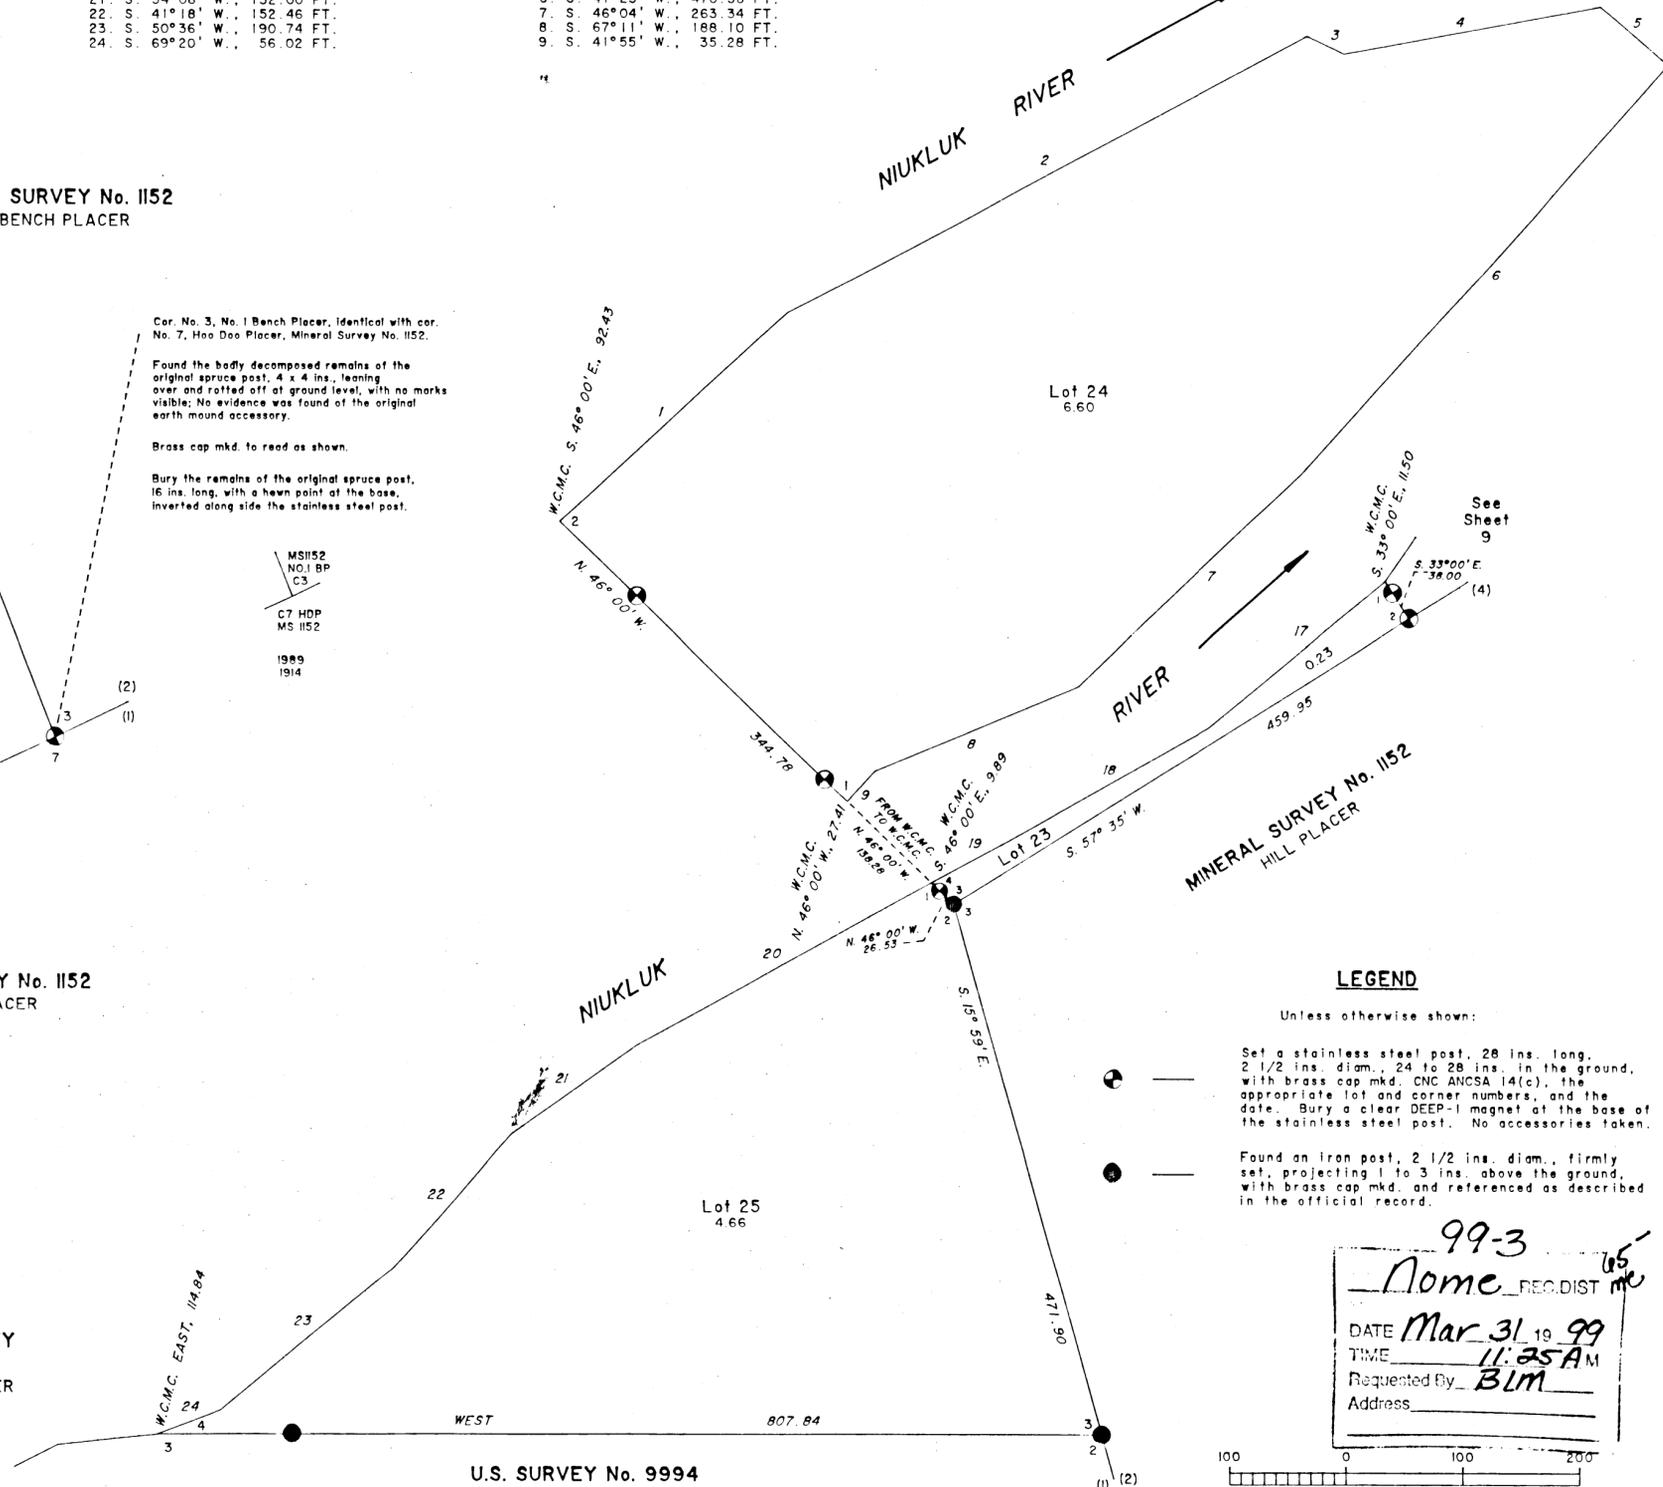



LEGEND

Unless otherwise shown:

- Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap mkd. CNC ANCSA 14(c), the appropriate lot and corner numbers, and the date. Bury a clear DEEP-1 magnet at the base of the stainless steel post. No accessories taken. Found an iron post, 2 1/2 ins. diam., firmly set, projecting 1 to 3 ins. above the ground, with brass cap mkd. and referenced as described in the official record.

99-3 Nome REC. DIST 05 me DATE Mar 31 1999 TIME 11:25 AM Requested By BLM Address



U.S. SURVEY No. 9994