

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT. 688, 702, 703)

CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

This plat contains the entire survey record.

The history of surveys is contained in SHEET No. 3

For description of TRACTS A, K, L, M, N, O and P see SHEET No. 10

This survey was executed by Daniel A. Wiesner and Peter R. Nanok Cadastral Surveyors, August 11, 1993 through June 7, 2007, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated August 6, 1993, approved August 20, 1993, and Assignment Instructions dated August 6, 1993.

1993-1998 Field assistants were:

- Dominica J. Smith, Land Surveyor
Mark D. Wahlfield, Land Surveyor
Matthew T. Crow, Contract Surveyor
Victor M. Rosgado, Contract Surveyor
Chris R. Cline, Contract Surveyor
Wilbert Gene, Volunteer

2007 Field assistants were:

- Thomas B. O'Toole, Land Surveyor
Andrew B. Heikkinen, Land Surveyor
John G. Hill, Land Surveyor
Isaiah Ditmer, Surveying Technician
Paul J. Hennen, Surveying Technician
Mark E. Saari, Surveying Technician

Area: 1780.20 Acres

The azimuth was obtained from direct observation of the sun, using the hour angle method and refers to the true meridian.

The geographic position of the northeast corner of Township 13 South, Range 56 West, as determined by utilizing Global Positioning System using static location methods, is:

Latitude: 59° 05' 12.83" North NAD 27
Longitude: 158° 31' 41.11" West

The mean magnetic declination was obtained from the U.S. Geological Survey quadrangle map "DILLINGHAM (A-7)," Alaska, 1952 edition, and indicates a mean value of 20° East.

The land is mostly very low rolling hills, with spruce and birch timber, with alder and willow brush.

The soil is sandy and silty loam.


UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT Anchorage, Alaska

The survey represented by this plat, sheets 1-18, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.


For the Director

Signature and Date: OCTOBER 6, 2009


Deputy State Director for Cadastral Survey, Alaska

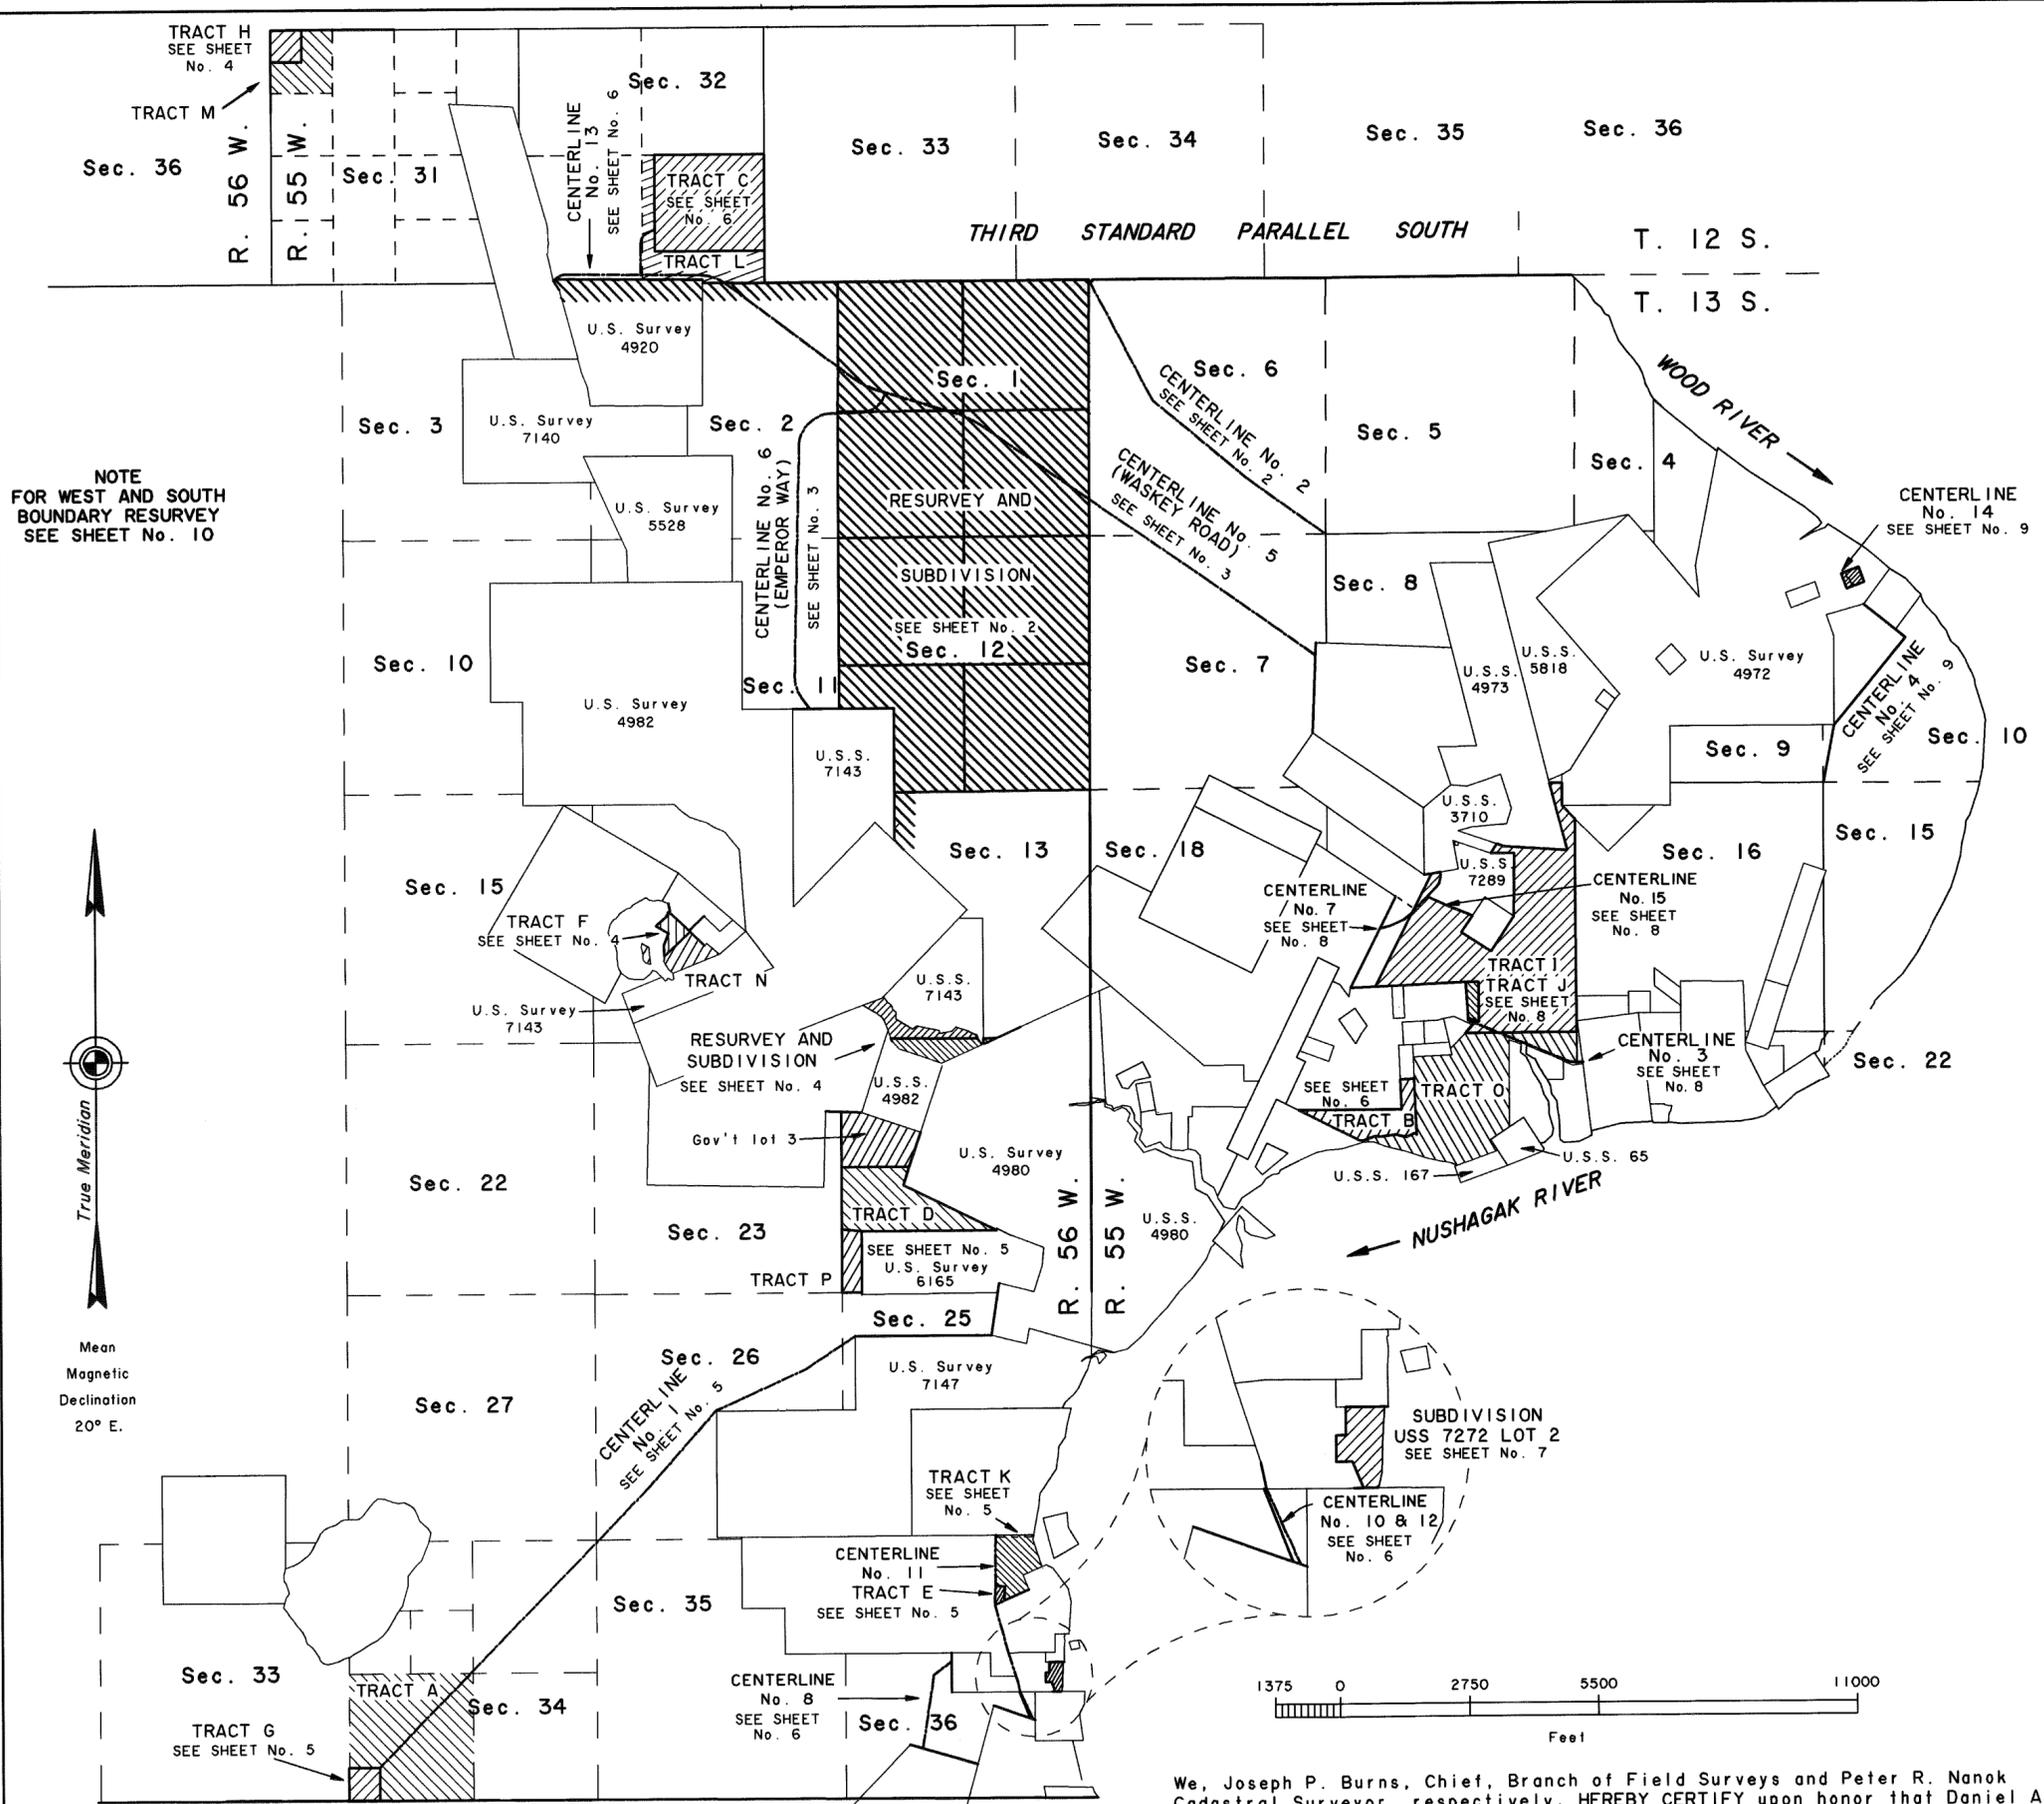

NOTE FOR WEST AND SOUTH BOUNDARY RESURVEY SEE SHEET No. 10

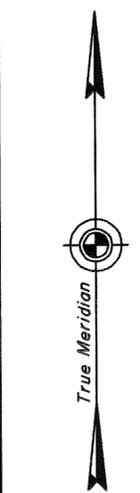

Mean Magnetic Declination 20° E.



I, hereby certify that the subdivision of a portion of Township 13 South, Range 56 West, Seward Meridian, Alaska; the subdivision of U.S. Survey No. 7272; Tracts A through P, and the rights-of-way centerline Nos. 1 through 8, and 10 through 15, represented on this plat of survey are lands Interim Conveyed to Choggiung Limited by Interim Conveyance Nos. 008, 233 and 626 or on surface estate lands patented to Choggiung Limited by Patent No. 50-88-0391, all issued by the United States of America; said subdivisions, Tracts, and rights-of-way also fulfill all entitlements under the provisions of ANCSA 14(c) as approved by Choggiung Limited, on August 3, 1983, the Dillingham City Ordinance No. 83-6, and Dillingham ANCSA 14(c) Map of Boundaries accepted on June 4, 1986.

We, Joseph P. Burns, Chief, Branch of Field Surveys and Peter R. Nanok Cadastral Surveyor, respectively, HEREBY CERTIFY upon honor that Daniel A. Wiesner, Cadastral Surveyor, and I, have executed the ANCSA 14(c) survey depicted on this plat, sheets 1-18, in conformity with the Special Instructions dated August 6, 1993, approved August 20, 1993, the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat. Daniel A. Wiesner is no longer employed by the Bureau of Land Management and is unavailable for signature.

Signatures and Dates: June 29, 2009; July 01, 2009

9-17-09 Date; Signature of Bruce Edgmon, President, Choggiung Limited

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c) TRACTS A THROUGH P,
 RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8
 AND 10 THROUGH 15. P.L. 92-203 (85 STAT, 688,
 702, 703)

CHOGGIUNG LIMITED
 AT
DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272,
 AND THE DEPENDENT RESURVEY AND
 SUBDIVISION OF A PORTION OF TOWNSHIP
 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1
 FOR SURVEY INFORMATION

LEGEND

- Bureau of Land Management monument recovered this survey.
- Private monument recovered this survey.
- Stainless steel post set this survey.
- ⊗ Aluminum Rod set this survey.
- Iron rebar set this survey.
- ⊗ Iron spike or other set this survey.
- Remonumented this survey.

Sec. 32


T. 12 S. R. 55 W.

Sec. 33


Sec. 34

Sec. 35

THIRD STANDARD PARALLEL SOUTH

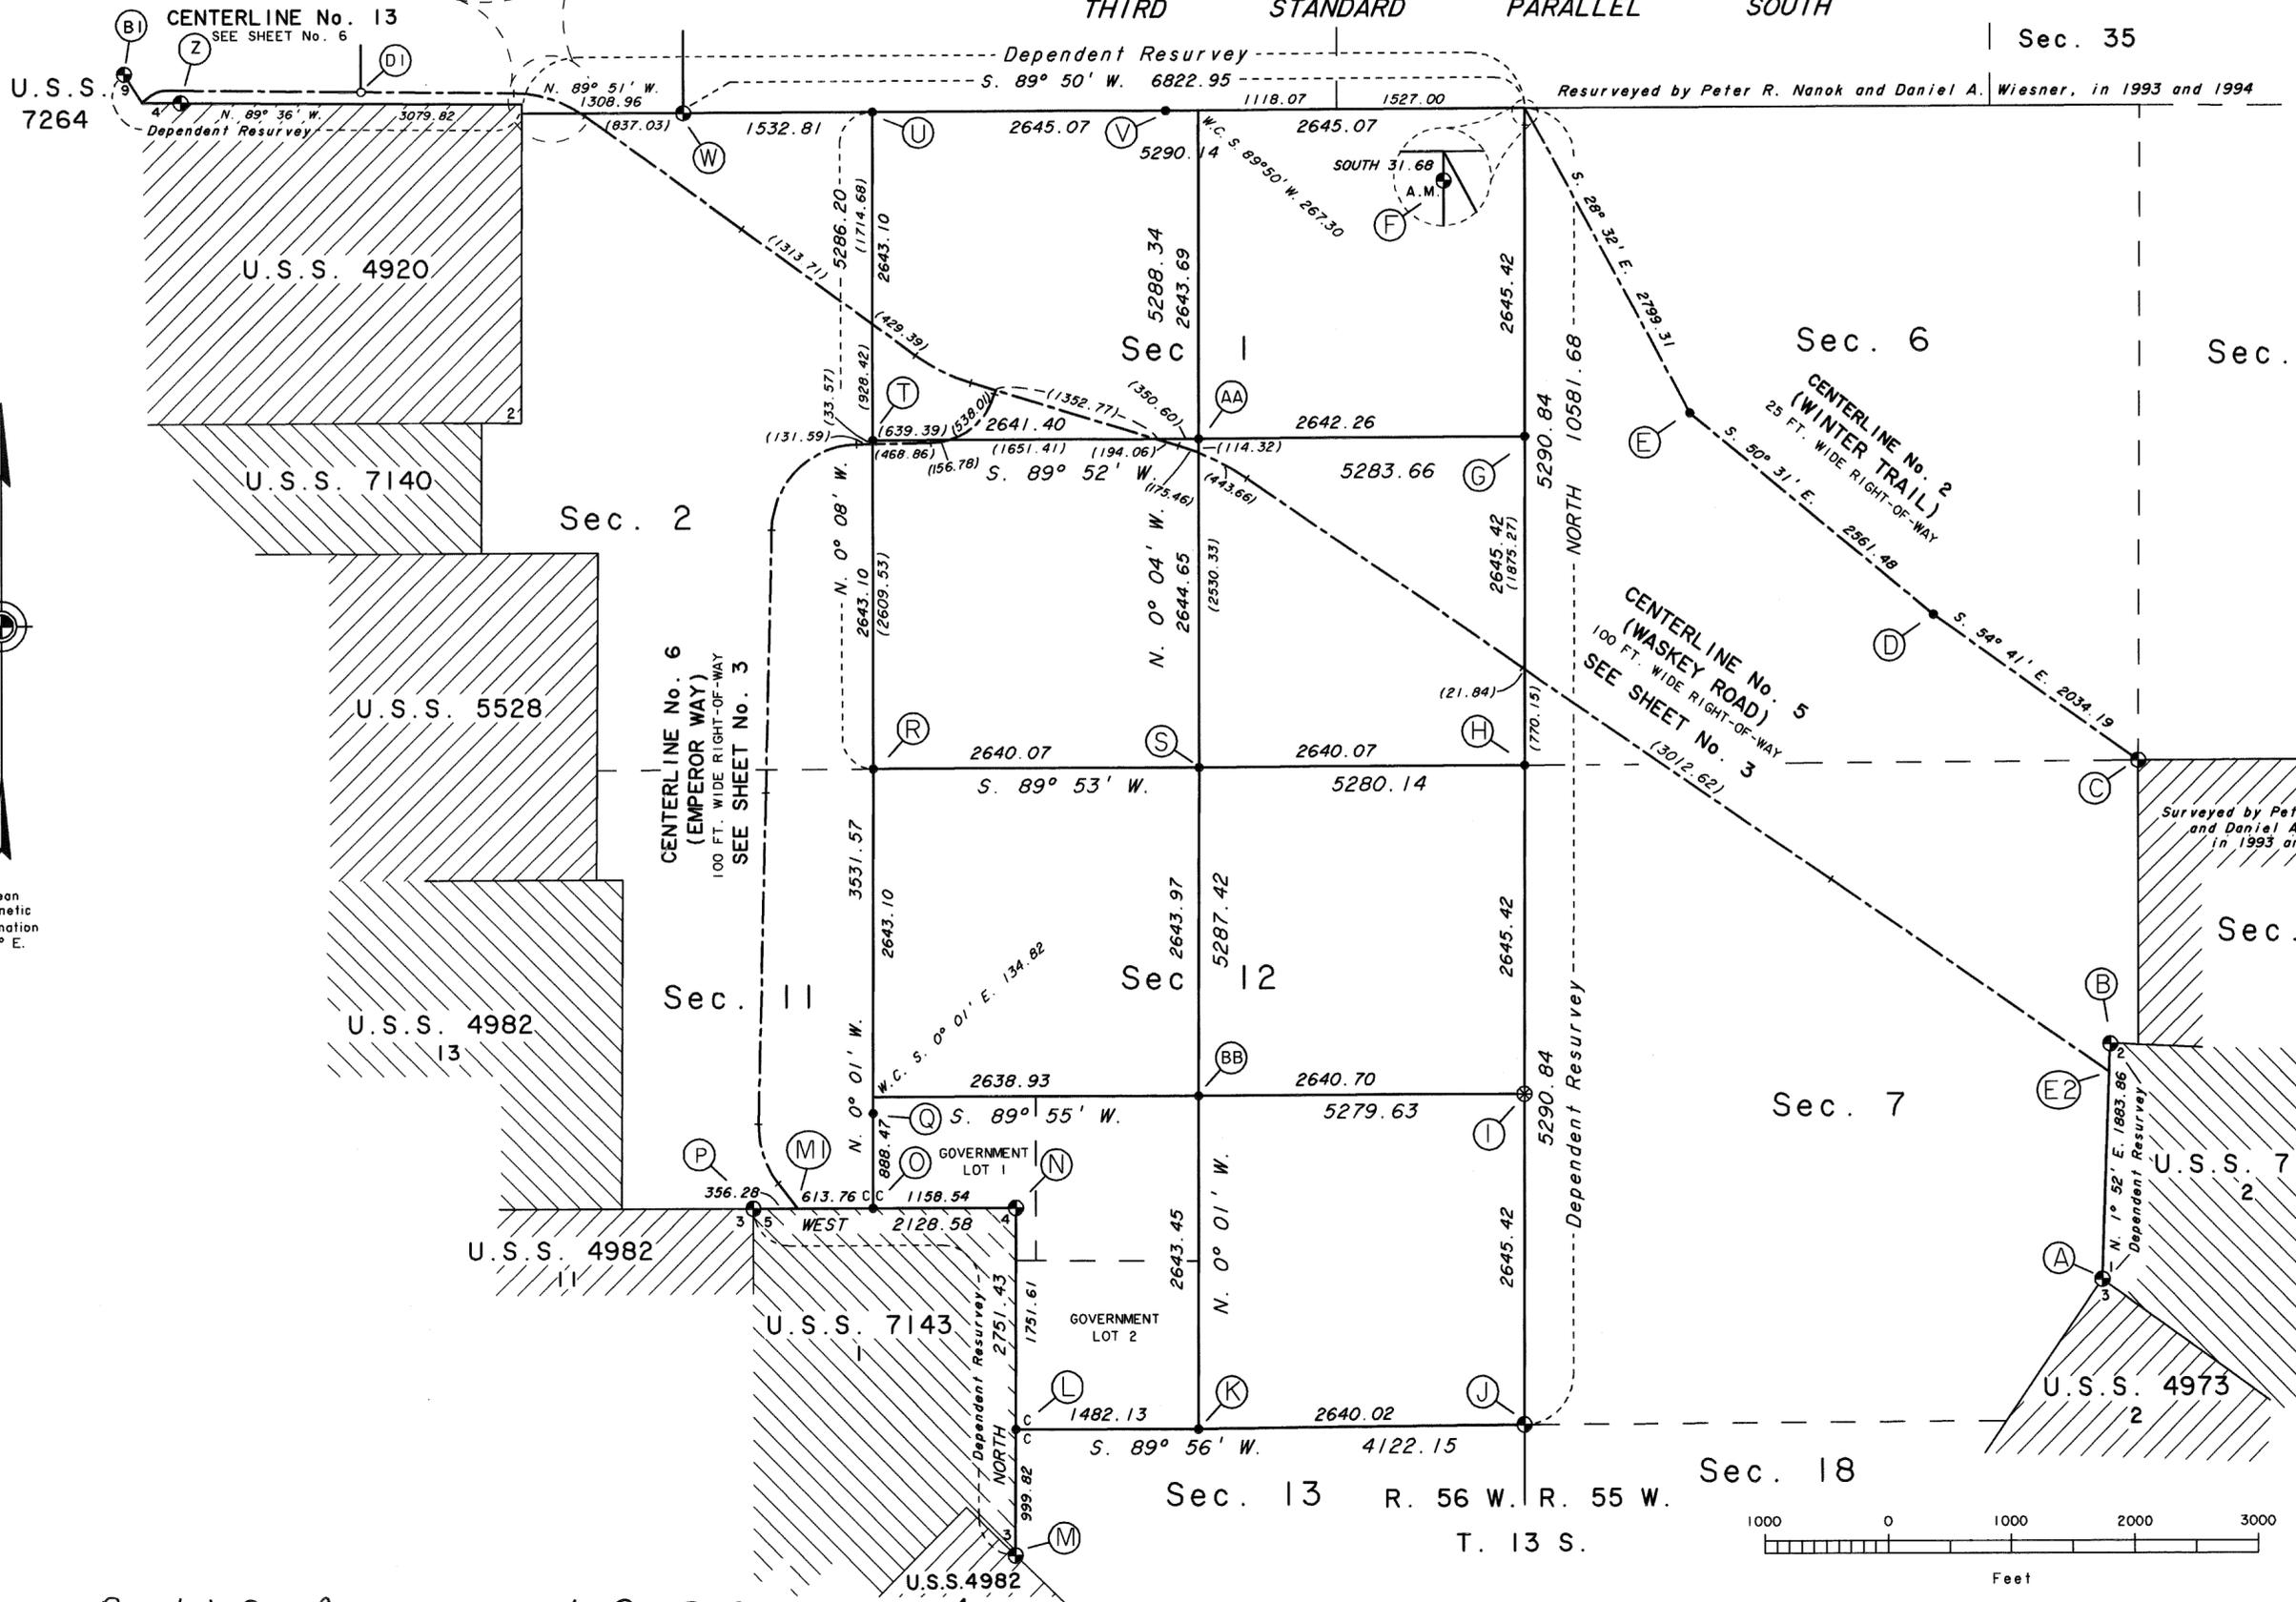

Mean
 Magnetic
 Declination
 20° E.



Bristol Bay Recording District 2009-12

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT, 688, 702, 703)

CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

The exterior boundaries of Township 12 South, Range 55 West was originally surveyed by Henry J. Grimmonpre' Supervisory Cadastral Surveyor, in 1966, and were dependently surveyed and subdivided by Richard T. Helm, III, Gary S. Speight, Ralph W. Wilson, Harold D. Corbin, Malcolm F. McCone, and Michael T. Birtles, Cadastral Surveyors, in 1973 through 1985. A portion of the Third Standard Parallel South was dependently resurveyed concurrently with this survey under Group No. 603, Alaska.

A portion of the exterior boundaries of Township 13 South, Range 55 West, was originally surveyed by Frederick W. Ward, Jerome C. Ives, and Henry J. Grimmonpre', Cadastral Surveyors, in 1966 through 1967, and Gary S. Speight, Ralph W. Wilson, Harold D. Corbin, and Malcolm F. McCone, Cadastral Surveyors, in 1974 through 1977. The west and east boundaries, and a portion of the subdivisional lines were resurveyed concurrently with this survey under Group No. 603, Alaska.

U.S. Survey No. 66 Amended was surveyed by Clinton Gurnee Jr., U.S. Deputy Surveyor, in 1897.

U.S. Survey No. 155 was surveyed by Clinton Gurnee Jr., U.S. Deputy Surveyor, in 1901.

U.S. Survey No. 2013 was surveyed by Floyd G. Betts, Cadastral Engineer, in 1931, and subdivided by Charles E. Akin, Jr., Cadastral Surveyor in 1982.

U.S. Survey No. 3181 was surveyed by Jack C. Means, Cadastral Engineer, in 1952.

U.S. Survey Nos. 3643 and 3710 were surveyed by Harold O. Temme, Cadastral Surveyor, in 1959.

U.S. Survey No. 4920 was surveyed by Walter W. Cooley, Cadastral Surveyor, in 1966.

U.S. Survey Nos. 4972, 4973, 4980, 4982, and 4985, were surveyed by Henry J. Grimmonpre', Supervisory Cadastral Surveyor, in 1967 through 1968. U.S. Survey No. 4985, Lot 16, was subdivided by Paul L. Moss, Cadastral Surveyor in 1988.

U.S. Survey No. 5688 was surveyed by Henry J. Grimmonpre', Supervisory Cadastral Surveyor, in 1971 through 1972. Lot 1 was subdivided by Charles E. Akin, Jr., Cadastral Surveyor in 1982.

U.S. Survey No. 5755, was surveyed by Malcolm F. McCone, Cadastral Surveyor, in 1977.

U.S. Survey Nos. 6165 and 6166 were surveyed by William A. Wiley, Cadastral Surveyor, in 1978.


U.S. Survey Nos. 7143, 7147, 7148, 7264 and U.S. Survey No. 7289 were surveyed by Charles E. Akin Jr., Cadastral Surveyor, in 1982.

There are other numerous U.S. surveys and private surveys in the vicinity.

The D.O.T. & P.F. Dillingham Airport Property Plan was plotted in 1980 by DOWL Engineers.

The State of Alaska Department of Highways Project No. S-0411(2), the Dillingham-Kanakanak Rights-of-Way Map was plotted in 1972.

Except as indicated, areas are as shown on the plat of Township 12 South, Range 55 West, Seward Meridian, Alaska, accepted May 10, 1991; the supplemental plat of Township 13 South, Range 55 West, Seward Meridian, Alaska, accepted March 2, 1984; and the supplemental plat of Township 13 South, Range 56 West, Seward Meridian, Alaska, accepted May 29, 1984.

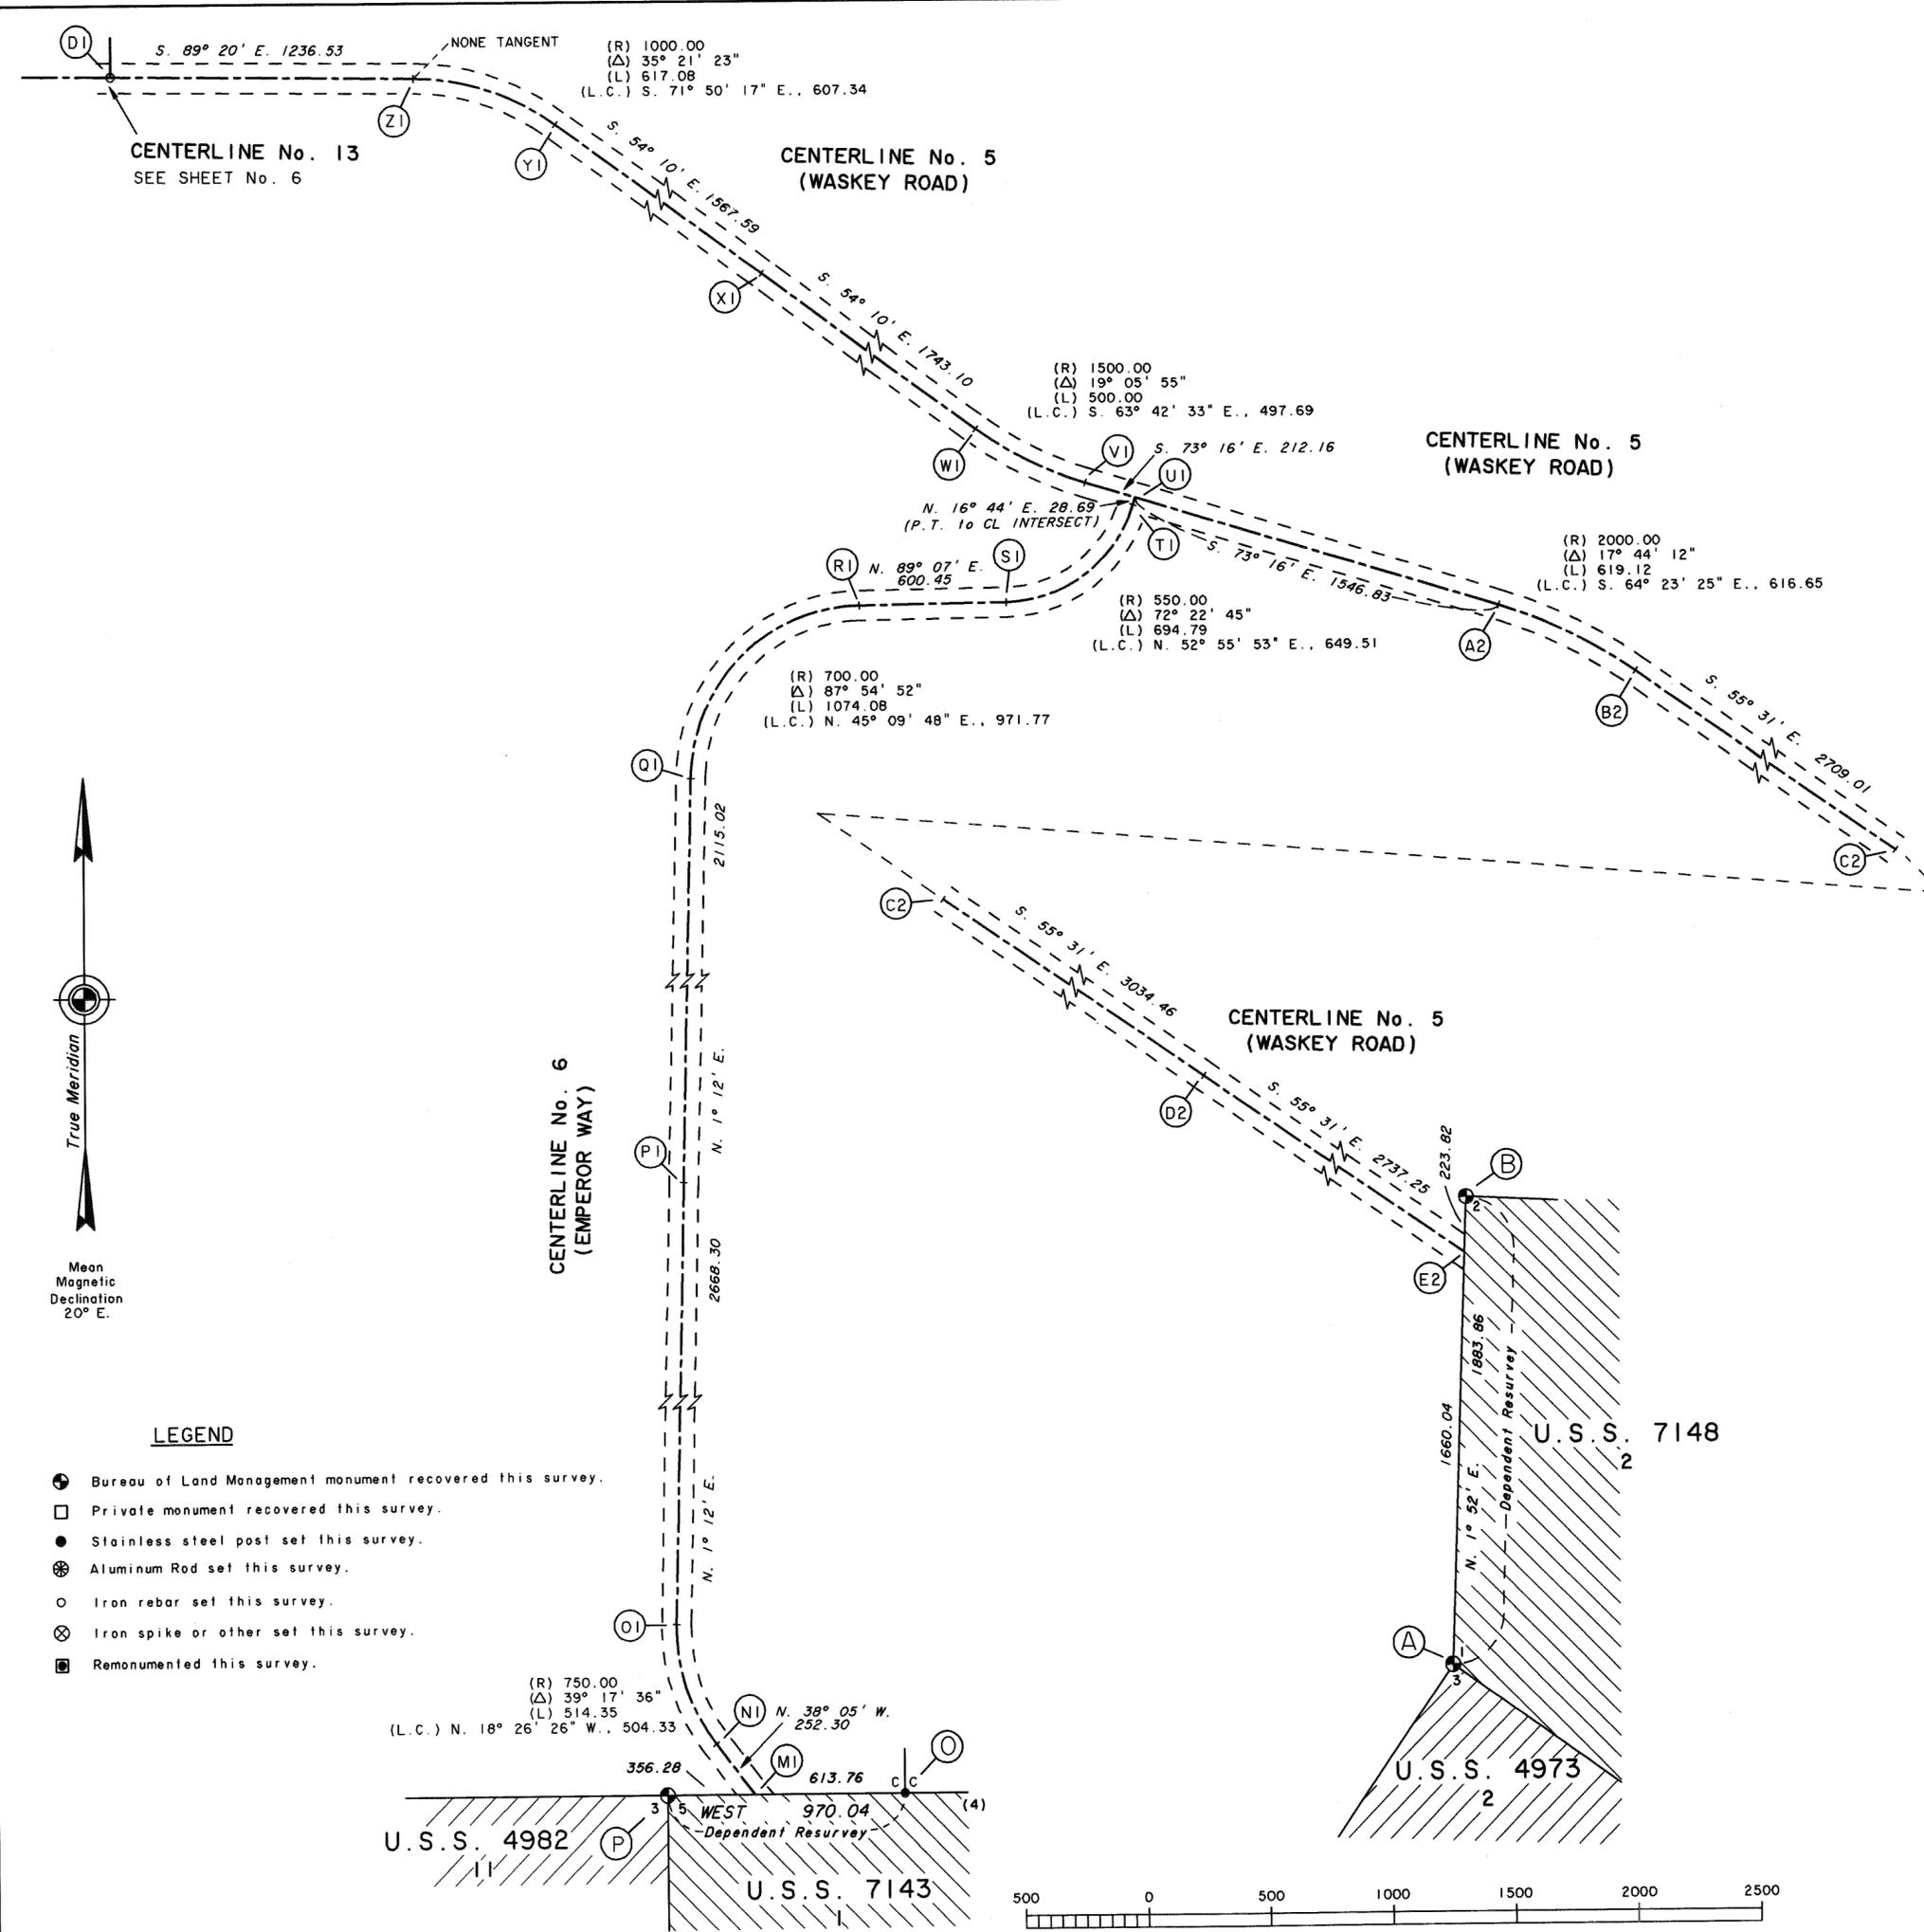

LEGEND


- Legend items: Bureau of Land Management monument recovered this survey, Private monument recovered this survey, Stainless steel post set this survey, Aluminum Rod set this survey, Iron rebar set this survey, Iron spike or other set this survey, Remonumented this survey.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT., 688, 702, 703)

CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA



AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

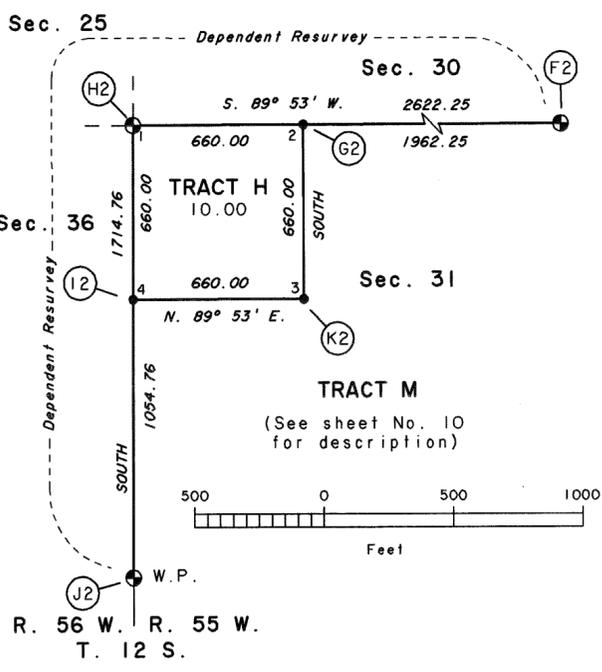

TRACT F Along a well defined bank, 8 ins. high, on the easterly shore of Shannon Lake, at the line of ordinary high water.

- 1. N. 28° 58' W., 3.81 ft.
2. N. 4° 34' W., 226.76 ft.
3. N. 21° 34' E., 288.17 ft.
4. N. 58° 14' W., 311.94 ft.
5. N. 48° 43' E., 303.48 ft.
6. N. 0° 03' E., 36.37 ft.
7. N. 54° 59' E., 28.81 ft.
8. N. 77° 02' E., 16.88 ft.
9. N. 10° 24' E., 12.16 ft.
10. N. 75° 07' W., 14.78 ft.
11. N. 8° 28' W., 32.83 ft.
12. N. 71° 21' E., 20.91 ft.
13. S. 54° 32' E., 19.00 ft.

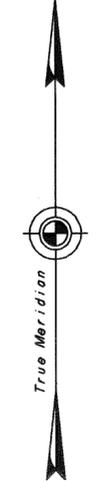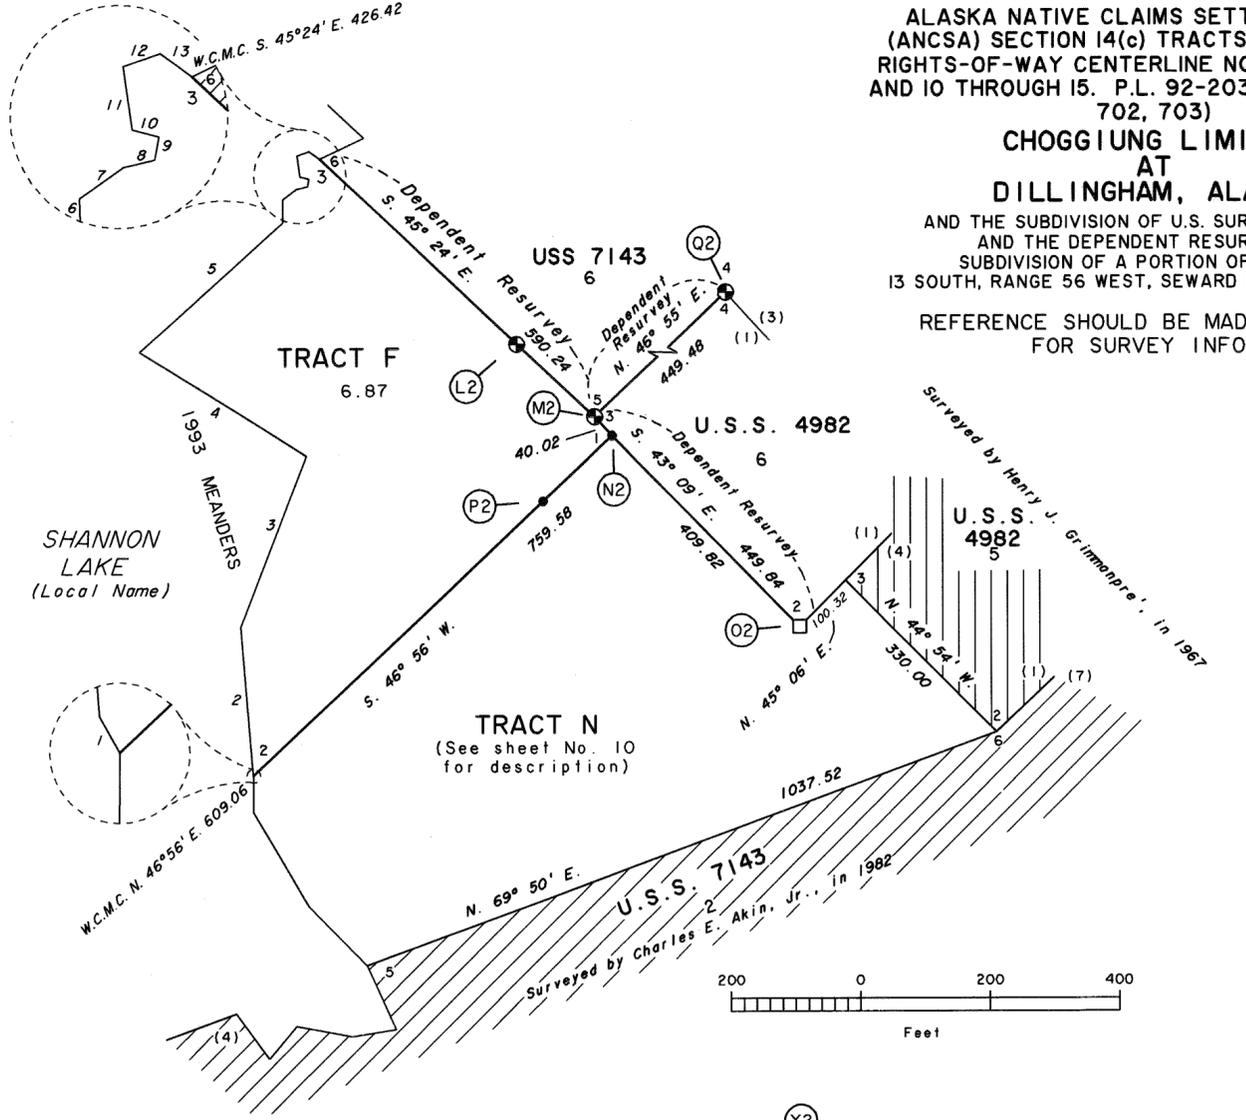


Mean Magnetic Declination 20° E.

- RECORD CURVE INFORMATION
(C1) (R) 442.86 (6.71 chs.) (Δ) 34° 25' (L.C.) S. 41° 35' E., 262.02 (3.97 chs.)
(C2) (R) 442.86 (6.71 chs.) (Δ) 8° 43' (L.C.) S. 20° 01' E., 67.32 (1.02 chs.)

LEGEND

- Bureau of Land Management monument recovered this survey.
□ Private monument recovered this survey.
● Stainless steel post set this survey.
⊗ Aluminum Rod set this survey.
○ Iron rebar set this survey.
⊗ Iron spike or other set this survey.
■ Remonumented this survey.







ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT. 688, 702, 703)

CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

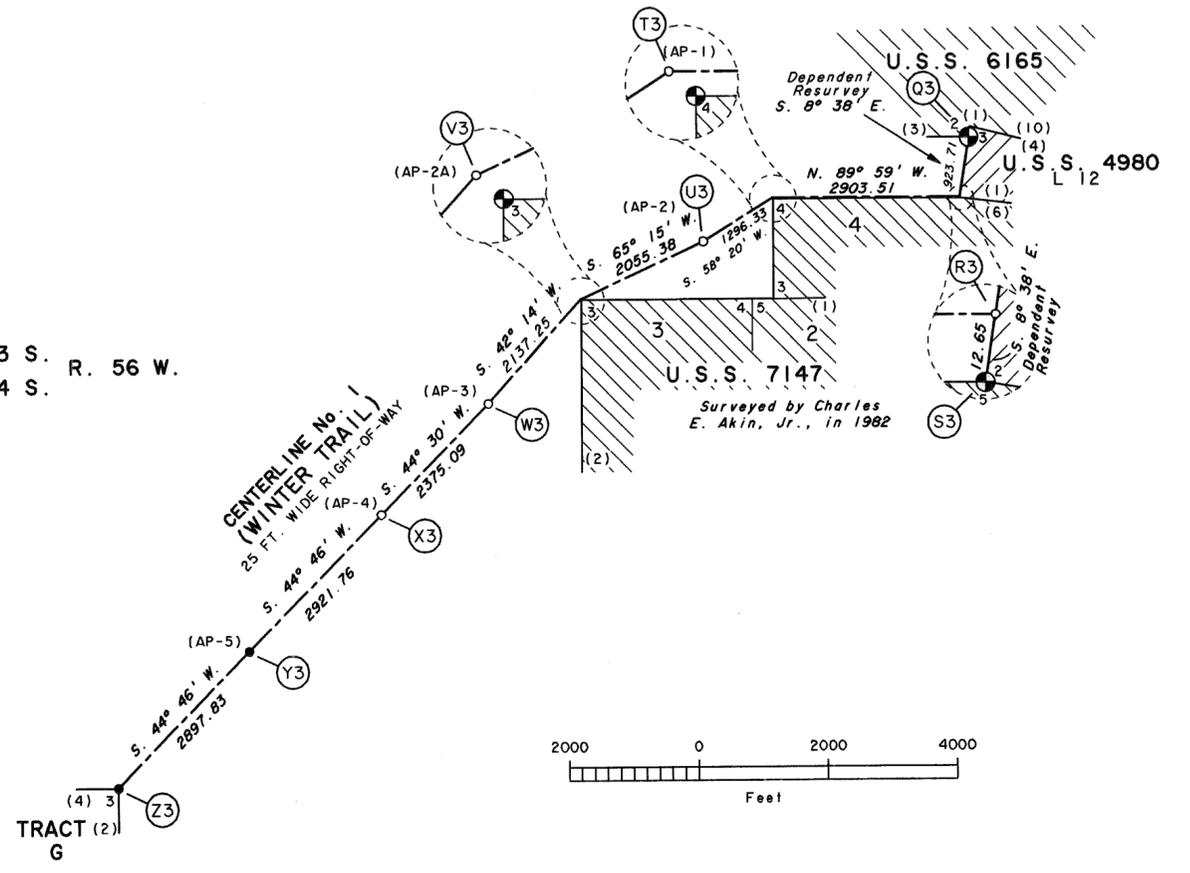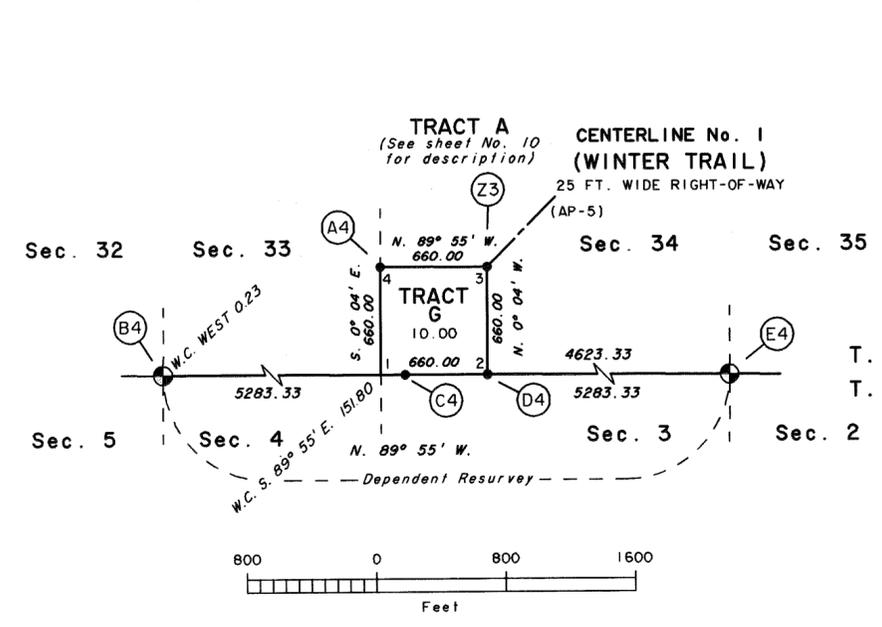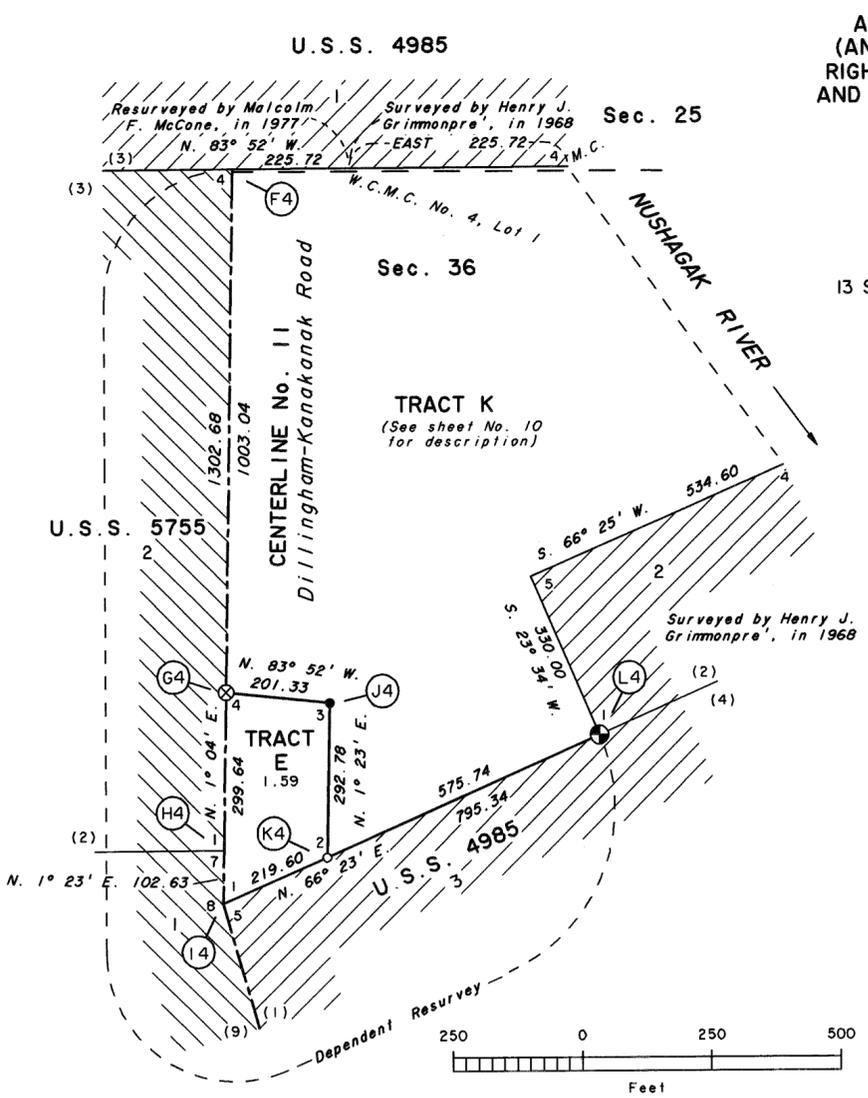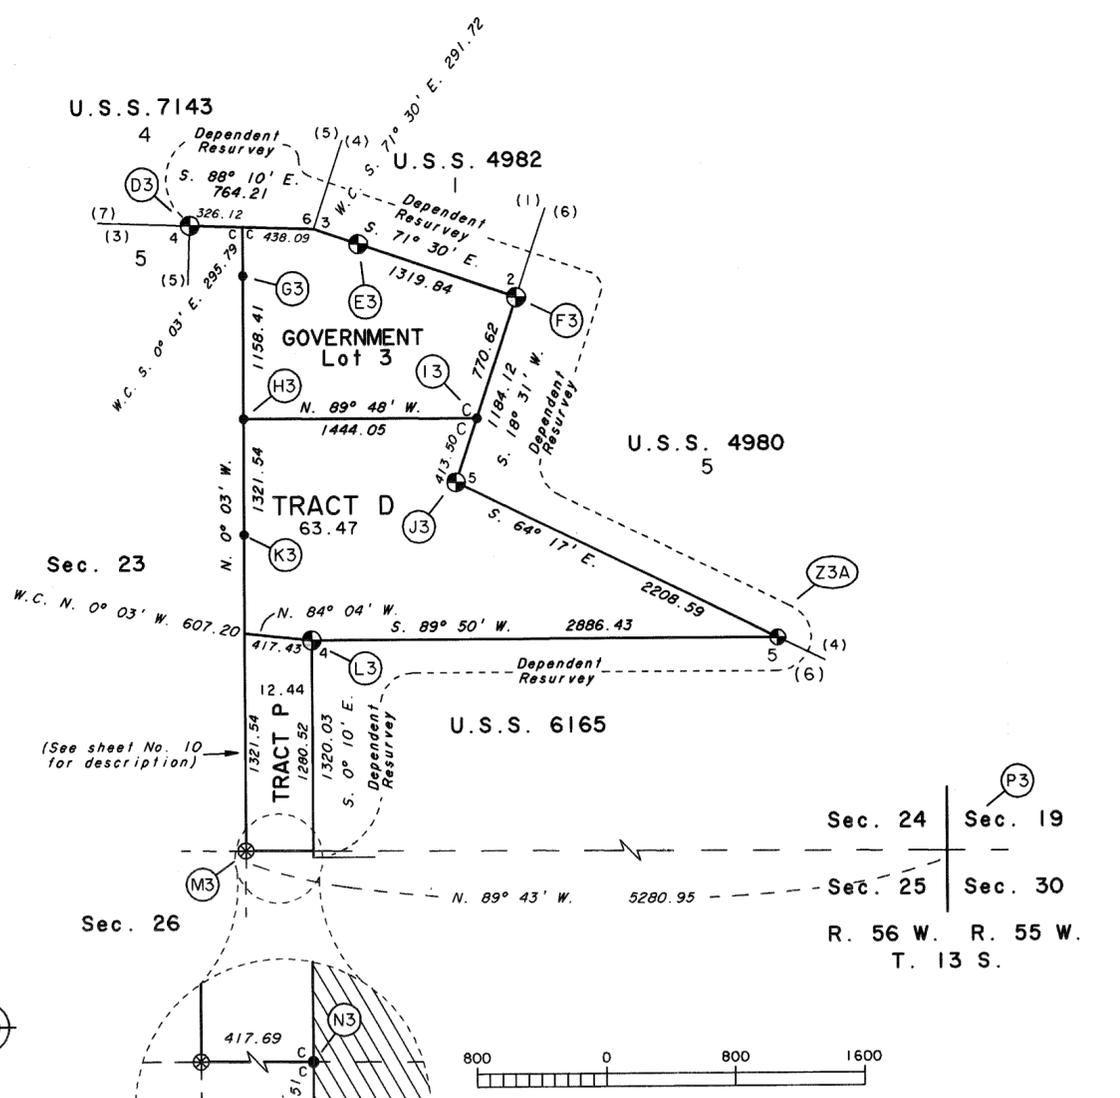

LEGEND

- Bureau of Land Management monument recovered this survey.
Private monument recovered this survey.
Stainless steel post set this survey.
Aluminum Rod set this survey.
Iron rebar set this survey.
Iron spike or other set this survey.
Remonumented this survey.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT., 688, 702, 703)

CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA


AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION


LEGEND

- Bureau of Land Management monument recovered this survey.
Private monument recovered this survey.
Stainless steel post set this survey.
Aluminum Rod set this survey.
Iron rebar set this survey.
Iron spike or other set this survey.
Remonumented this survey.



Sec. 32

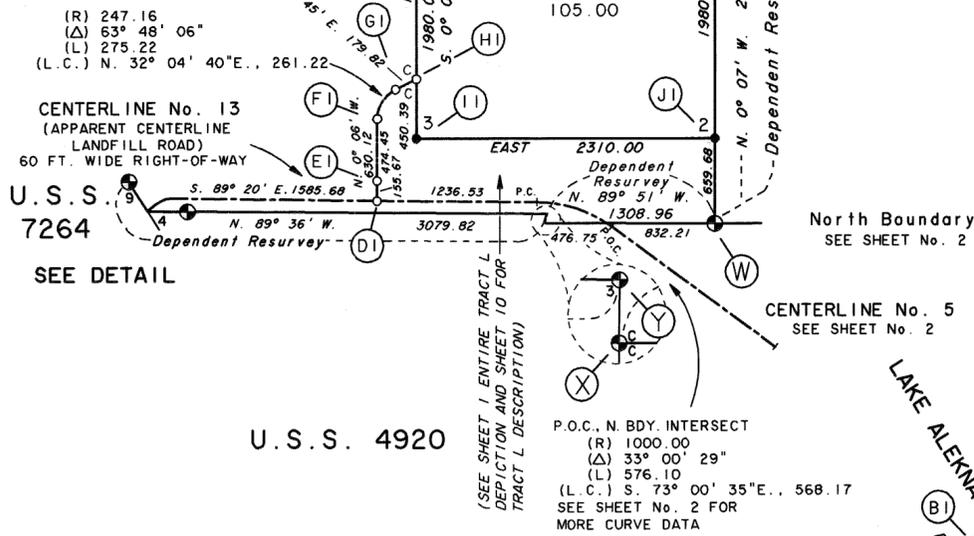

Sec. 33


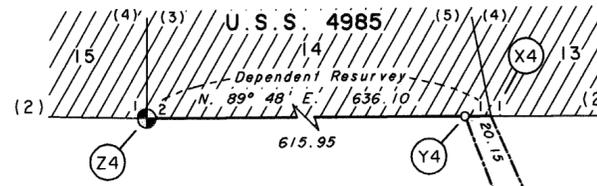


DETAIL

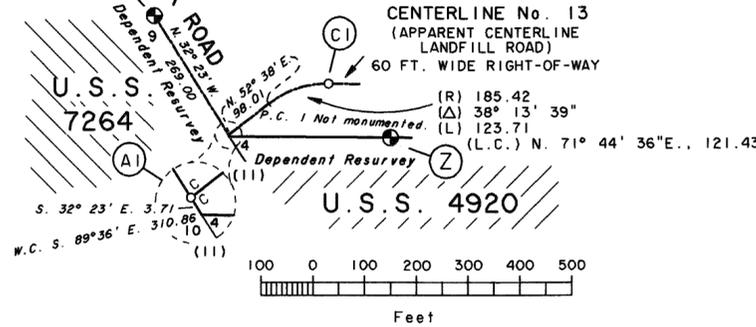

Mean Magnetic Declination 20° E.

CENTERLINE No. 8 (OVERHEAD UTILITY LINE) 30 FT. WIDE RIGHT-OF-WAY

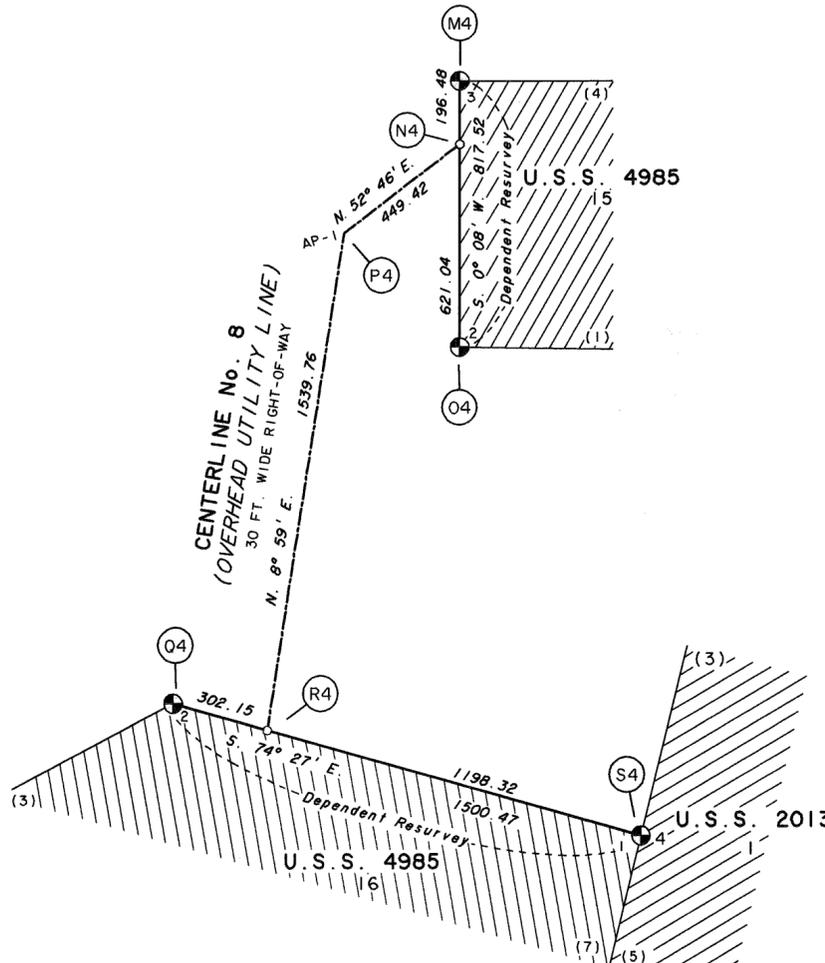

MEANDERS

Along a well defined bank, 5 ft. high, on the right bank of Nushagak River, at the line of mean high tide.

TRACT B

- 1. S. 67°09' W., 3.30 ft.
2. N. 52°50' W., 55.58 ft.
3. S. 66°21' W., 205.11 ft.
4. N. 76°24' W., 221.12 ft.
5. S. 83°13' W., 314.66 ft.
6. N. 89°07' W., 140.64 ft.
7. S. 70°33' W., 238.33 ft.
8. S. 89°27' W., 87.69 ft.



ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c) TRACTS A THROUGH P,
RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8
AND 10 THROUGH 15, P.L. 92-203 (85 STAT., 688,
702, 703)

SUBDIVISION OF LOT 2, U.S. SURVEY NO. 7272


CHOGGIUNG LIMITED

AT

DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272,
AND THE DEPENDENT RESERVE AND
SUBDIVISION OF A PORTION OF TOWNSHIP
13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NO. 1
FOR SURVEY INFORMATION

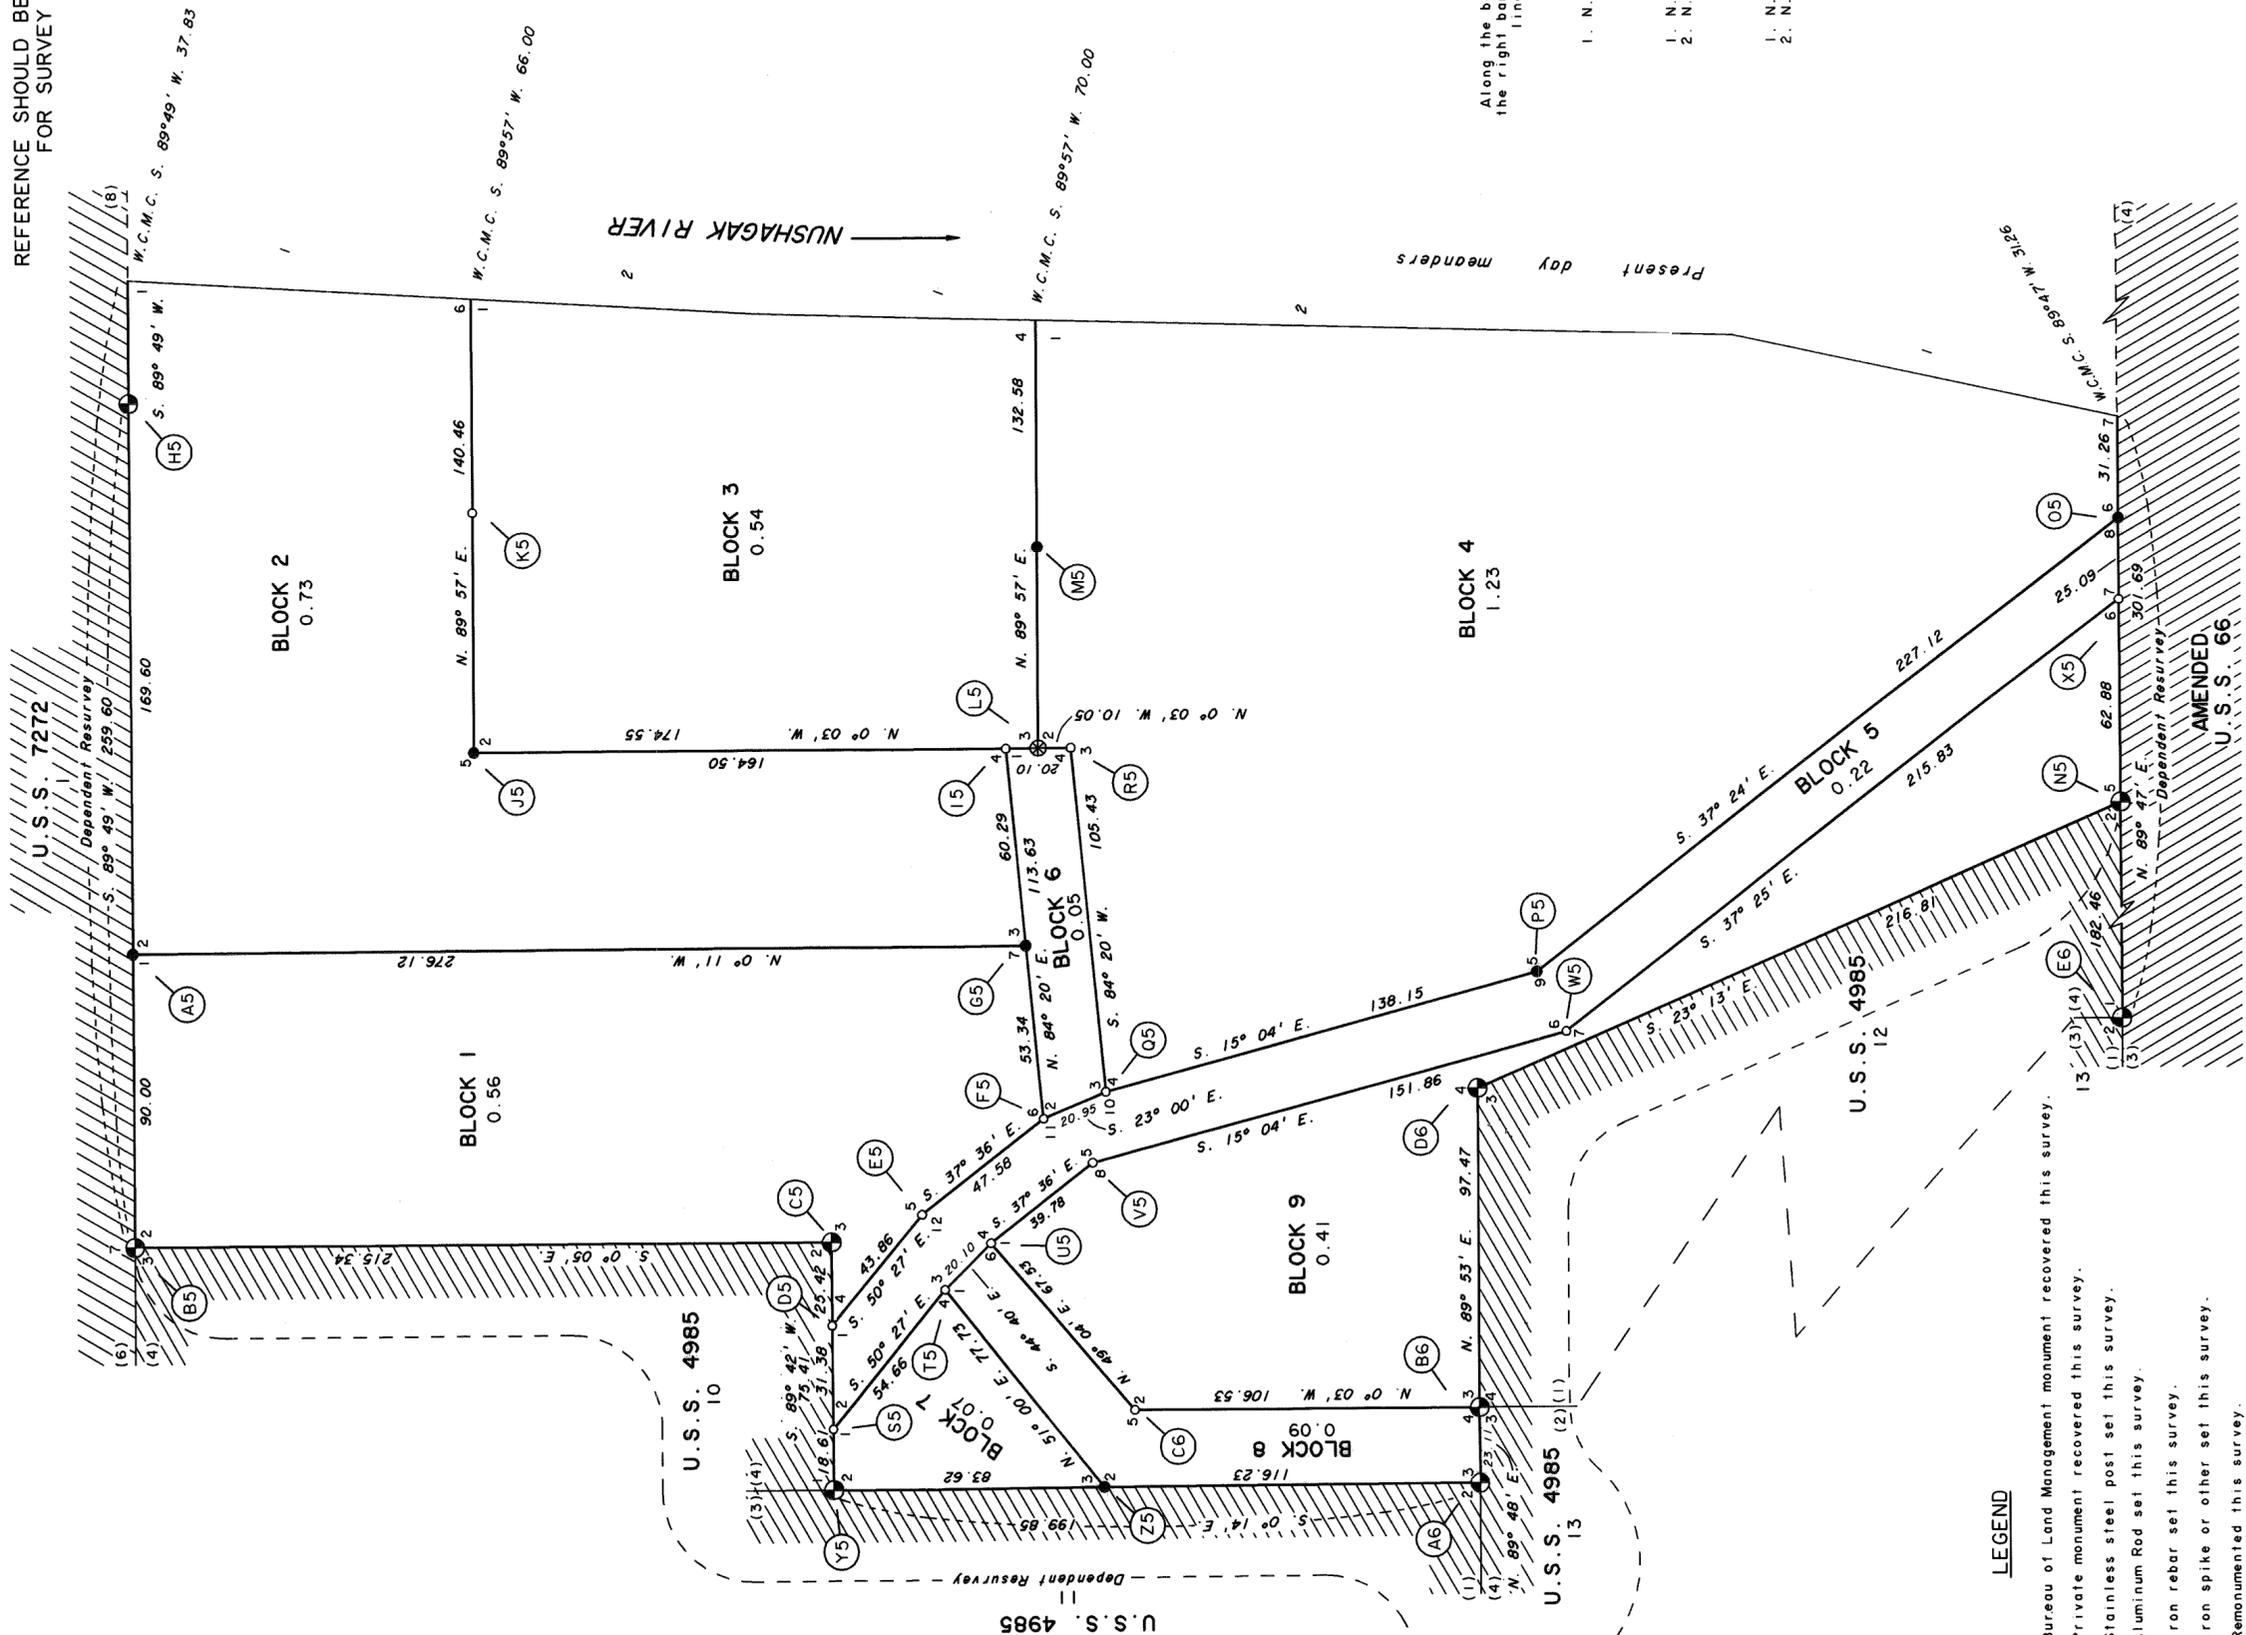

LEGEND

- Bureau of Land Management monument recovered this survey.
- Private monument recovered this survey.
- Stainless steel post set this survey.
- ⊗ Aluminum Rod set this survey.
- Iron rebar set this survey.
- ⊗ Iron spike or other set this survey.
- Remonumented this survey.

Bristol Bay Recording District 2009-12

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT, 688, 702, 703)

CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

EXISTING DRIVEWAY





- 1. N. 56°58' W., 99.61 ft.
- 2. N. 50°01' W., 30.91 ft.
- 3. N. 13°24' W., 46.38 ft.
- 4. N. 36°18' W., 36.13 ft.
- 5. N. 61°34' W., 42.94 ft.
- 6. N. 29°25' W., 30.59 ft.
- 7. N. 9°13' W., 29.56 ft.
- 8. N. 5°45' E., 57.05 ft.

EXISTING FOOT TRAIL

- 1. N. 63°28' W., 28.60 ft.
- 2. S. 80°01' W., 18.32 ft.
- 3. N. 66°08' W., 32.70 ft.
- 4. N. 36°51' W., 34.32 ft.

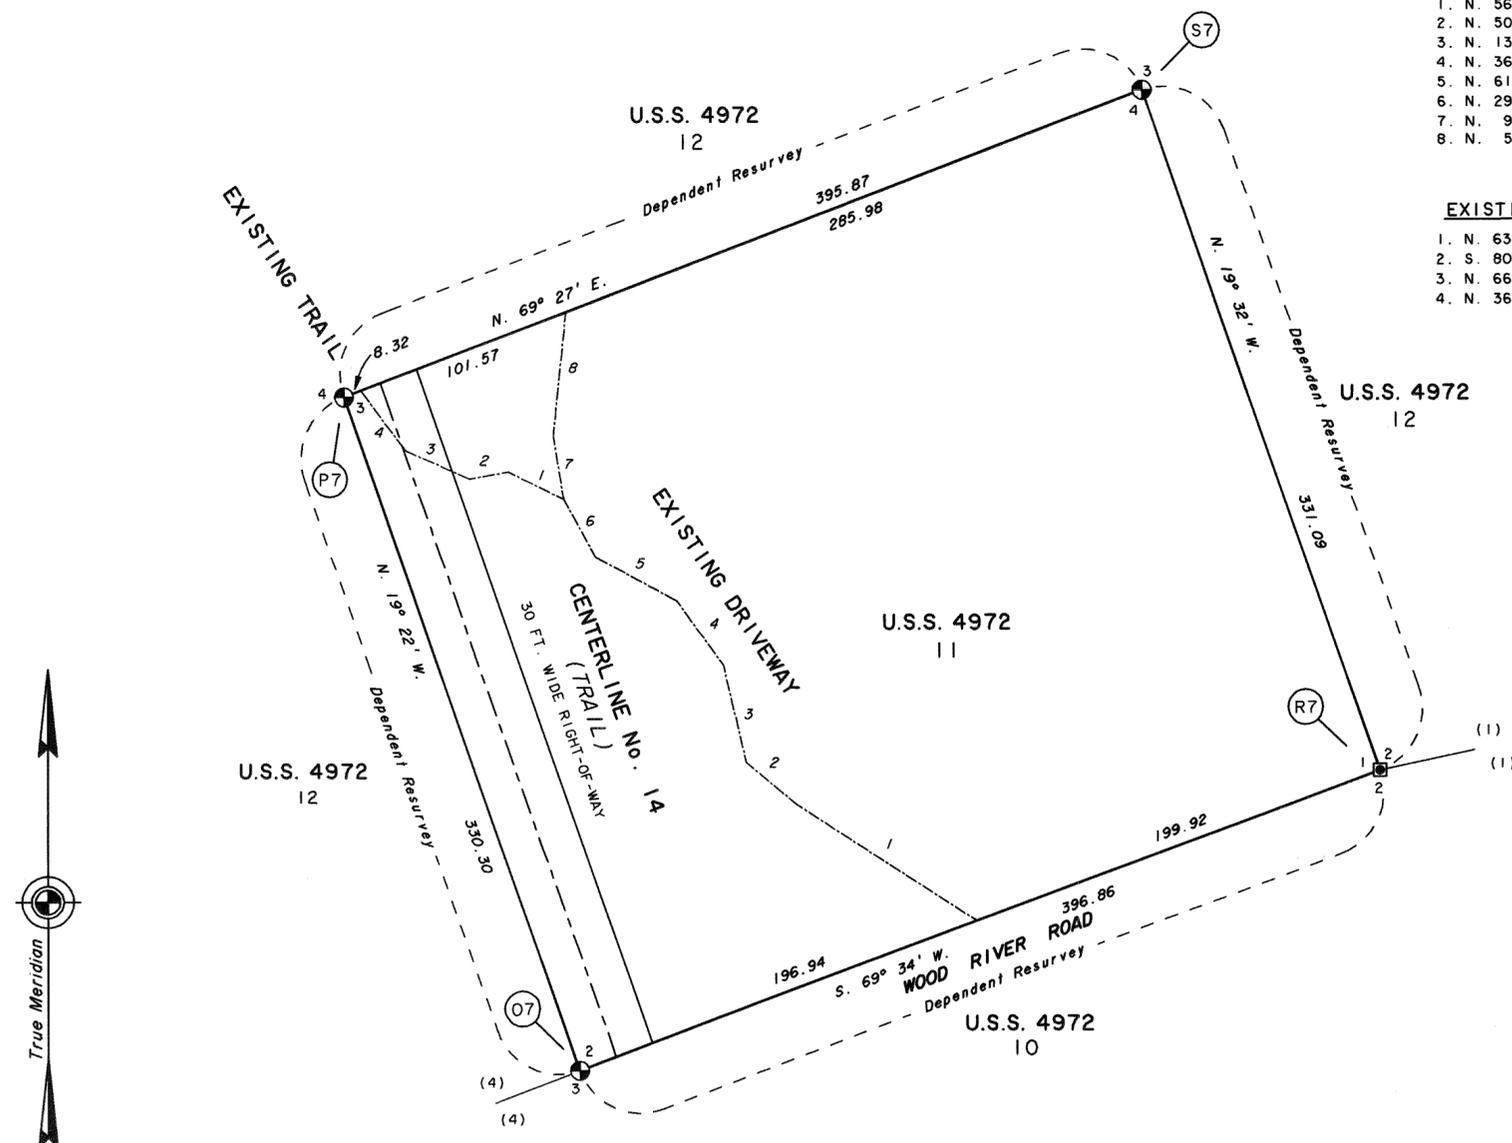

Mean Magnetic Declination 20° E.

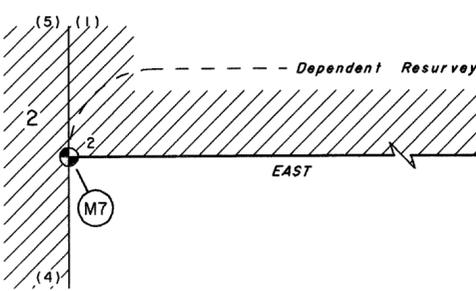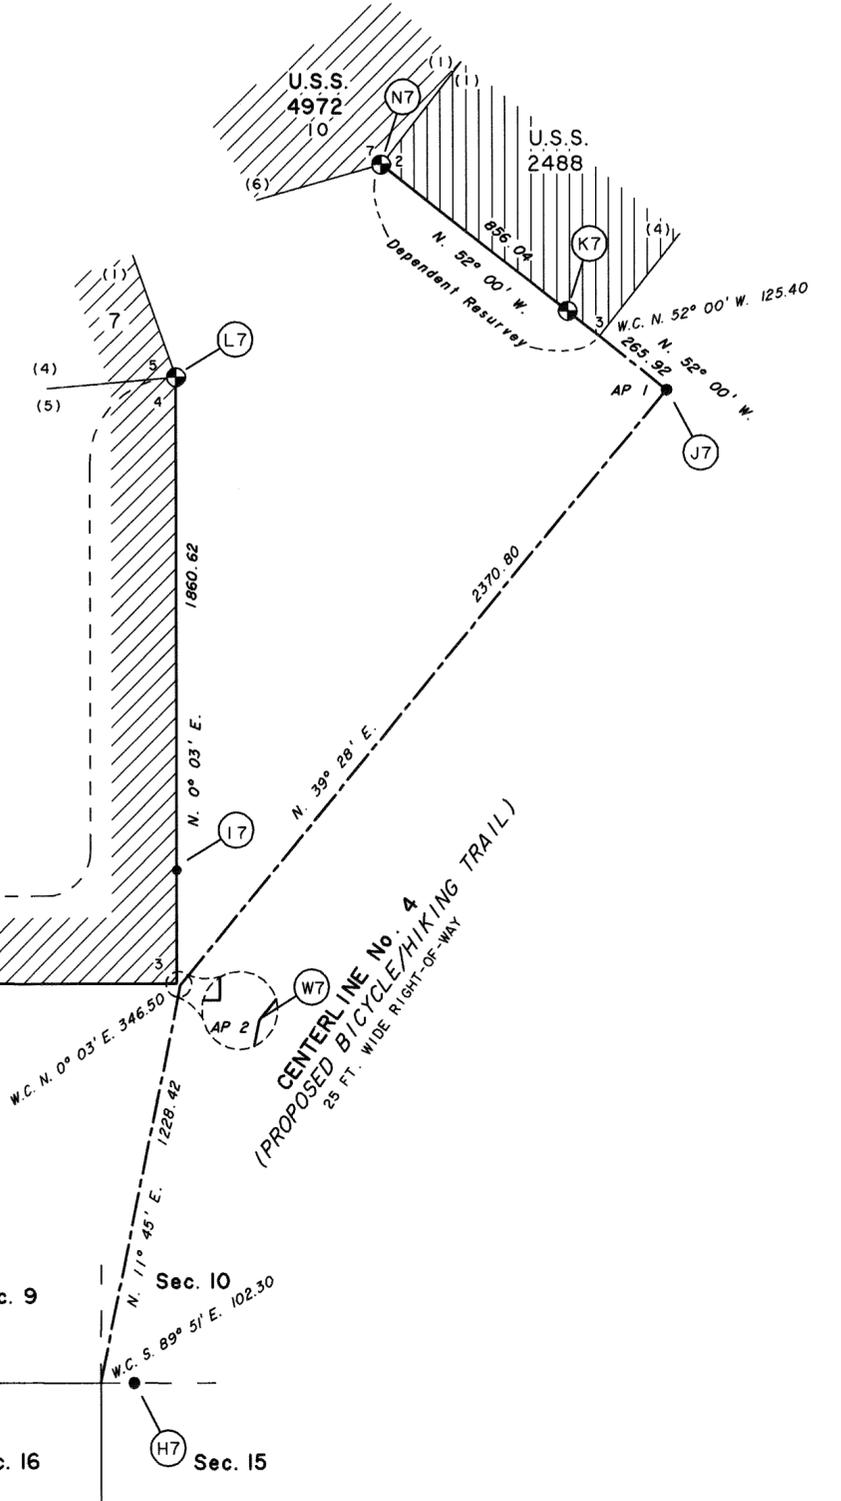

LEGEND

- ⊕ Bureau of Land Management monument recovered this survey.
- Private monument recovered this survey.
- Stainless steel post set this survey.
- ⊗ Aluminum Rod set this survey.
- Iron rebar set this survey.
- ⊗ Iron spike or other set this survey.
- ⊠ Remonumented this survey.

Bristol Bay Recording District 2009-12


CF

TOWNSHIP 13 SOUTH, RANGE 56 WEST, OF THE SEWARD MERIDIAN, ALASKA


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT, 688, 702, 703)

CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA
REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

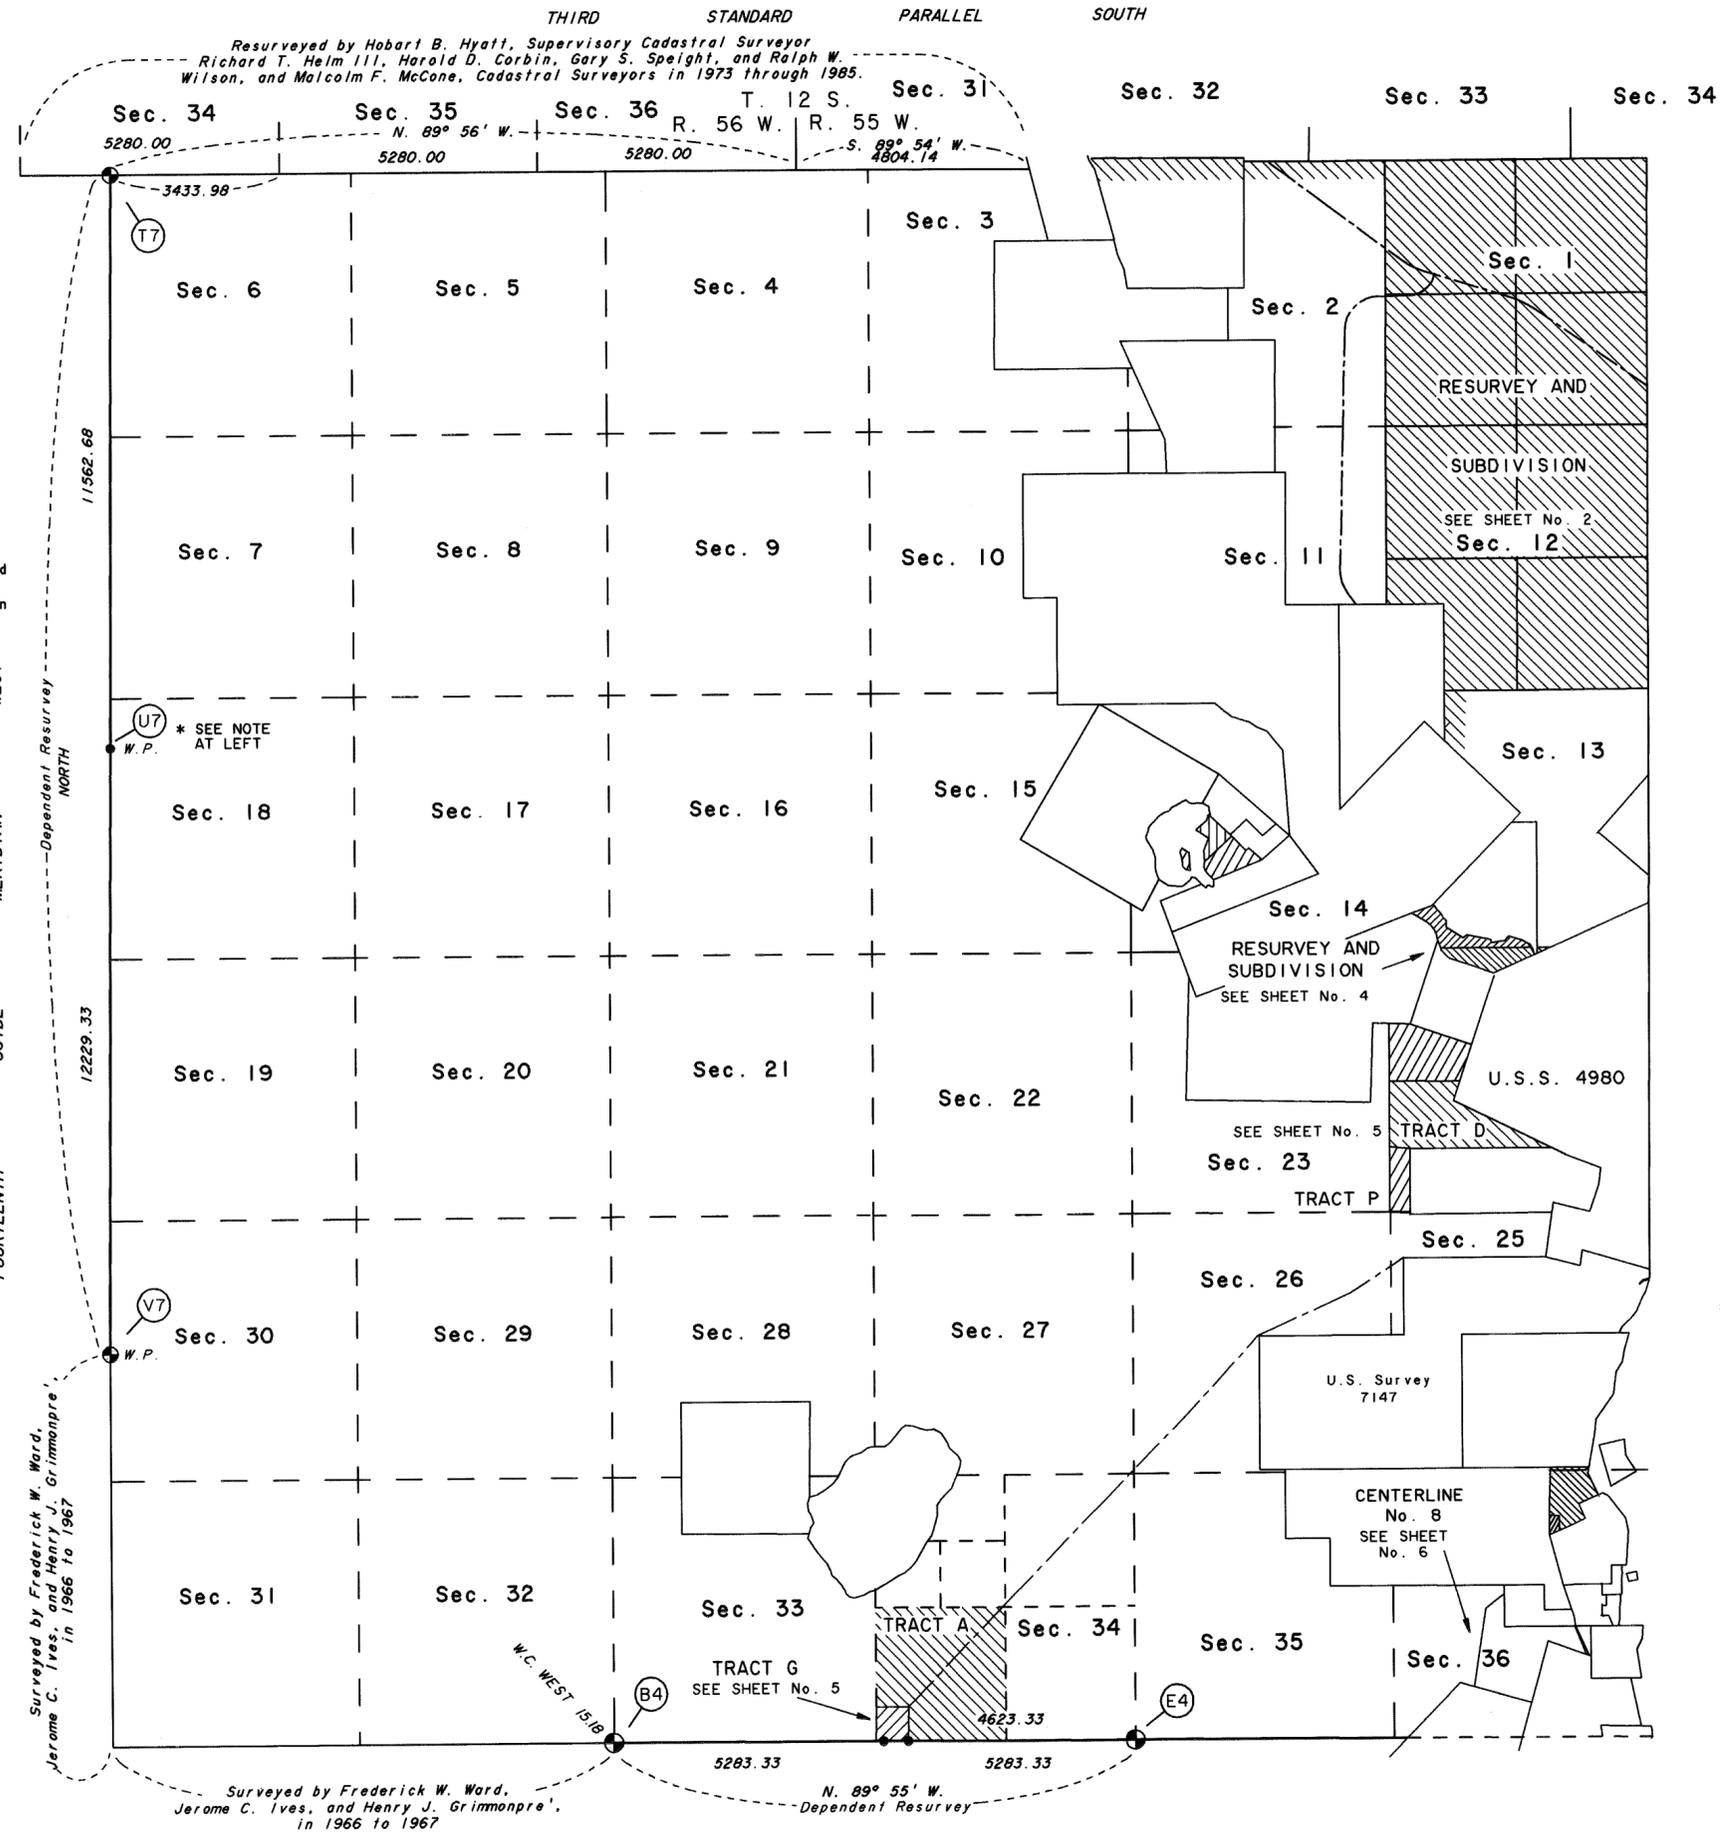

NOTE: The point selected for the witness point between sections 13 and 18 is located South, 113.45 ft. from the proportionate record position for the original 1966-1967 witness point. The record position now falls in the Snake River.

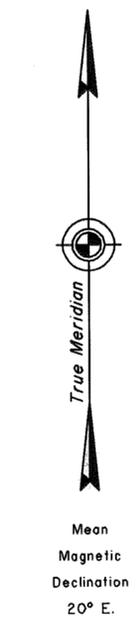

LEGEND

- ⊕ Bureau of Land Management monument recovered this survey.
- Private monument recovered this survey.
- Stainless steel post set this survey.
- ⊗ Aluminum Rod set this survey.
- Iron rebar set this survey.
- ⊗ Iron spike or other set this survey.
- ⊞ Remonumented this survey.

TRACT A is the unsubdivided remaining portion of the southwest 1/4 of section 34, Township 13 South, Range 56 West, Seward Meridian, Alaska, after the segregation of ANCSA Section 14(c) TRACT G.

TRACT K is the unsubdivided remaining portion of United States Government Lot 1, section 36, Township 13 South, Range 56 West, Seward Meridian, Alaska, after the segregation of ANCSA Section 14(c) TRACT E.


TRACT L is the unsubdivided remaining portion of the north 1/2 southeast 1/4 and United States Government Lots 8 and 9, section 32, Township 12 South, Range 56 West, Seward Meridian, Alaska, after the segregation of ANCSA Section 14(c) TRACT C.

TRACT M is the unsubdivided remaining portion of United States Government Lot 5, section 31, Township 12 South, Range 55 West, Seward Meridian, Alaska, after the segregation of ANCSA Section 14(c) TRACT H.

TRACT N is the unsubdivided remaining portion of United States Government Lot 1, section 14, Township 13 South, Range 56 West, Seward Meridian, Alaska, after the segregation of ANCSA Section 14(c) TRACT F.

TRACT O is the unsubdivided remaining portion of United States Government Lot 1, 2 and 6, and the unsubdivided remaining portions of United States Government Lots 3, 4, and 5, section 20, Township 13 South, Range 55 West, Seward Meridian, Alaska, after the segregation of ANCSA Section 14(c) TRACT B.

TRACT P is the unsubdivided remaining portion of United States Government Lot 6, section 24, Township 13 South, Range 56 West, Seward Meridian, Alaska after the segregation of ANCSA Section 14(c) TRACT D.

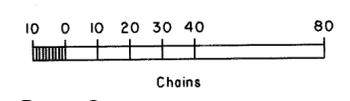


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND IO THROUGH 15. P.L. 92-203 (85 STAT. 688, 702, 703)


CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. as shown, from which the 1967 bearing trees
A spruce stump, 11 ins. diam., bears S. 17 1/2° E., 26.40 ft. dist., with the marks BT visible on a partially healed blaze.
A spruce, 13 ins. diam., bears S. 17 3/4° W., 42.24 ft. dist., with healed blaze.
and a new bearing tree
A spruce, 10 ins. diam., bears N. 45° E., 23.9 ft. dist., mkd. X BT.
Add the marks 1994 on the brass cap.




Found an alum. rod, 3/4 in. diam., firmly set, projecting 14 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees
A spruce, 10 ins. diam., bears S. 66° E., 17.82 ft. dist., with fragmented marks visible on a partially healed blaze. (Record; S. 63 1/4° E.)
A spruce, 6 ins. diam., bears N. 65° W., 51.48 ft. dist., mkd. X BT on a partially healed blaze. (Record; N. 66 1/2° W.)




Found a stainless steel post, 2 1/2 ins. diam., projecting 2 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees
A spruce, 11 ins. diam., bears N. 55 1/4° E., 38.28 ft. dist., mkd. X BT.
A spruce, 11 ins. diam., bears S. 27 1/4° E., 44.22 ft. dist., mkd. X BT.
A spruce, 13 ins. diam., bears S. 44 3/4° W., 45.54 ft. dist., mkd. X BT.
A spruce, 11 ins. diam., bears N. 65 1/2° W., 34.98 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears S. 32 1/2° E., 19.91 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears N. 88° W., 51.55 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
The monument is located among scattered spruce on a very gradual NE facing slope.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears S. 12 1/2° E., 184.00 ft. dist., mkd. X BT.
A spruce, 9 ins. diam., bears S. 41 1/4° W., 85.20 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
The monument is located in open tundra on a very gradual NW facing slope.




Found a fiberglass post, 2 1/2 ins. diam., loosely set, projecting 14 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees
A dead and standing spruce, 1 in. diam., bears S. 19 1/2° E., 166.3 ft. dist., with no marks. (Record, S. 21° E., 166.98 ft.)
A spruce, 4 ins. diam., bears S. 58 1/2° W., 336.1 ft. dist., with healed blaze. (Record, S. 57° W., 335.94 ft. dist.)
and a new bearing tree
A spruce 5 ins. diam., bears S. 37 1/2° E., 483.5 ft. dist., mkd. X BT.
Firm in place and add marks 2007 on brass cap. Amended monument is located on flat, open terrain.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
Drive an alum. rod, 3/4 in. diam., 9 ft. long, 8.2 ft. in the ground, 6.6 ft. dist. W. of cor., with an orange triangular marker on top.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears N. 58° E., 29.8 ft. dist., mkd. X BT.
A spruce, 11 ins. diam., bears S. 71° E., 31.0 ft. dist., mkd. T13S R55W S7 BT.
A birch, 13 ins. diam., bears S. 86 1/2° W., 25.7 ft. dist., mkd. T13S R56W S12 BT.
A spruce, 5 ins. diam., bears N. 75° W., 38.9 ft. dist., mkd. X BT.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 9 ft. in the ground, with alum. cap mkd. as shown, from which
Drive an alum. rod, 3/4 in. diam., 9 ft. long, 9 ft. in the ground, 6.6 ft. dist. W. of cor., with an orange triangular marker on top.
Bury a magnet in a white plastic case 1 ft. deep alongside the monument.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees
A spruce, 12 ins. diam., bears N. 76 1/2° E., 126.72 ft. dist., with healed blaze.
A spruce stump, 10 ft. high, 4 ins. diam., bears S. 37 3/4° E., 382.80 ft. dist., mkd. X BT on an open blaze.




and a new bearing tree
A spruce, 4 ins. diam., bears S., 132.0 ft. dist., with a nail driven on W face, 6 ins. above the ground.
Add the marks 1993 on the brass cap.
The monument is located on slight E slope, in scattered spruce trees.
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
Drive an alum. rod, 3/4 in. diam., 9 ft. long, 8.5 ft. in the ground, 6.6 ft. dist. N. of cor., with an orange triangular marker on top.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
The monument is located in open tundra, on the E. edge of a small patch of willow and dwarf birch.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N. 22° E., 21.4 ft. dist., mkd. T13S R56W S12 CC BT.
A spruce, 8 ins. diam., bears S. 59° E., 59.4 ft. dist., mkd. T13S R56W S13 CC BT.




Deposit a magnet in a white plastic case at the base of the stainless steel post.
The monument is located in spruce and birch.




Found an alum. rod, 3/4 in. diam., projecting 8 ins. above the ground, with alum. cap mkd. as shown, no accessories.
The monument is located in swampy ground.
Found an alum. rod, 3/4 in. diam., projecting 15 ins. above the ground, with alum. cap mkd. as shown, no accessories.
The monument is located in swampy ground.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
Drive an alum. rod, 3/4 in. diam., 9 ft. long, 8.3 ft. in the ground, 6.6 ft. dist. N. of cor., with an orange triangular marker on top.




Deposit a magnet in a white plastic case and clear glass at the base of the stainless steel post.
The monument is located in mossy ground.
Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees




A spruce stump, 4 ft. high, 15 ins. diam., bears S. 14° W., 40.26 ft. dist., mkd. S4982 L11 C3 BT on a partially healed blaze. (Record, S. 13 1/2° W.)
A dead standing spruce, 13 ins. diam., bears S. 55° W., 23.10 ft. dist., mkd. S4982 L11 C3 BT. (Record, S. 56° W.)
Monument is located in fairly dense spruce and birch trees.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears S. 24° W., 209.0 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears S. 88 1/2° W., 174.2 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
The monument is located in open marshy tundra.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 4 ins. diam., bears N. 52° E., 13.2 ft. dist., mkd. X BT.
A dead and standing spruce, 4 ins. diam., bears S. 26 1/4° E., 38.9 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears S. 8 1/4° E., 170.3 ft. dist., mkd. X BT.
The monument is located among scattered spruce on the easterly facing slope of a small hill.




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. as shown, from which the 1966 bearing trees
A dead and standing spruce, 3 ins. diam., bears N. 48° E., 20.8 ft. dist., mkd. T12S R55W S33 SC BT on an open blaze. (Record; N. 46° E., 20.46 ft.)
A spruce, 10 ins. diam., bears N. 67 1/2° W., 19.7 ft. dist., with mostly healed blaze. (Record; N. 70 1/2° W., 19.14 ft.)
and a new bearing tree
A spruce, 7 ins. diam., bears N. 79° E., 47.1 ft. dist., mkd. T12S R55W S33 SC BT.
Add the marks 1993 on the brass cap.
The monument is located among spruce and birch on the southerly edge of a clearing.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 10 ins. diam., bears N. 8 3/4° E., 15.9 ft. dist., mkd. 1/4 S1 BT.
A spruce, 10 ins. diam., bears S. 56° E., 36.5 ft. dist., mkd. 1/4 S12 BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
The monument is located among spruce and birch trees.




Found an iron post, 2 1/2 ins. diam. firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees
A spruce, 6 ins. diam., bears N. 21 1/2° E., 23.8 ft. dist., mkd. T12S R55W S32 CC BT. visible on partially healed blaze. (Record, 22.44 ft.)
A spruce, 10 ins. diam., bears S. 49 1/2° E., 23.76 ft. dist., mkd. X BT, visible on a partially healed blaze.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 40 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 9 ins. diam., bears S. 21° E., 102.5 ft. dist., mkd. X BT.
A spruce, 9 ins. diam., bears N. 6 1/2° W., 108.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
The monument is located at N'y toe of slope, 46 lks. N. of centerline.



Found an iron post, (record, plastic post) 2 1/2 ins. diam. firmly set, projecting 12 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees
A spruce, 8 ins. diam., bears N. 40° E., 8.2 ft. dist., with healed blaze. (Record N. 28° E., 7.92 ft.)
A spruce, 10 ins. diam., bears S. 62° E., 27.06 ft. dist., with healed blaze.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 8 ins. diam., bears S. 8 3/4° E., 15.5 ft. dist., mkd. T13S R56W S1 BT.
A spruce, 7 ins. diam., bears S. 48 1/2° W., 24.4 ft. dist., mkd. T13S R56W S2 BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
The monument is located among mature spruce and birch trees.



Found a plastic post, 2 1/2 ins. diam. firmly set, projecting 1 in. above the ground, with brass cap mkd. as shown, from which the original bearing trees
A dead spruce snag, 10 ins. diam., bears N. 52° E., 13.53 ft. dist., with fragmented marks visible on partially healed blaze.
A spruce, 6 ins. diam., bears N. 45° E., 15.51 ft. dist., with a healed blaze. (Record, N. 45° W.)

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT, 688, 702, 703)

CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

AA Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 6 ins. diam., bears N. 2 1/2° E., 21.3 ft. dist., mkd. X BT. A spruce, 11 ins. diam., bears S. 65 1/2° E., 34.6 ft. dist., mkd. C1/4 S1 BT Deposit a magnet in a white plastic case at the base of the stainless steel post. The monument is located on nearly level terrain in spruce and birch trees.

BB Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 10 ins. diam., bears S. 47 1/2° W., 36.0 ft. dist., mkd. C1/4 S12 BT. A spruce, 6 ins. diam., bears N. 15 1/2° W., 39.8 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. Drive a steel fence post, 5 ft. long 2 ft. in ground, 6.6 ft. N. of cor. The monument is located on nearly level terrain in spruce and birch trees.

AI Drive an iron rebar, 30 ins. long, 5/8 in. diam., 42 ins. in the ground, with alum. cap mkd. as shown, from which A spruce, 8 ins. diam., bears S. 13° E., 130.3 ft. dist., mkd. X BT. A spruce, 10 ins. diam., bears N. 71° W., 108.2 ft. dist., mkd. X BT.

BI Found a copper-coated steel rod, 10 ins. below the surface of the road, with cap not noted, from which the original bearing trees A spruce, 12 ins. diam., bears N. 59° E., 59.4 ft. dist., with the marks BT visible on a partly healed blaze. A spruce, 15 ins. diam., bears N. 66° W., 97.0 ft. dist., mkd. C9 S7264 BT on an open blaze.

CI Drive an iron rebar, 30 ins. long, 5/8 in. diam., 12 ins. below the surface of Waskey Road, with alum. cap mkd. as shown, from which An iron rebar, 30 ins. long, 5/8 in. diam., driven flush with the ground, for a reference monument, bears S. 0° 47' W., 39.45 ft. dist. with alum. cap mkd. CL RM 39.45 FT PT1 1993 and an arrow pointing to the cor. An iron rebar, 30 ins. long, 5/8 in. diam., driven flush with the ground, for a reference monument, bears N. 4° 29' W., 39.56 ft. dist. with alum. cap mkd. CL RM 39.56 FT PT1 1993 and an arrow pointing to the cor.

DI Drive an iron rebar 30 ins. long, 5/8 in. diam., 14 ins. below the surface of Waskey Road, with alum. cap mkd. as shown, from which A spruce, 11 ins. diam. bears S. 36 1/2° E. 88.3 ft. dist. mkd. X BT. A spruce, 7 ins. diam. bears S. 42 3/4° W. 82.7 ft. dist. mkd. X BT. Bury a magnet in a white plastic case alongside the iron rebar.

EI Drive an iron rebar, 30 ins. long, 5/8 in. diam., 12 ins. below the surface of land fill road, with alum. cap mkd. as shown, from which A spruce, 13 ins. diam., bears N. 33° E., 59.9 ft. dist., mkd. X BT. A spruce, 9 ins. diam., bears S. 53 1/2° E., 63.4 ft. dist., mkd. X BT.

FI Drive an iron rebar, 30 ins. long, 5/8 in. diam., 12 ins. below the surface of land fill road, with alum. cap mkd. as shown, from which An iron rebar, 30 ins. long, 5/8 in. diam., driven flush with the ground, for a reference monument, bears S. 83° 22' E., 40.24 ft. dist., with alum. cap mkd. CL RM 40.24 FT PC3 1993 and an arrow pointing to the cor. An iron rebar, 30 ins. long, 5/8 in. diam., driven flush with the ground, for a reference monument, bears N. 83° 02' W., 40.13 ft. dist., with alum. cap mkd. CL RM 40.13 FT PC3 1993 and an arrow pointing to the cor.

GI Drive an iron rebar, 30 ins. long, 5/8 in. diam., 12 ins. below the surface of land fill road with alum. cap mkd. as shown, from which An iron rebar, 30 ins. long, 5/8 in. diam., driven flush with the ground, for a reference monument, bears S. 34° 36' E., 33.23 ft. dist., with alum. cap mkd. CL RM 33.23 FT PT3 1993 and an arrow pointing to the cor. An iron rebar, 30 ins. long, 5/8 in. diam., driven flush with the ground, for a reference monument, bears N. 34° 53' W., 45.10 ft. dist., with alum. cap mkd. CL RM 45.10 FT PT3 1993 and an arrow pointing to the cor.

HI Drive an iron rebar, 30 ins. long, 5/8 in. diam., 12 ins. below the surface of land fill road with alum. cap mkd. as shown, from which A telephone pole, with a 5 in. spike, driven 4 ins. into the pole, 6 ins. above the ground, bears N. 32° 55' E., 28.4 ft. dist. An iron rebar, 30 ins. long, 5/8 in. diam., driven flush with the ground, for a reference monument, bears S. 15° 40' E., 40.04 ft. dist., with alum. cap mkd. CL RM 40.04 FT 1993 and an arrow pointing to the cor. An iron rebar, 30 ins. long, 5/8 in. diam., driven 25 ins. in the ground, for a reference monument, bears N. 15° 45' W., 29.03 ft. dist., with alum. cap mkd. C. RM 29.03 FT 1993 and an arrow pointing to the cor.

II Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which Drive an alum. rod, 3/4 in. diam, 12 ft. long, 11.5 ft. in the ground, 6.6 ft. dist. N. of cor., with an orange triangular marker on top. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on top of a small hill in a new growth of birch trees.

JI Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 11 ins. diam., bears N. 56 1/4° E., 37.6 ft. dist., mkd. X BT. A spruce, 12 ins. diam., bears N. 21 1/2° W., 16.5 ft. dist., mkd. TRC C2 BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located in southerly edge of spruce and birch trees.

KI Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees A spruce stump, 6 ins. diam., 5 ft. high, bears N. 71° E., 86.73 ft. dist., with the marks X BT visible on opened healed blaze. A spruce, 10 ins. diam., bears N. 67° W., 44.22 ft. dist., with fragmentary scribe marks visible on mostly healed blaze.

Added the marks 1993 on the brass cap, from which a new bearing tree A spruce, 3 ins. diam., bears N. 52 1/2° E., 74.0 ft. dist., with a 5 in. spike, driven 2 ins. into the northerly face. Monument is located at the westerly edge of a large open marsh.

LI Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 7 ins. diam., bears S. 53 1/2° E., 62.7 ft. dist., mkd. TRC C4 BT. A spruce, 10 ins. diam., bears S. 75° W., 22.4 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

MI Point for centerline No. 6 at the intersection of line 4-5, Lot 1, U.S. Survey No. 7143, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, for a reference monument, bears E., 63.52 ft. dist., with brass cap mkd. CL RM-1 CL 63.5 FT S7143 LI 1994 and an arrow pointing to the cor.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, for a reference monument, bears S. 89° 59' W., 63.52 ft. dist., with brass cap mkd. CL RM2 CL 63.5 FT S7143 LI 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

NI Point for PC 3 of centerline No. 6, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 51° 55' E., 50.00 ft. dist., with brass cap mkd. CL RMI 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears S. 51° 55' W., 50.00 ft. dist., with brass cap mkd. CL RM2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

OI Point for PT 3 of centerline No. 6, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, for a reference monument, bears S. 88° 48' E., 50.00 ft. dist., with brass cap mkd. CL RM-1 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, for a reference monument, bears N. 88° 48' W., 50.00 ft. dist., with brass cap mkd. CL RM-2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

PI Point for WP 1 of centerline No. 6, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, for a reference monument, bears S. 88° 48' E., 50.00 ft. dist., with brass cap mkd. CL RM-1 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, for a reference monument, bears N. 88° 48' W., 50.00 ft. dist., with brass cap mkd. CL RM-2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

QI Point for PC 4 of centerline No. 6, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, for a reference monument, bears S. 88° 48' E., 50.00 ft. dist., with brass cap mkd. CL RM-1 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 88° 48' W., 50.00 ft. dist., with brass cap mkd. CL RM-2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

RI Point for PT 4 of centerline No. 6, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, for a reference monument, bears S. 0° 53' E., 50.00 ft. dist., with brass cap mkd. CL RM-1 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, for a reference monument, bears N. 0° 53' W., 50.00 ft. dist., with brass cap mkd. CL RM-2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

SI Point for PC 5 of centerline No. 6, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, for a reference monument, bears S. 0° 53' E., 50.00 ft. dist., with brass cap mkd. CL RM-1 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, for a reference monument, bears N. 0° 53' W., 50.00 ft. dist., with brass cap mkd. CL RM-2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

TI Point for PT 5 of centerline No. 6, not monumented, due to the future planned road construction, from which the reference monument for the intersection of centerline 5 and 6 bears N. 16° 44' E., 80.21 ft. dist., as described in 'UI'.

UI Point for the intersection of centerline No. 6 and centerline No. 5, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 16° 44' E., 50.00 ft. dist., with brass cap mkd. CL RM-1 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT, 688, 702, 703)

CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

(V1) Point for PT 2 of centerline No. 5, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 16° 44' E., 50.00 ft. dist., with brass cap mkd. CL RM-1 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears S. 16° 44' W., 50.00 ft. dist., with brass cap mkd. CL RM-2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

(W1) Point for PC 2 of centerline No. 5, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 35° 50' E., 50.00 ft. dist., with brass cap mkd. CL RMI 50 FT 1994 and an arrow pointing to the cor.

A poplar, 14 ins. diam., bears S. 36° W., 50.0 ft. dist., mkd. X BT.

(X1) Point for WP 1 of centerline No. 5, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 35° 50' E., 50.00 ft. dist., with brass cap mkd. CL RMI 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears S. 35° 50' W., 50.00 ft. dist., with brass cap mkd. CL RM2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

(Y1) Point for PT 1 of centerline No. 5, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 35° 50' E., 50.00 ft. dist., with brass cap mkd. CL RMI 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears S. 35° 50' W., 50.00 ft. dist., with brass cap mkd. CL RM2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located at the base of a stump.

(Z1) Point for PC 1 of centerline No. 5, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 0° 29' E., 50.00 ft. dist., with brass cap mkd. CL RMI 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, for a reference monument, bears S. 0° 29' W., 50.00 ft. dist., with brass cap mkd. CL RM2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

(A2) Point for PC 3 of centerline No. 5, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 16° 44' E., 50.00 ft. dist., with brass cap mkd. CL RM-1 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 16° 44' W., 50.00 ft. dist., with brass cap mkd. CL RM-2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

(B2) Point for PT 3 of centerline No. 5, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 34° 29' E., 50.00 ft. dist., with brass cap mkd. CL RM-1 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears S. 34° 29' W., 50.00 ft. dist., with brass cap mkd. CL RM-2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

(C2) Point for WP 2 of centerline No. 5, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 34° 29' E., 50.00 ft. dist., with brass cap mkd. CL RM-1 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears S. 35° 50' W., 50.00 ft. dist., with brass cap mkd. CL RM-2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

(D2) Point for WP 3 of centerline No. 5, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 34° 29' E., 50.00 ft. dist., with brass cap mkd. CL RM-1 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.


A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears S. 35° 50' W., 50.00 ft. dist., with brass cap mkd. CL RM-2 50 FT 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

(E2) Point for centerline No. 5 at the intersection of line 1-2, Lot 2, U.S. Survey No. 7148, not monumented, due to the future planned road construction, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 1° 52' E., 59.40 ft. dist., with brass cap mkd. CL RM-1 59.4 FT CL S7148 L2 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears S. 1° 52' W., 59.40 ft. dist., with brass cap mkd. CL CL S7148 L2 59.4 FT RM-2 1994 and an arrow pointing to the cor. Deposit a magnet in a white plastic case at the base of the stainless steel post.

(F2)



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees

A dead spruce, 11 ins. diam., bears N. 4° E., 24.09 ft. dist., mkd. 1/4 S30 BT.

A spruce, 8 ins. diam., bears S. 7° E., 12.54 ft. dist., with healed blaze.

Add the marks 1993 on the brass cap, from which a new bearing tree


A spruce, 9 ins. diam., bears N. 43 3/4° W., 21.3 ft. dist., mkd. 1/4 S30 BT.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 8 ins. diam., bears N. 16° E., 36.3 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears S. 36 1/2° E., 11.9 ft. dist., mkd. X BT.

(G2)



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees


A spruce, 8 ins. diam., bears N. 45° E., 24.42 ft. dist., mkd. T12S R55W S30 BT.

A spruce, 6 ins. diam., bears S. 15° E., 11.88 ft. dist., with fragmentary scribe marks visible.

A dead spruce, 3 ins. diam., bears S. 49° W., 20.79 ft. dist., mkd. X BT on a partially healed blaze.

A birch, 7 ins. diam., bears N. 24 1/2° W., 32.34 ft. dist., mkd. T12S R56W S25 BT, on a partly healed blaze.

(H2)




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 28° E., 31.7 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears N. 86 1/2° W., 23.1 ft. dist., mkd. X BT.

(I2)




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears S. 52° E., 12.87 ft. dist., mkd. T12S R55W S31 WP BT, on an open blaze. (Record bearing S. 49 1/2° E.)

A spruce, 13 ins. diam., bears S. 46° W., 20.46 ft. dist., with the marks WP visible on a mostly healed blaze. (Record: 20.13 ft.)

The monument is located among dense spruce and birch trees.

(J2)




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears S. 85° E., 19.1 ft. dist., mkd. X BT.

A spruce, 12 ins. diam., bears S. 6 1/2° W., 13.9 ft. dist., mkd. X BT.

(K2)




Found an alum. rod, 3/4 in. diam., firmly set, projecting 12 ins. above the ground, with alum. cap mkd. as shown, no accessories.

The monument is located in a marsh.

(L2)



(M2)



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the 1967 bearing trees

A spruce, 18 ins. diam., bears N. 81° E., 71.50 ft. dist., with a healed blaze. (Record: 71.94)


A spruce stump, 2 ft. high, 4 ins. diam., bears S. 36° E., 62.3 ft. dist., mkd. BT on an open blaze. (Record: S. 31° E., 62.04)

and a bearing tree marked in 1982

A spruce, 14 ins. diam., bears S. 41 1/2° E., 82.50 ft. dist., mkd. X BT on a mostly healed blaze. (Record: S. 50° E.)

The monument is located in marshy ground.

(N2)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A magnet in a fluorescent blue case, bears S. 45° W., 4.0 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent orange case, bears N. 45° W., 4.0 ft. dist., buried 12 ins. below the ground.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

An iron rebar, 5/8 in. diam., projecting 3 ins. above the ground, with alum. cap mkd. 2087-S SSA RW L3 1983, along side the stainless steel post.


Found an iron rebar, 5/8 in. diam., flush with the ground, with alum. cap mkd. as shown, no accessories.

The monument is located on the south side of a gravel pit, in the middle of ATV ruts.

(O2)



(P2)




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd. as shown, from which

Drive a steel fence post, 6 ft. long, 30 ins. in the ground, 1 ft. N of cor.

A magnet in a fluorescent silver case, bears N. 45° E., 4.0 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent orange case, bears N. 45° W., 4.0 ft. dist., buried 12 ins. below the ground.

(Q2)



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as shown, from which the 1967 bearing trees

A fallen spruce, 6 ins. diam., bears S. 37 1/4° E., 15.84 ft. dist., mkd. S4982 L6 (Record: S. 42° E.)

Add the marks 1993 on the brass cap, from which new bearing trees

A spruce, 8 ins. diam., bears N. 65° E., 77.2 ft. dist., mkd. X BT

A spruce, 7 ins. diam., bears N. 56 3/4° W., 48.7 ft. dist., mkd. X BT.

(R2)

Point for cor. No. 1, Lot 8, U.S. Survey No. 7143, identical to cor. No. 4, Lot 1, U.S. Survey No. 4982, destroyed during road construction, not monumented, from which the 1982 bearing tree

A spruce, 7 ins. diam., bears N. 88° E., 71.28 ft. dist., mkd. X BT on a partly healed blaze.

A spruce, 7 ins. diam., bears N. 88° E., 71.28 ft. dist., mkd. X BT on a partly healed blaze.

Point for the closing cor. of secs. 13 and 24, on line 4-5, Lot 1, U.S. Survey No. 4982. Set an iron spike, 12 ins. long, 12 ins. below the road surface, no accessories.

(S2)

(T2)


Point for Cor. No. 5, Lot 1, U.S. Survey No. 4982, destroyed during road construction, not monumented, from which the remaining original accessory

An iron post, 2 1/2 ins. diam., 9.5 ins. below the ground, with brass cap missing, for a reference monument, bears S. 47° 42' W., 33.00 ft. dist.

Drive an iron rebar, 30 ins. long, 5/8 in. diam., 46 ins. in the ground, with an alum. cap mkd. as shown, from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, for a reference monument, bears N. 7° 12' E., 33.24 ft. dist., with brass cap mkd. CL RM2 33.24 FT 1993 and an arrow pointing to the cor.

(U2)



A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 7° 12' E., 33.24 ft. dist., with brass cap mkd. CL RM2 33.24 FT 1993 and an arrow pointing to the cor.


A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 77° 57' W., 35.69 ft. dist., with brass cap mkd. CL RMI 35.69 FT 1993 and an arrow pointing to the cor.

(V2)



Found an alum. rod, 3/4 in. diam., projecting 2 ins. above the ground, with alum. cap mkd. as shown, no accessories.

(W2)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which


A spruce, 6 ins. diam., bears S. 50° W., 47.2 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 69° W., 72.2 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of at the stainless steel post.

The monument is located in wet tundra.

(X2)



Found an alum. rod, 3/4 in. diam., firmly set, projecting 10 ins. above the ground, with alum. cap mkd. as shown, no accessories.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT. 688, 702, 703)

CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

Y2 Found an alum. rod, 3/4 in. diam., firmly set, projecting 6 ins. above the ground, with alum. cap mkd. as shown, no accessories. The monument is located in open marsh. Diagram: C3 L3 S7143 1982

Z2 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 2.0 ft., N. 79 1/4° W. of cor. Deposit a magnet in a white plastic case at the base of the stainless steel post. The monument is located in marshy tundra. Diagram: CL S7143 S13 L3 C S24 1993

A3 Found an alum. rod, 3/4 in. diam., firmly set, projecting 6 ins. above the ground, with alum. cap mkd. as shown, no accessories. Diagram: S7143 L3 C4 L2 S4980 1982

B3 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 12 ins. diam., bears N. 6 3/4° E., 28.3 ft. dist., mkd. S13 CC BT. A spruce, 6 ins. diam., bears N. 74° W., 35.9 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post. The monument is located in alder and scattered spruce. Diagram: CL S13 C S4980 L2 S24 1993

C3 Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the 1968 bearing tree A spruce stump, 5 ft. high, 9 ins. diam., bears S. 75 1/4° W., 24.2 ft. dist., marks (Record; 23.76 ft. dist.) not noted. and bearing trees marked in 1982 A birch, bears S. 34 1/2° E., 15.71 ft. dist., mkd. X BT on a partially healed blaze. (Record; 15.18 ft. dist.) A spruce, 8 ins. diam., bears N. 69 1/2° W., 17.16 ft. dist., mkd. X BT on a partly healed blaze. Diagram: CL WP L2 S4980 1982 1968

D3 Found an alum. rod, 3/4 in. diam., firmly set, projecting 8 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees A spruce, 10 ins. diam., bears S. 50° W., 46.20 ft. dist., with fragmented marks on a partially healed blaze. (Record, S. 46 1/2° W.) A 3 1/2 ft. high spruce stump, 9 ins. diam., bears N. 50° W., 43.56 ft. dist., X BT. on a partially healed blaze. (Record, N. 51 1/2° W.) And a new bearing tree A spruce, 9 ins. diam., bears S. 51° E., 20.0 ft. dist., mkd. X BT. Diagram: S7143 L4 C4 L5 1998 1982

E3 Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. as shown There is no remaining evidence of the original accessories. Diagram: WC S7143 L4 S4980 L1 C6 C3 1982 1967

F3 Found an iron post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. as shown, from which the 1967 bearing trees A spruce, 6 ins. diam., bears N. 57° W., 28.38 ft. dist., with healed blaze. A spruce, 10 ins. diam., bears N. 12° W., 27.06 ft. dist., mkd. 82 BT, on a partially healed blaze. Diagram: S4982 L1 C2 L5 S4980 1967-68

G3 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 4 ins. diam., bears S. 62 1/2° W., 76.7 ft. dist., mkd. X BT. A spruce, 5 ins. diam., bears N. 78° W., 79.6 ft. dist., mkd. X BT. Diagram: CL WC L4 S7143 C C S23 S24 1993

H3 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 7 ins. diam., bears N. 54 3/4° W., 233.3 ft. dist., mkd. X BT. Drive an alum. rod, 3/4 in. diam., 9 ft. long, 8.7 ft. in the ground, 6.6 ft. dist. W. of cor., with an orange triangular marker on top. Monument is located in open tundra. Diagram: CL T135 R56W 1/4 S23 S24 1993

I3 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 6 ins. diam., bears S. 74 1/2° W., 180.2 ft. dist., mkd. X BT. Drive an alum. rod, 3/4 in. diam., 9 ft. long, 8.7 ft. in the ground, 6.6 ft. dist. W. of cor., with an orange triangular marker on top. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on marsh ground, among scattered spruce. Diagram: CL S24 C C S4980 L5 1993

J3 Found an iron post, 2 1/2 ins. diam., loosely set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees A spruce, 6 ins. diam., bears S. 49 1/4° E., 39.8 ft. dist., mkd. X BT. (Record, S. 49 1/2° W., 44.22 ft.) A spruce, 5 ins. diam., bears S. 3° E., 29.70 ft. dist., mkd. X BT. Firmed up the monument and add the marks 1993 on the brass cap. Diagram: S4980 L5 C5 1993 1968

K3 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 5 ins. diam., bears S. 76° E., 70.0 ft. dist., mkd. X BT. A spruce, 7 ins. diam., bears N. 44° W., 72.6 ft. dist., mkd. X BT. Diagram: CL WC S 1/16 S23 S24 1993

L3 Found an alum. rod, 3/4 in. diam., firmly set, projecting 17 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees A spruce, 7 ins. diam., bears S. 8 1/4° E., 172.6 ft. dist., mkd. X BT, on a partially healed blaze. (Record, S. 5° E., 172.26 ft.) A spruce, 7 ins. diam., bears S. 2 1/4° E., 174.2 ft. dist., mkd. X BT, on a partially healed blaze. (Record, 173.58 ft.) Diagram: C4 S6165 1978

M3 Set an alum. rod, 3/4 in. diam., 9 ft. long, 8.7 ft. in the ground, with an alum. cap mkd. as shown, from which A spruce, 6 ins. diam., bears N. 7 1/2° W., 220.4 ft. dist., mkd. X BT. Drive an alum. rod, 3/4 in. diam., 9 ft. long, 8.7 ft. in the ground, 6.6 ft. dist. W. of cor., with an orange triangular marker on top. Diagram: CL T135R56W S23 S24 S26 S25 1993

N3 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which Dig pits, 18 x 18 x 12 ins., N and S of post, 3 ft. dist. Monument is located on open marshy ground. Diagram: CL S24 C S6165 S25 1993

O3 Found an alum. rod, 3/4 in. diam., firmly set, flush with the ground, with an alum. cap mkd. as shown, no accessories Diagram: S6165 C3 1978

P3 Point for the cor. of secs. 19, 24, 25, and 30, determined at record bearing and dist. from the remaining original bearing tree, no evidence of the monument found, falls on floating muskeg, unsuitable for remonumentation, from which the remaining original bearing tree. A spruce, 6 ins. diam., bears S. 86 1/2° E., 450 lks. dist., mkd. X BT. Diagram: P3 1978

Q3 Found an alum. rod, 3/4 in. diam., firmly set, projecting 3 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees A spruce, 13 ins. diam., bears N. 1 1/2° E., 34.98 ft. dist., with scribe marks S6165 C2 BT visible on a partially healed blaze. A birch, 8 ins. diam., bears N. 83 1/4° W., 30.36 ft. dist., with scribe marks S6165 C2 BT, visible on a partially healed blaze. Diagram: S6165 C2 L12 S4980 1973

R3 Drive an iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, with alum. cap mkd. as shown. No accessories taken. Diagram: CL C L12 S4980 L 1993

S3 Found an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees A spruce, 9 ins. diam., bears N. 20° E., 65.34 ft. dist., mkd. S4980 L12 C2 BT on a partially healed blaze. (Record, N. 20° 15' E.) A spruce, 9 ins. diam., bears S. 5° W., 10.0 ft. dist., with a healed blaze. (Record, S. 5° 19' W., 10.56 ft.) Diagram: S4980 L12 C2 C5 S7147 L4 1982 1968

T3 Drive an iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, with alum. cap mkd. as shown From this point, cor. No. 4, Lot 4, U.S. Survey No. 7147 bears S. 43° 01' E., 21.84 ft. dist., monumented with an alum. rod, 3/4 in. diam., firmly set, projecting 6 ins. above the ground, with an alum. cap mkd. C4 L4 S7147 1982, from which the original bearing trees A spruce, 10 ins. diam., bears N. 5 1/2° E., 44.88 ft. dist., mkd. X BT on an open blaze. A spruce, 8 ins. diam., bears N. 39 1/2° W., 100.98 ft. dist., with fragmented marks visible on partially healed blaze. Diagram: CL AP1 1993

U3 Drive an iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, with alum. cap mkd. as shown, from which A spruce, 10 ins. diam., bears S. 82 1/2° E., 92.8 ft. dist., mkd. X BT. Drive a steel fence post, 6 ft. long, 2 ft. in the ground, 3.3 ft. W. of cor. Diagram: CL AP2 1993

V3 Drive an iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, with alum. cap mkd. as shown From this point, cor. No. 3, Lot 3, U.S. Survey No. 7147 bears S. 48° 59' E., 15.01 ft. dist., monumented with an alum. rod, 3/4 in. diam., firmly set, projecting 3 ins. above the ground, with an alum. cap mkd. C3 L3 S7147 1982, no accessories. Deposit a magnet in a white plastic case alongside the iron rebar. Diagram: CL AP-2A 2007

W3 Drive an iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, with alum. cap mkd. as shown, from which Drive a steel fence post, 6 ft. long, 2 ft. in the ground, 3.3 ft. W. of cor. Diagram: CL AP3 1993

X3 Drive an iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, with alum. cap mkd. as shown, from which Drive a steel fence post, 6 ft. long, 2.7 ft. in the ground, 3.3 ft. W. of cor. The monument is located in open tundra. Diagram: CL AP4 1993

Y3 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 3.3 ft. N. of cor. Drive an alum. rod, 3/4 in. diam., 9 ft. long, 8.5 ft. in the ground, 6.5 ft. dist. N. 83° W. of cor. with an orange triangular marker on top. Diagram: CL AP5 1993


Z3 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 2.7 ft., W. of cor. Drive an alum. rod, 3/4 in. diam., 9 ft. long, 5.1 ft. in the ground, 6.7 ft. dist. S. of cor., with an orange triangular marker on top. Deposit a magnet in a white plastic case at the base of the stainless steel post. The monument is located in level marshy tundra. Diagram: CL TRG C3 1993

Z3A Found an alum. rod, 3/4 in. diam., firmly set, projecting 3 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees A spruce stump, 5 ins. diam., bears S. 83 1/2° W., 39.5 ft. dist., with scribe marks X BT visible on fallen portion of tree. (Record, S. 83° W., 94.38 ft.) A spruce, 6 ins. diam., bears N. 80 1/2° W., 94.2 ft. dist., with scribe marks S6165 C5 BT, visible on a partially healed blaze. (Record, 39.60 ft.) and a new bearing tree A spruce, 5 ins. diam., bears N. 34° E., 10.6 ft. dist., mkd. X BT. add marks 1998 to alum. cap. Diagram: S4980 L5 C5 S6165 1998 1978

**ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c) TRACTS A THROUGH P,
RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8
AND IO THROUGH 15. P.L. 92-203 (85 STAT, 688,
702, 703)
CHOGGIUNG LIMITED
AT
DILLINGHAM, ALASKA
AND THE SUBDIVISION OF U.S. SURVEY NO. 7272,
AND THE DEPENDENT RESURVEY AND
SUBDIVISION OF A PORTION OF TOWNSHIP
13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA**

REFERENCE SHOULD BE MADE
TO SHEET No. 1
FOR SURVEY INFORMATION

A4



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which


Drive a steel fence post, 6 ft. long, 4 ft. in the ground, 4 ft., E of cor.

Drive an alum. rod, 3/4 in. diam, 9 ft. long, 8.5 ft. in the ground, 6.6 ft. dist. S of cor., with an orange triangular marker on top.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

The monument is located in marshy tundra.

B4




Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. as shown, from which new bearing trees

A spruce, 6 ins. diam., bears S. 24 3/4° E., 239.4 ft. dist., mkd. X BT.

A spruce, 14 ins. diam., bears S. 9 1/2° W., 197.8 ft. dist., mkd. X BT.

Add the marks 2 to Sec. 32, and 1993 on the brass cap.

C4




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 3.3 ft., E of cor.

Drive an alum. rod, 3/4 in. diam, 9 ft. long, 8.5 ft. in the ground, 6.3 ft. dist. N. 10° E. of cor. with an orange triangular marker on top.

The monument is located in open tundra.

D4



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which


Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 3.3 ft., W. of cor.

Drive an alum. rod, 3/4 in. diam, 9 ft. long, 8.5 ft. in the ground, 6.6 ft. dist. N. of cor., with an orange triangular marker on top.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

The monument is located in marshy open tundra.

E4



Found a fiberglass post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. as shown, from which the original bearing tree

A dead spruce, diam. not noted bears N. 36 1/2° E., 351.78 ft. dist., mkd. X BT. on open blaze.

And new bearing trees

A spruce, 6 ins. diam., bears N. 32° E., 368.3 ft. dist., mkd. X BT.

A spruce, 3 ins. diam., bears S. 38° W., 139.9 ft. dist., with a 5 ins. long spike driven into tree 6 ins. above the ground on NW face.

Add the marks 1993 on the brass cap

Fiberglass marker over and wired to the monument.

F4

Point for Cor. No. 4, Lot 2, U.S.S. 5755 determined from the original reference monuments, there is no remaining evidence of the original monument, not remonumented, from which the original accessories.

An alum. post, 2 1/2 ins. diam., projecting 4 ins. above the ground, for a reference monument, bears East, 65.75 ft. dist., with an alum. cap mkd. 66 FT RM 1977 and an arrow pointing to the cor. (Record: N. 89° 57' E., 66.00 ft.)

An alum. rod, 5/8 in. diam., projecting 16 ins. above the ground, for a reference monument, bears West, 65.74 ft. dist., with an alum. cap mkd. S5755 L2 C4 RM 66 FT 1977 and an arrow pointing to the cor. (Record, S. 89° 57' W., 66.00 ft.)

G4

Set a metal screw, 1 1/2 ins. long, 3/16 in. diam, flush with the pavement of Kanakanak road, from which

An iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, for a reference monument, bears N. 86° 00' W., 66.23 ft. dist., with an alum. cap mkd. CL RM 66.23 FT C4 TRE 1993 and an arrow pointing to the cor.

An iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, for a reference monument, bears S. 89° 25' E., 66.63 ft. dist., with an alum. cap mkd. CL RM 66.63 FT C4 TRE 1993 and an arrow pointing to the cor.

Point for Cor. No. 1, Lot 2, identical with Cor. No. 7, Lot 1, U.S.S. 5755, identical with Cor. No. 5 Tract E, determined from the original reference monuments; there is no remaining evidence of the original monument, not remonumented, from which the original accessories

An alum. rod, 5/8 in. diam., projecting 3 ins. above the ground, for a reference monument, bears N. 89° 59' E., 66.00 ft. dist., with an alum. cap mkd. RM 66 FT 1977 and an arrow pointing to the cor. (Record: S. 89° 19' E.)

An alum. post, 2 1/2 ins. diam., projecting 4 ins. above the ground, for a reference monument, bears East, 65.75 ft. dist., with an alum. cap mkd. 66 FT RM 1977 and an arrow pointing to the cor. (Record: S. 78° 22' W.)

H4

Point for Cor. No. 5, Lot 3, U.S.S. 4985, identical with Cor. No. 8, Lot 1, U.S.S. 5755, identical with Cor. No. 1, Tract E, determined from the original reference monuments; there is no remaining evidence of the original monument, not remonumented, from which the 1968 accessory

An iron post, 2 1/2 ins. diam., filled with concrete, brass cap missing, leaning over, for a reference monument, bears N. 68° 07' E., 40.00 ft. dist., at the reference point, set a stainless steel post, 2 1/2 ins. diam., 28 ins. long, 28 ins. in the ground, with the brass cap mkd. RM 40 FT LS S4985 1968 1993 and an arrow pointing to the cor. (Record: N. 66° 25' E.) buried original iron post inverted along side the stainless steel post, 4 ins. below the ground.

from which the 1977 accessory

An alum. post, 2 1/2 ins. diam., projecting 5 ins. above the ground, for a reference monument, bears N. 61° 52' W., 116.00 ft. dist., with an alum. cap mkd. S5755 L1 C8 RM 116 FT 1977 and an arrow pointing to the cor. (Record, N. 61° 05' W.)

I4


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 6 ins. N of cor.

Dig pits, 18 x 18 x 12 ins., S and W of post, 3 ft. dist.

Deposit a magnet in a white plastic case at the base of the stainless steel post.


J4



K4

Drive an iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, with an alum. cap mkd. as shown, from which


Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 6 ins. N of cor.



L4

Found an iron post, 2 1/2 ins. diam., loosely set, projecting 14 ins. above the ground, with brass cap mkd. as shown, firmed up the iron post.

No accessories taken




M4

Found a post, of unknown make, 2 1/2 ins. diam., firmly set, 18 ins. below the surface of ground and muskeg and standing water, from which the original bearing tree

A birch, 5 ins. diam., bears N. 56° E., 22.1 ft. dist., mkd. X BT. (Record: N. 50° E., 23.10 ft.)


N4



Drive an iron rebar, 30 ins. long, 5/8 in. diam, 27 ins. in the ground, with an alum. cap mkd. as shown, from which

A telephone pole, bears N. 52 3/4° E., 1.3 ft. dist.

O4



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original bearing tree

A dead spruce, 6 ins. diam., bears N. 68° E., 59.5 ft. dist., with scribe marks S4985 L15 C2 BT visible on open blaze. (Record, N. 75° E., 59.07 ft.)


P4

Point for AP 1 of centerline No. 8, a telephone pole, from which

An iron rebar, 30 ins. long, 5/8 in. diam, 27 ins. in the ground, for a reference monument, bears N. 20° 33' E., 32.00 ft. dist., with an alum. cap mkd. CL RM 32 FT 1993 and an arrow pointing to the cor.

An iron rebar, 30 ins. long, 5/8 in. diam, 27 ins. in the ground, for a reference monument, bears S. 55° 34' E., 33.00 ft. dist., with an alum. cap mkd. CL RMI 33 FT 1993 and an arrow pointing to the cor.


Q4



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with an iron rebar, 5/8 in. diam., set alongside, projecting 1 in. with brass cap mkd. as shown, and witnessed by pits, on line easterly and southerly of the cor., 3 ft. dist.

No accessories taken.

R4



Drive an iron rebar, 30 ins. long, 5/8 in. diam., 25 ins. in the ground, with alum. cap mkd. as shown, from which


A telephone pole, bears N. 9° E., 193.5 ft. dist.

A spruce, 8 ins. diam., bears S. 56 3/4° E., 38.0 ft. dist., mkd. X BT.

A telephone pole, bears S. 9° W., 254.8 ft. dist.

A spruce, 7 ins. diam., bears N. 6 1/2° W., 61.2 ft. dist., mkd. X BT.

S4




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. as shown, from which the 1982 bearing trees

A spruce, 14 ins. diam., bears N. 46° E., 19.47 ft. dist., with a healed blaze.

A spruce, 12 ins. diam., bears S. 73° E., 14.19 ft. dist., with a healed blaze.

T4




Found an alum. rod, 3/4 in. diam., firmly set, projecting 6 ins. above the ground, set through center of original pipe, 2 ins. diam., with alum. cap mkd. as shown, from which the 1982 bearing trees

A spruce, 8 ins. diam., bears N. 30° E., 155.76 ft. dist., mkd. X BT on partially healed blaze.

A spruce, 11 ins. diam., bears S. 64 1/2° E., 147.4 ft. dist., with a mostly healed blaze. (Record, S. 70° E., 147.84 ft.)

U4



Drive an iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, with an alum. cap mkd. as shown, from which


A spruce, 8 ins. diam., bears S. 13 3/4° E., 110.1 ft. dist., mkd. X BT.

V4

Drive a concrete nail, 1 1/2 ins. long, flush with the pavement, from which

A telephone pole, bears S. 24 3/4° W., 67.3 ft. dist.

W4



Point for cor. No. 2, Lot 1, U.S. Survey No. 2013, no evidence of the monument was found, the corner point was determined by distance-distance intersect method from the 1982 bearing trees. At the corner point set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which the 1982 bearing trees

A spruce, 10 ins. diam., bears S. 22 1/4° E., 40.92 ft. dist., with fragmented marks visible on a mostly healed blaze. (Record, N. 22° E.)

A spruce, 7 ins. diam., bears S. 75 1/4° W., 61.38 ft. dist., with fragmented marks visible on a mostly healed blaze. (Record, S. 74° E.)


X4

Point for cor. No. 1, Lot 13, identical with cor. No. 1, Lot 14, U.S. Survey No. 4985, located on paved road, from which the remaining original accessory

An iron post, 2 1/2 ins. diam., flush with the ground, for a reference monument, bears S. 89° 57' W., 30.00 ft. dist., with brass cap mkd. S4985 L14 30FT RM 1968 and an arrow pointing to the cor.

And a new accessory.

Y4




Drive an iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, with an alum. cap mkd. as shown, from which

A spruce, 17 ins. diam., bears N. 36 3/4° W., 56.4 ft. dist., mkd. X BT.

Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 6 ft. W of cor.

Z4




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 12 ins. diam., bears N. 67° E., 44.22 ft. dist., with a healed blaze.

A spruce, 11 ins. diam., bears S. 41 1/2° W., 13.86 ft. dist., with a partially healed blaze.

A5



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

A magnet in a fluorescent pink case, bears S. 45° E., 6.6 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent blue case, bears S. 45° W., 6.6 ft. dist., buried 12 ins. below the ground.

Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 0.5 ft., N of cor.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT, 688, 702, 703)


CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as shown. There is no remaining evidence of the original pits.




Found an iron post, 2 1/2 ins. diam., leaning terribly, rehabilitated iron post, with brass cap mkd. as shown, from which the original accessory




Drive an iron rebar, 30 ins. long, 5/8 in. diam., 36 ins. in the ground, with alum. cap mkd. as shown.




Drive an iron rebar, 30 ins. long, 5/8 in. diam., 36 ins. in the ground, with alum. cap mkd. as shown.




Drive an iron rebar, 30 ins. long, 5/8 in. diam., 36 ins. in the ground, with alum. cap mkd. as shown.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which




Found an alum. rod, 3/4 in. diam., firmly set, projecting 4 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing tree




Drive an iron rebar, 30 ins. long, 5/8 in. diam., 31 ins. in the ground, with alum. cap mkd. as shown




No accessories taken.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with brass cap mkd. as shown, from which




Drive an iron rebar, 30 ins. long, 5/8 in. diam., flush with the ground, with alum. cap mkd. as shown, from which



Drive an alum. rod, 5/8 in. diam., 30 ins. long, 34 ins. in the ground, with alum. cap mkd. as shown



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which




A magnet in a fluorescent blue case, bears S. 45° W., 6.6 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent orange case, bears N. 45° W., 6.6 ft. dist., buried 12 ins. below the ground.

A birch, 4 ins. diam., bears N. 20 1/4° W., 28.6 ft. dist., mkd. X BT.


Deposit a magnet in a white plastic case at the base of the stainless steel post.




Found an iron post, 2 1/2 ins. diam., projecting 2 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees

A birch, 9 ins. diam., bears S. 42 1/4° W., 14.52 ft. dist., mkd. X BT on a partially healed blaze. (Record; S. 45° W.)

A dead birch, 14 ins. diam., bears N. 57 1/2° W., 29.70 ft. dist., with fragmented marks visible on a partly healed blaze. (Record; Spruce)




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 40 ins. in the ground, with brass cap mkd. as shown, from which




A magnet in a fluorescent blue case, bears S. 45° W., 3.3 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent orange case, bears N. 45° W., 3.3 ft. dist., buried 12 ins. below the ground.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with brass cap mkd. as shown, from which



A magnet in a fluorescent silver case, bears N. 45° E., 3.3 ft. dist., buried 12 ins. below the ground.


A magnet in a fluorescent pink case, bears S. 45° E., 3.3 ft. dist., buried 12 ins. below the ground.

Drive a steel fence post, 6 ft. long, 3 ft. in the ground, 2.0 ft., E of cor.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

Drive an iron rebar, 30 ins. long, 5/8 in. diam., 36 ins. in the ground, with an alum. cap mkd. as shown.


No accessories taken.




Drive an iron rebar, 30 ins. long, 5/8 in. diam., 31 ins. in the ground, with an alum. cap mkd. as shown.



No accessories taken.



Drive an iron rebar, 30 ins. long, 5/8 in. diam., 36 ins. in the ground, with an alum. cap mkd. as shown.



ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c) TRACTS A THROUGH P, RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8 AND 10 THROUGH 15. P.L. 92-203 (85 STAT, 688, 702, 703)


CHOGGIUNG LIMITED AT DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272, AND THE DEPENDENT RESURVEY AND SUBDIVISION OF A PORTION OF TOWNSHIP 13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

(K6)

Found an iron post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown, there is no remaining evidence of the original pits




Drive a galvanized fence post, 5 ft. long, 2 1/2 ft. in the ground, 0.7 ft. N. of cor.

Add the marks 2007 to cap, as shown.

(L6)

Drive an iron rebar, 30 ins. long, 5/8 in. diam., 41 ins. in the ground, with an alum. cap mkd. as shown, from which




A utility pole, bears S. 84 3/4° E., 149.3 ft. dist., with a 6 in. spike, driven 4 ins. into the NE face, 1 ft. above the ground.

A spruce, 9 ins. diam., bears S. 2° E., 88.6 ft. dist., mkd. X BT.

(M6)

Drive an iron rebar, 30 ins. long, 5/8 in. diam., 34 ins. in the ground, with an alum. cap mkd. as shown, from which




A spruce, 10 ins. diam., bears S. 19 3/4° E., 81.2 ft. dist., mkd. X BT.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, for a reference monument, bears N. 19° 07' W., 50.00 ft. dist., with brass cap mkd. RM-1 CL 50.00 FT 1994 and an arrow pointing to the cor.

(N6)

Drive an iron rebar, 30 ins. long, 5/8 in. diam., 36 ins. in the ground, with an alum. cap mkd. as shown, from which




A utility pole, bears S. 41 3/4° W., 109.1 ft. dist., with a 6 in. spike, driven 4 ins. into the NW face, 1 ft. above the ground.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, for a reference monument, bears N. 74° 04' W., 60.00 ft. dist., with brass cap mkd. RM-1 CL 60.00 FT 2007 and an arrow pointing to the cor.

(O6)

Drive an iron rebar, 30 ins. long, 5/8 in. diam., 36 ins. in the ground, with an alum. cap mkd. as shown, from which




A spruce, 7 ins. diam., bears S. 80 3/4° E., 99.0 ft. dist., mkd. X BT.

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, for a reference monument, bears N. 44 3/4° W., 50.00 ft. dist., with brass cap mkd. RM-1 CL 50.00 FT 2007 and an arrow pointing to the cor.

(P6)

Found an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap mkd. as shown, there is no remaining evidence of the original bearing tree.



At the witness corner position

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. WC S5688 L2 C14 C26 S3643 L15 1994 and an arrow pointing to the true cor., from which new accessories

A utility pole, bears N. 8 3/4° E., 183.7 ft. dist., with a 6 in. spike, driven 4 ins. into the E face, 1 ft. above the ground.

A spruce, 9 ins. diam., bears S. 84° E., 155.6 ft. dist., mkd. X BT.

Deposit the original iron post inverted alongside the stainless steel post.

Found an iron rebar, 5/8 in. diam., firmly set, 2 ins. below the surface, with an alum. cap mkd. as shown

from which new bearing trees.


A spruce, 9 ins. diam., bears N. 71 1/2° E., 20.7 ft. dist., mkd. X BT.

A spruce, 6 ins. diam., bears N. 73° W., 43.3 ft. dist., mkd. X BT.

The monument is located in dense spruce and birch forest.

(R6)

Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground with brass cap mkd. as shown, from which the original bearing trees



A dead spruce, 4 ins. diam., bears S. 24 1/4° E., 54.9 ft. dist., mkd. S3181 C3 BT, on an open blaze. (Record; 55.77 ft.)


A spruce, 9 ins. diam., bears S. 15° W., 45.54 ft. dist., with a healed blaze. (Record; S. 14 3/4° W.)

And a new bearing tree

A spruce, 5 ins. diam., bears S. 46 1/4° E., 128.4 ft. dist., mkd. X BT.

(S6)

Found an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground with brass cap mkd. as shown, from which the original bearing tree



A spruce, 10 ins. diam., bears N. 88° E., 164.1 ft. dist., with a healed blaze. (Record; 166.32 ft.)

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which


A spruce, 7 ins. diam., bears S. 78 1/2° W., 114.2 ft. dist., mkd. X BT.

Drive an alum. rod, 3/4 in. diam., 6 ft. long, flush with the ground, inside stainless steel post for support.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

(U6)

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which



A SE cor. of a utility box, bears N. 50 3/4° E., 33.6 ft. dist.

A spruce, 10 ins. diam., bears N. 53 3/4° E., 116.4 ft. dist., mkd. TRJ C5 BT.


A utility pole, bears S. 85° E., 18.8 ft. dist.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

The monument is located in tall grass at the bottom of road fill.

(V6)

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown




A utility pole, bears S. 66 3/4° E., 91.1 ft. dist.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

The monument is located in grass and scattered alder.

(W6)


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which



A utility pole, bears N. 73 1/2° W., 8.6 ft. dist.

(X6)

Found an iron post, 28 ins. long, 2 1/2 ins. diam., mkd. as shown, laying horizontally on the ground, the true point for the witness cor. to cor. No. 32, identical with the point for the witness cor. to cor. No. 2, Lot 3, U.S. Survey No. 3643, was determined at record bearing and distance from the original bearing tree



A dead spruce, 6 ins. diam., bears N. 5° W., 115.50 ft. dist., mkd. S3643 C32 L3 BT.

At the corner point

Re-set the original iron post, 33 ins. in the ground, and add the marks 1997 to the brass cap as shown


Located half way down slope of the road shoulder.

(Y6)

Set a PK nail at the intersection of the centerline of Dillingham-Kanakanak Road with line 4-5, U.S. Survey No. 3643.

(Z6)


Found an iron post, 2 1/2 ins. diam., 36 ins. below the ground, with brass cap mkd. as shown, there is no remaining evidence of the original bearing tree, from which a new bearing tree



A spruce, 8 ins. diam., bears N. 79 3/4° W., 65.84 ft. dist., mkd. X BT.


This cor. now also functions as the witness cor. to cor. No. 5, Lot 5, U.S. Survey 3643, no new marks added.

Found an iron post, 2 1/2 ins. diam., 2 ins. below the water, with brass cap mkd. as shown, there is no remaining evidence of the original bearing tree



Found an iron rebar, 5/8 in. diam., firmly set, flush with the ground, with an alum. cap mkd. as shown from which original bearing tree

A spruce, 12 ins. diam., bears N. 11 1/2° E., 35.3 ft. dist., with a healed blaze.



Found an iron rebar, 5/8 in. diam., firmly set, 12 ins. below the surface of the Wood River road, with no cap, there is no remaining evidence of the original accessories of the 1982 bearing trees

Drive an iron rebar, 30 ins. long, 5/8 in. diam., 42 ins. in the ground, with an alum. cap mkd. as shown, from which




A utility pole, bears S. 38° E., 33.6 ft. dist.

A spruce, 6 ins. diam., bears N. 39° W., 156.9 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case alongside the iron rebar.

Drive an iron rebar, 30 ins. long, 5/8 in. diam., 40 ins. in the ground, with an alum. cap mkd. as shown, from which




A utility pole, bears S. 14° W., 75.3 ft. dist.

A guy wire pole, bears S. 75 1/2° W., 98.8 ft. dist. with a 60D nail set at right base of pole.

Deposit a magnet in a white plastic case alongside the iron rebar.

Drive an iron rebar, 30 ins. long, 5/8 in. diam., 48 ins. in the ground, with an alum. cap mkd. as shown, from which



A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, encasing a fence post, 5 ft. long, 5 ft. in the ground for support, for a reference monument, bears South, 50.00 ft. dist., with brass cap mkd. RM KR AP2 50.0 FT 2007 and an arrow pointing to the cor; Deposit a magnet in a white plastic case alongside the fence post.

Deposit a magnet in a white plastic case alongside the iron rebar.


Found an iron rebar, 5/8 in. diam., firmly set, 4 ins. below the water surface with a 3 ins. diam. alum. cap, from which an original bearing tree



A dead and standing spruce, 11 ins. diam., bears N. 2° W., 78.8 ft. dist., with fragmentary scribe mks. visible on mostly healed blaze. (Record; N. 3 3/4° W., 77.22 ft.)

Drive a fence post, 5 ft. long, 3 ft. in the ground, 0.7 ft. dist. N of monument.


Found an iron rebar, 5/8 in. diam., leaning slightly to east, 2 ins. above ground, with an alum. cap mkd. as shown, from which the original bearing tree



A spruce, 6 ins. diam., bears N. 44 3/4° W., 183.48 ft. dist., with fragmentary scribe mks. visible on mostly healed blaze. (Record; N. 45 1/4° W)

Straighten and firm monument in place.

(KK)




Drive an iron rebar, 30 ins. long, 5/8 in. diam., 44 ins. in the ground, with an alum. cap mkd. as shown, from which

A double trunk spruce, 5 ins. diam., bears S. 88 1/2° W., 68.9 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case alongside the iron rebar.

(LL)



Found an iron post, 2 1/2 ins. diam., loosely set, flush with the ground, with brass cap mkd. as shown, add the marks 2007 to cap, from which the original bearing trees

A spruce, 20 ins. diam., bears N. 40 1/2° E., 128.0 ft. dist., with fragmentary scribe marks visible on a partially healed blaze. (Record; N. 40 1/4° E., 127.38 ft.)


A dead and standing spruce, 6 ins. diam., bears S. 74° E., 143.2 ft. dist., mkd. X BT. (Record; 145.20 ft.)

and a new bearing tree.

A spruce, 5 ins. diam., bears N. 85 3/4° E., 66.7 ft. dist., mkd. X BT.

Set a PK nail at the intersection of the centerline of Dillingham-Kanakanak Road with line between sections 17 and 20.


(MM)



Found an alum. cap, 2 ins. diam., firmly set in a monument well, 4 ins. below the surface of asphalt, mkd. STATE OF ALASKA LS 6101 1998 DOT&PF.

Found an alum. cap, 2 ins. diam., firmly set in a monument well, 4 ins. below the surface of asphalt, mkd. STATE OF ALASKA LS 6101 1998 DOT&PF; This cor. was established by this survey in 1993, and subsequently perpetuated by the State of Alaska Department of Transportation in 1998; from which

(A7)




Found an alum. cap, 2 ins. diam., firmly set in a monument well, 4 ins. below the surface of asphalt, mkd. STATE OF ALASKA LS 6101 1998 DOT&PF; This cor. was established by this survey in 1993, and subsequently perpetuated by the State of Alaska Department of Transportation in 1998; from which

A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, for a reference monument, bears N. 5° 35' E., 51.11 ft. dist., with brass cap mkd. CL RM 51.11 FT 2007 and an arrow pointing to the cor.

From this point, cor. No. 4 U.S.S 2874, identical with witness cor. to cor. No. 1, Lot 2, U.S. Survey 3643 bears S. 69° 58' W., 59.47 ft. dist., with brass cap mkd. WC C1 L2 S3642 1989

(B7)



Set a PK nail at the intersection of the centerline of Dillingham-Kanakanak Road with line 1-2, U.S. Survey No. 155.

Found a stainless steel post, 2 1/2 ins. diam., 4 ft. below the ground, with an iron post, inverted alongside; raise and reset stainless steel post to 2 ins. below the ground, with brass cap mkd. as shown

from which, new bearing trees

A spruce, 6 ins. diam., bears S. 20 3/4° E., 58.1 ft. dist., mkd. X BT.

A spruce, 4 ins. diam., bears S. 34° W., 53.8 ft. dist., mkd. X BT.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located under an asphalt surface sidewalk.

Found a capped galvanized iron pipe, 3 ins. diam., firmly set, projecting 20 ins. above the ground, with punch marks on the easterly side WC COR 2 S155 with an X on top.

Monument is located on the S edge of muskeg, in dwarf birch.

(F7)




Found a stainless steel post, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown

Found a broken fence post, 2 ft. long, lying alongside, drive broken section alongside the fence post and set a galvanized fence post, 5 ft. long, 2 1/2 ft. in the ground, 1 ft. N. of cor.

Monument is located in muskeg.

(G7)



Found a stainless steel post, 2 1/2 ins. diam., 3 ft. below the ground; raise and reset in place, 2 ins. below the ground, with brass cap mkd. as shown


from which new accessories

A utility pole, bears N. 20 1/2° E., 121.2 ft. dist.

A spruce, 12 ins. diam., bears S. 48 3/4° E., 64.75 ft. dist., mkd. X BT.

Monument is located under an asphalt surface sidewalk.

(H7)




Found a stainless steel post, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown

A steel fence post, projecting 3 ft. above the ground, along side the monument.

Monument is located in muskeg.

(I7)




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encasing an alum. rod, 18 ft. long, 3/4 in. diam., 18 ft. in the ground for support, with brass cap mkd. as shown, from which

Drive an alum. rod, 3/4 in. diam., 9 ft. long, 8.5 ft. in the ground, 3.3 ft. dist N of cor., with an orange triangular marker of top.

Deposit a magnet in a white plastic case at the base of the stainless steel post.


(J7)



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

Drive an alum. rod, 3/4 in. diam., 9 ft. long, 8.5 ft. in the ground, 3.3 ft. dist N of cor., with a yellow triangular marker of top.

(K7)



Found a capped galvanized iron pipe, 3 ins. diam., firmly set, projecting 12 ins. above the ground, with punch marks on the northwesterly side mkd. S2488, punch marks on the south-easterly side mkd. WC COR 3, and with an X on top, from which the original pit

A pit 16 x 16 x 16 ins., N. 50° W., 7.4 ft. dist. (Record; 18 x 18 x 12 ins., N. 52° 04' W., 6 ft. dist.)

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c) TRACTS A THROUGH P,
RIGHTS-OF-WAY CENTERLINE NOS. 1 THROUGH 8
AND 10 THROUGH 15. P.L. 92-203 (85 STAT, 688,
702, 703)


CHOGGIUNG LIMITED
AT
DILLINGHAM, ALASKA

AND THE SUBDIVISION OF U.S. SURVEY NO. 7272,
AND THE DEPENDENT RESURVEY AND
SUBDIVISION OF A PORTION OF TOWNSHIP
13 SOUTH, RANGE 56 WEST, SEWARD MERIDIAN, ALASKA

REFERENCE SHOULD BE MADE
TO SHEET No. 1
FOR SURVEY INFORMATION

2009-12
Bristol Bay
DIST
10-72009
DATE
10-26-09
TIME

L7




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears S. 70 3/4° E., 161.7 ft. dist., mkd. X BT on a partly healed blaze. (Record, N. 69 1/2° E., 162.36 ft.)

A spruce, 12 ins. diam., bears N. 39 1/2° W., 197.34 ft. dist., mkd. S4972 C BT on a partly healed blaze. (Record, N. 39° W.)

M7



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as shown, from which bearing trees, marked by person(s) unknown


A dead spruce, 7 ins. diam., bears N. 2° E., 116.1 ft. dist., mkd. S4972 L4 C2 BT on an open blaze.

A spruce, 8 ins. diam., bears N. 17 1/4° W., 72.0 ft. dist., mkd. S4972 L2 BT on an open blaze.

and a new bearing tree

A spruce, 5 ins. diam., bears N. 9 1/2° E., 120.8 ft. dist., mkd. X BT.

N7



Found a capped galvanized iron pipe, 3 ins. diam., 12 ins. below the surface of the intersection of Yako and Dragnet Road, with galvanized cap mkd. as shown.


O7

Found a large spike, 20 ins. below the surface of the intersection of Yako and Wood River Road, from which the original accessories

An iron post, 2 1/2 ins. diam., firmly set, 40 ins. below the surface of the intersection of Yako and Wood River road, for a reference monument, bears S. 19° 23' E., 33.00 ft. dist., with a brass cap mkd. RM S4972 L10 33 1967 and an arrow pointing to the cor.

An iron post, 2 1/2 ins. diam., firmly set, project 3 ins. above the ground, for a reference monument, bears N. 18° 50' W., 33.00 ft. dist., with a brass cap mkd. S4972 L11 33 S4972 L12 1967 and an arrow pointing to the cor. (Record, N. 19° 23' W.)


P7



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as shown, from which

Pits, bear N. 69° E. and S. 19° E., 3.00 ft. dist.

Q7




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 8 ins. diam., bears N. 77° E., 22.11 ft. dist., with healed blaze. (Record; N. 69° E.)

A spruce, 9 ins. diam., bears N. 29° E., 34.65 ft. dist., with fragmentary scribe marks visible on mostly healed blaze. (Record; N. 24° E.)

R7




Found an iron rebar, 24 ins. long, 5/8 in. diam., bent, laying horizontally below the surface of the road. True point for cor. reestablished using the original accessories. Set an iron rebar, 30 ins. long, 5/8 in. diam., 12 ins. below the surface of road, with alum. cap mkd. as shown, from which the original reference monuments

An iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, for a reference monument, bears S. 19° 03' E., 33.00 ft. dist., with a brass cap mkd. RM S4972 L10 33 1967 and an arrow pointing to the cor. (Record, S. 19° 23' E.)


An iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, for a reference monument, bears N. 19° 03' W., 33.00 ft. dist., with a brass cap mkd. S4972 L11 33 S4972 L12 1967 and an arrow pointing to the cor. (Record, N. 19° 23' W.)

S7



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. as shown.

T7




Found a fiberglass post, 2 1/2 ins. diam., projecting 5 ins. above the ground, with brass cap mkd. as shown,

No evidence of the pits was found, ground unsuitable for new pits.

Wire a fiberglass cone over and to the monument.

U7




Point selected for the witness point bet. secs. 13 and 18 is located South, 113.45 ft. from the proportionate record position for the original 1966-1967 witness point. There is no remaining evidence of the original witness point. The record position now falls in the Snake River.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown

Drive an alum. rod, 3/4 in. diam., 9 ft. long, 8.5 ft. in the ground, 6.6 ft. dist W of cor., with a yellow triangular marker on top.

V7



Found a fiberglass post, 2 1/2 ins. diam., projecting 14 ins. above the ground, with brass cap mkd. as shown,

No evidence of the pits was found, ground unsuitable for new pits.

Wire a fiberglass cone over and to the monument.

Monument is 40 ft. S. of Snake River, bears S. 48° E. and N. 48° W.

W7

Point for AP 2, not monumented.

From this point the the true point for cor. No 3, Lot 4, U.S. Survey No. 4872, bears N. 64°06' W., 12.87 ft. dist.

From this same point the witness cor. to cor. No. 3, bears N. 1°53' W., 352.31 ft dist.