

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (c), BLOCKS 1 THROUGH 6,  
TRACTS A, B, AND C AND RIGHTS-OF-WAY  
P.L. 92-203 (85 STAT. 688, 702, 703)  
EVANSVILLE, INCORPORATED  
AT  
EVANSVILLE, ALASKA  
AND  
THE RETRACEMENT OF A PORTION OF  
U.S. SURVEY NO. 10830

This plat contains the entire survey record.

U.S. Survey No. 10830 was surveyed by Paul L. Moss, Cadastral Surveyor, in 1991.

The survey of the Bettles Airport Boundary, a State of Alaska survey, was surveyed by H. Lee Saylor, Alaska Registered Land Surveyor No. 4922, in 1989; and filed as plat No. 90-7RS on January 29, 1990, in Fairbanks Recording District, Alaska.

This survey was executed by Michael O. Harmening, Cadastral Surveyor, July 17 through September 7, 1991, in accordance with the principals set forth in the Manual of Surveying Instructions, 1973; Special Instructions approved June 12, 1991; the Evansville ANCSA 14(c) map of boundaries approved November 20, 1990; and Assignment Instructions dated June 13, 1991.

Field assistants were:

Paul L. Moss, Land Surveyor  
Patrick S. Twohy, Land Surveyor  
Douglas N. Haywood, Student Trainee (LS)  
David M. Klein, Student Trainee (LS)  
Robert M. Devine, Surveying Technician  
Steven A. Bumgarner, Surveying Technician

Area: 45.95 Acres

The azimuth was obtained from direct observations of the sun, using the hour angle method, and refers to the true meridian.

The geographic position of the northeast corner of ANCSA 14(c) Tract C, identical with corner No. 4, Lot 5, and corner No. 7, Lot 3, U.S. Survey No. 10830, as determined from the record of U.S. Survey No. 10830, is:

Latitude: 66° 54' 22.18" North  
Longitude: 156° 32' 42.94" West  
NAD 27

The mean magnetic declination was obtained from U.S. Geological Survey quadrangle map "BETTLES (D-3)," Alaska, 1970 edition.

This survey is situated in and around the village of Evansville, Alaska, and is adjacent to portions of U.S. Survey No. 10830 and the State of Alaska Bettles Airport Boundary survey, within Township 24 North, Range 18 West, Fairbanks Meridian, Alaska.

The land is open rolling tundra, with patches of scattered birch and spruce, and areas of dense alder and willow growth.

The soil is mostly sandy loam, with mixed gravels.

The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Anchorage, Alaska

The survey represented by this plat, sheets 1 through 9, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.


For the Director

*George C. Piant* 21 April 1993  
Date



Deputy State Director for Cadastral Survey, Alaska

ROAD AREAS

1. SUBDIVISION ACCESS ROAD NORTH OF HICKEL HIGHWAY	0.25 AC.
2. SUBDIVISION ACCESS ROAD SOUTH OF HICKEL HIGHWAY	3.52 AC.
3. SUBDIVISION STREET No. 1 NORTH OF ACCESS ROAD	0.23 AC.
4. SUBDIVISION STREET No. 1 SOUTH OF ACCESS ROAD	0.23 AC.
5. SUBDIVISION STREET No. 2 NORTH OF ACCESS ROAD	0.23 AC.
6. SUBDIVISION STREET No. 2 SOUTH OF ACCESS ROAD	0.23 AC.
7. SUBDIVISION STREET No. 3 NORTH OF ACCESS ROAD	0.23 AC.
8. SUBDIVISION STREET No. 3 SOUTH OF ACCESS ROAD	0.23 AC.
9. SUBDIVISION STREET No. 4	0.37 AC.
10. AIRPORT ACCESS ROAD	0.37 AC.
11. CEMETARY ACCESS ROAD	0.06 AC.
12. HICKEL HIGHWAY	9.38 AC.
TOTAL	15.33 AC.

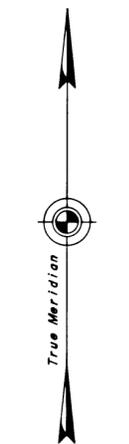


Mean Magnetic Declination 27° E.

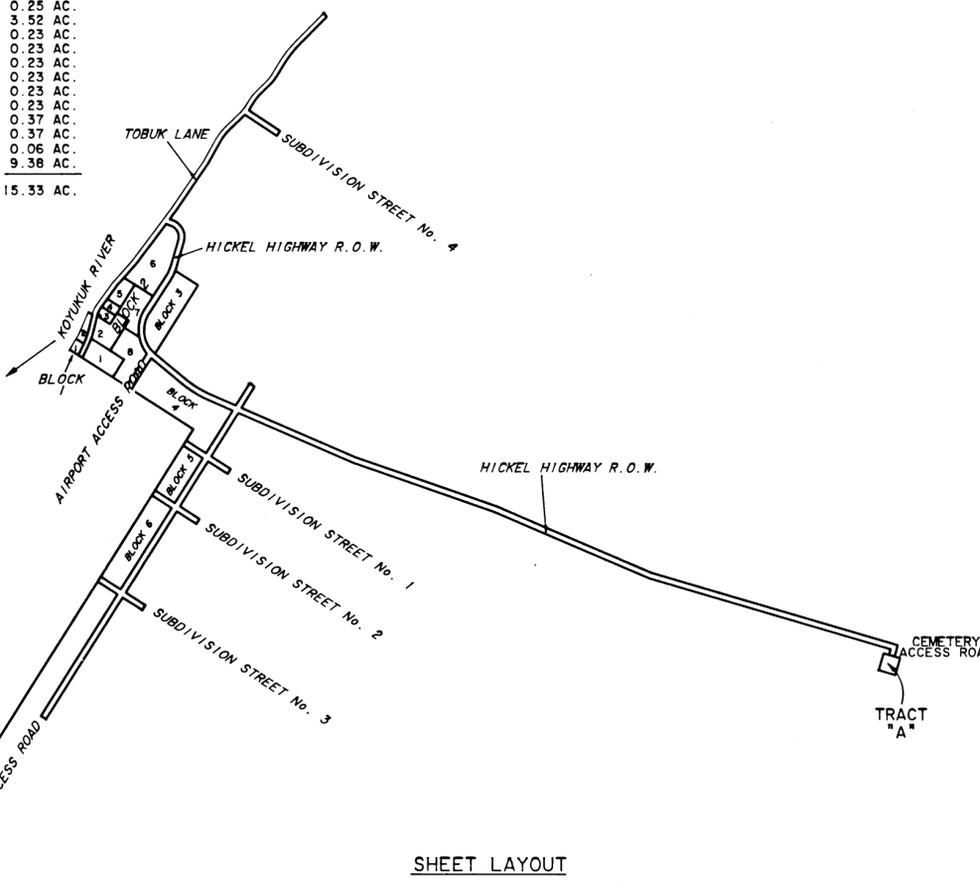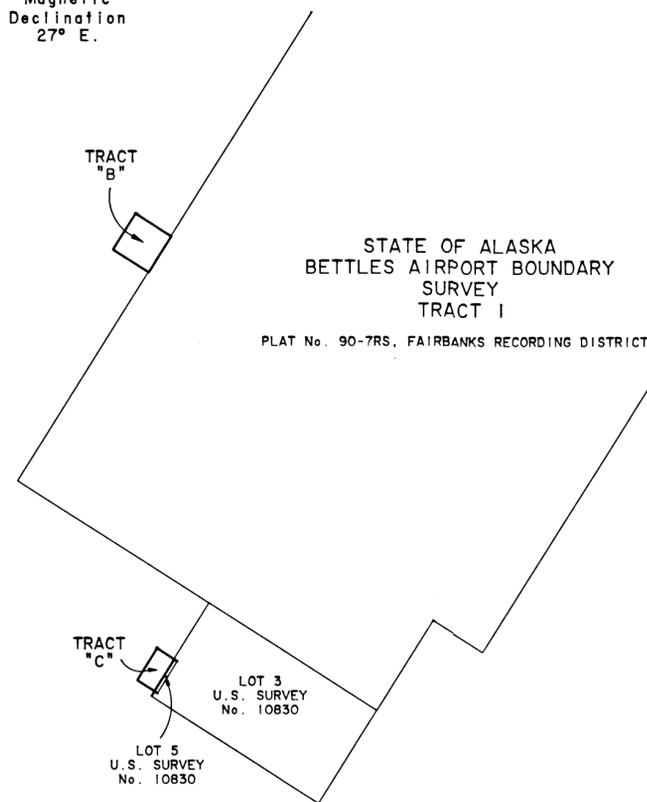

SHEET LAYOUT

- SHEET 2 - SUBDIVISION STREET No. 4 AND TOBUK LANE NORTH OF HICKEL HIGHWAY R.O.W.
- SHEET 3 - BLOCKS 1, 2, AND 3, AND HICKEL HIGHWAY R.O.W. ALONG BLOCKS 2 AND 3, AND THE AIRPORT ACCESS ROAD.
- SHEET 4 - BLOCKS 4 AND 5, SUBDIVISION STREET Nos. 1 AND 2, SUBDIVISION ACCESS ROAD ALONG BLOCKS 4 AND 5, AND THE HICKEL HIGHWAY R.O.W. NORTH OF BLOCK 4 EXTENDING TO THE EAST.
- SHEET 5 - BLOCK 6, SUBDIVISION STREET No. 3 AND SUBDIVISION ACCESS ROAD ALONG BLOCK 6 EXTENDING SOUTHWESTERLY.
- SHEET 6 - HICKEL HIGHWAY R.O.W. EAST TO TRACT A AND TRACT A.
- SHEET 7 - TRACTS B AND C.
- SHEET 8 - MONUMENT DESCRIPTIONS.
- SHEET 9 - MONUMENT DESCRIPTIONS.



93-142  
RECORDED - FILED *dfp/chg.*  
Fairbanks REC. INST.  
DATE 4/28 1993  
TIME 1:59 P.M.  
Requested by USA/BLM  
Address \_\_\_\_\_

I, Michael O. Harmening, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 through 9, in conformity with the Special Instructions approved June 12, 1991, the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.

MARCH 16, 1993  
Date

*Michael O. Harmening*  
Cadastral Surveyor

I hereby certify that Blocks 1 through 6, Tracts A, B, and C and roads represented on this plat of survey are on lands Interim Conveyed to Evansville Incorporated by Interim Conveyance No. 600, issued by the United States of America; said blocks, tracts, and roads also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by the Evansville, Incorporated Resolution Agreement No. 89-10, and the Evansville ANCSA 14(c) Map of Boundaries approved November 20, 1990.

April 7 1993  
Date


*Lula James*  
President, Evansville, Incorporated

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (c), BLOCKS 1 THROUGH 6,  
TRACTS A, B, AND C AND RIGHTS-OF-WAY  
P.L. 92-203 (85 STAT. 688, 702, 703)  
EVANSVILLE, INCORPORATED  
AT  
EVANSVILLE, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NO. 1  
FOR SURVEY INFORMATION

CURVE TABLE



(C1)	(R) = 934.72 (LC) = N. 38° 18' E. 222.70 (L) = 223.23	(C4A)	(R) = 290.00 (LC) = N. 33° 43' E. 9.87 (L) = 9.87
(C2)	(R) = 270.00 (LC) = N. 38° 40' E. 67.76 (L) = 67.94	(C4B)	(R) = 290.00 (LC) = N. 39° 41' E. 50.40 (L) = 50.46
(C3)	(R) = 279.91 (LC) = N. 39° 19' E. 64.02 (L) = 64.16	(C4C)	(R) = 290.00 (LC) = N. 45° 39' E. 9.87 (L) = 9.87
		(C5)	(R) = 405.21 (LC) = N. 37° 54' E. 122.70 (L) = 123.17



Mean  
Magnetic  
Declination  
27° E.

LEGEND

- SET ANCSA 14(C) PRIMARY MONUMENT, DESCRIBED ON SHEET No. 8.
- SET ANCSA 14(C) SECONDARY MONUMENT, 3/8 IN. LONG, 3/4 IN. DIAM., DRIVEN 30 INS. IN THE GROUND, WITH AN ALUM. CAP, 2 1/2 IN. DIAM.

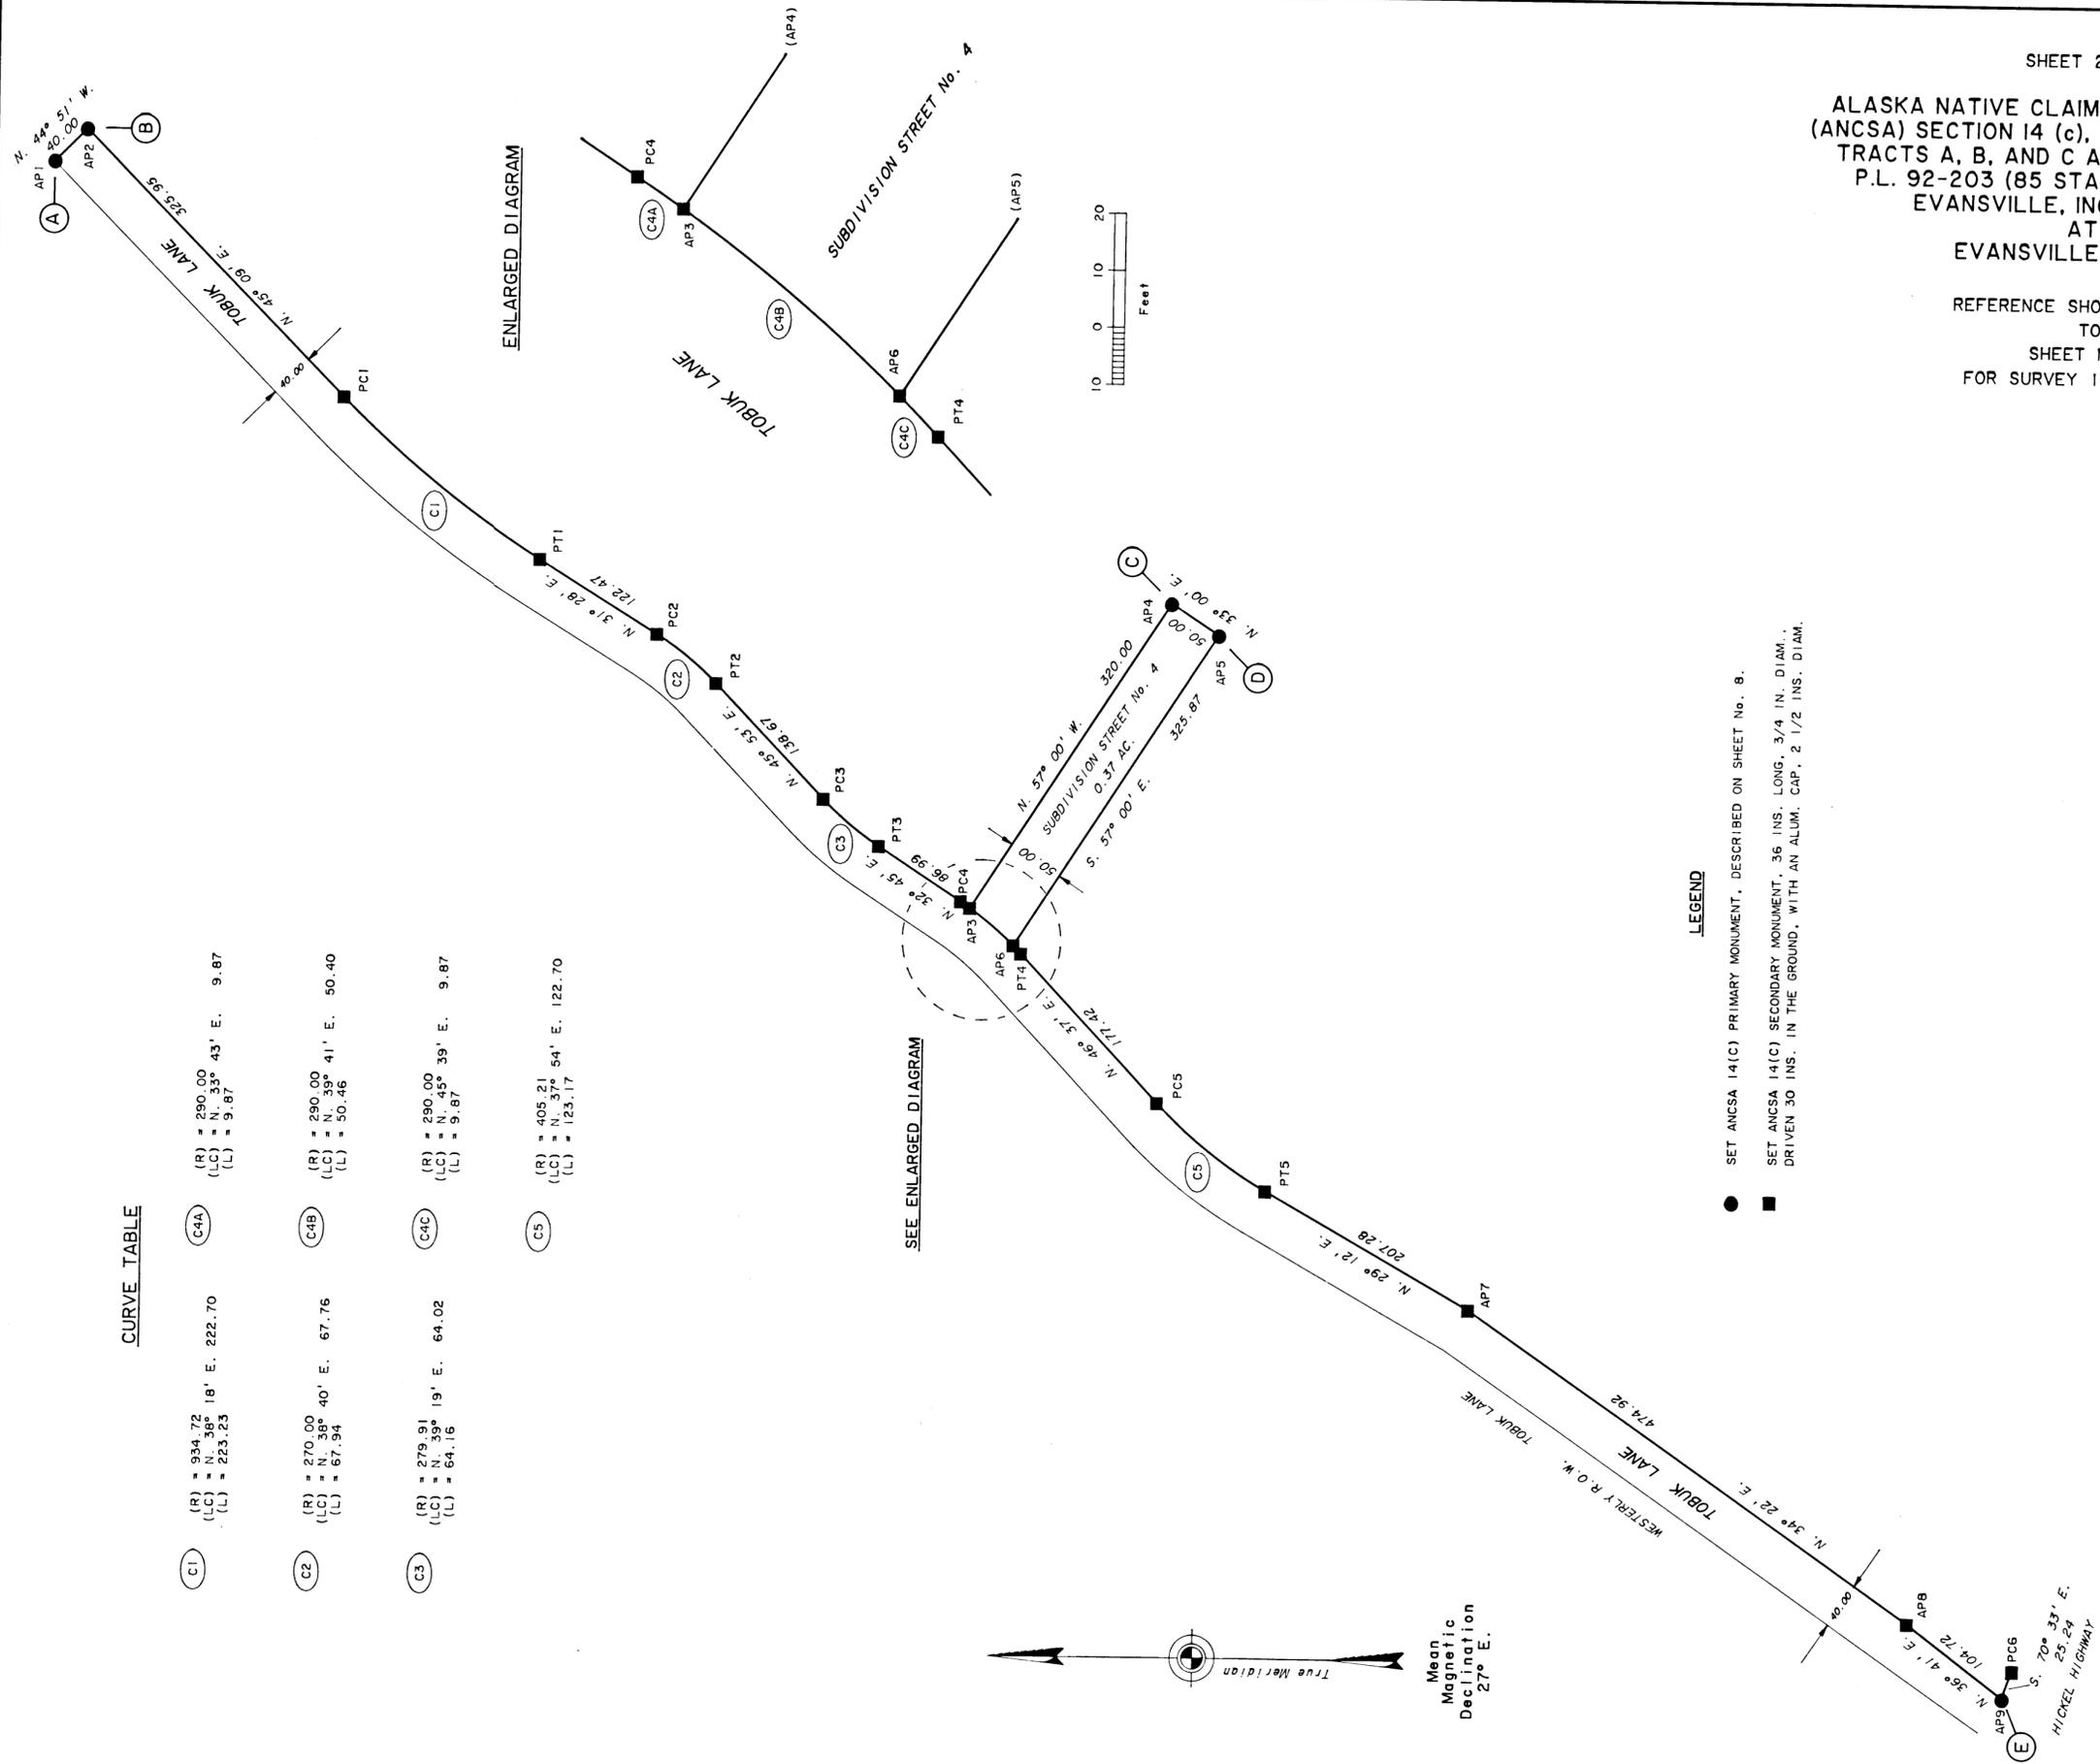


9.3-142 Subs.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (c), BLOCKS I THROUGH 6, TRACTS A, B, AND C AND RIGHTS-OF-WAY P.L. 92-203 (85 STAT. 688, 702, 703) EVANSVILLE, INCORPORATED

AT EVANSVILLE, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

- LEGEND**
- SET ANCSA 14(C) PRIMARY MONUMENT, DESCRIBED ON SHEET No. 8.
  - SET ANCSA 14(C) SECONDARY MONUMENT, 36 INS. LONG, 3/4 IN. DIAM., DRIVEN 30 INS. IN THE GROUND, WITH AN ALUM. CAP, 2 1/2 INS. DIAM.
  - RECOVERED STATE OF ALASKA DOT & PF 2 1/2 IN. DIAM. ALUM. POST, DESCRIBED ON SHEET No. 8.



CURVE TABLE

(C6)	(R) = 155.01 (LC) = S. 27° 09' E. 213.01 (L) = 234.83	(C11D)	(R) = 315.00 (LC) = N. 11° 05' E. 234.62 (L) = 240.41	(C16A)	(R) = 735.69 (LC) = S. 16° 32' W. 74.29 (L) = 74.32
(C7A)	(R) = 474.88 (LC) = S. 18° 53' W. 43.50 (L) = 43.51	(C12)	(R) = 424.88 (LC) = N. 24° 36' E. 123.40 (L) = 123.64	(C16B)	(R) = 735.69 (LC) = S. 22° 45' W. 85.49 (L) = 85.54
(C7B)	(R) = 474.88 (LC) = S. 27° 13' W. 94.74 (L) = 94.90	(C13)	(R) = 105.01 (LC) = N. 27° 08' W. 144.30 (L) = 139.08	(C17A)	(R) = 695.69 (LC) = N. 63° 24' E. 16.67 (L) = 16.67
(C8A)	(R) = 265.00 (LC) = S. 8° 11' E. 348.68 (L) = 360.54	(C14)	(R) = 1930.34 (LC) = S. 39° 20' W. 177.94 (L) = 178.00	(C17B)	(R) = 695.69 (LC) = N. 19° 10' E. 134.29 (L) = 134.50
(C11B)	(R) = 315.00 (LC) = S. 44° 23' E. 51.38 (L) = 51.44	(C15A)	(R) = 180.00 (LC) = S. 27° 41' W. 52.20 (L) = 52.38	(C17C)	(R) = 180.00 (LC) = S. 16° 29' W. 17.93 (L) = 17.93
(C11D)	(R) = 315.00 (LC) = N. 25° 14' W. 157.29 (L) = 158.97	(C15B)			


LINE AND TANGENT TABLE

(L1)	N. 57° 41' W. 34.53
(L2)	N. 32° 19' E. 18.00
(L3)	N. 57° 41' W. 38.53
(T1)	S. 36° 01' W. 15.56

MEANDER TABLE

**BLOCK 1**  
along the left bank of the Koyukuk River,  
at the line of ordinary high water

1.	S. 22° 38' W. 187.72
2.	S. 30° 46' W. 107.94
3.	S. 30° 46' W. 107.94

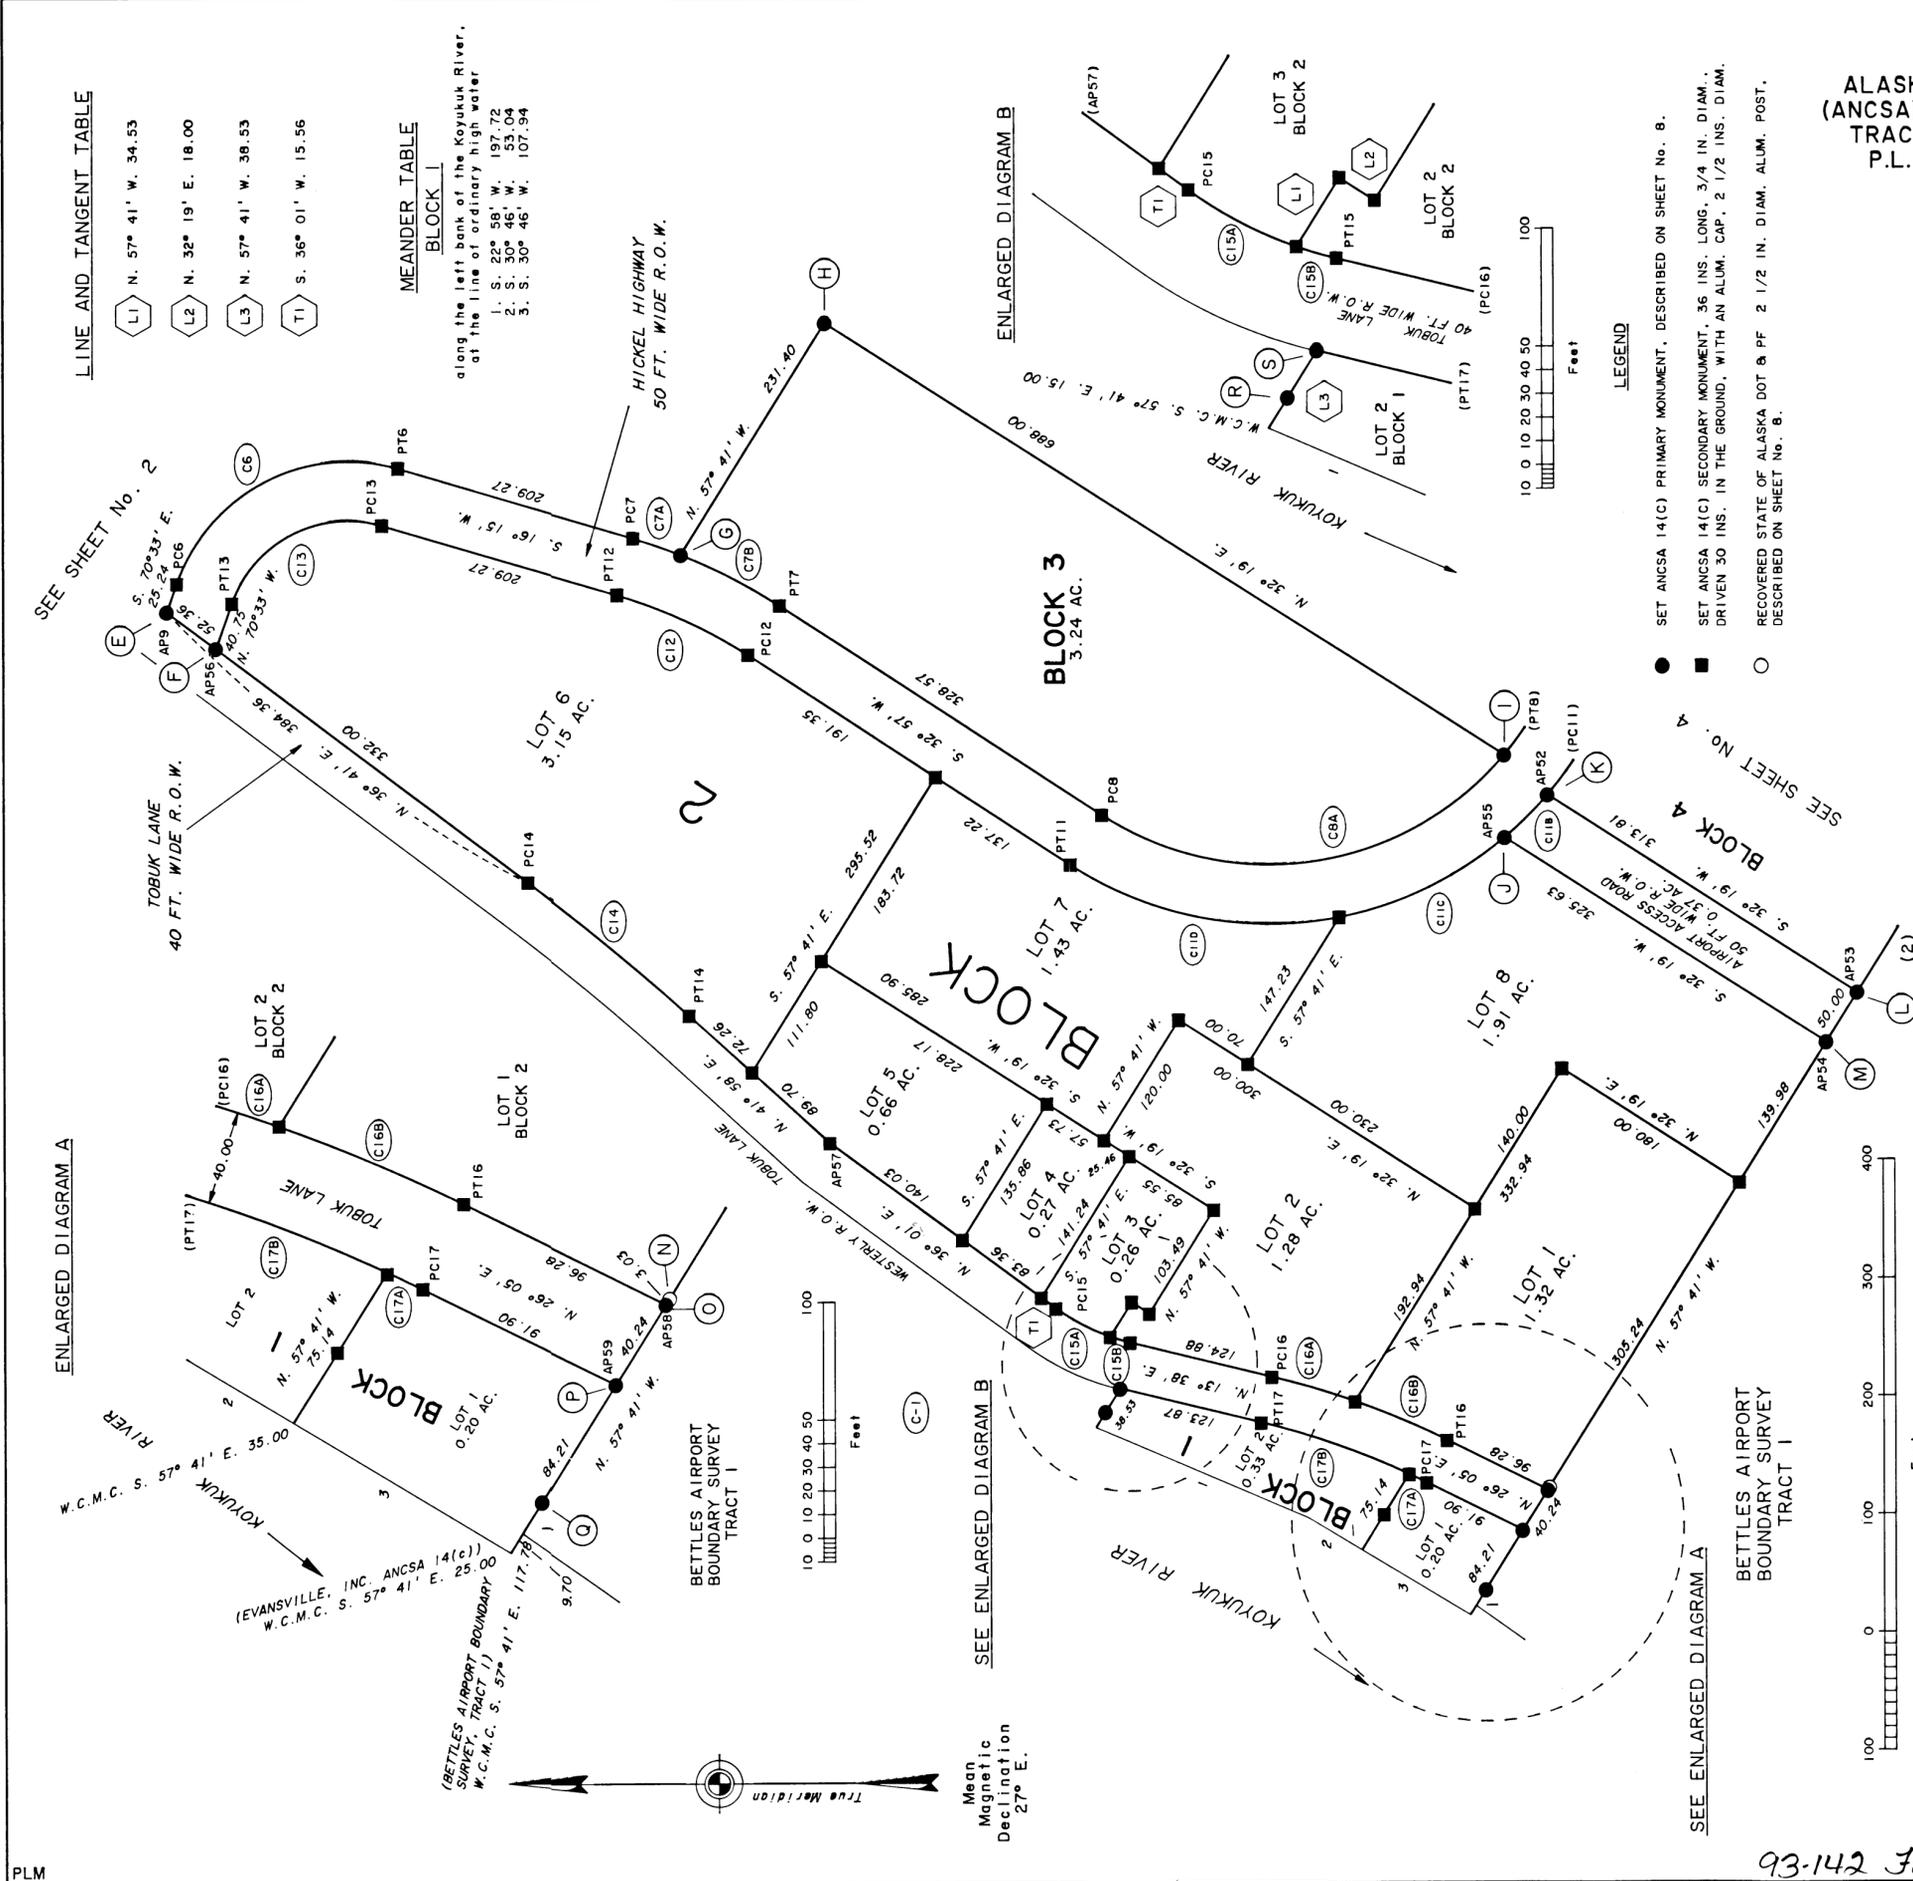

PLM



93-142 Subs.

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (c), BLOCKS 1 THROUGH 6,  
TRACTS A, B, AND C AND RIGHTS-OF-WAY  
P.L. 92-203 (85 STAT. 688, 702, 703)  
EVANSVILLE, INCORPORATED  
AT  
EVANSVILLE, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NO. 1  
FOR SURVEY INFORMATION


LEGEND

- SET ANCSA 14(C) PRIMARY MONUMENT, DESCRIBED ON SHEET No. 8.
- SET ANCSA 14(C) SECONDARY MONUMENT, 36 INS. LONG, 3/4 IN. DIAM., DRIVEN 30 INS. IN THE GROUND, WITH AN ALUM. CAP, 2 1/2 INS. DIAM.
- RECOVERED STATE OF ALASKA DOT & PF 2 1/2 IN. DIAM. ALUM. POST, DESCRIBED ON SHEET No. 8.

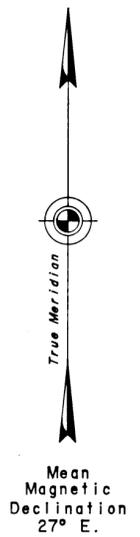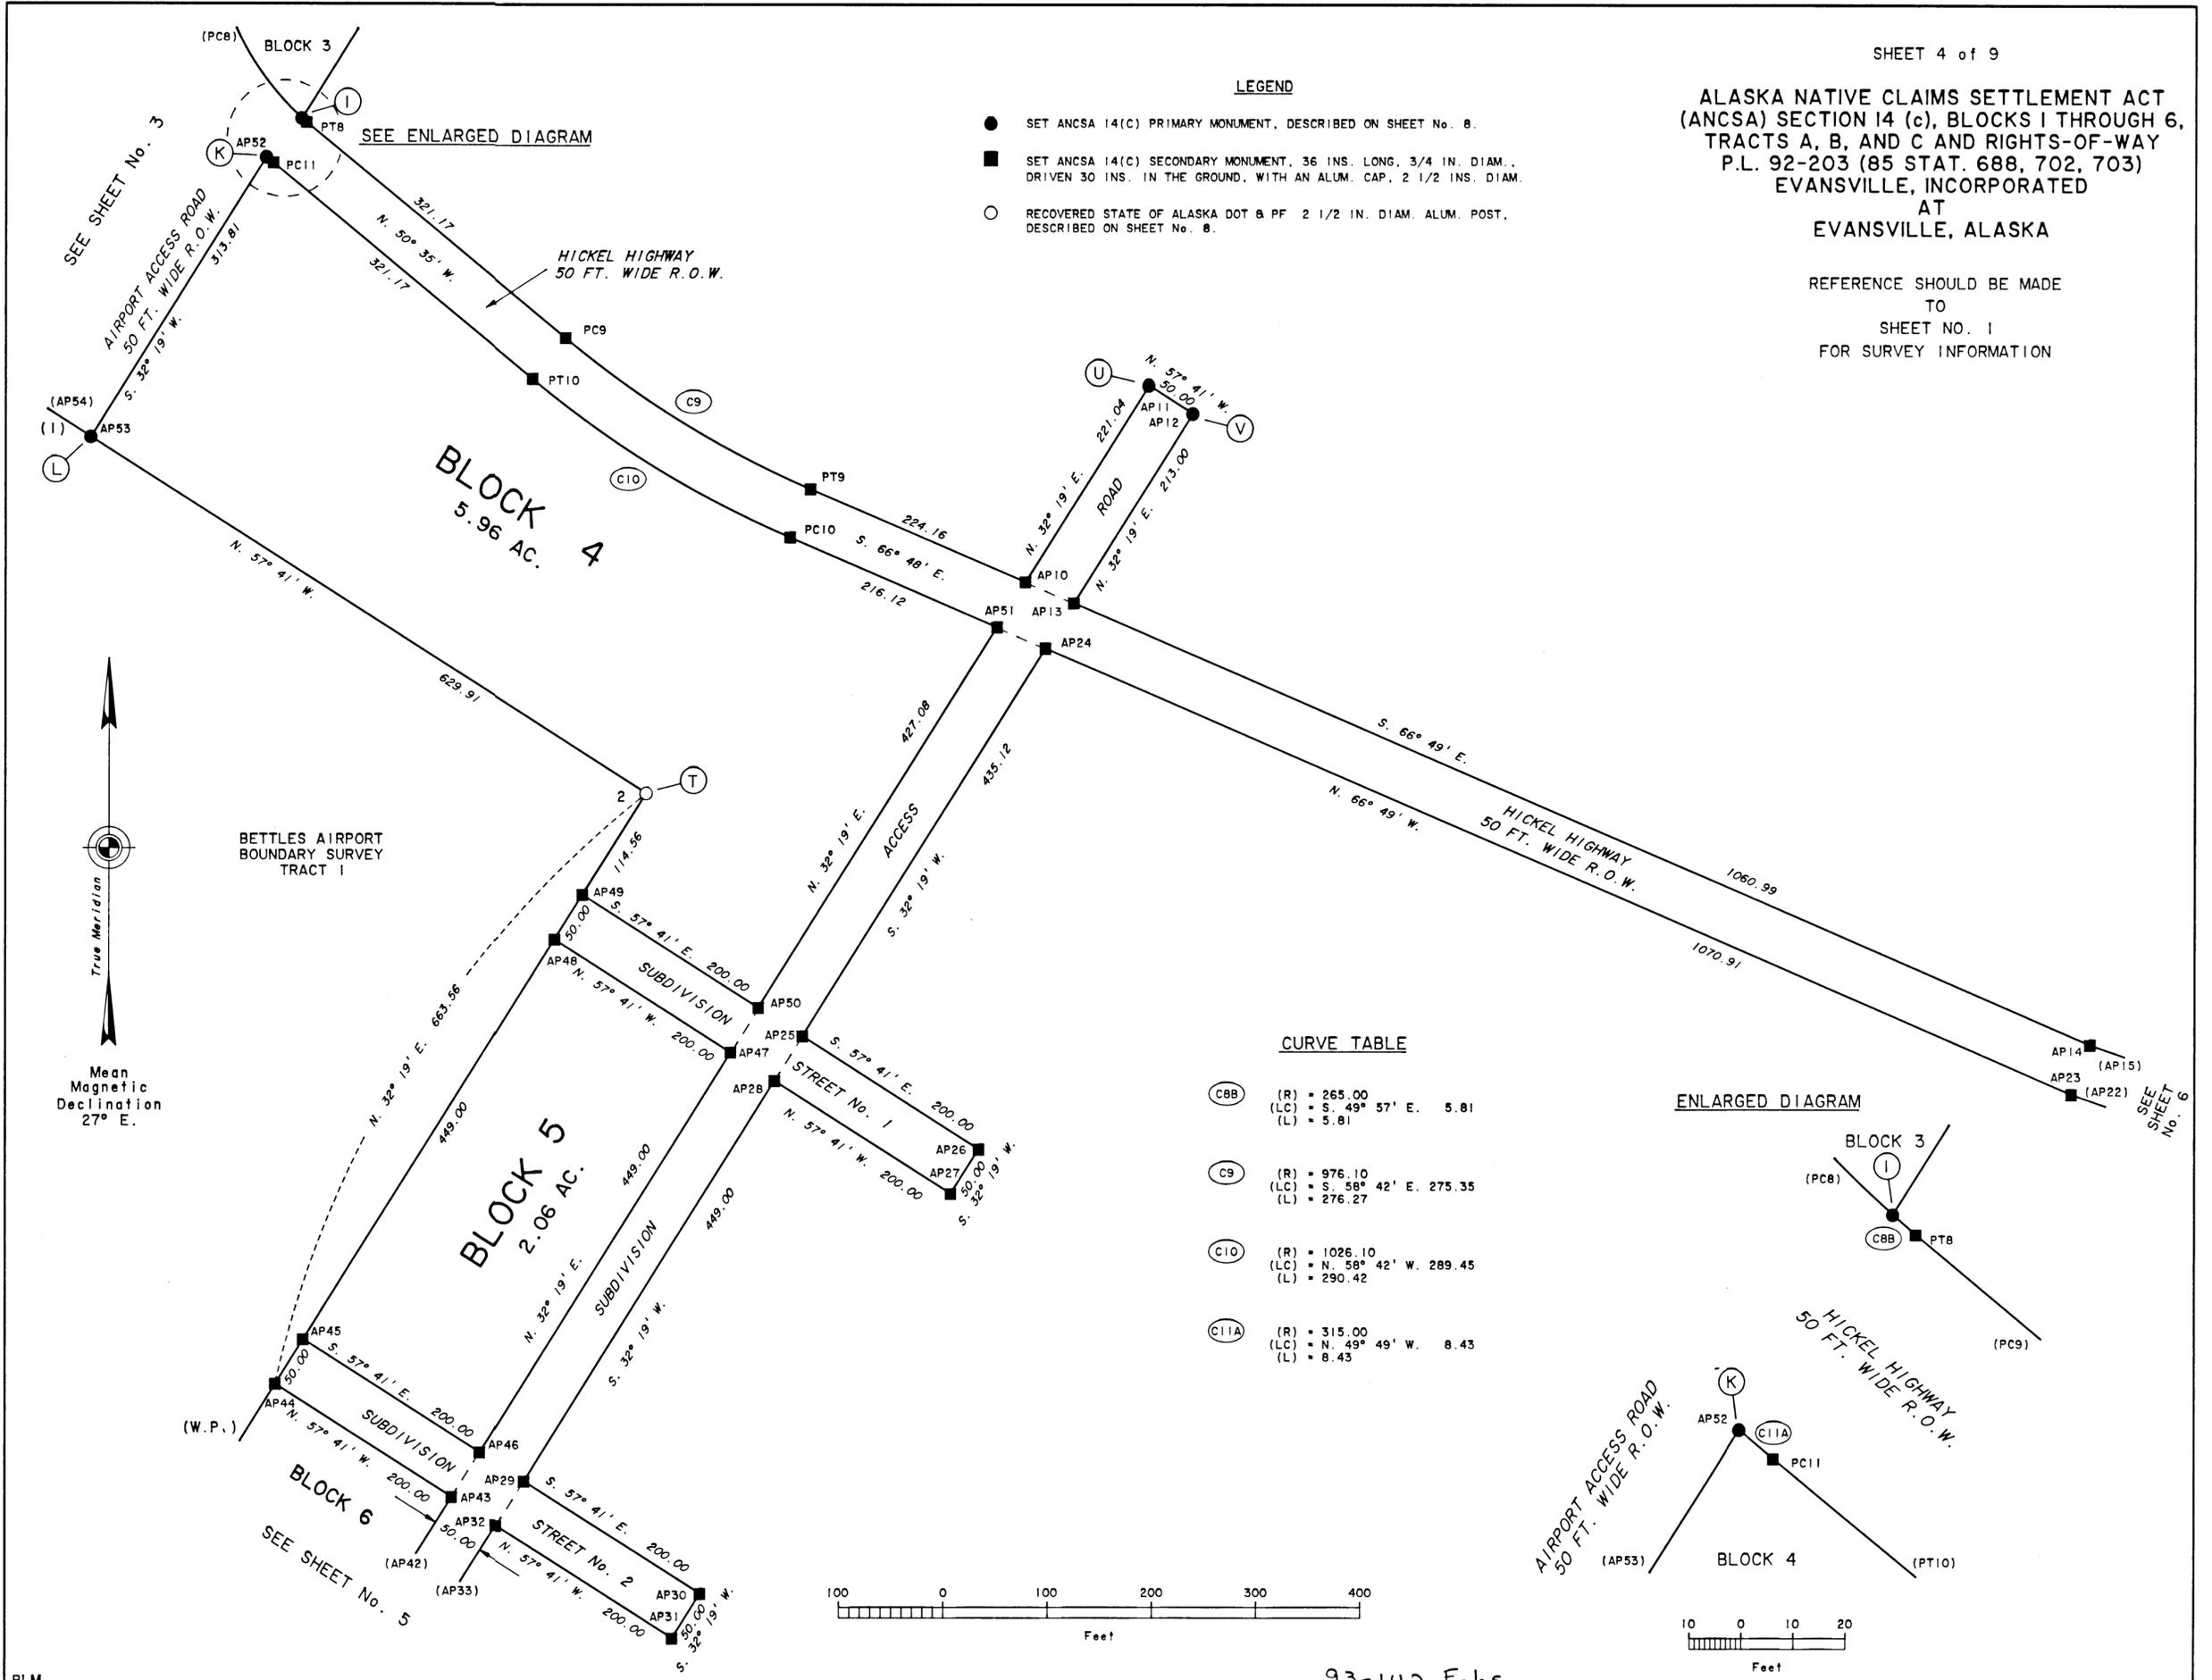


CURVE TABLE

(CBB)	(R) = 265.00 (LC) = S. 49° 57' E. 5.81 (L) = 5.81
(C9)	(R) = 976.10 (LC) = S. 58° 42' E. 275.35 (L) = 276.27
(C10)	(R) = 1026.10 (LC) = N. 58° 42' W. 289.45 (L) = 290.42
(C11A)	(R) = 315.00 (LC) = N. 49° 49' W. 8.43 (L) = 8.43



ENLARGED DIAGRAM

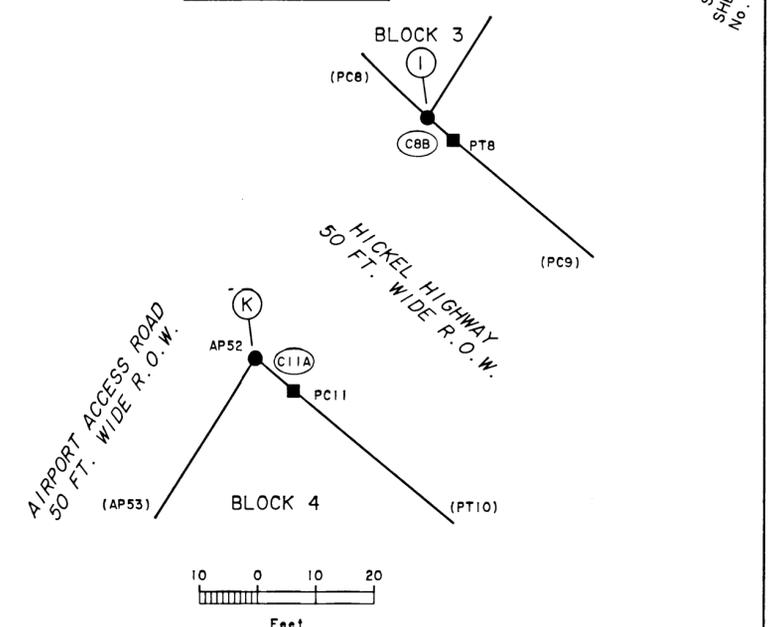


DUPLICATE

SHEET 5 of 9

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14 (c), BLOCKS 1 THROUGH 6,  
 TRACTS A, B, AND C AND RIGHTS-OF-WAY  
 P.L. 92-203 (85 STAT. 688, 702, 703)  
 EVANSVILLE, INCORPORATED  
 AT  
 EVANSVILLE, ALASKA

REFERENCE SHOULD BE MADE  
 TO  
 SHEET NO. 1  
 FOR SURVEY INFORMATION

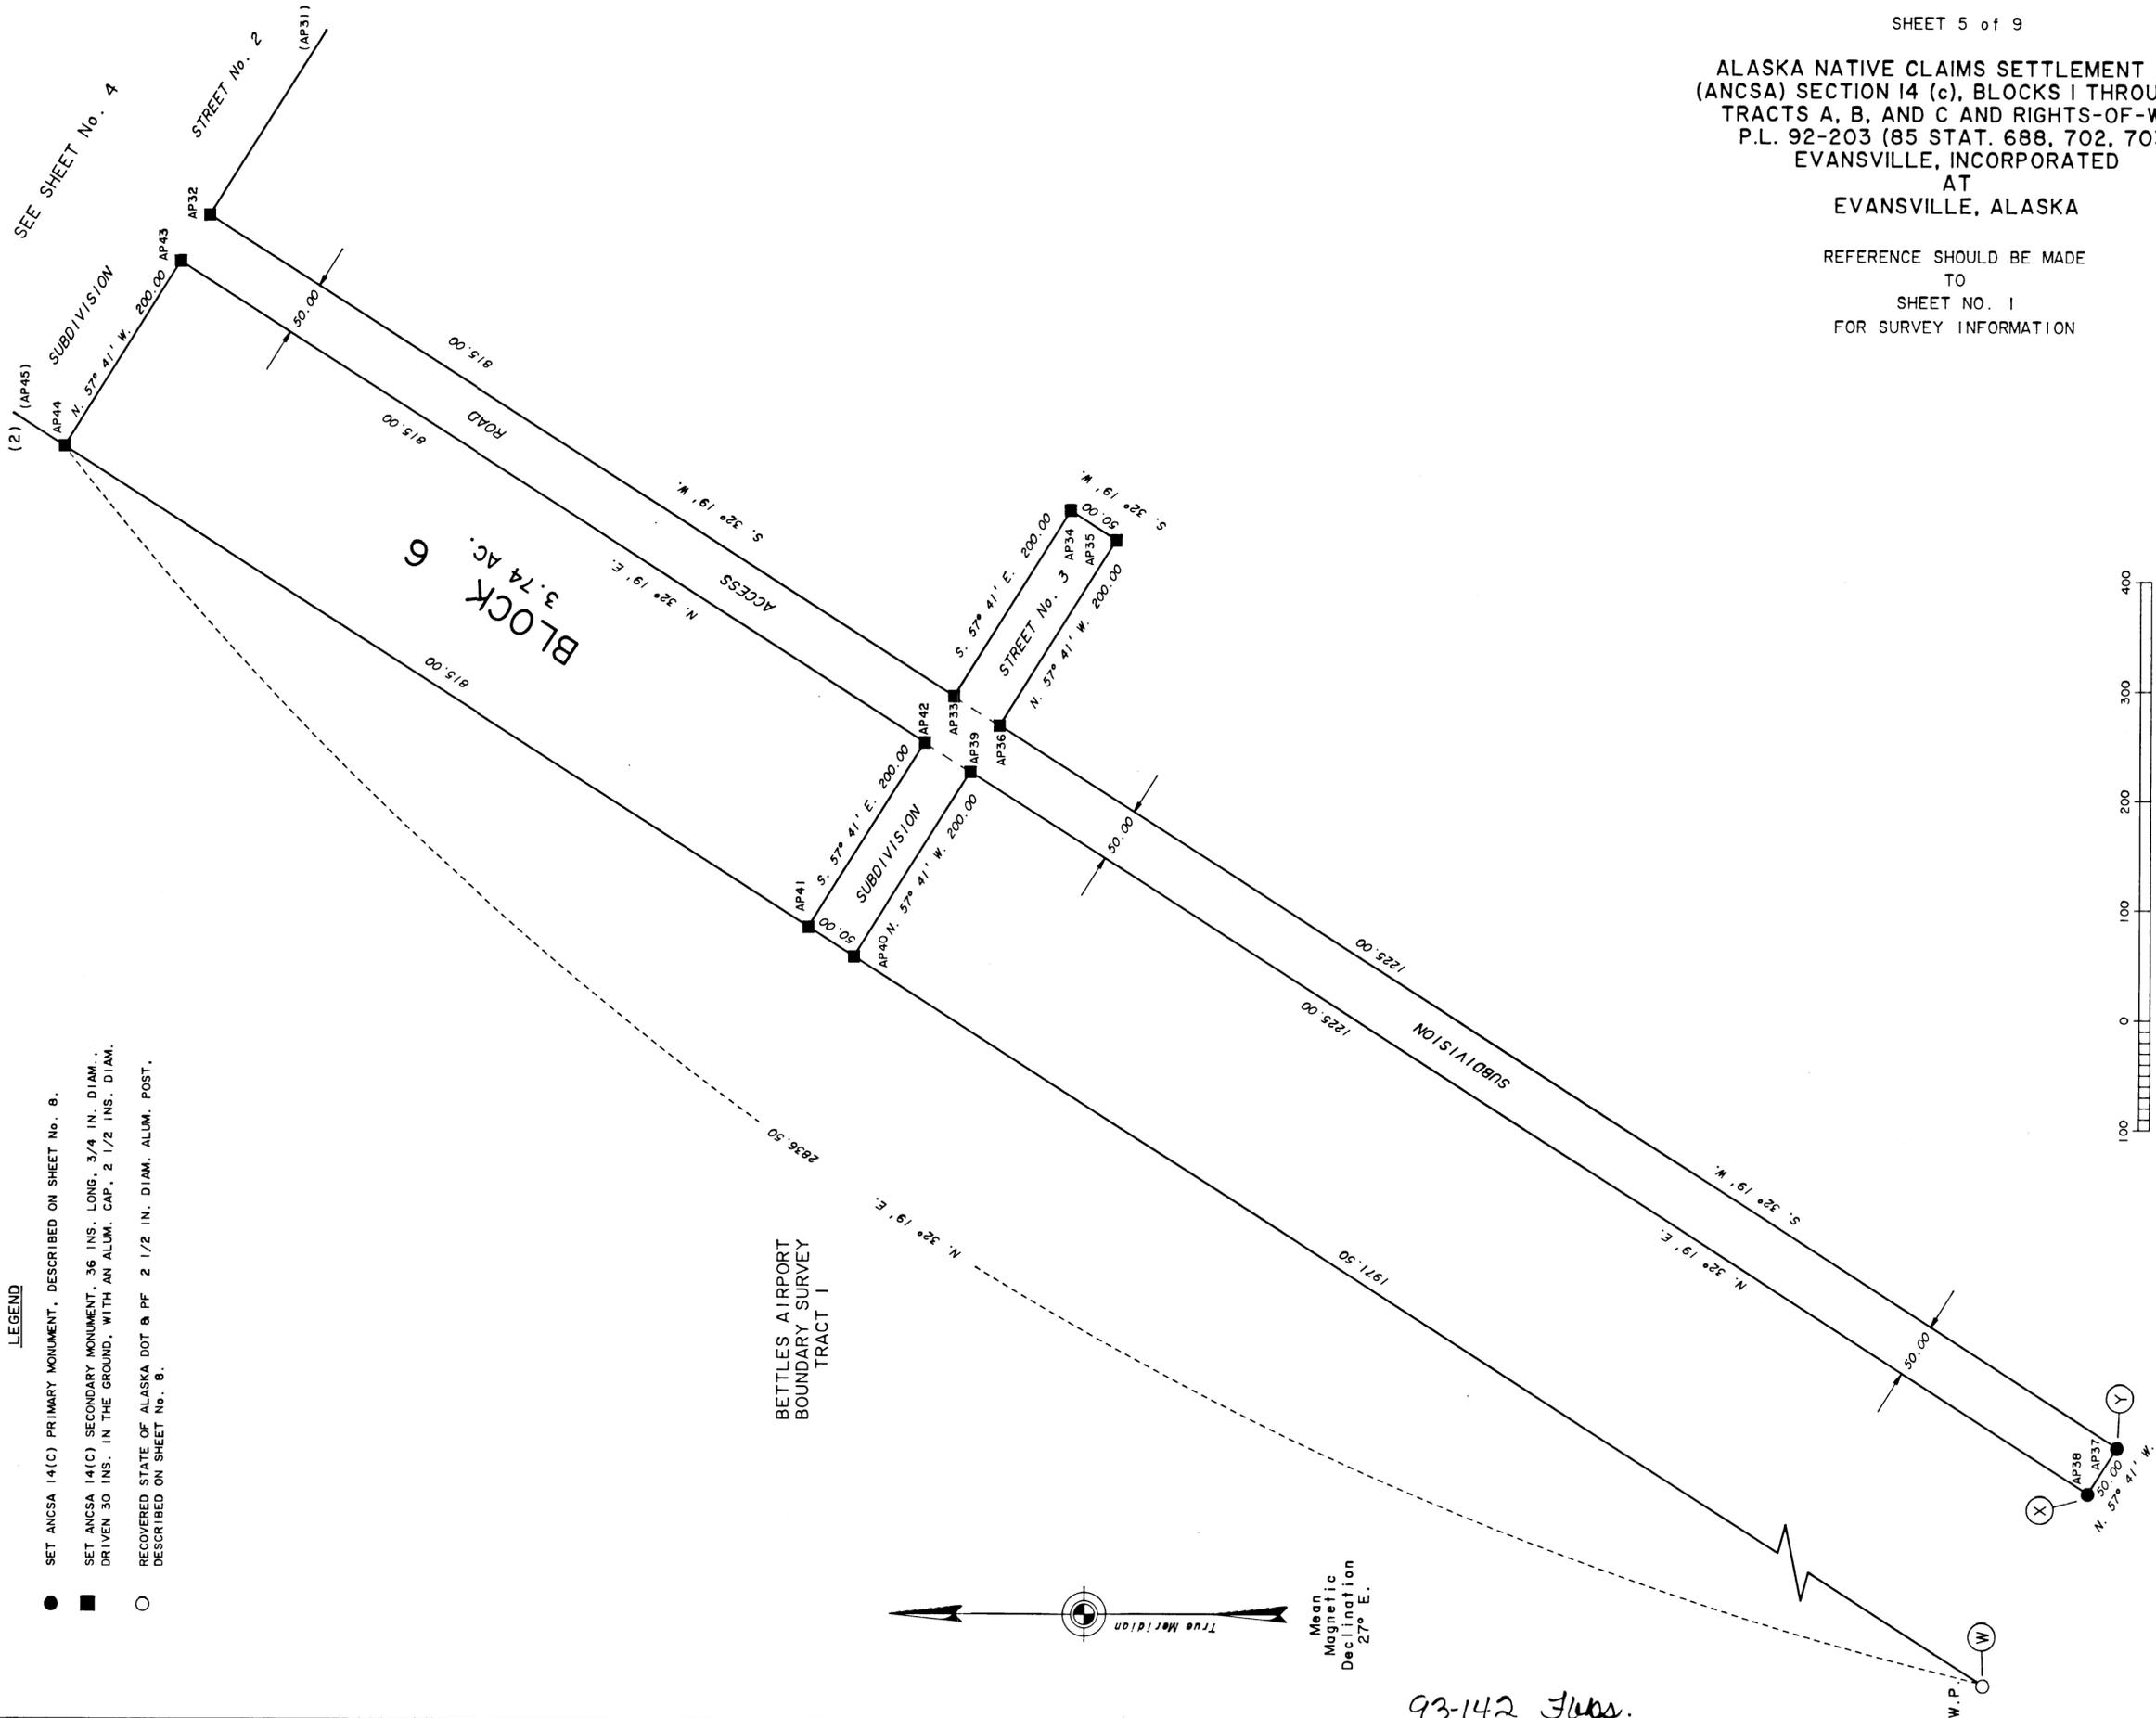

LEGEND

- SET ANCSA 14(C) PRIMARY MONUMENT, DESCRIBED ON SHEET No. 8.
- SET ANCSA 14(C) SECONDARY MONUMENT, 3/4 IN. LONG, 3/4 IN. DIAM., DRIVEN 30 INS. IN THE GROUND, WITH AN ALUM. CAP. 2 1/2 IN. DIAM.
- RECOVERED STATE OF ALASKA DOT & PF 2 1/2 IN. DIAM. ALUM. POST, DESCRIBED ON SHEET No. 8.



Mean  
 Magnetic  
 Declination  
 27° E.

93-142 Subs.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (c), BLOCKS I THROUGH 6, TRACTS A, B, AND C AND RIGHTS-OF-WAY P.L. 92-203 (85 STAT. 688, 702, 703) EVANSVILLE, INCORPORATED AT EVANSVILLE, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

ENLARGED DIAGRAM


HICKEL HIGHWAY TRAIL EASEMENT 50 FT. WIDE R.O.W.

CEMETARY ACCESS ROAD 50 FT. WIDE R.O.W.

TRACT A


LINE TABLE

L4	S. 16° 11' W. 50.00
L5	S. 16° 11' W. 50.00
L6	N. 73° 49' W. 50.00
L7	N. 16° 11' E. 50.00





SEE SHEET No. 4

SEE ENLARGED DIAGRAM

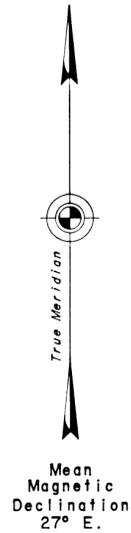

LEGEND

- SET ANCSA 14(C) PRIMARY MONUMENT, DESCRIBED ON SHEET No. 8.
- SET ANCSA 14(C) SECONDARY MONUMENT, 36 INS. LONG, 3/4 IN. DIAM., DRIVEN 30 INS. IN THE GROUND, WITH AN ALUM. CAP, 2 1/2 INS. DIAM.

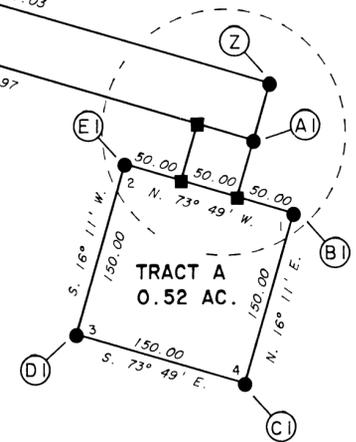

93-142 JWS.

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (c), BLOCKS 1 THROUGH 6,  
TRACTS A, B, AND C AND RIGHTS-OF-WAY  
P.L. 92-203 (85 STAT. 688, 702, 703)  
EVANSVILLE, INCORPORATED  
AT  
EVANSVILLE, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NO. 1  
FOR SURVEY INFORMATION


LEGEND

- SET ANCSA 14(C) PRIMARY MONUMENT, DESCRIBED ON SHEET No. 8.
- SET ANCSA 14(C) SECONDARY MONUMENT, 36 INS. LONG, 3/4 IN. DIAM., DRIVEN 30 INS. IN THE GROUND, WITH AN ALUM. CAP, 2 1/2 INS. DIAM.
- RECOVERED STATE OF ALASKA DOT & PF 2 1/2 IN. DIAM. ALUM. POST, DESCRIBED ON SHEET No. 8.
- ⊙ RECOVERED STATE OF ALASKA DOT & PF SECONDARY MONUMENT, DESCRIBED ON SHEET No. 9
- ⊙ RECOVERED B.L.M. STAINLESS STEEL POST, DESCRIBED ON SHEET No. 9




LINE TABLE

L8	S. 57° 44' E.	35.57
L9	S. 32° 16' W.	45.01
L10	S. 57° 38' E.	35.57

ENLARGED DIAGRAM

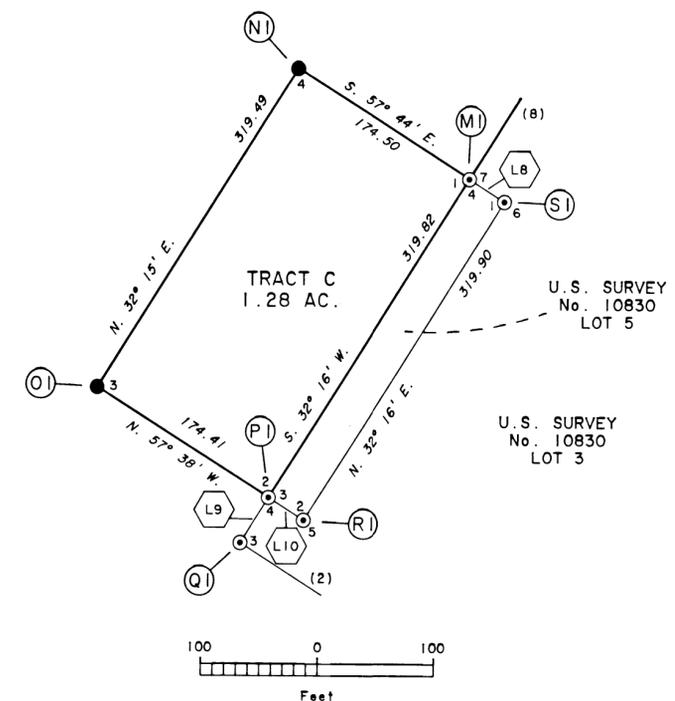


SEE ENLARGED DIAGRAM

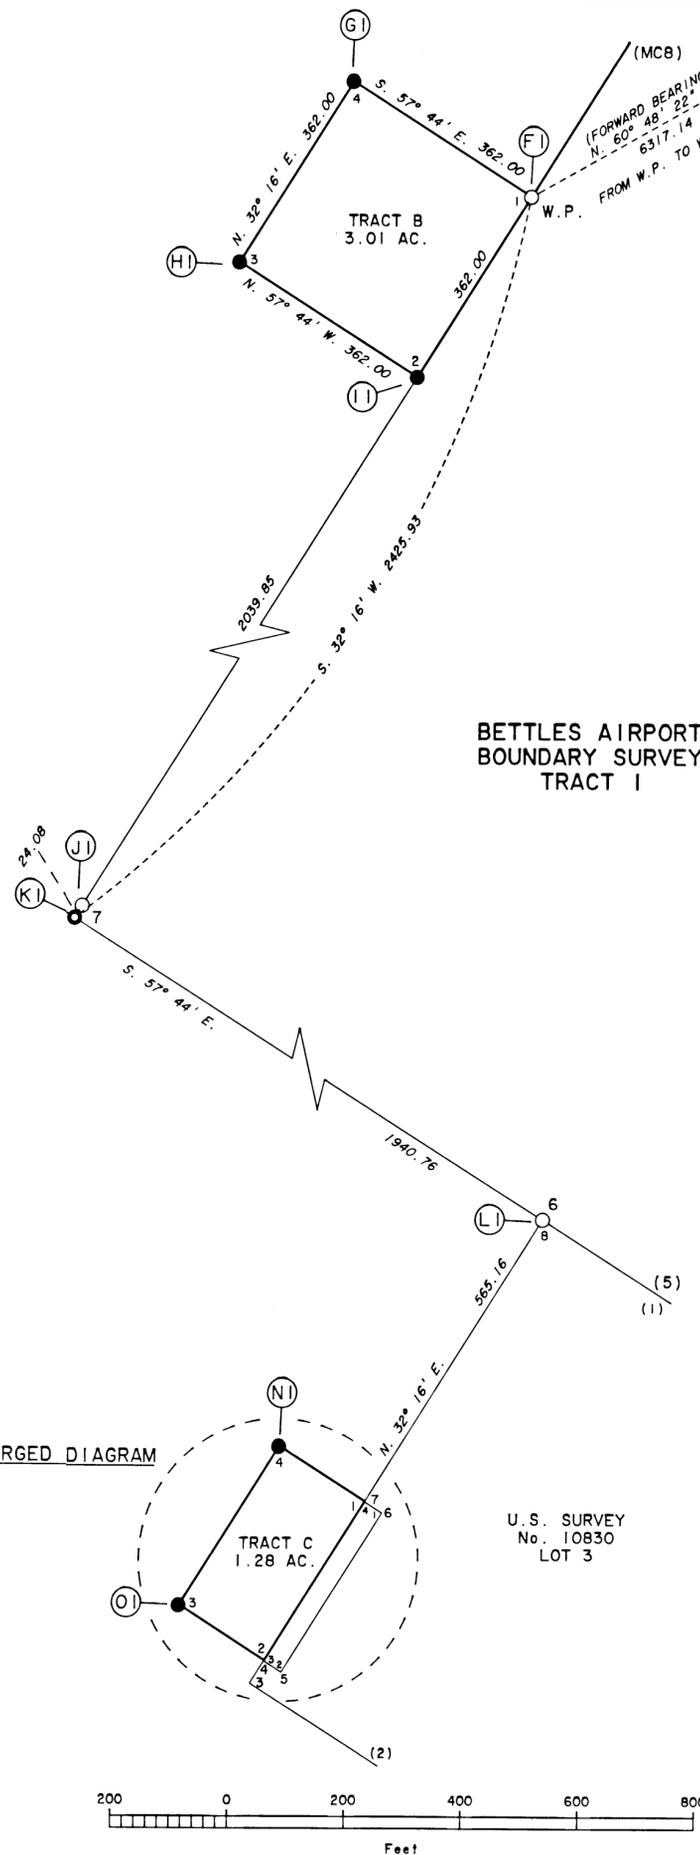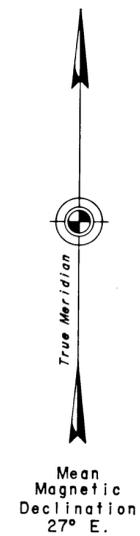


ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14 (c), BLOCKS I THROUGH 6,  
 TRACTS A, B, AND C AND RIGHTS-OF-WAY  
 P.L. 92-203 (85 STAT. 688, 702, 703)  
 EVANSVILLE, INCORPORATED  
 AT  
 EVANSVILLE, ALASKA


REFERENCE SHOULD BE MADE  
 TO  
 SHEET NO. 1  
 FOR SURVEY INFORMATION




Recovered a rebar, 3/8 in. diam., firmly set, projecting 2 ins. above the ground, no cap on rebar.  
 At the corner point  
 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
 A birch, 7 ins. diam., bears N. 45 1/2° E., 42.9 ft. dist., mkd. X BT.  
 A spruce, 4 ins. diam., bears N. 67 3/4° W., 6.2 ft. dist., mkd. X BT.  
 Bury the rebar inside the stainless steel post.  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 4 ins. diam., bears N. 14° E., 6.7 ft. dist., mkd. X BT.  
 A spruce, 4 ins. diam., bears N. 80 1/2° W., 36.7 ft. dist., mkd. X BT.  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the surface of the ground, with brass cap mkd. as shown  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Recovered a rebar, 3/8 in. diam., firmly set, projecting 2 ins. above the ground, no cap on rebar.  
 At the corner point  
 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 3 ins. diam., bears S. 65° E., 27.7 ft. dist., mkd. X BT.  
 A spruce, 3 ins. diam., bears S. 50° W., 19.9 ft. dist., mkd. X BT.  
 Bury the rebar inside the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 1 in. below the surface of the ground, with brass cap mkd. as shown, from which  
 A poplar, 4 ins. diam., bears N. 28° E., 66.7 ft. dist., bark scribed X BT.  
 A poplar, 3 ins. diam., bears N. 87 1/4° E., 40.3 ft. dist., bark scribed X BT.  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. below the surface of the ground, with brass cap mkd. as shown  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown  
 A spruce, 3 ins. diam., bears N. 77° E., 4.2 ft. dist., mkd. X BT.  
 A spruce, 3 ins. diam., bears S. 7 1/2° E., 18.5 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 4 ins. diam., bears S. 88° W., 15.2 ft. dist., mkd. X BT.  
 A spruce, 3 ins. diam., bears N. 6° W., 29.4 ft. dist., mkd. X BT.  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown  
 A spruce, 5 ins. diam., bears N. 29° E., 15.6 ft. dist., mkd. X BT.  
 A spruce, 3 ins. diam., bears N. 60° W., 26.1 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with an alum. cap mkd. as shown, from which bearing trees described in the record of U.S. Survey No. 10830  
 A spruce, 4 ins. diam., bears S. 17 1/2° E., 22.5 ft. dist., no scribe marks, snow blazed.  
 A spruce, 4 ins. diam., bears S. 17 1/2° W., 36.1 ft. dist., no scribe marks, snow blazed.  
 A spruce, 4 ins. diam., bears N. 84° W., 27.9 ft. dist., no scribe marks, snow blazed. (Record, N. 24 1/4° W., 62 lks. dist.)




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 3 ins. below the surface of the ground, with brass cap mkd. as shown  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. below the surface of the ground, with brass cap mkd. as shown  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., NE and SE on line, 3 ft. dist.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below the surface of the ground, with brass cap mkd. as shown  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.  
 Cor. falls in gravel driveway.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 2 ins. below the surface of the ground, with brass cap mkd. as shown  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with an alum. cap mkd. as shown, from which bearing trees mkd. by person(s) unknown  
 A spruce, 3 ins. diam., bears S. 46° E., 17.4 ft. dist., with scribe mark X visible on partially healed blaze.  
 A spruce, 5 ins. diam., bears S. 79 3/4° W., 42.7 ft. dist., with scribe mark X visible on partially healed blaze.  
 A spruce, 4 ins. diam., bears N. 51 3/4° W., 57.1 ft. dist., with scribe mark X visible on partially healed blaze.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., NE and NW on line, 3 ft. dist.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 3 ins. diam., bears N. 50° E., 27.2 ft. dist., mkd. X BT.  
 A spruce, 4 ins. diam., bears S. 45° E., 40.9 ft. dist., mkd. X BT.  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.



Recovered an alum post, 2 1/2 ins. diam., firmly set, flush with the ground, with alum. cap mkd. as shown



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which  
 A poplar, 3 ins. diam., bears S. 14° E., 12.9 ft. dist., mkd. X BT.  
 A poplar, 4 ins. diam., bears S. 88° W., 4.2 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 8 ins. diam., bears N. 6 1/2° E., 33.0 ft. dist., mkd. X BT.  
 A birch, 3 ins. diam., bears N. 44° W., 28.0 ft. dist., mkd. X BT.  
 Bury a clear DEEP-1 magnet at the base of the stainless steel post.


93-142 Fds.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (c), BLOCKS I THROUGH 6, TRACTS A, B, AND C AND RIGHTS-OF-WAY P.L. 92-203 (85 STAT. 688, 702, 703) EVANSVILLE, INCORPORATED AT EVANSVILLE, ALASKA


REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
A birch, 3 ins. diam., bears S. 24 1/2° E., 29.5 ft. dist., mkd. X BT.  
A spruce, 4 ins. diam., bears S. 71 1/4° W., 45.7 ft. dist., mkd. X BT.  
Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown  
Dig pits, 18 x 18 x 12 ins., NE and SE on line, 3 ft. dist.  
Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Recovered a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, with an alum. cap, 1 1/2 ins. diam., not mkd.  
At the cor. point  
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 8 ins. diam., bears N. 77° E., 20.8 ft. dist., mkd. X BT.  
A spruce, 7 ins. diam., bears S. 6° W., 11.6 ft. dist., mkd. X BT.  
Bury the 5/8 in. diam. rebar, 30 ins. long with alum. cap, inside the stainless steel post, inverted.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 5 ins. diam., bears S. 42 1/4° W., 10.5 ft. dist., mkd. X BT.  
A birch, 4 ins. diam., bears N. 20 1/2° W., 28.5 ft. dist., mkd. X BT.  
Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which  
A spruce, 5 ins. diam., bears N. 60 3/4° E., 12.3 ft. dist., mkd. X BT.  
A spruce, 6 ins. diam., bears S. 60° E., 30.3 ft. dist., mkd. X BT.  
Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Recovered a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, with an alum. cap, 1 1/2 ins. diam., not mkd.  
At the cor. point  
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which  
A spruce, 4 ins. diam., bears N. 13° E., 19.2 ft. dist., mkd. X BT.  
A spruce, 4 ins. diam., bears S. 52 1/2° W., 29.4 ft. dist., mkd. X BT.  
Bury the 5/8 in. diam. rebar, 30 ins. long with alum. cap, inside the stainless steel post, inverted.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which  
A birch, 7 ins. diam., bears N. 3 3/4° E., 19.6 ft. dist., mkd. X BT.  
A spruce, 9 ins. diam., bears S. 26 1/2° E., 20.3 ft. dist., mkd. X BT.  
Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, with an alum. cap mkd. as shown




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with brass cap marked C4L3 C3L5 SIO830 1991, add marks to read as shown, from which the original accessories  
A steel chain-link fence cor. post, 3 ins. diam., bears S. 72 3/4° E., 7.6 ft. dist.  
A birch, 4 ins. diam., bears N. 25 1/2° W., 59.4 ft. dist., with scribe marks X BT visible.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
A birch, 7 ins. diam., bears N. 27 1/4° E., 33.1 ft. dist., mkd. X BT.  
A spruce, 7 ins. diam., bears N. 53 1/4° W., 28.0 ft. dist., mkd. X BT.  
Bury a clear DEEP-1 magnet at the base of the stainless steel post.



Recovered a machine bolt, 5/8 in. diam., with a square head, firmly set, projecting 1 in. above the ground, from which bearing trees not of record  
A spruce, 6 ins. diam., bears N. 59° E., 48.1 ft. dist., with scribe marks X visible on partially healed blaze.  
A spruce, 6 ins. diam., bears S. 76 3/4° E., 33.6 ft. dist., with scribe marks X visible on partially healed blaze.  
A spruce, 3 ins. diam., bears S. 16 1/4° W., 5.7 ft. dist., with scribe marks X visible on partially healed blaze.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown, from which the original bearing trees  
A spruce, 4 ins. diam., bears S. 65 1/2° E., 37.3 ft. dist., with scribe marks X BT visible on open blazes.  
A spruce, 5 ins. diam., bears S. 59 1/4° W., 34.6 ft. dist., with scribe marks X BT visible on open blazes.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 10 ins. diam., bears N. 37 1/2° E., 22.0 ft. dist., mkd. X BT.  
A birch, 3 ins. diam., bears N. 34 1/4° W., 25.6 ft. dist., mkd. X BT.  
Bury a clear DEEP-1 magnet at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with alum. cap mkd. as shown, from which the bearing trees described in the record of U.S. Survey No. 10830  
A spruce, 3 ins. diam., bears S. 34 1/4° E., 25.7 ft. dist., no marks, snow blazed.  
A spruce, 4 ins. diam., bears S. 30 3/4° W., 39.3 ft. dist., no marks, snow blazed.  
A spruce, 4 ins. diam., bears N. 6° W., 64.4 ft. dist., no marks, snow blazed.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. as shown, from which the original bearing trees  
A cottonwood, 4 ins. diam., bears N. 60° E., 21.4 ft. dist., with scribe marks X BT visible on open blazes.  
A spruce, 4 ins. diam., bears S. 48 1/2° E., 11.9 ft. dist., with scribe marks X BT visible on open blazes.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, with an alum. cap mkd. as shown, from which bearing trees mkd. by person(s) unknown  
A spruce, 7 ins. diam., bears S. 60° E., 11.2 ft. dist., with scribe mark X visible on partially healed blaze.  
A spruce, 4 ins. diam., bears S. 83 3/4° W., 21.8 ft. dist., with scribe mark X visible on partially healed blaze.  
A spruce, 5 ins. diam., bears N. 31 3/4° W., 28.1 ft. dist., with scribe mark X visible on partially healed blaze.



Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap marked C7L3 C4L5 SIO830 1991, add marks to read as shown, from which the original bearing trees  
A spruce, 6 ins. diam., bears N. 14° E., 11.9 ft. dist., with scribe marks X BT visible on open blazes.  
A spruce, 3 ins. diam., bears N. 78° W., 13.2 ft. dist., with scribe marks X BT visible on open blazes.



Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees  
A spruce, 3 ins. diam., bears S. 38 1/4° E., 7.3 ft. dist., with scribe marks X BT visible on open blazes.  
A spruce, 4 ins. diam., bears S. 56 1/2° W., 13.2 ft. dist., with scribe marks X BT visible on open blazes.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown  
Dig pits, 18 x 18 x 12 ins., SE and SW on line, 3 ft. dist.  
Bury a clear DEEP-1 magnet at the base of the stainless steel post.

93-142  
RECORDED - FILED  
Fairbanks REC DIST.  
DATE 4/28 1993  
TIME 1:59 P.M.  
Requested by USA/BLM  
Address