

DUPLICATE

Sheet 1 of 7

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), LOTS 1 THROUGH 7  
(P.L. 92-203, 85 STAT. 688, 702, 703)  
NANA REGIONAL CORPORATION, INC.

AT  
KOBUK, ALASKA  
AND

THE RETRACEMENT OF PORTIONS OF U.S. SURVEY  
NOS. 3788, 5895, 9855, and 10644

This plat contains the entire survey record.

U.S. Survey No. 3788 was surveyed by Edward A. Taylor, Supervisory Cadastral Surveyor, in 1962, and a portion dependently resurveyed by Paul L. Moss, Cadastral Surveyor, in 1990.

U.S. Survey No. 5895 was surveyed by Harold D. Corbin, Cadastral Surveyor, in 1977.

U.S. Survey Nos. 9855 and 10644 were surveyed by Paul L. Moss, Cadastral Surveyor, in 1990.

The survey of the Dahl Creek Airport Boundary, a State of Alaska survey, was surveyed by Paul E. Stutzmann, Alaska Registered Land Surveyor No. 705, in 1987; and filed as 91-4 on March 28, 1991, in the Kotzebue Recording District.

This survey was executed by Paul L. Moss, Cadastral Surveyor, July 18 through September 23, 1990, in accordance with the principals set forth in the Manual of Surveying Instructions, 1973; Special Instructions, approved May 30, 1990; the Kobuk ANCSA 14(c) Map of boundaries approved September 28, 1989; and Assignment Instructions dated June 1, 1990.

Field assistants were:

Michael D. Wilson,	Supervisory Land Surveyor
Randy J. Deones,	Land Surveyor
Michael O. Harmening,	Land Surveyor
Daniel A. Wiesner,	Land Surveyor
Christopher D. Wiita,	Land Surveyor
Douglas N. Haywood,	Student Trainee (LS)
Brian A. Homrich,	Student trainee (LS)
Brit L. Primm,	Student trainee (LS)
James C. Davis,	Surveying Technician
Elmer S. Bekoolok,	Volunteer
Dominic E. Oyoumick,	Volunteer

Area: 364.81 Acres.

The azimuth was obtained from direct observations of the sun, using the hour angle method, and refers to the true meridian.

The geographic position of Corner No. 2, ANCSA 14(c) Lot 5, identical with Corner No. 2, U.S. Survey Number 5895, as determined from a tie to U.S. Army Corps of Engineers triangulation station "DAHL-ET 1976" is:

Latitude: 66° 56' 33.97" North NAD 27  
Longitude: 156° 53' 56.02" West

The mean magnetic declination was obtained from U.S. Geological Survey quadrangle map "SHUNGNAC (D-2)," Alaska, 1955, with minor revisions in 1967.

This survey is situated in and around the village of Kobuk, Alaska, and is adjacent to portions of U.S. Survey Nos. 3788, 5895, 9855, and 10644, within Townships 17 and 18 North, Range 9 East, Koteel River Meridian, Alaska.

The land is open rolling tundra, through patches of scattered birch and spruce, with areas of dense alder and willow undergrowth.

The soil is a thin layer of top soil over permafrost.

The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.



UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Anchorage, Alaska

The survey represented by this plat, sheets 1 -7, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

*George J. Lind* 29 SEPT. 1992  
Date


Deputy State Director for Cadastral Survey, Alaska

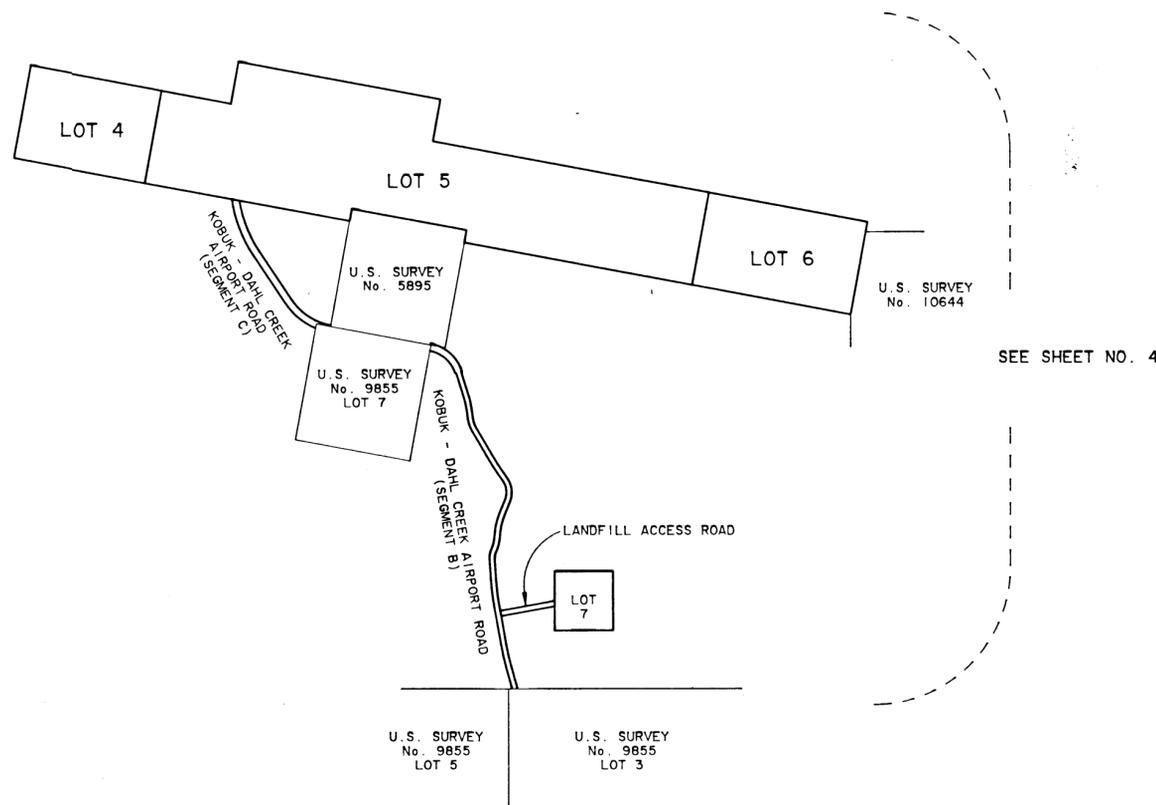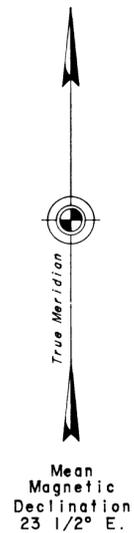

VILLAGE CORPORATION PRESIDENT CERTIFICATE

I hereby certify that Lots 1 through 7 represented on this plat of survey are on lands Interim Conveyed to the NANA Regional Corporation, Inc. by Interim Conveyance Nos. 995 issued by the United States of America; said lots also fulfill all entitlements under the provisions of the ANCSA 14(c) as requested by the NANA Regional Corporation, Inc. Resolution Agreement No. 88-10, and the Kobuk ANCSA 14(c) Map of Boundaries approved September 28, 1989.


*August 27, 1992*  
Date  
*Paul J. Moss*  
President, NANA Regional Corporation, Inc.

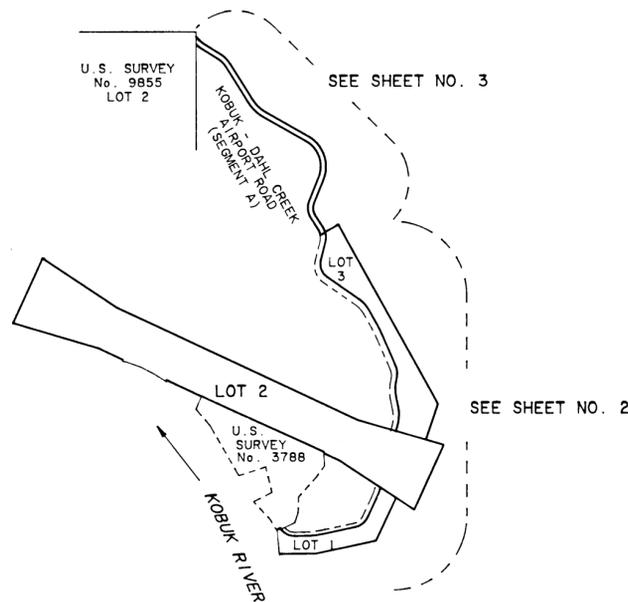

SURVEYORS CERTIFICATE

I, Paul L. Moss, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) survey depicted on this plat, sheets 1 - 7, in conformity with the Special Instructions dated May 21, 1990, the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.

*JUNE 12, 1992*  
Date  
*Paul L. Moss*  
Cadastral Surveyor



92-6

RECORDED - FILED 50

KOTZEBUE REC DIST

DATE *OCT 8 1992*

TIME *2:00 P.M.*

Requested by *USA/BLM*

Address \_\_\_\_\_

MEANDER TABLE

Northwesterly with meanders of the right bank of the Kobuk River, along a well-defined bank, at the line of ordinary high water.


LOT 1

1. N. 5° 38' W., 275.78


LOT 2

1. N. 58° 16' W., 181.21  
2. N. 63° 18' W., 157.08  
3. N. 71° 05' W., 162.36  
4. N. 76° 21' W., 52.76

ENLARGED DIAGRAM "B"

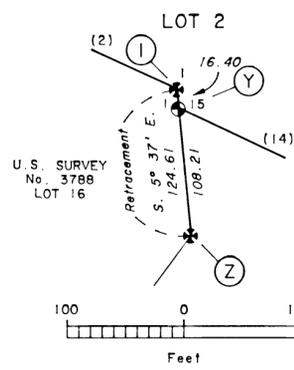

ENLARGED DIAGRAM "A"

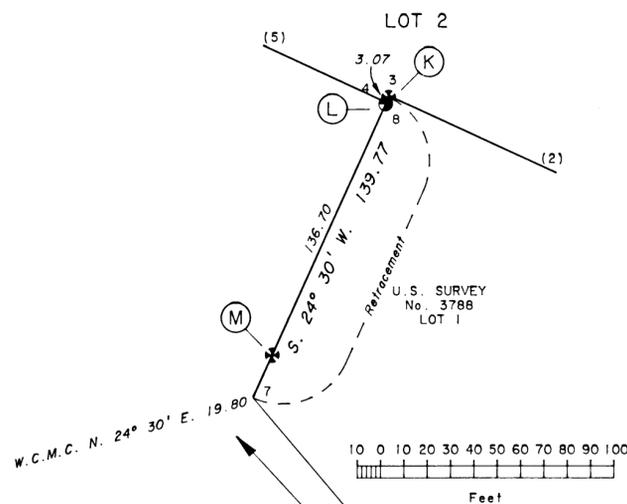


SEE SHEET 3

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA), SECTION 14(c), LOTS 1 THROUGH 7 (P.L. 92-203, 85 STAT. 688, 702, 703) NANA REGIONAL CORPORATION, INC. AT KOBUK, ALASKA AND THE RETRACEMENT OF PORTIONS OF U.S. SURVEY NOS. 3788, 5895, 9855, and 10644

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

ENLARGED DIAGRAM "C"

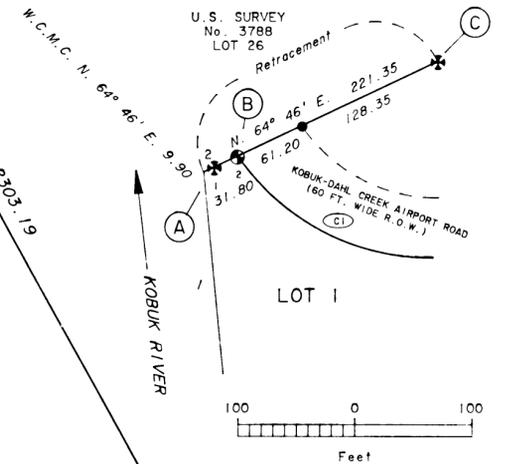

TANGENT TABLE

Table with 10 rows (T1-T10) listing bearings and distances: T1 N. 89° 23' E., 115.00; T2 N. 78° 23' E., 377.00; T3 N. 25° 38' E., 229.00; T4 N. 16° 18' E., 63.76; T5 N. 12° 00' W., 119.17; T6 N. 10° 13' E., 75.85; T7 N. 23° 37' W., 385.04; T8 N. 29° 33' W., 186.82; T9 N. 55° 20' W., 448.35; T10 N. 14° 30' E., 211.92

CURVE TABLE

LOT 1

C1 (R) 200.00 (Δ) 55° 55' 54" (L) 195.24 (L.C.) S. 62° 39' E., 187.57

C2 (R) 1030.00 (Δ) 10° 59' 57" (L) 197.75 (L.C.) N. 83° 53' E., 197.44

C3 (R) 205.00 (Δ) 52° 44' 58" (L) 188.74 (L.C.) N. 52° 00' E., 182.14

C4 (R) 900.00 (Δ) 8° 16' 06" (L) 129.89 (L.C.) N. 21° 30' E., 129.77

C5 (R) 430.00 (Δ) 28° 18' 00" (L) 212.39 (L.C.) N. 2° 09' E., 210.24

C6 (R) 370.00 (Δ) 22° 13' 23" (L) 143.48 (L.C.) N. 0° 54' W., 142.61

C7 (R) 210.00 (Δ) 33° 49' 48" (L) 124.01 (L.C.) N. 6° 42' W., 122.20



C8 (R) 1350.00 (Δ) 5° 56' 12" (L) 139.85 (L.C.) N. 26° 35' W., 139.81

LOT 3

C9 (R) 300.00 (Δ) 25° 46' 56" (L) 148.50 (L.C.) N. 42° 27' W., 147.24

C10 (R) 170.00 (Δ) 22° 13' 23" (L) 207.24 (L.C.) N. 20° 25' W., 194.65

C11 (R) 210.00 (Δ) 30° 11' 01" (L) 110.62 (L.C.) N. 0° 35' W., 109.35

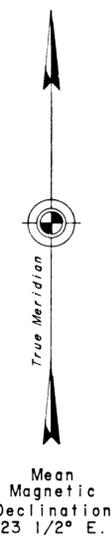

LEGEND

- ✱ BUREAU OF LAND MANAGEMENT MONUMENT OF RECORD
✳ ANCSA 14(c) PRIMARY MONUMENT
● ANCSA 14(c) SECONDARY MONUMENT (ALUM. ROD, 3/4 IN. DIA. 36 INS. LONG, DRIVEN 30 INS. IN THE GROUND, WITH A 2 1/2 IN. DIA. ALUM. CAP.)

KOTZEBIE PLAT 92-6

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), LOTS 1 THROUGH 7  
 (P.L. 92-203, 85 STAT. 688, 702, 703)  
 NANA REGIONAL CORPORATION, INC.  
 AT  
 KOBUK, ALASKA  
 AND  
 THE RETRACEMENT OF PORTIONS OF U.S. SURVEY  
 NOS. 3788, 5895, 9855, and 10644


REFERENCE SHOULD BE MADE  
 TO  
 SHEET NO. 1  
 FOR SURVEY INFORMATION

**LEGEND**

- ✱ BUREAU OF LAND MANAGEMENT MONUMENT OF RECORD
- ⊕ ANCSA 14(c) PRIMARY MONUMENT
- ANCSA 14(c) SECONDARY MONUMENT (ALUM. ROD. 3/4 IN. DIA. 36 INS. LONG, DRIVEN 30 INS. IN THE GROUND, WITH A 2 1/2 IN. DIA. ALUM. CAP.)

**TANGENT TABLE**


T11	N. 32° 48' W., 158.58
T12	N. 22° 03' E., 284.99
T13	N. 60° 51' W., 548.46
T14	N. 32° 04' W., 480.10
T15	N. 58° 16' W., 206.97
T16	S. 58° 16' E., 207.02
T17	S. 32° 04' E., 480.10
T18	S. 60° 51' E., 548.45
T19	S. 22° 03' W., 284.99
T20	S. 32° 48' E., 158.58
T21	N. 60° 49' E., 62.44

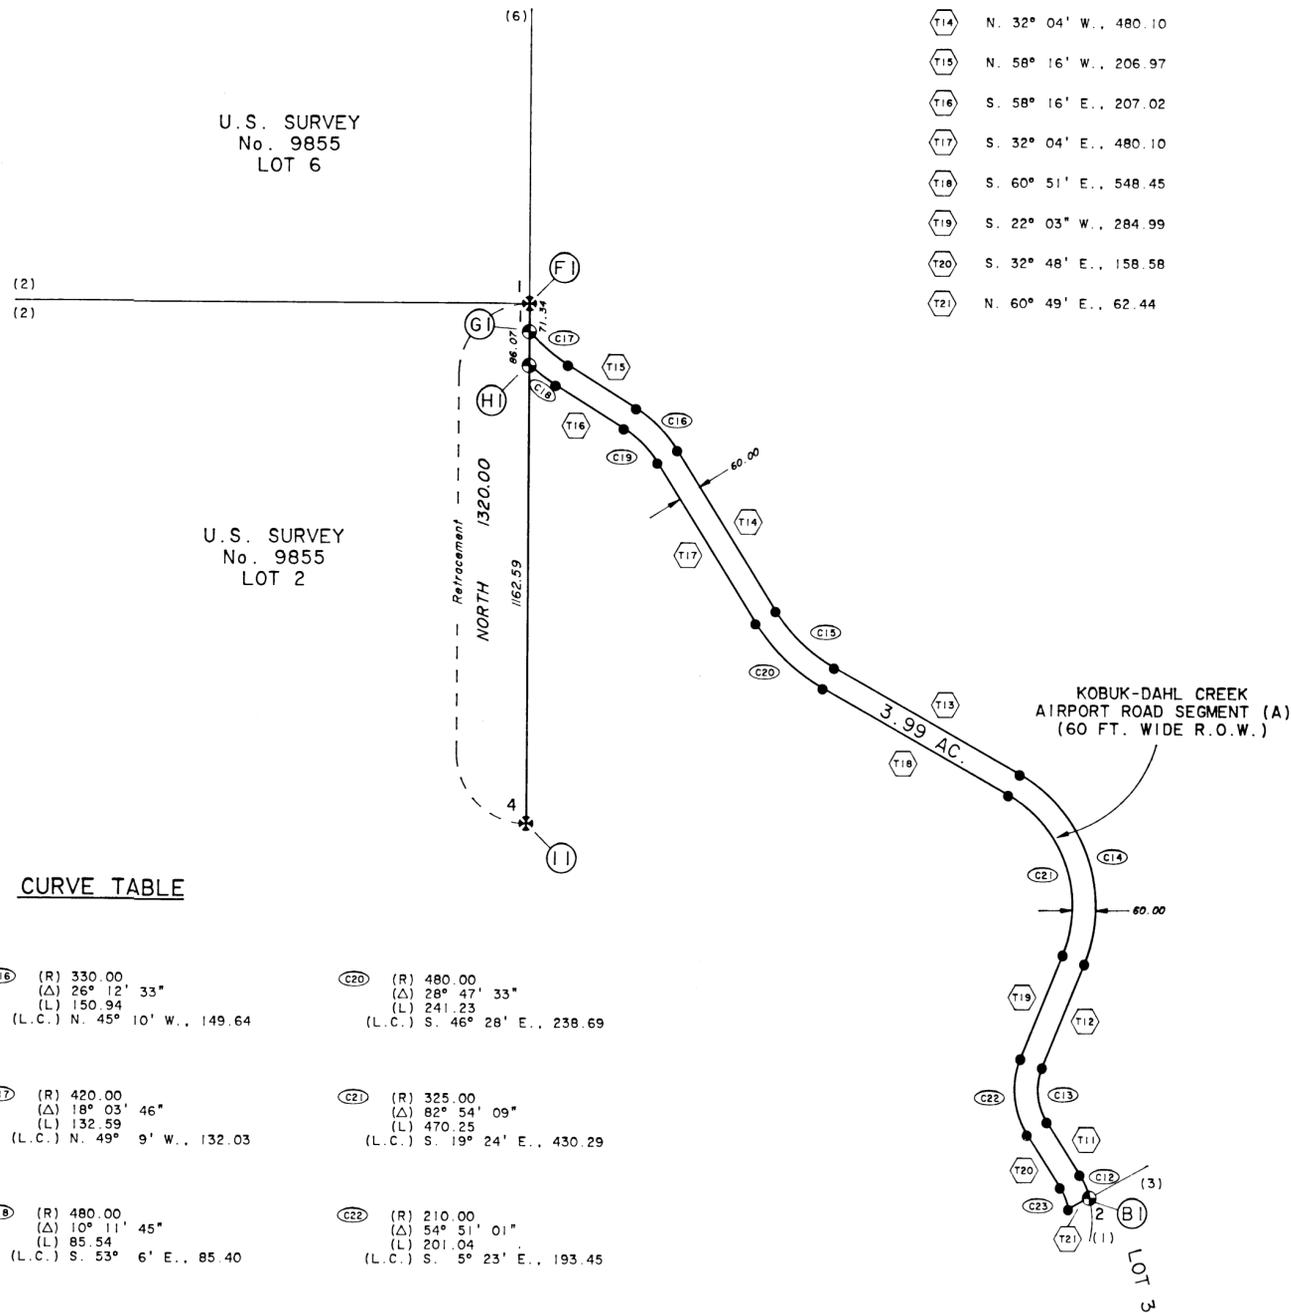

**CURVE TABLE**



C12 (R) 210.00 (Δ) 17° 07' 49" (L) 60.79 (L.C.) N. 24° 14' W., 62.55	C16 (R) 330.00 (Δ) 26° 12' 33" (L) 150.94 (L.C.) N. 45° 10' W., 149.64	C20 (R) 480.00 (Δ) 28° 47' 33" (L) 241.23 (L.C.) S. 46° 28' E., 238.69
C13 (R) 150.00 (Δ) 54° 51' 01" (L) 143.62 (L.C.) N. 5° 22' W., 138.18	C17 (R) 420.00 (Δ) 18° 05' 46" (L) 132.59 (L.C.) N. 49° 9' W., 132.03	C21 (R) 325.00 (Δ) 82° 54' 09" (L) 470.25 (L.C.) S. 19° 24' E., 430.29
C14 (R) 385.00 (Δ) 82° 54' 09" (L) 557.04 (L.C.) N. 19° 24' W., 509.72	C18 (R) 480.00 (Δ) 10° 11' 45" (L) 85.54 (L.C.) S. 53° 6' E., 85.40	C22 (R) 210.00 (Δ) 54° 51' 01" (L) 201.04 (L.C.) S. 5° 23' E., 193.45
C15 (R) 420.00 (Δ) 28° 47' 34" (L) 211.07 (L.C.) N. 46° 28' W., 208.85	C19 (R) 270.00 (Δ) 26° 12' 32" (L) 123.49 (L.C.) S. 45° 10' E., 122.43	C23 (R) 150.00 (Δ) 22° 42' 41" (L) 59.47 (L.C.) S. 21° 26' E., 59.07

SEE SHEET 2




ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), LOTS 1 THROUGH 7  
(P.L. 92-203, 85 STAT. 688, 702, 703)  
NANA REGIONAL CORPORATION, INC.  
AT  
KOBUK, ALASKA  
AND  
THE RETRACEMENT OF PORTIONS OF U.S. SURVEY  
NOS. 3788, 5895, 9855, and 10644


REFERENCE SHOULD BE MADE  
TO  
SHEET NO. 1  
FOR SURVEY INFORMATION

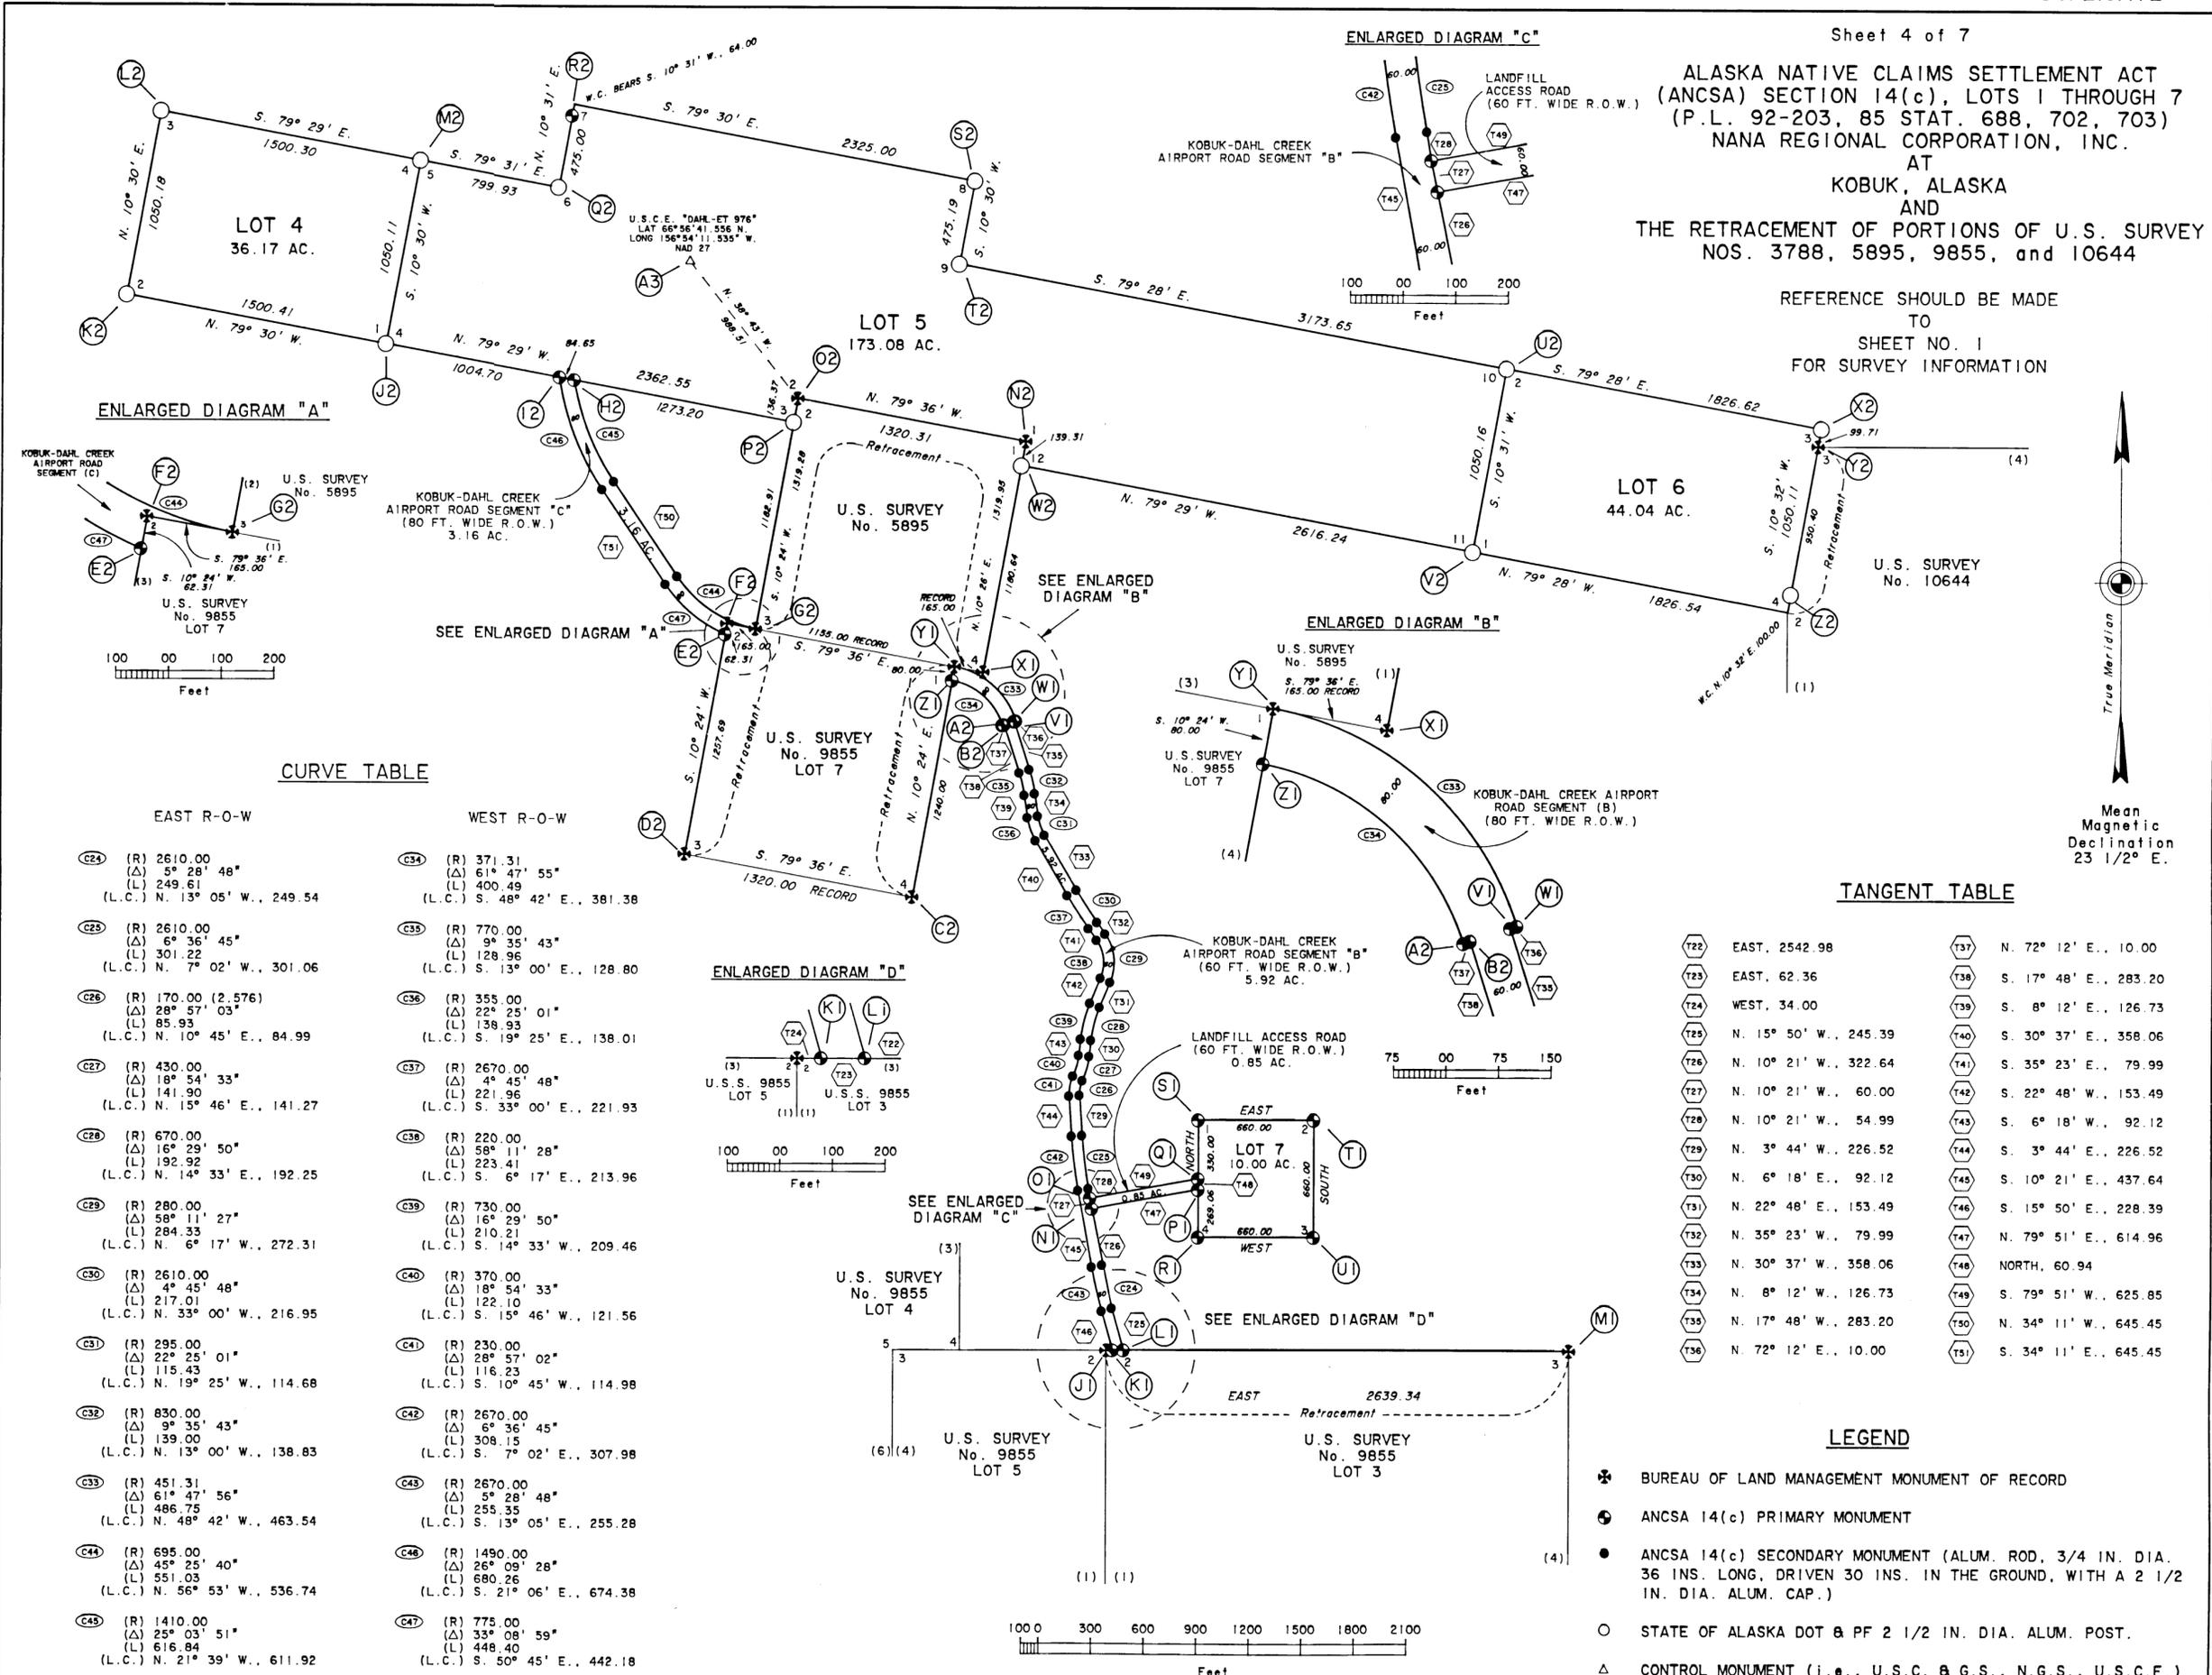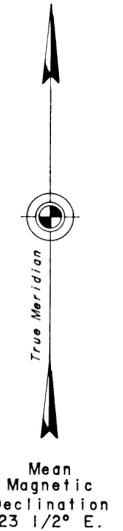

ENLARGED DIAGRAM "A"

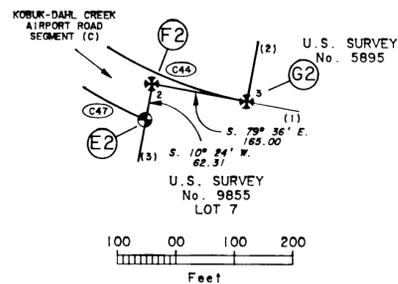

ENLARGED DIAGRAM "C"

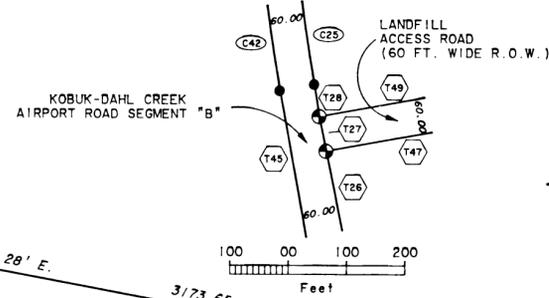

CURVE TABLE

EAST R-O-W

C24	(R) 2610.00 (Δ) 5° 28' 48" (L) 249.61 (L.C.) N. 13° 05' W., 249.54
C25	(R) 2610.00 (Δ) 6° 36' 45" (L) 301.22 (L.C.) N. 7° 02' W., 301.06
C26	(R) 170.00 (2.576) (Δ) 28° 57' 03" (L) 85.93 (L.C.) N. 10° 45' E., 84.99
C27	(R) 430.00 (Δ) 18° 54' 33" (L) 141.90 (L.C.) N. 15° 46' E., 141.27
C28	(R) 670.00 (Δ) 16° 29' 50" (L) 192.92 (L.C.) N. 14° 33' E., 192.25
C29	(R) 280.00 (Δ) 58° 11' 27" (L) 284.33 (L.C.) N. 6° 17' W., 272.31
C30	(R) 2610.00 (Δ) 4° 45' 48" (L) 217.01 (L.C.) N. 33° 00' W., 216.95
C31	(R) 295.00 (Δ) 22° 25' 01" (L) 115.43 (L.C.) N. 19° 25' W., 114.68
C32	(R) 830.00 (Δ) 9° 35' 43" (L) 139.00 (L.C.) N. 13° 00' W., 138.83
C33	(R) 451.31 (Δ) 61° 47' 56" (L) 486.75 (L.C.) N. 48° 42' W., 463.54
C34	(R) 695.00 (Δ) 45° 25' 40" (L) 551.03 (L.C.) N. 56° 53' W., 536.74
C35	(R) 1410.00 (Δ) 25° 03' 51" (L) 616.84 (L.C.) N. 21° 39' W., 611.92

WEST R-O-W

C34	(R) 371.31 (Δ) 61° 47' 55" (L) 400.49 (L.C.) S. 48° 42' E., 381.38
C35	(R) 770.00 (Δ) 9° 35' 43" (L) 128.96 (L.C.) S. 13° 00' E., 128.80
C36	(R) 355.00 (Δ) 22° 25' 01" (L) 138.93 (L.C.) S. 19° 25' E., 138.01
C37	(R) 2670.00 (Δ) 4° 45' 48" (L) 221.96 (L.C.) S. 33° 00' E., 221.93
C38	(R) 220.00 (Δ) 58° 11' 28" (L) 223.41 (L.C.) S. 6° 17' E., 213.96
C39	(R) 730.00 (Δ) 16° 29' 50" (L) 210.21 (L.C.) S. 14° 33' W., 209.46
C40	(R) 370.00 (Δ) 18° 54' 33" (L) 122.10 (L.C.) S. 15° 46' W., 121.56
C41	(R) 230.00 (Δ) 28° 57' 02" (L) 116.23 (L.C.) S. 10° 45' W., 114.98
C42	(R) 2670.00 (Δ) 6° 36' 45" (L) 308.15 (L.C.) S. 7° 02' E., 307.98
C43	(R) 2670.00 (Δ) 5° 28' 48" (L) 255.35 (L.C.) S. 13° 05' E., 255.28
C44	(R) 1490.00 (Δ) 26° 09' 28" (L) 680.26 (L.C.) S. 21° 06' E., 674.38
C47	(R) 775.00 (Δ) 33° 08' 59" (L) 448.40 (L.C.) S. 50° 45' E., 442.18

TANGENT TABLE


T22	EAST, 2542.98	T37	N. 72° 12' E., 10.00
T23	EAST, 62.36	T38	S. 17° 48' E., 283.20
T24	WEST, 34.00	T39	S. 8° 12' E., 126.73
T25	N. 15° 50' W., 245.39	T40	S. 30° 37' E., 358.06
T26	N. 10° 21' W., 322.64	T41	S. 35° 23' E., 79.99
T27	N. 10° 21' W., 60.00	T42	S. 22° 48' W., 153.49
T28	N. 10° 21' W., 54.99	T43	S. 6° 18' W., 92.12
T29	N. 3° 44' W., 226.52	T44	S. 3° 44' E., 226.52
T30	N. 6° 18' E., 92.12	T45	S. 10° 21' E., 437.64
T31	N. 22° 48' E., 153.49	T46	S. 15° 50' E., 228.39
T32	N. 35° 23' W., 79.99	T47	N. 79° 51' E., 614.96
T33	N. 30° 37' W., 358.06	T48	NORTH, 60.94
T34	N. 8° 12' W., 126.73	T49	S. 79° 51' W., 625.85
T35	N. 17° 48' W., 283.20	T50	N. 34° 11' W., 645.45
T36	N. 72° 12' E., 10.00	T51	S. 34° 11' E., 645.45

LEGEND


- ⊗ BUREAU OF LAND MANAGEMENT MONUMENT OF RECORD
- ⊙ ANCSA 14(c) PRIMARY MONUMENT
- ANCSA 14(c) SECONDARY MONUMENT (ALUM. ROD, 3/4 IN. DIA. 36 INS. LONG, DRIVEN 30 INS. IN THE GROUND, WITH A 2 1/2 IN. DIA. ALUM. CAP.)
- STATE OF ALASKA DOT & PF 2 1/2 IN. DIA. ALUM. POST.
- △ CONTROL MONUMENT (i.e., U.S.C. & G.S., N.G.S., U.S.C.E.)

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), LOTS 1 THROUGH 7  
 (P.L. 92-203, 85 STAT. 688, 702, 703)  
 NANA REGIONAL CORPORATION, INC.  
 AT  
 KOBUK, ALASKA  
 AND  
 THE RETRACEMENT OF PORTIONS OF U.S. SURVEY  
 NOS. 3788, 5895, 9855, and 10644


REFERENCE SHOULD BE MADE  
 TO  
 SHEET NO. 1  
 FOR SURVEY INFORMATION




Recovered an iron post, 2 1/2 ins. diam., firmly set, bent and flush with the ground, with brass cap mkd. WCMC C2 S3788 1962.  
 At the corner point  
 Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., NE and SW on line, 3 ft. dist.  
 Bury the bent iron post alongside the stainless steel post, inverted.  
 Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., W on line, 3 and 6 ft. dist.  
 Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., SE and NW on line, 3 ft. dist.  
 Bury an orange DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Raise a mound of stone, 3 1/2 ft. base, 2 ft. high, SE of cor.  
 Bury a clear DEEP-1 magnet at base of iron post.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown  
 The original mound of stone, 2 1/2 ft. base, 1 1/2 ft. high is SW of cor.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., SE and NW on line, 3 ft. dist.  
 Bury a pink DEEP-1 magnet at base of iron post.




Recovered an angle iron, 1 in. flanges, firmly set, projecting 6 ins. above the ground.  
 No original accessories.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground with brass cap. mkd. as shown  
 No original accessories.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., NE and SE on line, 3 ft. dist.  
 Bury a silver DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown, from which  
 A spruce, 4 ins. diam., bears S. 40 1/4° W., 38.0 ft. dist., mkd. X BT.  
 A spruce, 7 ins. diam., bears N. 51° W., 10.6 ft. dist., mkd. X BT.  
 Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Raise a mound of stone, 3 ft. base, 2 ft. high, S of cor.  
 Bury a clear DEEP-1 magnet at base of iron post.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as shown  
 No original accessories.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown, from which  
 A spruce, 4 ins. diam., bears N. 79 1/2° E., 50.5 ft. dist., mkd. X BT.  
 A spruce, 6 ins. diam., bears N. 1/4° W., 47.5 ft. dist., mkd. X BT.  
 Bury a silver DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap. mkd. as shown, from which  
 A spruce, 5 ins. diam., bears S. 47 1/2° W., 78.5 ft. dist., mkd. X BT.  
 A spruce, 3 ins. diam., bears N. 11 3/4° W., 14.5 ft. dist., mkd. X BT.  
 Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown, from which  
 A spruce, 4 ins. diam., bears S. 77 1/2° W., 28.0 ft. dist., mkd. X BT.  
 A spruce, 4 ins. diam., bears N. 31 1/2° W., 25.7 ft. dist., mkd. X BT.  
 Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Raise a mound of stone, 3 1/2 ft. base, 2 ft. high, NW of cor.  
 Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., SE and NW on line, 3 ft. dist.  
 Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap. mkd. as shown  
 Raise a mound of stone, 3 ft. base, 1 ft. high, N of cor.  
 Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap. mkd. as shown, from which  
 A spruce, 4 ins. diam., bears N. 52 1/2° E., 10.9 ft. dist., mkd. X BT.  
 A spruce, 8 ins. diam., bears N. 28° W., 46.9 ft. dist., mkd. X BT.  
 Bury a clear DEEP-1 magnet at base of iron post.




Recovered an iron post, 2 1/2 ins. diam., firmly set, bent and flush with the ground, with brass cap mkd. WCMC C7 S3788 1962.  
 At the corner point  
 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., NE and SW on line, 3 ft. dist.  
 Bury the bent iron post alongside the stainless steel post, inverted.  
 Bury a magnet at base of stainless steel post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., SE and NW on line, 3 ft. dist.  
 Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., SE and NW on line, 3 ft. dist.  
 Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., E and W on line, 3 ft. dist.  
 Bury a clear DEEP-1 magnet at base of iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., E on line, 3 and 6 ft. dist.  
 Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown, from which  
 A spruce, 9 ins. diam., bears N. 87 1/4° W., 318.1 ft. dist., mkd. X BT.  
 A spruce, 13 ins. diam., bears N. 21 1/2° W., 196.7 ft. dist., mkd. X BT.  
 Bury a clear DEEP-1 magnet at base of iron post.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap. mkd. as shown

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), LOTS 1 THROUGH 7  
 (P.L. 92-203, 85 STAT. 688, 702, 703)  
 NANA REGIONAL CORPORATION, INC.  
 AT  
 KOBUK, ALASKA  
 AND  
 THE RETRACEMENT OF PORTIONS OF U.S. SURVEY  
 NOS. 3788, 5895, 9855, and 10644


REFERENCE SHOULD BE MADE  
 TO  
 SHEET NO. 1  
 FOR SURVEY INFORMATION




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown, from which  
 A spruce, 4 ins. diam., bears S. 49° E., 26.1 ft. dist., mkd. X BT.  
 Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, SE of cor.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., N and S on line, 3 ft. dist.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Raise a mound of stone, 2 ft. dia., 1 1/2 ft. high, SW of cor.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown, from which  
 A spruce, 4 ins. diam., bears N. 55 1/4° E., 95.5 ft. dist., mkd. X BT.  
 Raise a mound of stone, 2 ft. base, 1 ft. high, NE of cor.  
 Bury a clear DEEP-I magnet at base of iron post.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set projecting 2 ins. above the ground, with brass cap mkd as shown  
 The original pits, 18 x 18 x 12 ins. bear N and W on line, 3 ft. dist.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., N and S on line, 3 ft. dist.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap. mkd. as shown, from which  
 A spruce, 6 ins. diam., bears N. 70 1/2° E., 17.2 ft. dist., mkd. X BT.  
 A spruce, 4 ins. diam., bears S. 4 3/4° W., 14.5 ft. dist., mkd. X BT.  
 Bury a clear DEEP-I magnet at base of iron post.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd as shown, from which the original bearing trees  
 A spruce, 5 ins. diam., bears S. 34 3/4° W., 15.5 ft. dist., marked C2 L5 S9855 BT, visible on open blaze.  
 A spruce, 5 ins. diam., bears N. 81 3/4° W., 62.7 ft. dist., marked X BT, visible on open blazes.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., N and S on line, 3 ft. dist.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., NE and SE on line, 3 ft. dist.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap. mkd. as shown, from which  
 A spruce, 8 ins. diam., bears N. 10° E., 64.4 ft. dist., mkd. X BT.  
 A powerpole, 11 ins. diam., bears S. 88° E., 6.6 ft. dist., drive a large 6 in. long spike, 5 ins. into the N face.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Raise a mound of stone, 3 ft. base, 2 ft. high, NE of cor.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap. mkd. as shown, from which  
 A spruce, 4 ins. diam., bears N. 37 3/4° E., 257.4 ft. dist., mkd. X BT.  
 Dig pits, 18 x 18 x 12 ins., N and E on line, 3 ft. dist.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins., SW and NW on line, 3 ft. dist.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown, from which  
 A spruce, 4 ins. diam., bears S. 50 3/4° W., 26.1 ft. dist., mkd. X BT.  
 A spruce, 4 ins. diam., bears N. 17 3/4° W., 30.0 ft. dist., mkd. X BT.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, NW of cor.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap. mkd. as shown, from which  
 A spruce, 4 ins. diam., bears N. 60 3/4° E., 59.7 ft. dist., mkd. X BT.  
 A spruce, 4 ins. diam., bears S. 43 1/4° E., 166.0 ft. dist., mkd. X BT.  
 Bury a clear DEEP-I magnet at base of iron post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees  
 A spruce, 5 ins. diam., bears S. 45 1/2° E., 6.6 ft. dist., mkd. X BT on partially healed blazes.  
 A spruce, 7 ins. diam., bears N. 21 1/4° W., 92.4 ft. dist., mkd. C4 S5895 BT on partially healed blaze.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap. mkd. as shown  
 The original pits, 18 x 18 x 12 ins. bear N and W on line, 3 ft. dist.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd as shown, from which the original bearing trees  
 A spruce, 10 ins. diam., bears S. 22 3/4° W., 52.8 ft. dist., marked C3 L3 S9855 BT, visible on open blaze.  
 A spruce, 8 ins. diam., bears N. 77 3/4° W., 53.1 ft. dist., marked X BT, visible on open blazes.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap. mkd. as shown, from which  
 A spruce, 6 ins. diam., bears S. 7° E., 116.2 ft. dist., mkd. X BT.  
 A spruce, 6 ins. diam., bears S. 70 3/4° E., 109.2 ft. dist., mkd. X BT.  
 Bury a clear DEEP-I magnet at base of iron post.




Recovered a stainless steel post, 2 1/2 ins. dia., firmly set, projecting 6 ins. above the ground, encircled by a rock collar, 3 ft. diam. to top of brass cap mkd. as shown, from which the original bearing trees  
 A spruce, 6 ins. diam., bears N. 30° E., 259.4 ft. dist., mkd. X BT, on open blazes.  
 A spruce, 7 ins. diam., bears N. 32 3/4° W., 72.6 ft. dist., mkd. X BT, on open blazes.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Dig pits, 18 x 18 x 12 ins. N and S on line, 3 ft. dist.  
 Bury a clear DEEP-I magnet at base of iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
 Raise a mound of stone, 3 ft. dia., 2 ft. high, NW of cor.  
 Bury a clear DEEP-I magnet at base of iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap. mkd. as shown, from which  
 A spruce, 5 ins. diam., bears N. 13 1/4° E., 307.9 ft. dist., mkd. X BT.  
 A spruce, 4 ins. diam., bears N. 2 1/2° W., 270.9 ft. dist., mkd. X BT.  
 Bury a clear DEEP-I magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 3 ft. diam. to top of brass cap. mkd. as shown  
 Raise a mound of stone, 3 1/2 ft. base, 2 ft. high W of cor.  
 Bury a clear DEEP-I magnet at base of iron post.


Sheet 7 of 7  
ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), LOTS 1 THROUGH 7  
(P.L. 92-203, 85 STAT. 688, 702, 703)  
NANA REGIONAL CORPORATION, INC.

AT  
KOBUK, ALASKA  
AND  
THE RETRACEMENT OF PORTIONS OF U.S. SURVEY  
NOS. 3788, 5895, 9855, and 10644


REFERENCE SHOULD BE MADE  
TO  
SHEET NO. 1  
FOR SURVEY INFORMATION




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
Dig pits, 18 x 18 x 12 ins., NE and NW on line 3 ft. dist.  
Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown  
Dig pits, 18 x 18 x 12 ins., SW on line 3 and 6 ft. dist.  
Bury a clear DEEP-1 magnet at base of iron post.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap. mkd. as shown, from which the original bearing trees  
A spruce, 7 ins. diam., bears N. 14 1/4° E., 67.0 ft. dist., marked X BT, visible on open blazes.  
A spruce, 4 ins. diam., bears N. 78 3/4° W., 17.8 ft. dist., marked X BT, visible on open blazes.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with brass cap. mkd. as shown, from which the original bearing trees  
A spruce, 5 ins. diam., bears N. 83 1/2° E., 299.3 ft. dist., marked C3 L7 S9855 BT, visible on open blazes.  
A spruce, 6 ins. diam., bears S. 33 3/4° E., 195.4 ft. dist., marked X BT, visible on open blazes.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 1 1/2 ft. diam. to top of brass cap. mkd. as shown  
Raise a mound of stone 3 ft. base, 2 ft. high, E of cor.  
Bury a clear DEEP-1 magnet at base of iron post.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with brass cap. mkd. as shown  
The original mound of stone, 3 ft. base, 2 ft. high bears E of cor.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with alum. cap. mkd. as shown, from which the original bearing trees  
A birch, 9 ins. diam., bears N. 27 1/2° E., 518.8 ft. dist., marked C3 S5895 BT, visible on partially healed blaze.  
A birch, 7 ins. diam., bears N. 59° E., 432.3 ft. dist., marked C3 S5895 BT, visible on partially healed blaze.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown, from which  
A spruce, 6 ins. diam., bears S. 78 3/4° E., 35.0 ft. dist., mkd. X BT.  
A spruce, 5 ins. diam., bears N. 25 1/2° W., 40.9 ft. dist., mkd. X BT.  
Bury a clear DEEP-1 magnet at base of iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap. mkd. as shown, from which  
A spruce, 6 ins. diam., bears S. 7 1/4° W., 23.1 ft. dist., mkd. X BT.  
A spruce, 4 ins. diam., bears N. 36° W., 56.1 ft. dist., mkd. X BT.  
Bury a clear DEEP-1 magnet at base of iron post.




Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with alum. cap. mkd. as shown, from which bearing trees taken by Stutzmann  
A spruce, 6 ins. diam., bears N. 4 1/4° E., 41.9 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 4 ins. diam., bears S. 50 1/2° E., 44.2 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 8 ins. diam., bears S. 87° W., 31.0 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.




Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with alum. cap. mkd. as shown, from which bearing trees taken by Stutzmann  
A spruce, 4 ins. diam., bears N. 34 3/4° E., 10.9 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 4 ins. diam., bears S. 38 1/2° E., 14.8 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 3 ins. diam., bears S. 51 1/2° W., 25.7 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.




Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with alum. cap. mkd. as shown  
No accessories.




Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, with alum. cap. mkd. as shown  
No accessories.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with alum. cap. mkd. as shown, from which the original bearing trees  
A spruce, 6 ins. diam., bears S. 56 1/4° W., 363.7 ft. dist., marked C1 S5895 BT visible on a partially healed blaze.  
A spruce, 9 ins. diam., bears S. 89 1/2° W., 298.3 ft. dist., marked C1 S5895 BT visible on a partially healed blaze.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above the ground, with alum. cap. mkd. as shown, from which the original bearing trees  
A spruce, 10 ins. diam., bears S. 15° E., 216.8 ft. dist., no visible marks on a partially healed blaze.  
A spruce, 6 ins. diam., bears S. 71 1/2° W., 368.3 ft. dist., with a healed blaze.



Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above the ground, with alum. cap. mkd. as shown, from which bearing trees taken by Stutzmann  
A spruce, 3 ins. diam., bears N. 36° E., 36.0 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 4 ins. diam., bears S. 65 3/4° E., 102.3 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 6 ins. diam., bears S. 9 1/4° W., 86.8 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.




Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 18 ins. above the ground, encircled by a rock collar, 1 1/2 ft. diam., to top of alum. cap. mkd. as shown, from which bearing trees taken by Stutzmann  
A spruce, 3 ins. diam., bears S. 86° E., 21.1 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 9 ins. diam., bears S. 20 1/2° E., 40.9 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 5 ins. diam., bears S. 45 1/2° W., 47.8 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap. mkd. as shown  
No suitable accessories available.  
Bury a clear DEEP-1 magnet at base of iron post.




Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with alum. cap. mkd. as shown, from which bearing trees taken by Stutzmann  
A spruce, 6 ins. diam., bears S. 72° E., 43.9 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 6 ins. diam., bears S. 61 1/2° W., 28.7 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 10 ins. diam., bears N. 43° W., 68.0 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.




Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, encircled by a rock collar, 1 1/2 ft. diam., to top of alum. cap. mkd. as shown, from which bearing trees taken by Stutzmann  
A spruce, 3 ins. diam., bears N. 69° E., 23.8 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 2 ins. diam., bears S. 31 1/4° E., 27.7 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 5 ins. diam., bears N. 27 1/2° W., 9.2 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.



Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with alum. cap. mkd. as shown, from which bearing trees taken by Stutzmann  
A spruce, 4 ins. diam., bears N. 11 1/4° E., 43.9 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 4 ins. diam., bears N. 72 1/2° E., 70.6 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 6 ins. diam., bears N. 63 3/4° W., 54.1 ft. dist., no marks visible on partially healed blaze, with an alum. tag.



Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, with alum. cap. mkd. as shown  
No accessories.




Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 14 ins. above the ground, encircled by a rock collar, 1 ft. diam., to top of alum. cap. mkd. as shown, from which bearing trees taken by Stutzmann  
A spruce, 3 ins. diam., bears S. 49° W., 56.1 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 2 ins. diam., bears N. 72 3/4° W., 97.7 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.




Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with alum. cap. mkd. as shown, from which bearing trees taken by Stutzmann  
A spruce, 5 ins. diam., bears N. 55 1/4° E., 19.8 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 4 ins. diam., bears S. 21 3/4° E., 21.1 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 6 ins. diam., bears N. 33 1/2° W., 13.2 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.



Recovered stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with brass cap. mkd. as shown, from which the original bearing trees  
A spruce, 5 ins. diam., bears N. 6 1/2° E., 18.5 ft. dist., marked X BT visible on open blazes.  
A spruce, 9 ins. diam., bears S. 52 3/4° E., 11.2 ft. dist., marked C3 S10644 BT visible on open blaze.



Recovered a State of Alaska DOT and PF alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with alum. cap. mkd. as shown, from which bearing trees taken by Stutzmann  
A spruce, 10 ins. diam., bears N. 14 1/2° E., 34.3 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.  
A spruce, 4 ins. diam., bears S. 58° E., 34.0 ft. dist., no marks visible on a partially healed blaze, with an alum. tag.



Recovered a brass tablet, soldered to the top of a copperweld rod, firmly set inside a gravel filled iron casing, 9 1/2 ins. diam., buried 7 ins. below the ground within a gravel filled iron casing, 15 1/2 ins. diam., covered with an iron manhole cover, buried flush with the ground, with brass cap. mkd. as shown

92-6  
RECORDED - FILED 50  
KUTREBUE REC. DIST  
DATE Oct 8, 1992  
TIME 2:00 PM  
Requested by USA/BLD  
Address