

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.

AT  
KOKHANOK, ALASKA  
AND  
THE DEPENDENT RESURVEY OF A PORTION OF  
THE NEW KOKHANOK SUBDIVISION  
AND  
THE RETRACEMENT A PORTION  
OF U.S. SURVEY No. 7808  
AND  
THE RETRACEMENT OF U.S. SURVEY No. 894

This plat contains the entire survey record.

U.S. Survey No. 894 was surveyed by Clinton Gurnee, U.S. Deputy Surveyor, in 1908, and dependently resurveyed by Stanley E. King, Cadastral Surveyor in 1979.

The exterior boundaries and a portion of the subdivisional lines of Townships 8 and 9 South, Range 32 West, was surveyed by Stanley E. King, Cadastral Surveyor, in 1979.

The New Kokhanok Subdivision was surveyed by Robert M. Schweitzer, RLS 2240, in 1982.

U.S. Survey No. 7808 was surveyed by John A. Pex, Cadastral Surveyor in 1986.

This survey was executed by John A. Pex, Cadastral Surveyor, July 7, 1988 through June 24, 1990, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated June 2, 1988, approved June 9, 1988, Amended Special Instructions dated June 28, 1989, approved September 15, 1989, and Assignment Instructions dated June 10, 1988.

Field assistants:

Jon L. Kehler, Land Surveyor  
Douglas S. Spence, Land Surveyor  
Mark D. Wahlfield, Student Trainee (LS)  
Steve W. Schwarz, Student Trainee (LS)  
Peter J. Drescher, Surveying Technician  
Todd O. Whitton, Surveying Technician

Area: 1241.11 Acres.

The azimuth was obtained from direct observations of the sun, using the hour angle method, and refers to the true meridian.

The geographic position of the witness corner to corner No. 1, Lot 1, identical with the witness corner to corner No. 5, Lot 1, U.S. Survey No. 7808, both meander corners, is:

Latitude: 59° 26' 15.03" North NAD 27  
Longitude: 154° 49' 20.63" West

The mean magnetic declination was obtained from U.S. Geological Survey quadrangle map "ILIAMNA (B-4)," Alaska, 1954 edition with minor revisions in 1976, "ILIAMNA (B-5)," Alaska, 1954 edition with minor revisions in 1966, and "ILIAMNA (C-5)," Alaska, 1954 edition.

This survey is situated on the southerly shore of Iliamna Lake in and around the village of Kokhanok, within Townships 8 and 9 south, Ranges 32 and 33 west, Seward Meridian, Alaska.

The land is level supporting scattered patches of spruce and birch trees, the rest of the Survey is open rolling terrain.

The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Anchorage, Alaska

The survey represented by this plat, sheets 1 through 13, having been executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

*John M. Toms, Jr.* March 18, 1992  
Acting  
Date

Deputy State Director for Cadastral Survey, Alaska

Village Corporation President Certificate:

I hereby certify that the Lots 1 through 24 represented on this plat of survey are lands patented to the Alaska Peninsula Corporation by patent No. 50-89-0771 issued by the United States of America; said lots also fulfill all entitlements under the provisions of ANCSA 14 (c) as requested by the Alaska Peninsula Corporation Resolution Agreement No. 86-11, and the Kokhanok ANCSA 14C Map of Boundaries, approved January 23, 1987.

3-5-92  
Date

*Ralph Angason Sr.*  
President, Alaska Peninsula Corporation

LAKE ILIAMNA

SEE SHEETS 5 THROUGH 6


SEE SHEET 13

U.S.S. 894 SEE SHEETS 2 THROUGH 4  
LOT 1

U.S. SURVEY  
No. 7808  
LOT 1



Mean  
Magnetic  
Declination  
22° E.



- |                |              |
|----------------|--------------|
| Lots 15 and 16 | SEE SHEET 7  |
| Lots 17 and 18 | SEE SHEET 8  |
| Lot 19         | SEE SHEET 9  |
| Lot 20         | SEE SHEET 10 |
| Lot 21         | SEE SHEET 11 |
| Lot 22         | SEE SHEET 12 |

I, John A. Pex Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 through 13, in conformity with the Special Instructions dated June 2, 1988 and Amended Special Instructions dated June 28, 1989, the principles of survey described in the Manual of Instruction for the Survey of the Public Lands of the United States, 1973, and in the specific manner described on this plat.

2-19-92  
Date

*John A. Pex*  
Cadastral Surveyor

92-02

RECORDED - FILED	80-
ILIAMNA	
DATE	4/7 1992
TIME	9:45 A.M.
Submitted by	(USA/BLM)

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.


AT  
KOKHANOK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION


LEGEND

- SET AN IRON POST OR STAINLESS STEEL POST, 2 1/2 INS. DIAM., WITH BRASS CAP
- FOUND AN ALUM. POST, 2 1/2 INS. DIAM., WITH ALUM. CAP
- FOUND AN ALUM ROD, 3/4 IN. DIAM., WITH ALUM. CAP
- ⊗ FOUND AN IRON POST, 3 INS. DIAM., NO CAP
- FOUND A D.O.T. IRON POST, 2 INS. DIAM., WITH BRASS CAP

ENLARGED DIAGRAM A

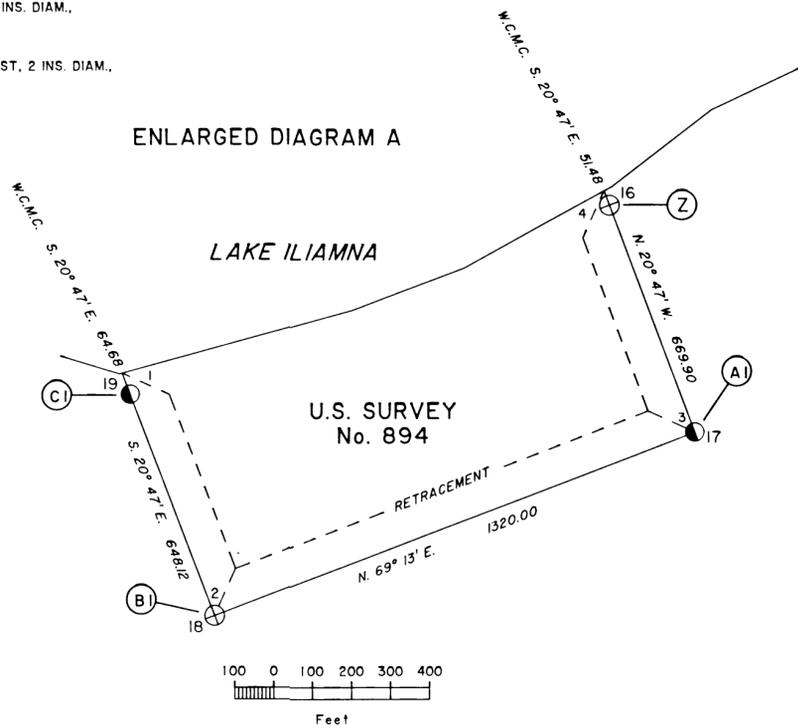

ENLARGED DIAGRAM B

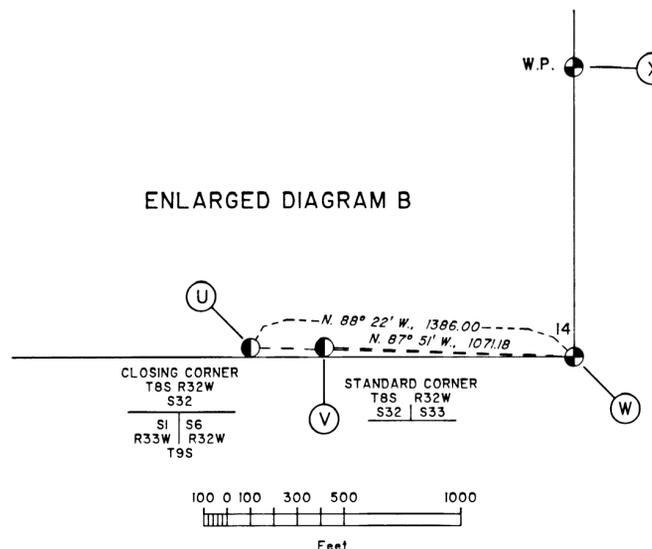

Mean  
Magnetic  
Declination  
22° E.

LAKE ILIAMNA


SEE SHEETS 5 THROUGH 6

SEE SHEET 13

SEE ENLARGED DIAGRAM A

LOT 1  
1206.57

U.S. SURVEY  
No. 7808  
LOT 1

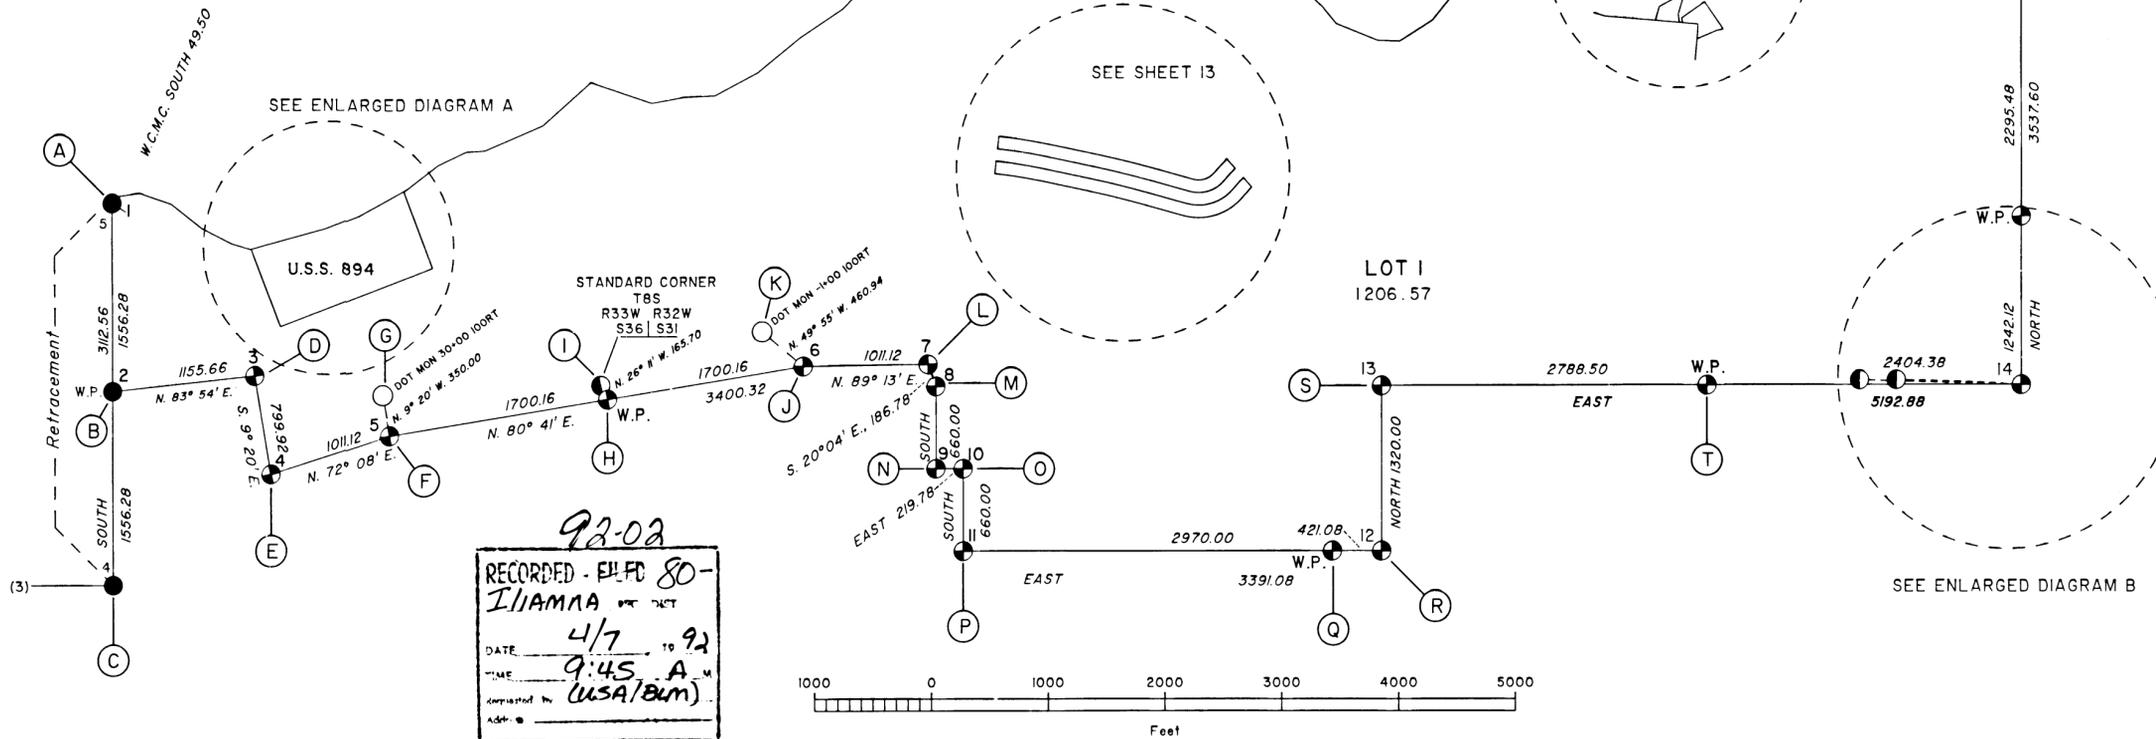


92-02  
RECORDED - FILED 80-  
ILIAMNA DIST  
DATE 4/7 1992  
TIME 9:45 A.M.  
SURVEYED BY (USA/BUM)


SHEET 3 OF 13  
 ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
 (P.L. 92-203, 85 STAT. 688,702,703)  
 ALASKA PENINSULA CORP.

AT  
 KOKHANOK, ALASKA


REFERENCE SHOULD BE MADE  
 TO  
 SHEET No. 1  
 FOR SURVEY INFORMATION




Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown, from which  
 A boulder, 2 X 1 1/2 X 1 ft. bears S. 51° E., 44.5 ft. dist., mkd. X BT.  
 A boulder, 7 X 7 X 2 1/2 ft. bears S. 8 1/4° E., 75.0 ft. dist., mkd. X BT.




Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown, from which  
 A spruce, 8 ins. diam., bears S. 88 1/4° E., 95.0 ft. dist., mkd. X BT.  
 A spruce, 10 ins. diam., bears N. 88 1/2° W., 124.0 ft. dist., mkd. X BT.




Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with alum. cap mkd. as shown, from which  
 A spruce, 6 ins. diam., bears N. 74 1/4° E., 143.0 ft. dist., mkd. X BT.  
 A spruce, 20 ins. diam., bears S. 34° W., 119.0 ft. dist., mkd. X BT.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 5 ins. diam., bears S. 5° E., 10.0 ft. dist., mkd. X BT.  
 A spruce, 8 ins. diam., bears N. 76° W., 15.0 ft. dist., mkd. X BT.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 6 ins. diam., bears N. 47° E., 176.0 ft. dist., mkd. X BT.  
 A spruce, 5 ins. diam., bears S. 18° E., 146.5 ft. dist., mkd. X BT.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 7 ins. diam., bears S. 88° W., 34.5 ft. dist., mkd. X BT.  
 A spruce, 10 ins. diam., bears S. 36° W., 24.5 ft. dist., mkd. X BT.




Found an iron post, 2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which  
 A two bole spruce, 15 ins. diam., bears S. 77° E., 142.5 ft. dist., mkd. X BT.  
 A spruce, 5 ins. diam., bears S. 47° E., 93.5 ft. dist., mkd. X BT.




Found an alum. rod, 3/4 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown  
 No evidence of original accessories.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 8 ins. diam., bears S. 26° E., 23.0 ft. dist., mkd. X BT.  
 A spruce, 7 ins. diam., bears S. 82° W., 16.0 ft. dist., mkd. X BT.




Found an iron post, 2 ins. diam., firmly set, projecting 5 in. above ground, with brass cap mkd. as shown




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 18 ins. diam., bears N. 48° E., 64.0 ft. dist., mkd. X BT.  
 A spruce, 20 ins. diam., bears S. 76° E., 75.0 ft. dist., mkd. X BT.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 12 ins. diam., bears N. 20° E., 14.0 ft. dist., mkd. X BT.  
 A spruce, 10 ins. diam., bears S. 72° W., 36.5 ft. dist., mkd. X BT.




Set an iron post, 25 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
 A boulder, 4 X 3 X 2 ft., bears N. 1° E., 43.0 ft. dist., mkd. X BT.  
 A spruce, 4 ins. diam., bears S. 67° W., 134.0 ft. dist., mkd. X BT.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 5 ins. diam., bears N. 67° E., 92.5 ft. dist., mkd. X BT.  
 A spruce, 10 ins. diam., bears S. 14° E., 175.0 ft. dist., mkd. X BT.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 8 ins. diam., bears N. 32° E., 34.0 ft. dist., mkd. X BT.  
 A spruce, 10 ins. diam., bears S. 50° E., 34.0 ft. dist., mkd. X BT.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 10 ins. diam., bears N. 10° E., 12.0 ft. dist., mkd. X BT.  
 A spruce, 12 ins. diam., bears N. 81° E., 18.5 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 8 ins. diam., bears N. 65° E., 11.0 ft. dist., mkd. X BT.  
 A spruce, 10 ins. diam., bears N. 64° W., 35.5 ft. dist., mkd. X BT.  
 Deposit a clear "DEEP-" magnet at the base of stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 15 ins. diam., bears N. 47° E., 18.0 ft. dist., mkd. X BT.  
 A spruce, 10 ins. diam., bears N. 38° W., 37.5 ft. dist., mkd. X BT.  
 Deposit a clear "DEEP-" magnet at the base of stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 6 ins. diam., bears S. 35° E., 78.5 ft. dist., mkd. X BT.  
 A spruce, 13 ins. diam., bears N. 10° W., 90.0 ft. dist., mkd. X BT.  
 Deposit a clear "DEEP-" magnet at the base of stainless steel post.




Found an alum. rod, 3/4 in. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown, from which  
 A spruce stump, bears S. 39° E., 55.5 ft. dist., mkd. with fragmented scribing on partially healed blaze.  
 A spruce, 13 ins. diam., bears S. 47° W., 41.5 ft. dist., mkd. with fragmented scribing on partially healed blaze.




Found an alum. rod, 3/4 in. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown, from which  
 A spruce, 7 ins. diam., bears N. 81° E., 90.0 ft. dist., mkd. with healed blaze.  
 A spruce, 9 ins. diam., bears N. 8° W., 55.0 ft. dist., mkd. with fragmented scribing on partially healed blaze.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 7 ins. diam., bears N. 22° E., 20.0 ft. dist., mkd. X BT.  
 A spruce, 10 ins. diam., bears S. 4° E., 41.5 ft. dist., mkd. X BT.  
 Deposit a clear "DEEP-" magnet at the base of stainless steel post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 10 ins. diam., bears S. 78° E., 40.0 ft. dist., mkd. X BT.  
 A spruce, 8 ins. diam., bears S. 14° E., 36.0 ft. dist., mkd. X BT.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
 A spruce, 12 ins. diam., bears S. 29° E., 14.5 ft. dist., mkd. X BT.  
 A spruce, 10 ins. diam., bears South, 41.5 ft. dist., mkd. X BT.

92-02  
 RECORDED - FILED 80  
 ILLAMNA DIST.  
 DATE 4/7 10 92  
 TIME 9:45 A.M.  
 Surveyed by CUSA/BLM

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.

AT  
KOKHANOK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

MEANDERS LOT 1

Beginning of the true point for meander corner No. 15, thence Westerly with meanders on the southerly shore of Iliamna Lake of the line of ordinary high water.


1. N. 85°46' W.	40.26 ft.
2. S. 35°58' W.	27.06 ft.
3. S. 57°01' W.	92.40 ft.
4. S. 84°25' W.	122.76 ft.
5. S. 41°08' W.	143.88 ft.
6. S. 76°46' W.	409.20 ft.
7. N. 77°35' W.	240.24 ft.
8. N. 52°09' W.	198.00 ft.
9. N. 72°03' W.	194.70 ft.
10. N. 46°44' W.	246.84 ft.
11. S. 82°19' W.	299.64 ft.
12. N. 72°43' W.	77.88 ft.
13. N. 11°20' W.	67.32 ft.
14. S. 70°47' W.	58.08 ft.
15. N. 86°44' W.	114.18 ft.
16. S. 11°37' W.	40.92 ft.
17. S. 5°11' E.	139.26 ft.
18. S. 58°47' W.	221.10 ft.
19. N. 87°58' W.	42.90 ft.
20. S. 45°11' W.	91.74 ft.
21. S. 85°37' W.	173.58 ft.
22. N. 77°58' W.	189.42 ft.
23. N. 62°14' W.	183.48 ft.
24. N. 49°55' W.	149.16 ft.
25. N. 41°12' W.	205.92 ft.
26. N. 26°54' W.	689.70 ft.
27. N. 18°38' W.	1620.30 ft.
28. N. 19°45' W.	638.88 ft.
29. N. 59°06' W.	81.84 ft.
30. S. 48°34' W.	258.06 ft.
31. S. 31°42' W.	704.22 ft.
32. S. 43°44' W.	1511.40 ft.
33. S. 60°57' W.	289.74 ft.
34. S. 43°53' W.	117.48 ft.
35. S. 23°06' E.	49.50 ft.
36. S. 71°28' E.	74.58 ft.
37. N. 54°39' E.	176.22 ft.
38. N. 68°37' E.	442.96 ft.
39. N. 55°15' E.	573.54 ft.
40. S. 78°04' E.	93.06 ft.
41. S. 1°24' W.	72.60 ft.
42. S. 41°32' E.	98.34 ft.
43. N. 80°48' E.	331.98 ft.
44. S. 89°43' E.	271.92 ft.
45. S. 27°38' E.	270.60 ft.
46. S. 15°27' E.	512.16 ft.
47. S. 1°04' E.	153.12 ft.
48. S. 17°32' W.	150.48 ft.
49. S. 50°11' W.	126.72 ft.
50. N. 47°16' W.	70.62 ft.
51. N. 51°47' W.	88.44 ft.
52. S. 60°51' W.	169.62 ft.
53. S. 3°07' E.	58.74 ft.
54. S. 32°03' W.	99.00 ft.
55. S. 81°17' W.	59.40 ft.
56. S. 35°30' W.	41.58 ft.
57. S. 16°52' E.	49.50 ft.
58. S. 47°35' W.	40.92 ft.
59. S. 22°43' E.	165.66 ft.
60. S. 26°00' W.	216.48 ft.
61. S. 39°05' W.	227.70 ft.
62. S. 57°36' W.	316.14 ft.
63. N. 87°45' W.	175.56 ft.
64. N. 68°07' W.	363.00 ft.
65. N. 39°34' W.	177.54 ft.
66. N. 46°50' W.	79.86 ft.
67. N. 13°42' W.	180.84 ft.
68. N. 76°57' W.	297.00 ft.
69. N. 39°08' W.	425.70 ft.
70. N. 16°43' E.	165.66 ft.
71. N. 5°52' E.	287.10 ft.
72. N. 18°08' E.	192.72 ft.
73. N. 28°04' W.	92.40 ft.
74. N. 8°23' W.	67.32 ft.
75. S. 82°48' W.	200.64 ft.
76. N. 71°39' W.	551.10 ft.
77. S. 79°16' W.	302.28 ft.
78. N. 86°02' W.	580.80 ft.
79. S. 45°03' W.	795.30 ft.
80. S. 57°38' W.	186.12 ft.
81. N. 79°26' W.	36.96 ft.
82. S. 9°36' E.	22.44 ft.
83. S. 57°09' W.	562.98 ft.
84. S. 37°17' W.	375.54 ft.
85. S. 43°41' W.	372.24 ft.
86. S. 56°15' W.	412.50 ft.
87. S. 50°49' W.	448.14 ft.
88. S. 62°04' W.	393.36 ft.
89. S. 86°58' W.	250.80 ft.
90. S. 79°48' W.	265.98 ft.
91. N. 71°13' W.	522.06 ft.
92. S. 48°20' W.	524.04 ft.
93. S. 66°50' W.	507.54 ft.
94. S. 85°27' W.	157.08 ft.
95. S. 64°54' W.	248.82 ft.
96. S. 52°36' W.	320.76 ft.
97. S. 88°35' W.	26.40 ft.

At end of course, the true point for cor. No. 16, identical with the true point for cor. No. 4, USS 894, both meander cors.

Beginning at the true point for Meander cor. 19, identical with the true point for cor. No. 1, USS 894, both meander cors. thence westerly with meanders on Iliamna Lake of the line of ordinary high water.

98. N. 76°36' W.	158.40 ft.
99. N. 62°55' W.	271.26 ft.
100. N. 51°45' W.	315.48 ft.
101. N. 71°21' W.	269.28 ft.
102. S. 81°37' W.	223.08 ft.

At end of course, true point for cor. No. 1, identical with the true point for cor. No. 5, lot 1, USS 7808, both meander cors.



Found an alum. rod, 3/4 ins. diam., firmly set, projecting 12 ins. above the ground, with alum. cap mkd. as shown, from which the 1979 bearing trees

A spruce, 9 ins. diam., bears S. 52° E., 130.5 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears S. 87° W., 12.5 ft. dist., mkd. X BT.



Found an iron post, 3 ins. diam., firmly set, projecting 10 ins. above the ground, mkd. RGM COR 2 on the NE side, from which the 1979 bearing trees

A spruce, 14 ins. diam., bears N. 28° E., 25.0 ft. dist., mkd. X BT.

A spruce, 10 ins. diam., bears N. 57° W., 35.5 ft. dist., mkd. X BT.



Found an alum. rod, 3/4 ins. diam., firmly set, projecting 12 ins. above the ground, with alum. cap mkd. as shown, from which the 1979 bearing trees

A spruce, 7 ins. diam., bears S. 61° W., 54.0 ft. dist., mkd. USS894 BT.

A spruce, 9 ins. diam., bears N. 71° W., 34.5 ft. dist., mkd. USS894 BT.



Found an iron post, 3 ins. diam., firmly set, projecting 12 ins. above the ground, mkd. RGM C4 WC on the SW side, from which the 1979 bearing trees

A spruce, 17 ins. diam., bears S. 67 1/2° E., 148.5 ft. dist., mkd. X BT.

A spruce, 14 ins. diam., bears S. 3° E., 54.0 ft. dist., mkd. X BT.

92-02

RECORDED - FILED 80
ILIAMNA DIST.
DATE 4/7 19 92
TIME 9:45 A.M.
Examined by (USA/BUM)
A-10-0

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.

AT  
KOKHANOK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

MEANDERS OF LOT 14


1.	N. 72° 43' W. .	62.21 Ft.
2.	N. 11° 20' W. .	67.32 Ft.
3.	S. 70° 47' W. .	58.08 Ft.
4.	N. 86° 44' W. .	114.18 Ft.
5.	S. 11° 37' W. .	40.92 Ft.
6.	S. 5° 11' E. .	100.78 Ft.

MEANDERS OF LOT 13

1.	S. 87° 58' E. .	5.32 Ft.
2.	N. 58° 47' E. .	221.10 Ft.
3.	N. 5° 11' W. .	38.48 Ft.

MEANDERS OF LOT 9


1.	S. 85° 37' W. .	38.19 Ft.
2.	N. 77° 58' W. .	189.42 Ft.
3.	N. 62° 14' W. .	26.02 Ft.

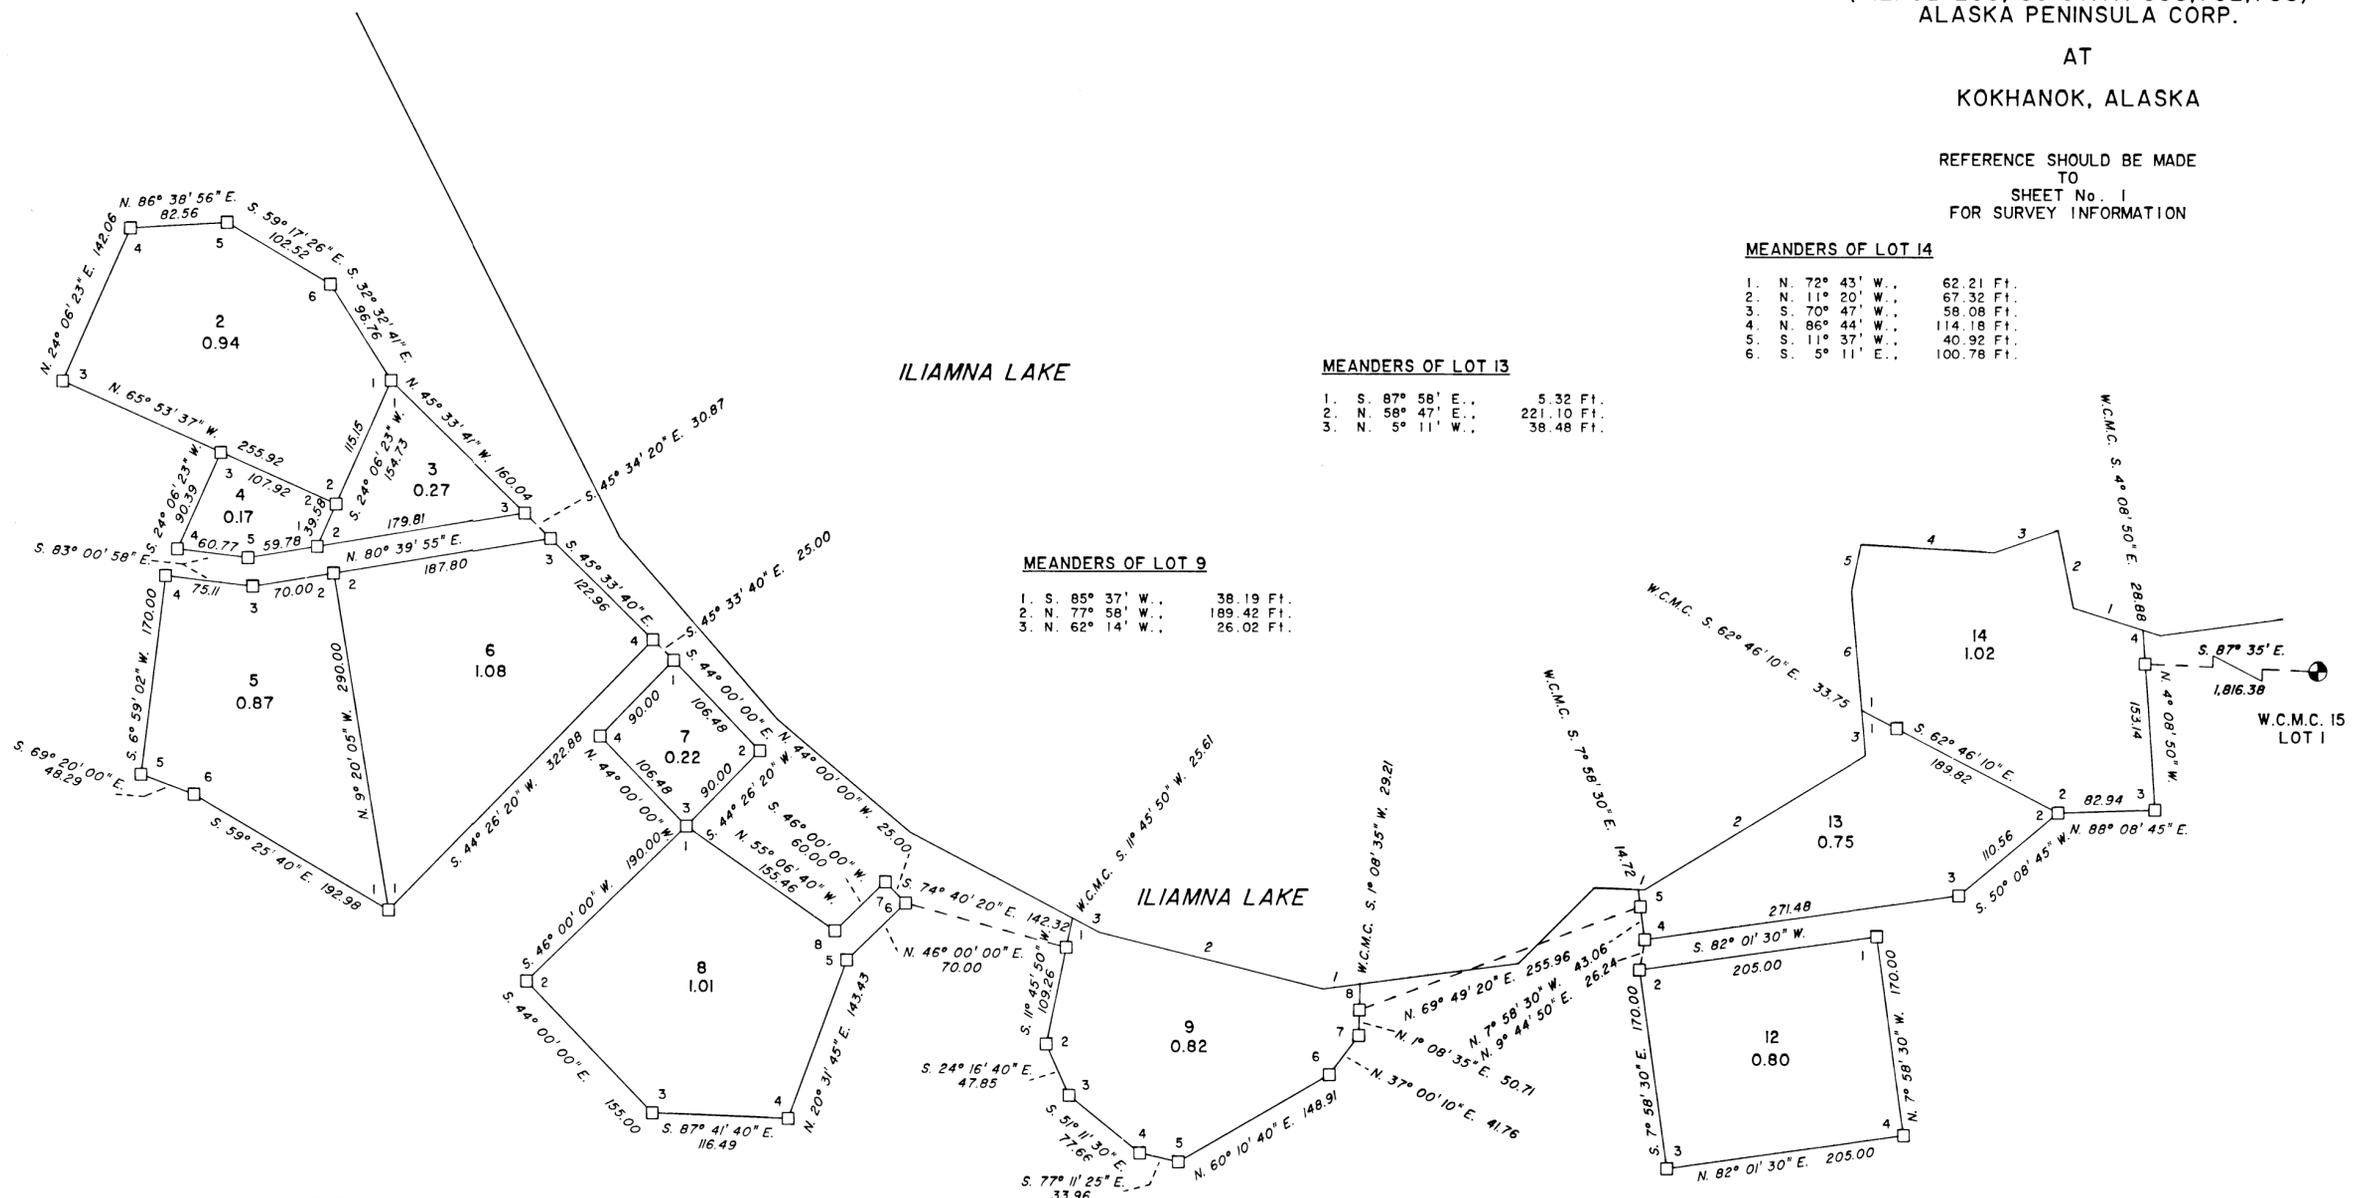

True Meridian  
Mean  
Magnetic  
Declination  
22° E.

LEGEND

- SET A REBAR, 30 INS. LONG, 5/8" IN DIAM., 28 INS. IN THE GROUND WITH ALUM. CAP MARKED WITH APPROPRIATE COR. NO. AND LOT NO.
- SET AN IRON POST OR STAINLESS STEEL POST, 2 1/2 INS. DIAM., WITH BRASS CAP



92-02  
RECORDED - FILED 80-  
ILIAMNA DIST  
DATE 4/7 19 92  
TIME 9:45 A.M.  
Surveyed by (USA/BLM)  
Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.


AT  
KOKHANOK, ALASKA

LEGEND

- SET A REBAR, 30 INS. LONG, 5/8" IN DIAM., 28 INS. IN THE GROUND WITH ALUM. CAP MARKED WITH APPROPRIATE COR. NO. AND LOT NO.
- FOUND A REBAR, 5/8 IN. DIAM., WITH ALUM CAP
- ⊗ FOUND A REBAR, 5/8" IN DIAM., WITHOUT A CAP, ADD ALUM CAP

MEANDERS OF LOT 9

- 1. S. 85° 37' W., 38.19 Ft.
- 2. N. 77° 58' W., 189.42 Ft.
- 3. N. 62° 14' W., 26.02 Ft.

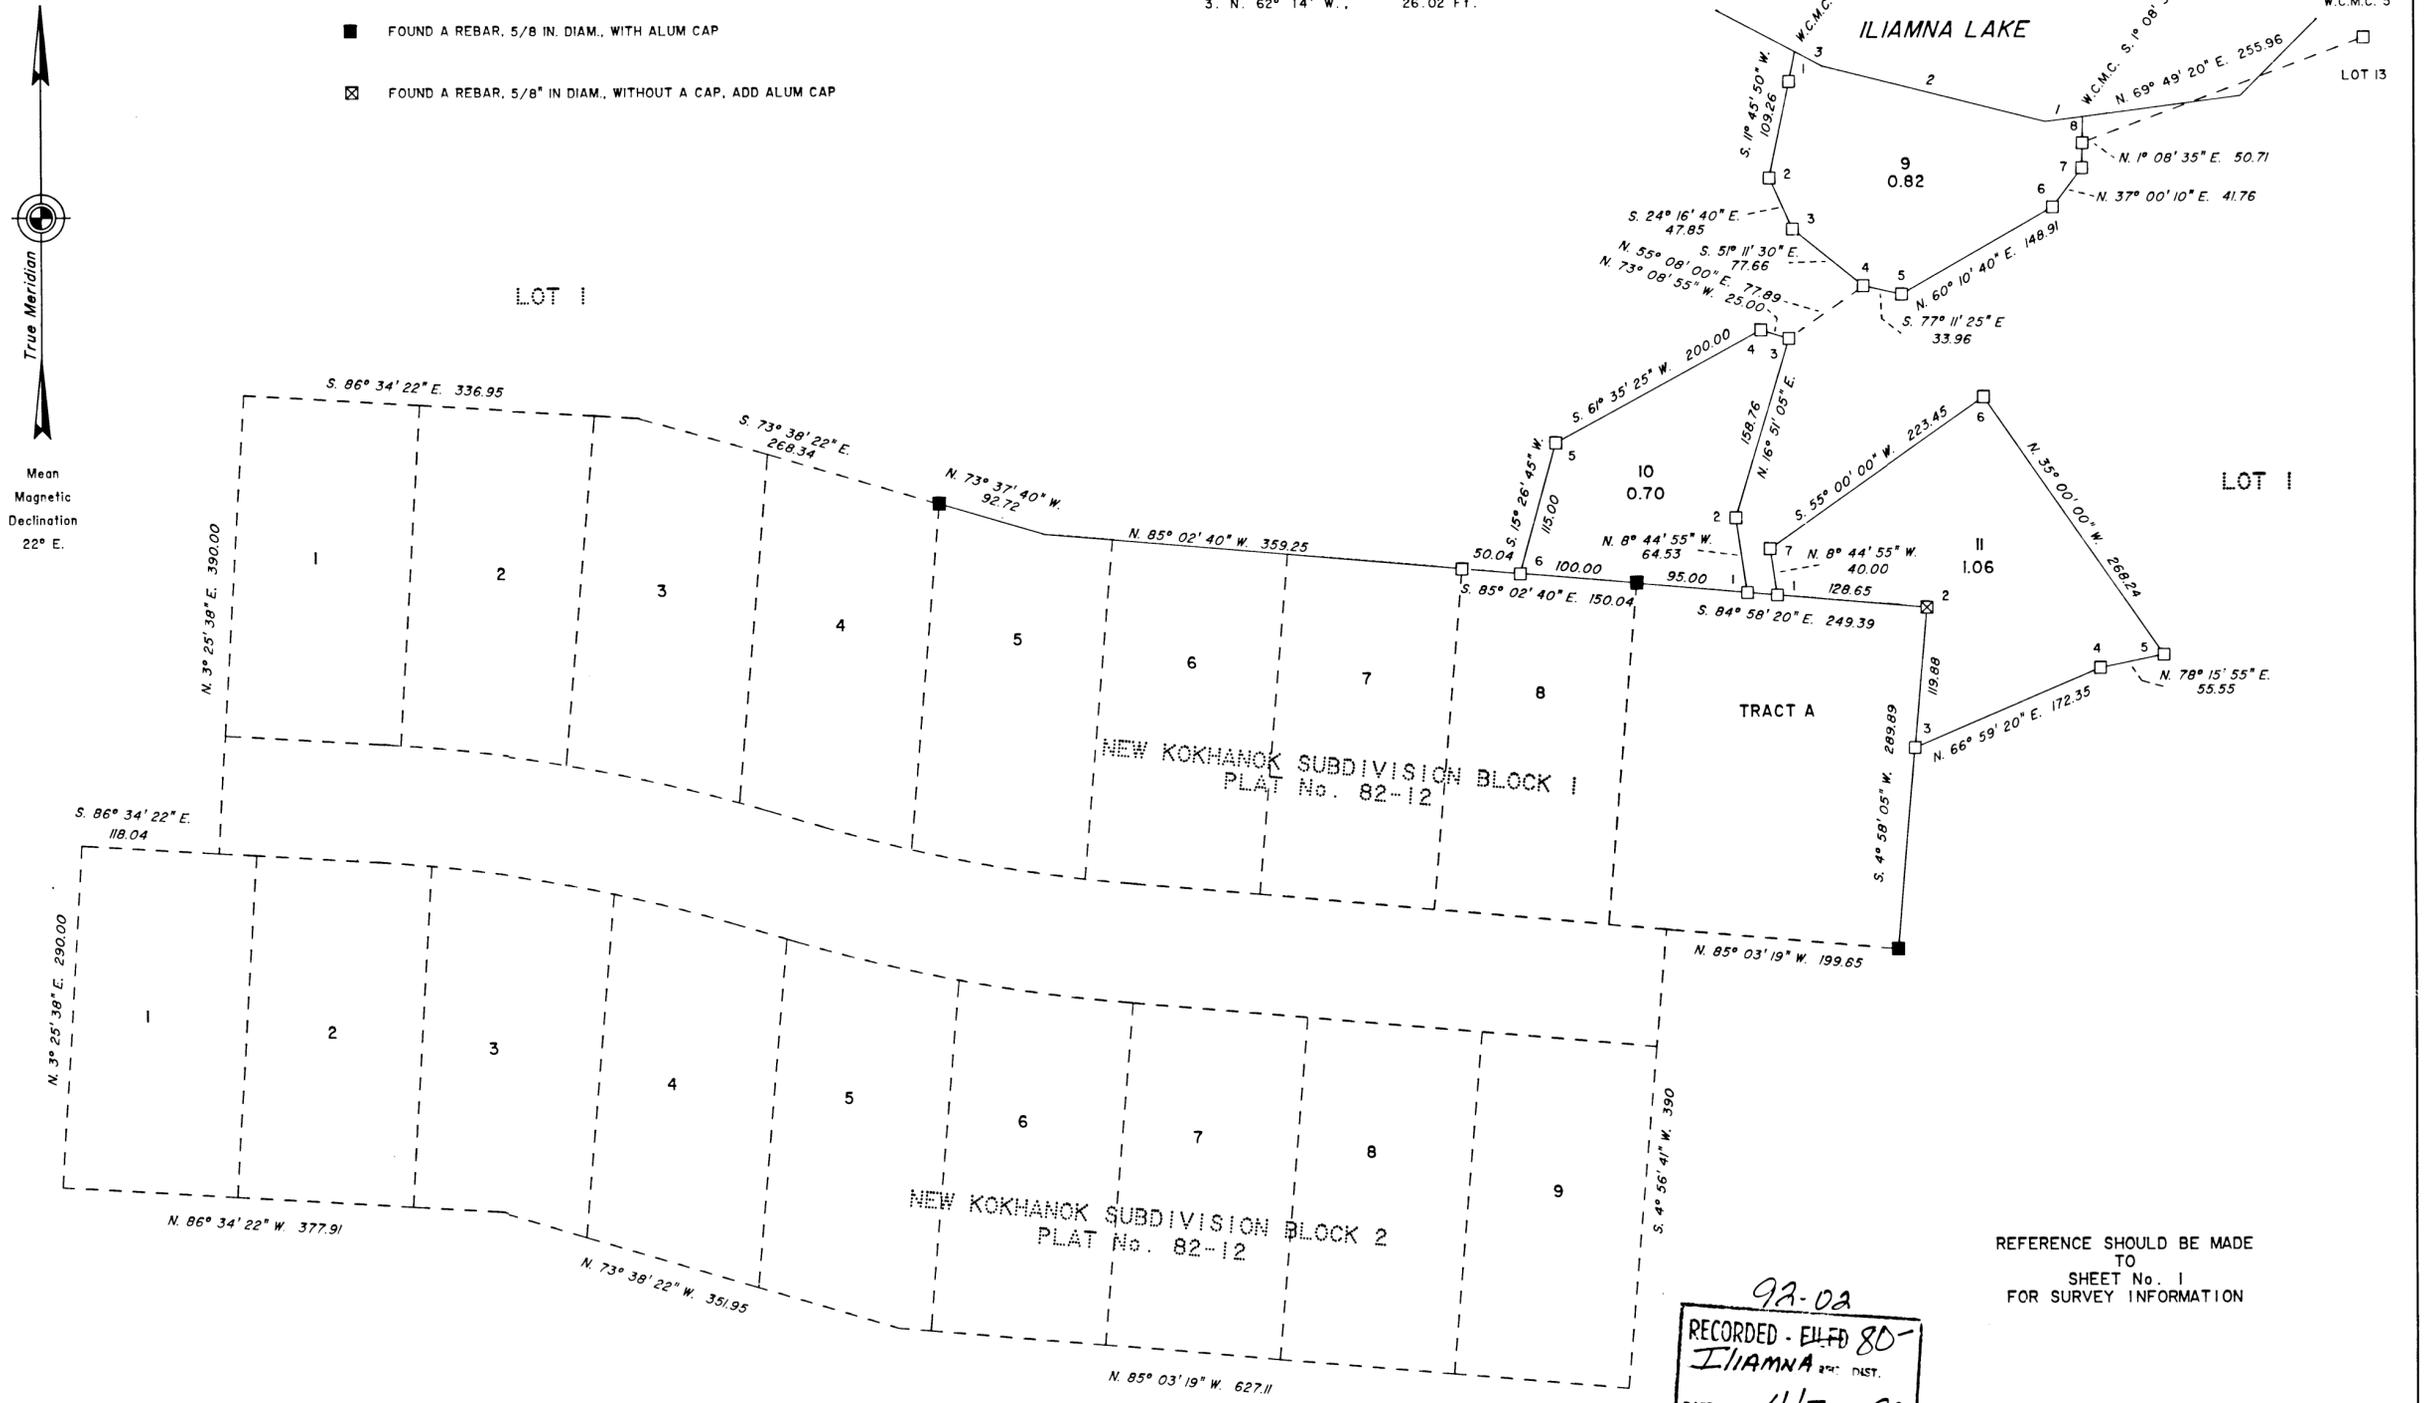

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

92-02  
RECORDED - FILED 80-  
ILIAMNA DIST. DIST.  
DATE 4/7 1993  
TIME 9:45 A.M.  
Submitted by (USA 18cm)  
Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.

AT  
KOKHANOK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

Note:

U.S. Survey No. 5546 was surveyed by Wayne C. Fields,  
Supervisory Cadastral Surveyor, in 1969.

Area of lots 15 and 16: 3.89 Acres.



The azimuth was obtained from direct observations of  
the sun, using the hour angle method, and refers to  
the true meridian.

The geographic position of the witness corner to  
corner No. 1, Lot 15, a meander corner, as determined  
from a tie to the witness corner to corner No. 3, U.S.  
Survey No. 5546, a meander corner, is:

Latitude: 59° 25.7' North

Longitude: 154° 37.7' West

This survey is situated on the Northerly and easterly  
shore of Foldager Lake, (local name) approximately 1/4  
mile south of Kokhanok bay on Iliamna Lake,  
approximately 4 miles easterly of the village of  
Kokhanok, within Townships 9 South, Range 32 West,  
Seward Meridian, Alaska.

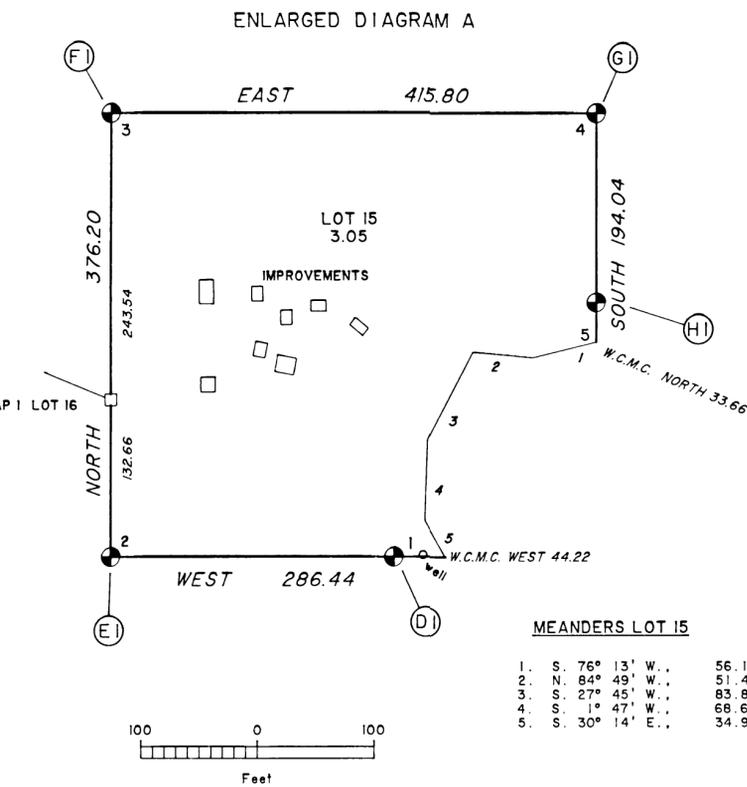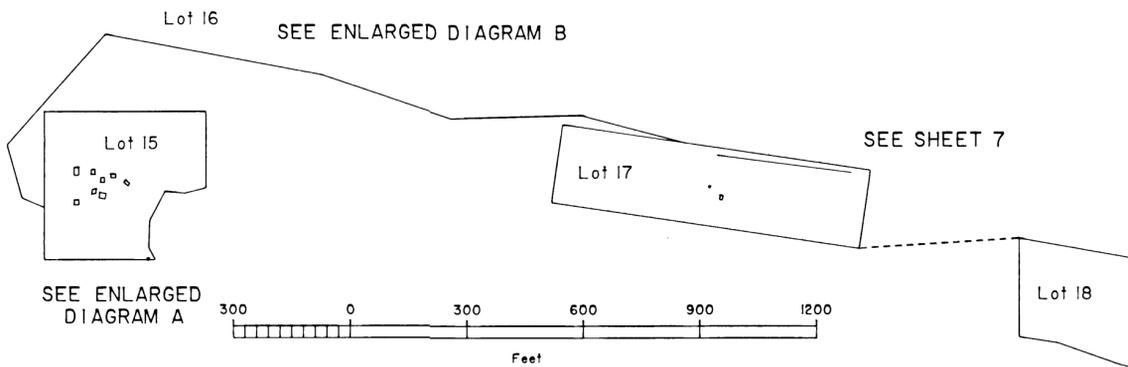

IMPROVEMENTS

From the witness corner to corner  
No. 1, Lot 15 the following  
improvements:

A well bears N. 86° 06' E., 25.08  
ft. dist.

SW cor. of a cabin, 12 X 12 ft., bears  
N. 49° 51' W., 216.48 ft. dist., long  
side extends North.

SW cor. of a cabin, 20 X 12 ft., bears  
N. 37° 51' W., 271.26 ft. dist., long  
side extends North.

NE cor. of a cabin, 13 X 11 ft., bears  
N. 33° 29' W., 214.50 ft. dist., long  
side extends S. 10° W.

SW cor. of a cabin, 13 X 10 ft., bears  
N. 29° 20' W., 248.82 ft. dist., long  
side extends North.

NE cor. of a cabin, 16 X 15 ft., bears  
N. 26° 17' W., 187.44 ft. dist., long  
side extends N. 80° W.


SE cor. of a shed, 13 X 10 ft., bears  
N. 23° 55' W., 215.16 ft. dist., long  
side extends North.

SE cor. of a shed, 13 X 9 ft., bears  
N. 15° 34' W., 215.82 ft. dist., long  
side extends West.

SE cor. of a shed, 15 X 8 ft., bears  
N. 8° 08' W., 189.42 ft. dist., long  
side extends N. 50° W.

MEANDERS LOT 15


1.	S. 76° 13' W.	56.10 Ft.
2.	N. 84° 49' W.	51.48 Ft.
3.	S. 27° 45' W.	83.82 Ft.
4.	S. 1° 47' W.	68.64 Ft.
5.	S. 30° 14' E.	34.98 Ft.



Set an iron post, 28 ins. long, 2 1/2 ins.  
diam., 27 ins. in the ground, with brass cap  
mkd. as shown, from which

A spruce, 7 ins. diam., bears S. 63° W.,  
47.5 ft. dist., mkd. X BT.


A spruce, 17 ins. diam., bears N. 37° W.,  
55.5 ft. dist., mkd. X BT.



Set an iron post, 28 ins. long, 2 1/2 ins.  
diam., 27 ins. in the ground, with brass cap  
mkd. as shown, from which

A spruce, 10 ins. diam., bears N. 41° E.,  
34.5 ft. dist., mkd. X BT.


A spruce, 9 ins. diam., bears S. 61° E.,  
10.0 ft. dist., mkd. X BT.



Set an iron post, 28 ins. long, 2 1/2 ins.  
diam., 27 ins. in the ground, with brass cap  
mkd. as shown, from which

A spruce, 13 ins. diam., bears N. 83° E.,  
39.5 ft. dist., mkd. X BT.


A spruce, 8 ins. diam., bears S. 15° E.,  
61.5 ft. dist., mkd. X BT.



Set an iron post, 28 ins. long, 2 1/2 ins.  
diam., 27 ins. in the ground, with brass cap  
mkd. as shown, from which

A spruce, 13 ins. diam., bears S. 33° E.,  
23.0 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears S. 41° W.,  
39.5 ft. dist., mkd. X BT.




Set an iron post, 28 ins. long, 2 1/2 ins.  
diam., 27 ins. in the ground, with brass cap  
mkd. as shown, from which

A spruce, 8 ins. diam., bears N. 21° E.,  
27.5 ft. dist., mkd. X BT.

A spruce, 15 ins. diam., bears N. 34° W.,  
45.0 ft. dist., mkd. X BT.

LEGEND

- ⊕ SET AN IRON POST OR STAINLESS STEEL POST,  
2 1/2 INS. DIAM., WITH BRASS CAP
- SET A REBAR, 30 INS. LONG, 5/8" IN DIAM., 28 INS. IN THE GROUND WITH  
ALUM. CAP MARKED WITH APPROPRIATE COR. NO. AND LOT NO.

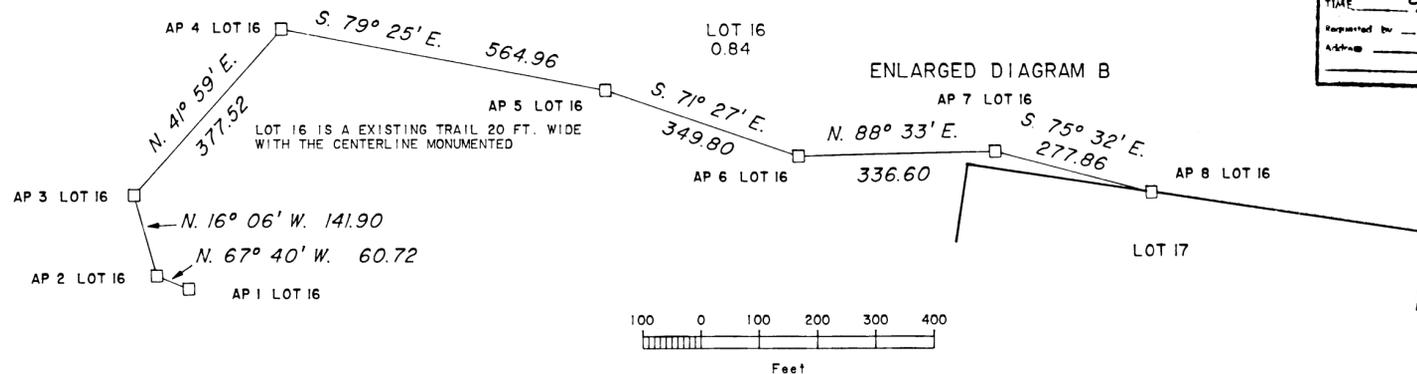

92-02  
RECORDED - FILED 80 -  
ILLIAMNA REC DIST.  
DATE 4/7 1992  
TIME 9:45 A  
Requested by (USA/BUM)  
Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.

AT  
KOKHANOK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

**Note:**

U.S. Survey No. 5546 was surveyed by Wayne C. Fields,  
Supervisory Cadastral Surveyor, in 1969.

Area of lots 17 and 18: 5.43 Acres.


The azimuth was obtained from direct observations of  
the sun, using the hour angle method, and refers to  
the true meridian.

The geographic position of the witness corner to  
corner No. 4, Lot 18, a meander corner, as determined  
from a tie to the witness corner to corner No. 3, U.S.  
Survey No. 5546, a meander corner, is:

Latitude: 59° 25.7' North

Longitude: 154° 37.7' West


This survey is situated on the northerly and easterly  
shore of Foldager Lake, (local name) approximately 1/4  
mile south of Kokhanok bay on Iliamna Lake,  
approximately 4 miles east of the village of Kokhanok,  
in Township 9 South, Range 32 West, Seward Meridian,  
Alaska.

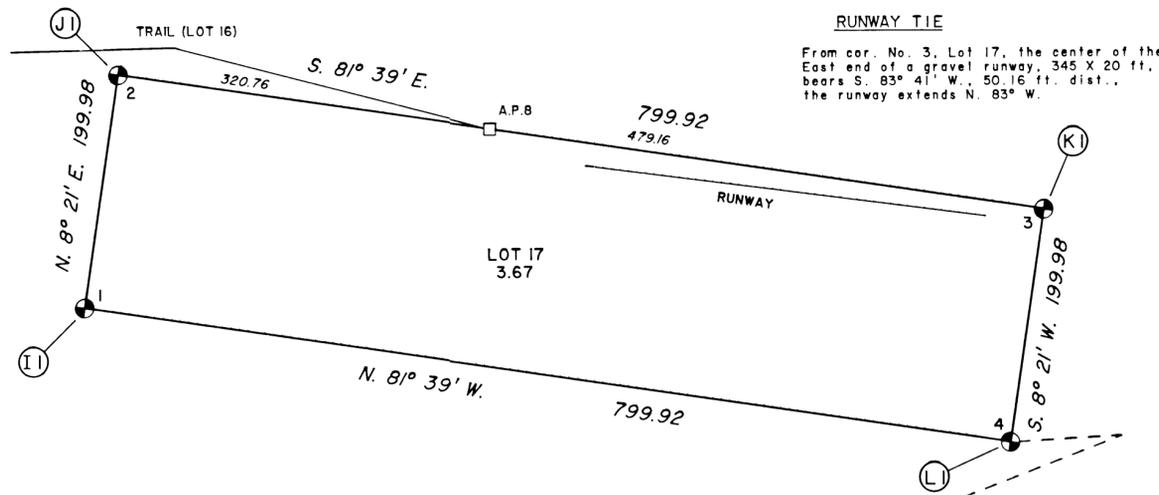


**MEANDERS LOT 18**

Meanders of the northerly shore of  
Foldager Lake, (local name).

1. N. 75° 00' W., 38.94 Ft.
2. N. 70° 44' W., 168.30 Ft.
3. N. 81° 35' W., 99.66 Ft.








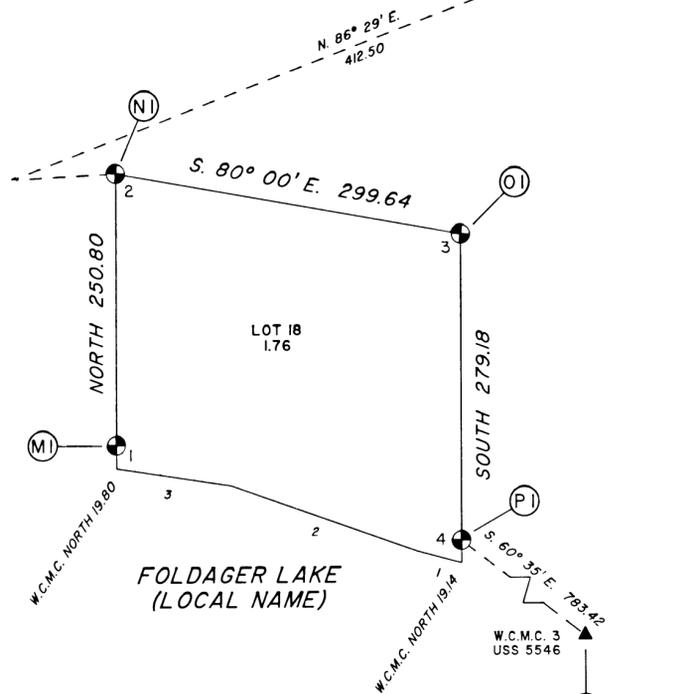


Mean  
Magnetic  
Declination  
22° E.



**LEGEND**

- SET AN IRON POST OR STAINLESS STEEL POST, 2 1/2 INS. DIAM., WITH BRASS CAP
- SET A REBAR, 30 INS. LONG, 5/8" IN DIAM., 28 INS. IN THE GROUND WITH ALUM. CAP MARKED WITH APPROPRIATE COR. NO. AND LOT NO.
- ▲ FOUND AN IRON POST, 2 1/2 INS. DIAM., WITH BRASS CAP



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears N. 56° E., 31.5 ft. dist., mkd. X BT.

A spruce, 18 ins. diam., bears S. 49° E., 19.0 ft. dist., mkd. X BT.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 31° E., 78.5 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears S. 30° E., 115.0 ft. dist., mkd. X BT.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears S. 27° W., 132.5 ft. dist., mkd. X BT.

A Graniteboulder, 3 X 2 X 1/2 ft., bears N. 19° W., 12.5 ft. dist., mkd. X BT.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 50° E., 11.0 ft. dist., mkd. X BT.

A spruce, 10 ins. diam., bears N. 1° W., 12.0 ft. dist., mkd. X BT.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 12 ins. diam., bears N. 24° E., 11.5 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears N. 24° W., 15.0 ft. dist., mkd. X BT.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears S. 28° E., 74.5 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears S. 64° W., 51.0 ft. dist., mkd. X BT.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 11 ins. diam., bears S. 43° E., 27.5 ft. dist., mkd. X BT.

A spruce, 6 ins. diam., bears S. 43° W., 25.5 ft. dist., mkd. X BT.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 12 ins. diam., bears N. 22° E., 41.5 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 48° W., 37.0 ft. dist., mkd. X BT.

Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 5 ins. diam., bears S. 87° W., 50.0 ft. dist., mkd. X BT on partially healed blaze.

A spruce snag, 3 ins. diam., bears N. 24° W., 4.0 ft. dist., mkd. X BT on open blaze.

From which a new bearing tree

A spruce, 5 ins. diam., bears N. 34° E., 17.16 ft. dist., mkd. X BT.

92-02  
RECORDED - FILED 80+  
ILIAMNA REC. DIST.  
DATE 4/7 1992  
TIME 9:45 A.M.  
Surveyed by (USA/BLM)  
Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.

AT  
KOKHANOK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

Note:

U.S. Survey No. 7653 was surveyed by John A. Pex,  
Cadastral Surveyor, in 1986.

Area: 0.99 Acres.


The azimuth was obtained from direct observations of  
the sun, using the hour angle method, and refers to  
the true meridian.

The geographic position of the witness corner to  
corner No. 1, Lot 19, a meander corner, as determined  
from a tie to the witness corner to corner No. 2, U.S.  
Survey No. 7653, a meander corner, is:

Latitude: 59° 26' 48.23" North

Longitude: 154° 32' 43.18" West

This survey is situated on a peninsula in Kokhanok Bay  
on Iliamna Lake, approximately 8 miles easterly of the  
village of Kokhanok, in township 8 South, Range 31  
West, Seward Meridian, Alaska.

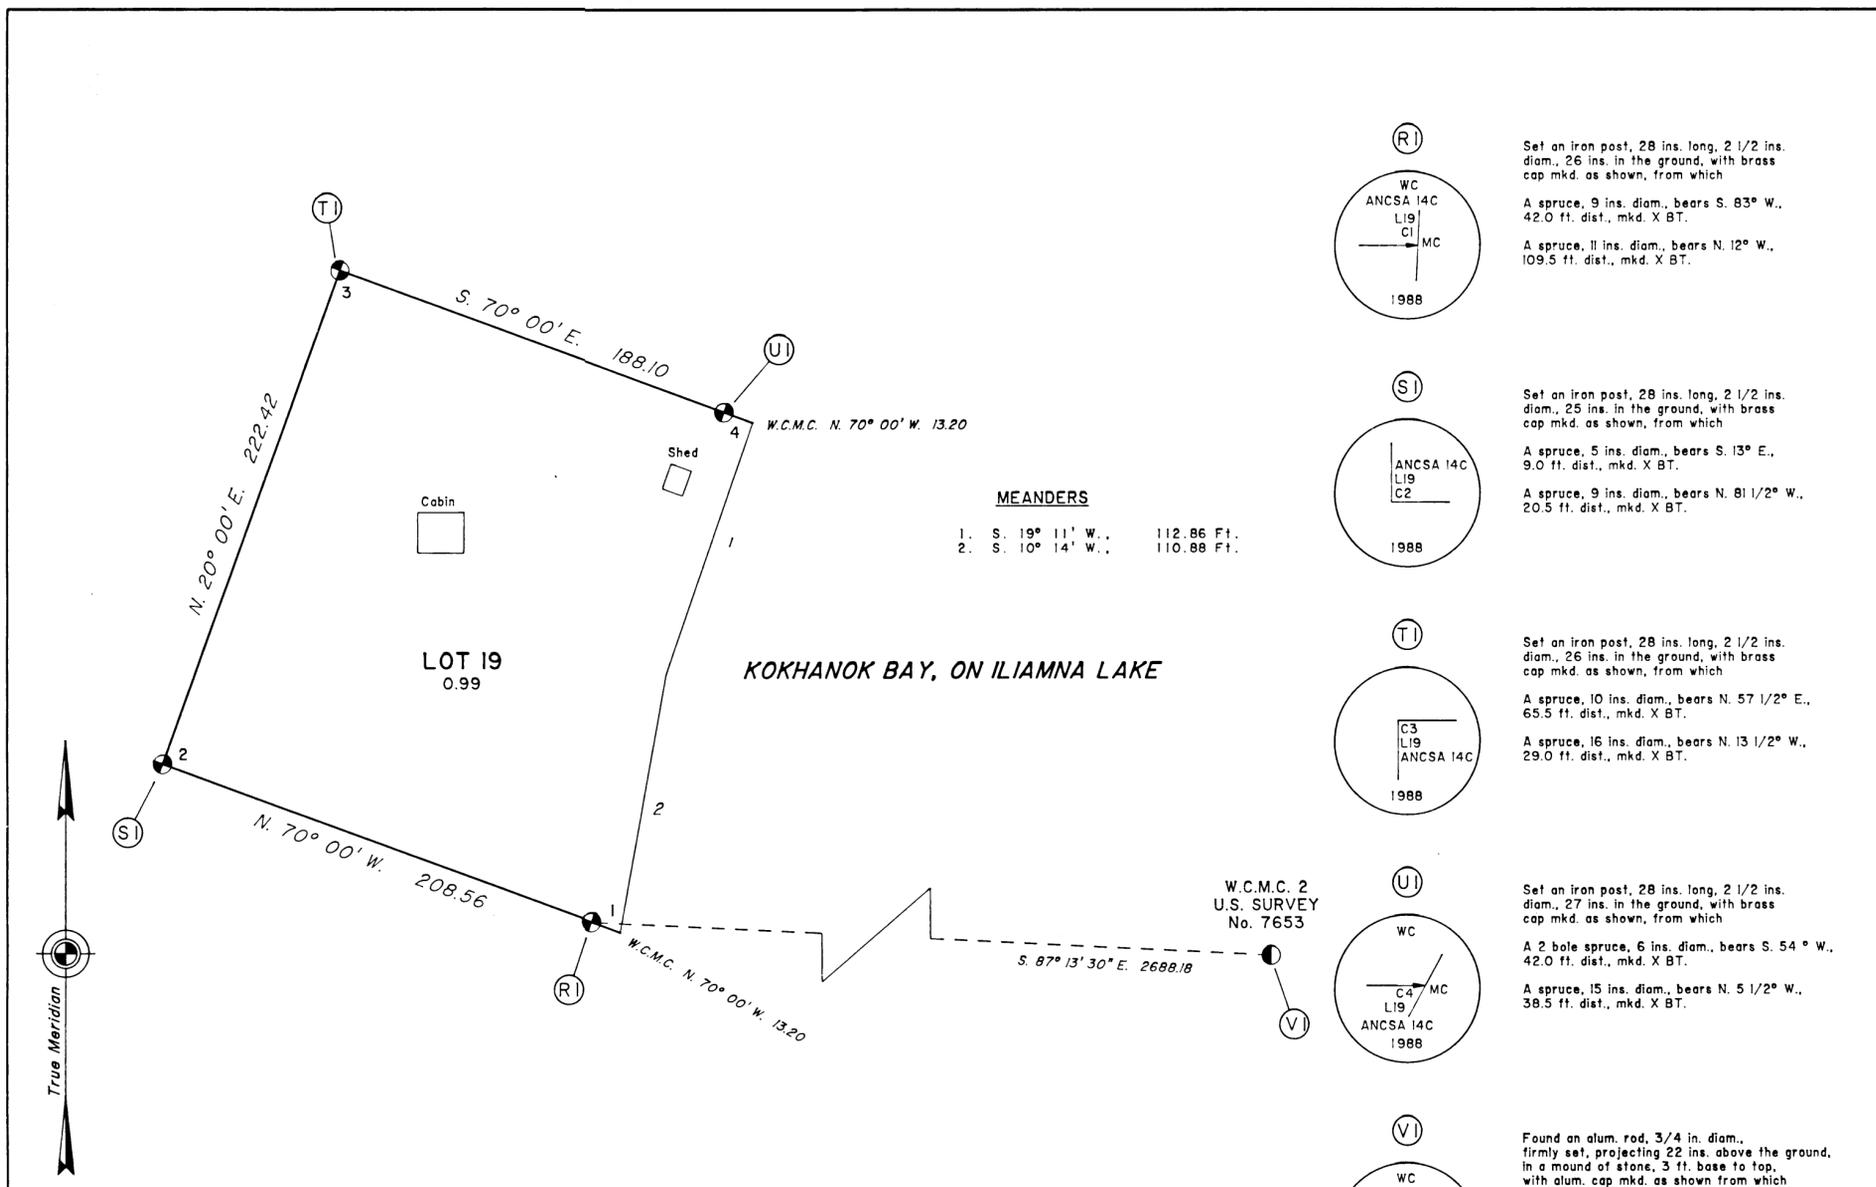

MEANDERS

- S. 19° 11' W., 112.86 Ft.
- S. 10° 14' W., 110.88 Ft.

KOKHANOK BAY, ON ILIAMNA LAKE

LOT 19  
0.99

LEGEND


- SET AN IRON POST OR STAINLESS STEEL POST, 2 1/2 INS. DIAM., WITH BRASS CAP
- FOUND AN ALUM ROD, 3/4 IN. DIAM., WITH ALUM. CAP

IMPROVEMENTS

From the witness corner to corner No. 4, a meander corner, the following improvements

The NW corner of a cabin, 17 X 20 ft. bears S. 7° 58' W., 137.94 ft. dist. Longside extends West


The NE corner of a shed, 12 X 10 ft. bears S. 29° 06' W., 28.38 ft. dist. Longside extends S. 20° W.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears S. 83° W., 42.0 ft. dist., mkd. X BT.


A spruce, 11 ins. diam., bears N. 12° W., 109.5 ft. dist., mkd. X BT.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 13° E., 9.0 ft. dist., mkd. X BT.


A spruce, 9 ins. diam., bears N. 81 1/2° W., 20.5 ft. dist., mkd. X BT.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears N. 57 1/2° E., 65.5 ft. dist., mkd. X BT.


A spruce, 16 ins. diam., bears N. 13 1/2° W., 29.0 ft. dist., mkd. X BT.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A 2 bole spruce, 6 ins. diam., bears S. 54° W., 42.0 ft. dist., mkd. X BT.

A spruce, 15 ins. diam., bears N. 5 1/2° W., 38.5 ft. dist., mkd. X BT.




Found an alum. rod, 3/4 in. diam., firmly set, projecting 22 ins. above the ground, in a mound of stone, 3 ft. base to top, with alum. cap mkd. as shown from which the original bearing trees

A spruce, 5 ins. diam., bears N. 66° E., 22.5 ft. dist., mkd. X BT, on open blaze.

A spruce, 6 ins. diam., bears S. 30 3/4° W., 141.0 ft. dist., mkd. X BT, on open blaze.

Mean Magnetic Declination 22° E.



92-02

RECORDED - FILED 80-  
ILIAMNA REC. DIST.

DATE 4/7 1992  
TIME 9:45 A.M.  
Examined by (USA/Blm)  
Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.

AT  
KOKHANOK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

Note:

U.S. Survey No. 6297 was surveyed by James W. Hawke, Jr., Cadastral Surveyor, in 1979.

Area: 2.97 Acres.


The azimuth was obtained from direct observations of the sun, using the hour angle method, and refers to the true meridian.

The geographic position of the witness corner to corner No. 1, Lot 20, a meander corner, as determined from a tie to the witness corner to corner No. 4, Lot 2, U.S. Survey No. 6297, is:

Latitude: 59° 28' 28.50" North

Longitude: 154° 30' 42.10" West


This survey is situated on a peninsula in Kokhanok Bay on Iliamna Lake, approximately 9 miles northeasterly of the village of Kokhanok, in Township 8 South, Range 31 West, Seward Meridian, Alaska.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 11 ins. diam., bears S. 25° E., 78.0 ft. dist., mkd. X BT.


A spruce, 10 ins. diam., bears S. 52 1/2° W., 45.0 ft. dist., mkd. X BT.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, 18 ins. diam., with brass cap mkd. as shown, from which

A spruce, 14 ins. diam., bears N. 28° E., 68.5 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 26° W., 82.5 ft. dist., mkd. X BT.



Found an alum. rod, 3/4 in. diam., firmly set, projecting 6 ins. above the ground, with alum. cap mkd. as shown from which the original bearing trees

A spruce, 12 ins. diam., bears N. 76 1/2° E., (Record S. 76 1/2° W.) 32.5 ft. dist., mkd. X BT, on open blaze.



A spruce, 9 ins. diam., bears S. 30° W., 22.0 ft. dist., mkd. X BT, on open blaze.

MEANDERS

1.	N. 71° 03' E.	134.64 Ft.
2.	N. 49° 45' E.	161.70 Ft.
3.	N. 10° 48' E.	83.16 Ft.
4.	N. 43° 27' W.	68.64 Ft.
5.	N. 65° 48' W.	94.38 Ft.
6.	N. 22° 09' W.	119.46 Ft.
7.	N. 25° 35' E.	140.58 Ft.
8.	N. 73° 45' W.	52.80 Ft.
9.	S. 66° 15' W.	143.22 Ft.
10.	N. 84° 38' W.	76.56 Ft.
11.	N. 31° 04' W.	78.54 Ft.
12.	N. 16° 18' E.	56.10 Ft.
13.	N. 63° 36' W.	52.80 Ft.

LEGEND

- SET AN IRON POST OR STAINLESS STEEL POST, 2 1/2 INS. DIAM., WITH BRASS CAP
- FOUND AN ALUM. ROD, 3/4 IN. DIAM., WITH ALUM. CAP

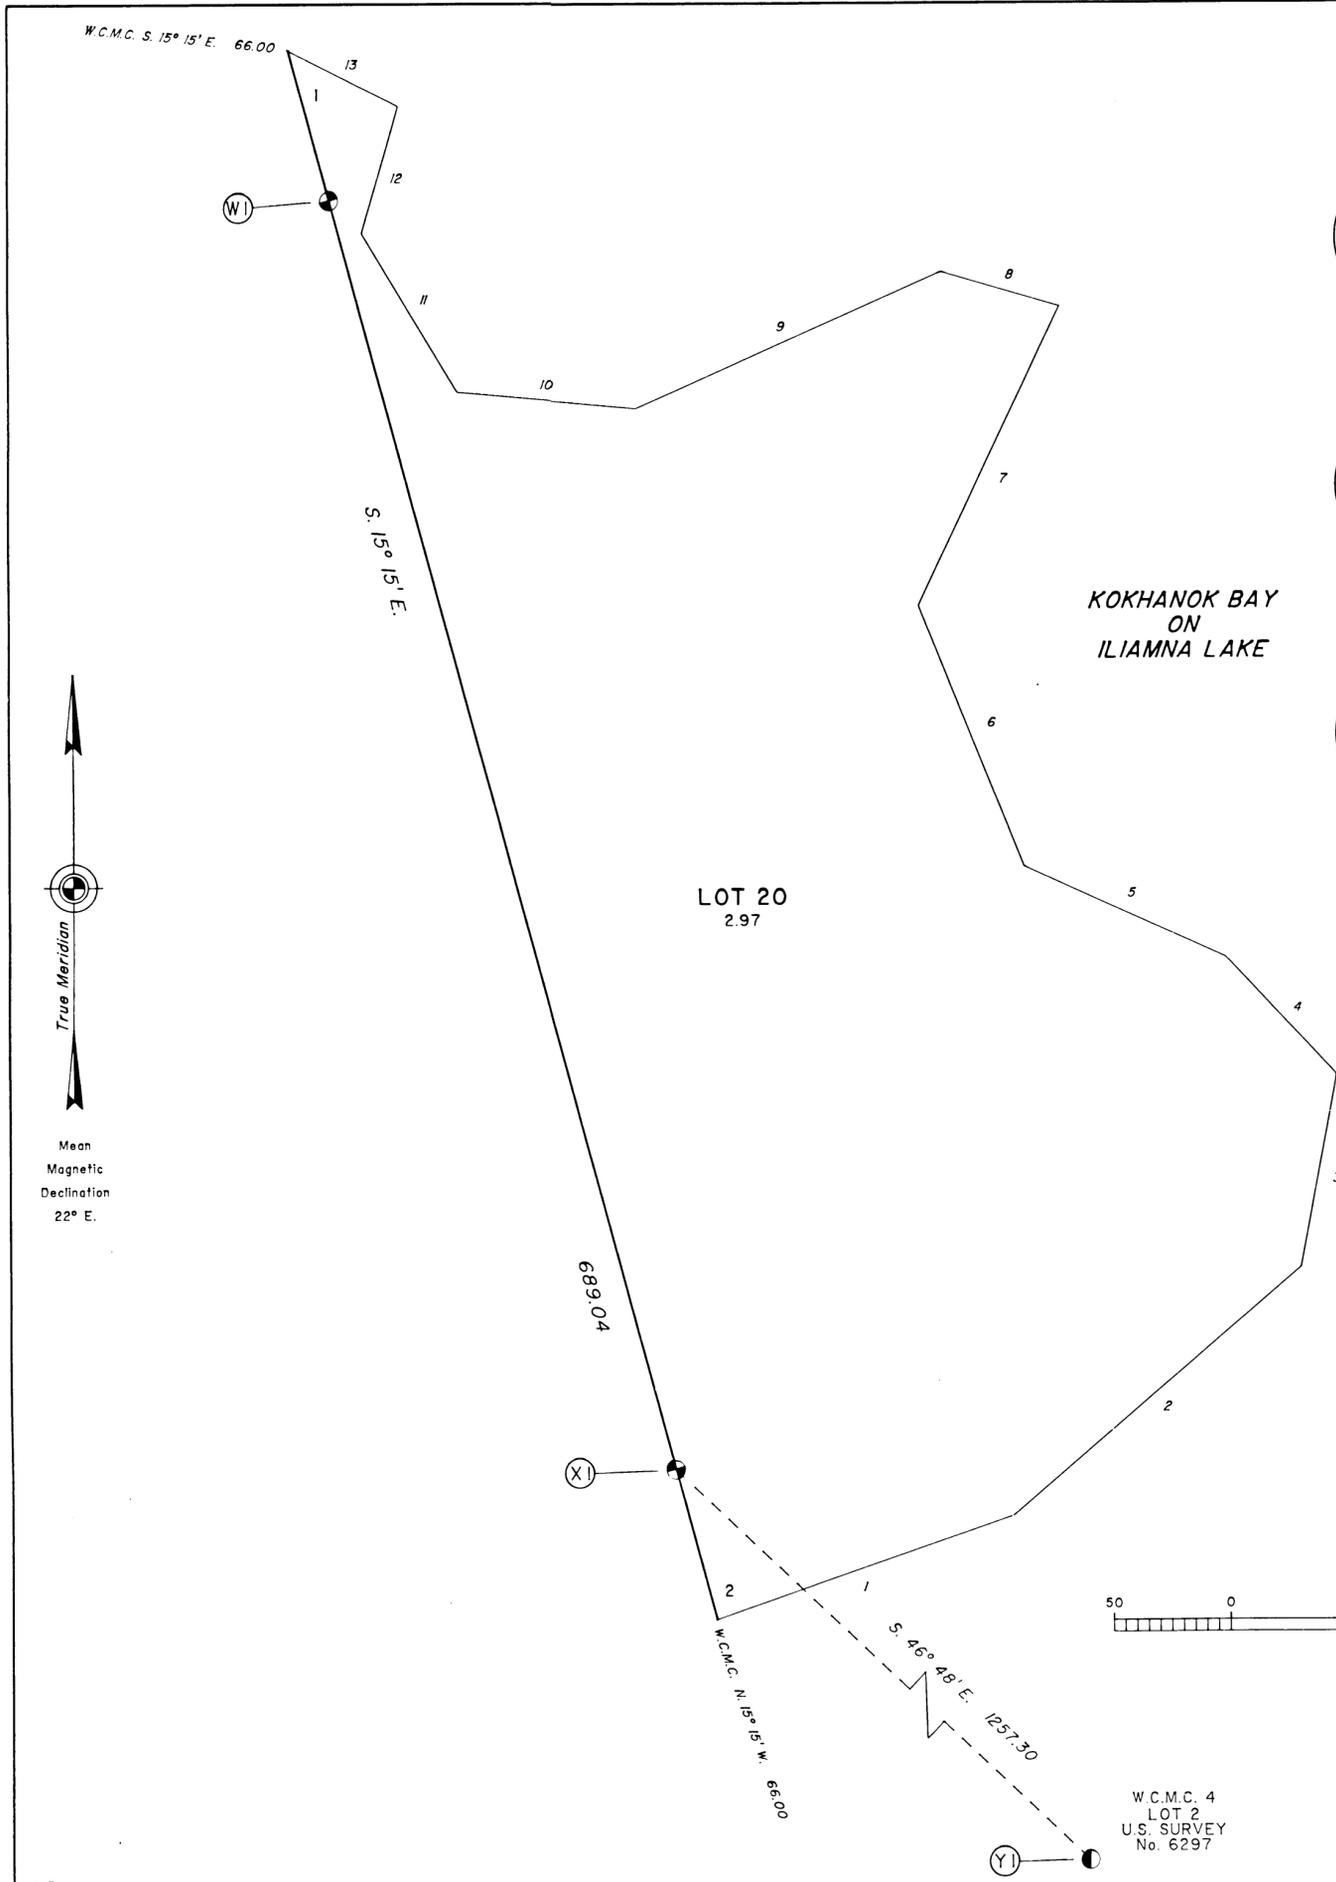

92-02



RECORDED - FILED 60-  
ILIAMNA DIST.

DATE 4/7 1992  
TIME 9:45 A.M.  
Submitted by (USA/Bum)

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.

AT  
KOKHANOK, ALASKA  
REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION


CORPS OF ENGINEERS  
"TRI STA KAK 1953"  
Lat. 59° 27' 12.021" N.  
Long. 154° 21' 44.591" W.  
NAD 1927

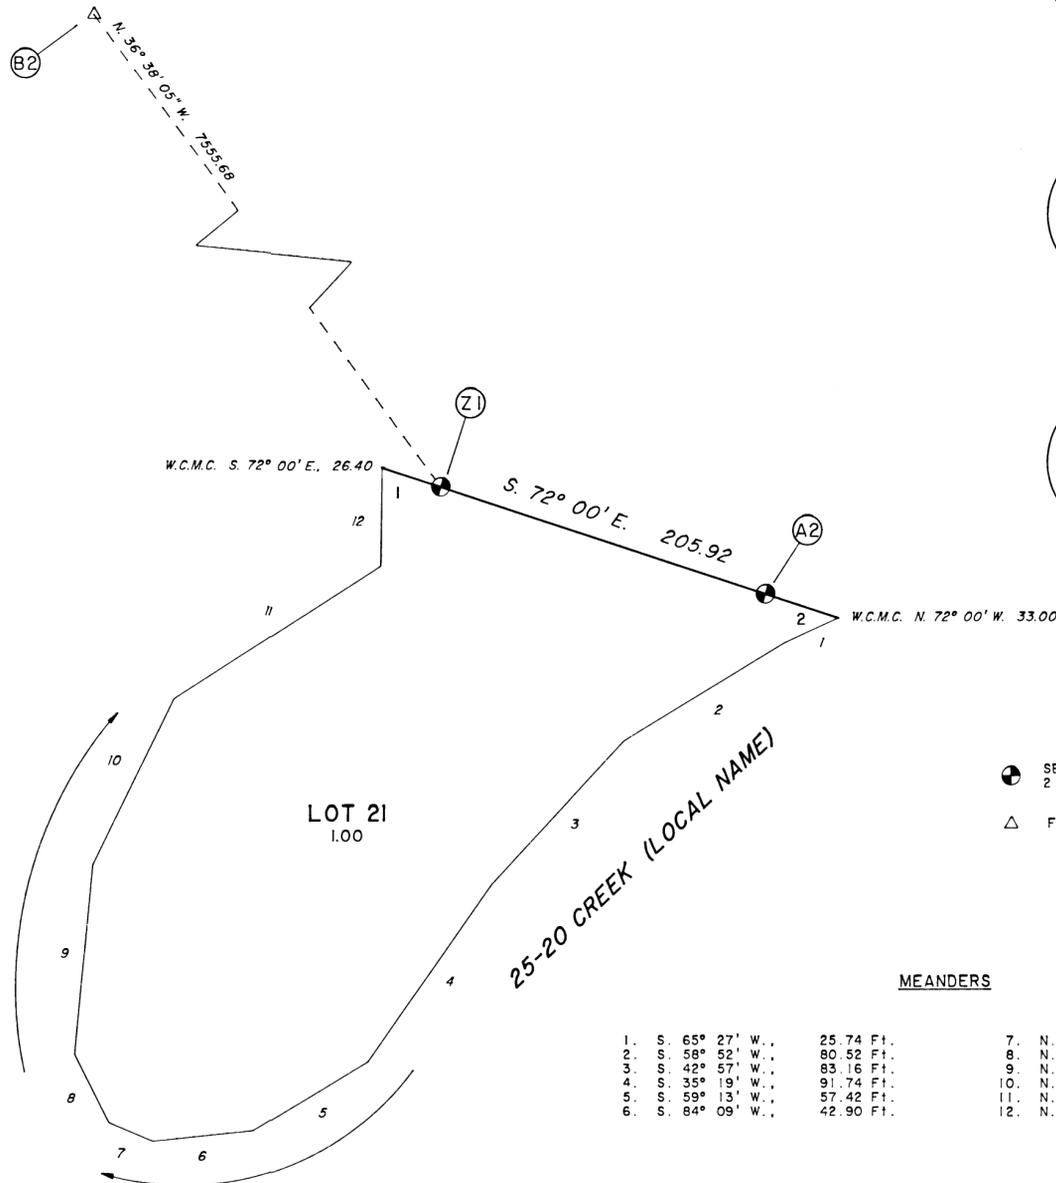

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears N. 69° E., 32.5 ft. dist., mkd. X BT.

A spruce, 12 ins. diam., bears S. 32° E., 29.5 ft. dist., mkd. X BT.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 8 ins. diam., bears N. 81° W., 10.5 ft. dist., mkd. X BT.

A spruce, 13 ins. diam., bears N. 32° W., 20.0 ft. dist., mkd. X BT.



Found a standard Corps of Engineers disk on top of a hill, mkd. as shown


Referenced as shown in the published record.

LEGEND

- SET AN IRON POST OR STAINLESS STEEL POST, 2 1/2 INS. DIAM., WITH BRASS CAP
- △ FOUND CORPS OF ENGINEERS DISK

MEANDERS

1. S. 65° 27' W.,	25.74 Ft.	7. N. 67° 05' W.,	20.46 Ft.
2. S. 58° 52' W.,	80.52 Ft.	8. N. 26° 51' W.,	32.34 Ft.
3. S. 42° 57' W.,	83.16 Ft.	9. N. 5° 27' E.,	80.52 Ft.
4. S. 35° 19' W.,	91.74 Ft.	10. N. 26° 18' E.,	78.54 Ft.
5. S. 59° 13' W.,	57.42 Ft.	11. N. 57° 30' E.,	104.94 Ft.
6. S. 84° 09' W.,	42.90 Ft.	12. N. 0° 40' E.,	41.58 Ft.



Note:

Area: 1.00 Acres.

The azimuth was obtained from triangulation stations, and refers to the true meridian.

The geographic position of the witness corner to corner No. 1, Lot 21, a meander corner, as determined from a tie to Corps of Engineers Tri station "KAK 1953", is:

Latitude: 59° 26' 12.31" North

Longitude: 154° 20' 17.37" West

This survey is situated on a bend in 25-20 creek, (local name), approximately 15 miles easterly of the village of Kokhanok, in Township 8 South, Range 30 West, Seward Meridian, Alaska.

92-02

RECORDED - FILED 80

DIAMNA REC. DIST

DATE 4/7 1992

TIME 9:45 A.M.

Surveyed by (USA/BLM)

Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.

AT  
KOKHANOK, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

Note:

U.S. Survey No. 4672 was surveyed by Harold O. Temme,  
Supervisory Cadastral Surveyor, in 1965.

Area: 1.00 Acres.


The azimuth was obtained from direct observations of  
the sun, using the hour angle method, and refers to  
the true meridian.

The geographic position of the witness corner to  
corner No. 1, Lot 22, a meander corner, as determined  
from a tie to U.S.L.M. No. 4672, is:

Latitude: 59° 33' 17" North

Longitude: 154° 30' 23" West

This survey is situated on a peninsula in Intricate  
Bay on Iliamna Lake, approximately 12 miles  
northeasterly of the village of Kokhanok, in  
Township 7 South, Range 31 West, Seward Meridian,  
Alaska.

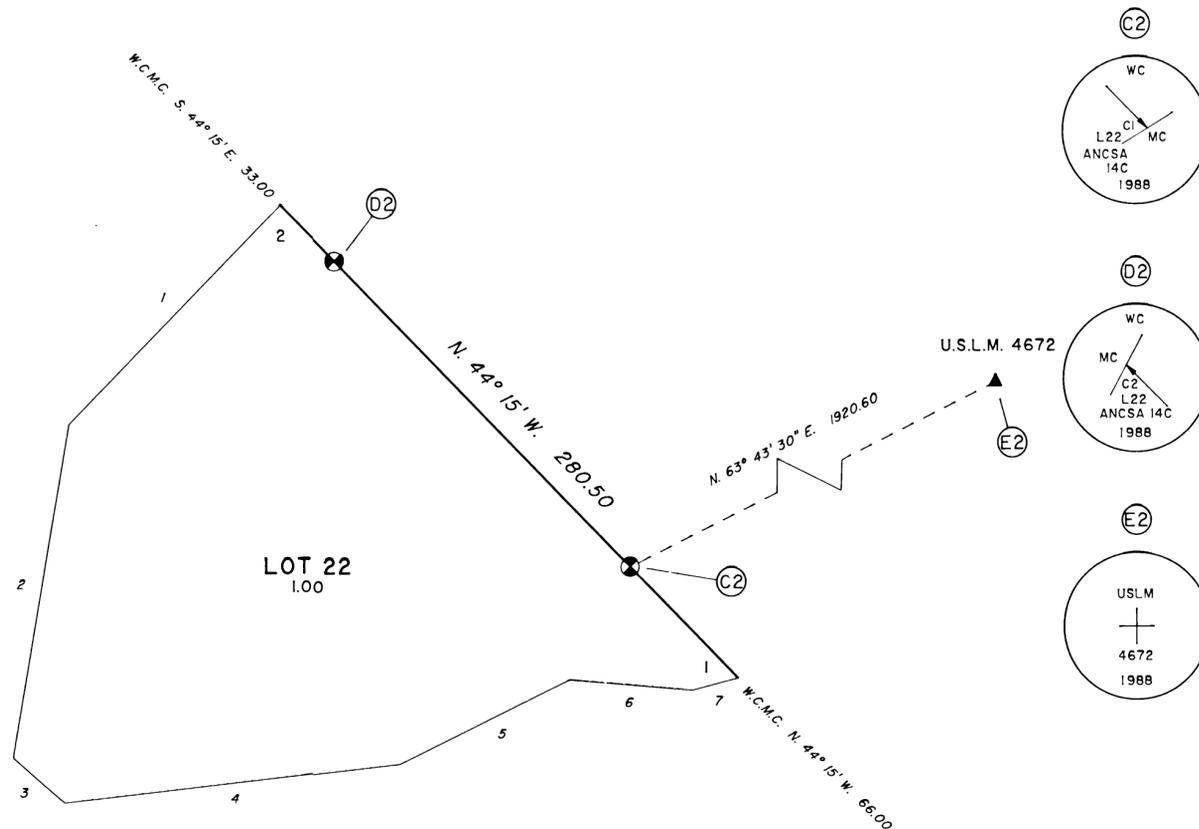

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, in a collar of stone, 24 ins. diam., with brass cap mkd. as shown, from which  
A spruce, 11 ins. diam., bears S. 65° W., 12.0 ft. dist., mkd. X BT.

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 10 ins. diam., bears N. 77° E., 84.0 ft. dist., mkd. X BT.  
A spruce, 7 ins. diam., bears S. 4° E., 73.5 ft. dist., mkd. X BT.

Found an iron post, 2 1/2 in. diam., firmly set, projecting 8 ins. above the ground, with brass cap mkd. as shown from which the original bearing trees  
A spruce, 6 ins. diam., bears North, 32.5 ft. dist., mkd. USLM 4672 BT, on open blaze.  
A spruce stump, 7 ins. diam., 3 ft high bears N. 83° W., 52.5 ft. dist., mkd. BT at the bottom.  
and a new bearing tree.  
A spruce, 5 ins. diam., bears N. 75° W., 39.5 ft. dist., mkd. X BT.



INTRICATE BAY  
ON  
ILIAMNA LAKE

MEANDERS

1.	S.	44°	26'	W.	129.36 Ft.
2.	S.	9°	47'	W.	143.22 Ft.
3.	S.	48°	43'	E.	29.04 Ft.
4.	N.	83°	44'	E.	144.54 Ft.
5.	N.	63°	04'	E.	81.18 Ft.
6.	S.	84°	57'	E.	52.80 Ft.
7.	N.	74°	33'	E.	20.46 Ft.

LEGEND

- ⊕ SET AN IRON POST OR STAINLESS STEEL POST, 2 1/2 INS. DIAM., WITH BRASS CAP
- ▲ FOUND AN IRON POST, 2 1/2 INS. DIAM., WITH BRASS CAP



92-02

RECORDED - FILED	80-
ILIAMNA REC. DIST.	
DATE	4/7 19 92
TIME	9:45 A.M.
Requested by	(USA/BUM)
Address	

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) LOTS 1 THROUGH 24  
(P.L. 92-203, 85 STAT. 688,702,703)  
ALASKA PENINSULA CORP.  
AT  
KOKHANOK, ALASKA

CURVE TABLE



(A) R: 4146.00 L: 417.59 Δ: 5° 46' 15" L.C.: S. 80° 58' 56" E., 417.41	(I) R: 168.00 L: 187.27 Δ: 63° 52' 03" L.C.: N. 73° 37' 19" E., 177.72
(B) R: 4046.00 L: 407.51 Δ: 5° 46' 15" L.C.: N. 80° 58' 56" W., 407.34	(J) R: 268.00 L: 298.74 Δ: 63° 52' 03" L.C.: S. 73° 37' 19" W., 283.51
(C) R: 3946.00 L: 397.44 Δ: 5° 46' 15" L.C.: S. 80° 58' 56" E., 397.27	(K) R: 368.00 L: 410.21 Δ: 63° 52' 03" L.C.: N. 73° 37' 19" E., 389.30
(D) R: 3846.00 L: 387.37 Δ: 5° 46' 15" L.C.: N. 80° 58' 56" W., 387.21	(L) R: 468.00 L: 521.68 Δ: 63° 52' 03" L.C.: S. 73° 37' 19" W., 495.09
(E) R: 7789.00 L: 496.50 Δ: 3° 39' 08" L.C.: S. 76° 16' 14" E., 496.41	(M) R: 591.00 L: 65.98 Δ: 6° 23' 46" L.C.: N. 44° 53' 11" E., 65.94
(F) R: 7689.00 L: 490.12 Δ: 3° 39' 08" L.C.: N. 76° 16' 14" W., 490.04	(N) R: 491.00 L: 54.81 Δ: 6° 23' 46" L.C.: S. 44° 53' 11" W., 54.78
(G) R: 7589.00 L: 483.75 Δ: 3° 39' 08" L.C.: S. 76° 16' 14" E., 483.67	(O) R: 391.00 L: 43.65 Δ: 6° 23' 46" L.C.: N. 44° 53' 11" E., 43.63
(H) R: 7489.00 L: 477.37 Δ: 3° 39' 08" L.C.: N. 76° 16' 14" W., 477.29	(P) R: 291.00 L: 32.49 Δ: 6° 23' 46" L.C.: S. 44° 53' 11" W., 32.47

LEGEND


- SET AN IRON POST OR STAINLESS STEEL POST, 2 1/2 INS. DIAM., WITH BRASS CAP
- SET A REBAR, 30 INS. LONG, 5/8" IN DIAM., 28 INS. IN THE GROUND WITH ALUM. CAP MARKED WITH APPROPRIATE COR. NO. AND LOT NO.




Mean Magnetic Declination 22° E.

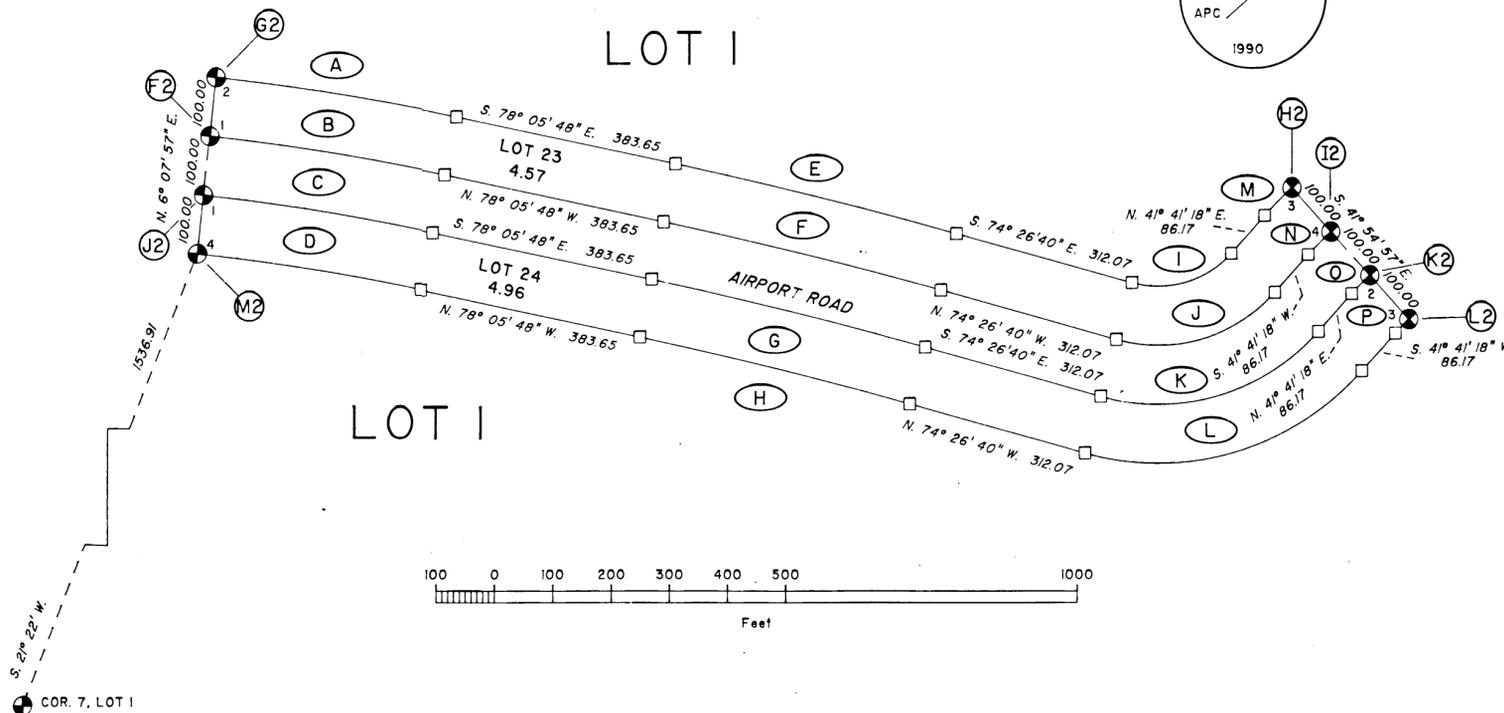


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 7 ins. diam., bears N. 75° E., 53.5 ft. dist., mkd. X BT.  
A spruce, 6 ins. diam., bears N. 25° W., 66.5 ft. dist., mkd. X BT.  
Deposit a magnet at the base of stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 9 ins. diam., bears South, 13.5 ft. dist., mkd. X BT.  
A spruce, 6 ins. diam., bears S. 59° W., 35.5 ft. dist., mkd. X BT.  
Deposit a magnet at the base of stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 4 ins. diam., bears N. 16° E., 23.5 ft. dist., mkd. X BT.  
A spruce, 7 ins. diam., bears N. 55° W., 37.5 ft. dist., mkd. X BT.  
Deposit a magnet at the base of stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown  
No accessories available.  
Deposit a magnet at the base of stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 15 ins. diam., bears West, 17.0 ft. dist., mkd. X BT.  
A spruce, 11 ins. diam., bears N. 10° W., 32.5 ft. dist., mkd. X BT.  
Deposit a magnet at the base of stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 12 ins. diam., bears S. 47° E., 83.0 ft. dist., mkd. X BT.  
A spruce, 11 ins. diam., bears S. 3° E., 91.5 ft. dist., mkd. X BT.  
Deposit a magnet at the base of stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown  
No accessories available.  
Deposit a magnet at the base of stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 4 ins. diam., bears N. 87° E., 15.0 ft. dist., mkd. X BT.  
A spruce, 10 ins. diam., bears S. 10° W., 34.5 ft. dist., mkd. X BT.  
Deposit a magnet at the base of stainless steel post.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

92-02

RECORDED - FILED 8-  
ILLIAMNA DIST.

DATE 4/7 1992  
TIME 9:45 A.M.  
Requested by LUSA/BUM  
Address