

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS 1 THROUGH 73 AND 75 THROUGH 93
P.L. 92-203 (85 STAT. 688, 702, 703)

KOLIGANEK NATIVES, LIMITED
AT
KOLIGANEK, ALASKA

AND THE DEPENDENT RESURVEY
OF A PORTION OF U.S. SURVEY No. 3509,
AND A PORTION OF U.S. SURVEY No. 6080.

This plat contains the entire survey record.

The history of surveys is referenced on sheet number 2.

This survey was executed by Stanley E. Sears, Registered Alaska Land Surveyor No. 2087-S, for Bristol Bay Native Corporation, August 12, 2002 through July 17, 2003, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated May 7, 2002, approved May 31, 2002, under Contract No. NAC-020125, awarded August 16, 2002 and Notice to Proceed dated August 10, 2002.

Field assistants were:

- Tom R. Moore, Surveying Technician
- Marlene M. O'Domin, Surveying Aide
- Taylor M. Moore, Surveying Aide
- Wassillie N.M.I. Wenhola, Sr., Surveying Aide

Area Surveyed: 139 68 Acres

The geographic position of corner No. 3, Tract 45, identical with corner No. 4, U.S. Survey No. 3509, is:

Latitude: 59° 43' 41.47" North (NAD 27)
Longitude: 157° 17' 04.56" West

This survey was accomplished using global positioning systems (GPS). The control was obtained using static, fast static, and real time kinematics (RTK) with GPS carrier phase receivers. Monuments were positioned using RTK, and positions were confirmed with a redundant fast static observation.

The mean magnetic declination was computed by U.S.G.S. Geomag program using AK-2000.COF model as of August 12, 2002.

This survey is situated on the right bank of the Nushagak River, within Township 5 South, Range 47 West, Seward Meridian, Alaska.


The land, which is mostly open rolling tundra, with small spruce, willow, and dense alder undergrowth along the river banks and along the various small streams and creeks in the area. Fibrous organics overlie glacial fill and or silt with discontinuous permafrost. There are deposits of gravel along the bank of the Nushagak River.

Access to this survey was by ATV.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, sheets 1 through 12 having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director
Daniel L. Johnson 6-15-04
Date
Deputy State Director for Cadastral Survey, Alaska

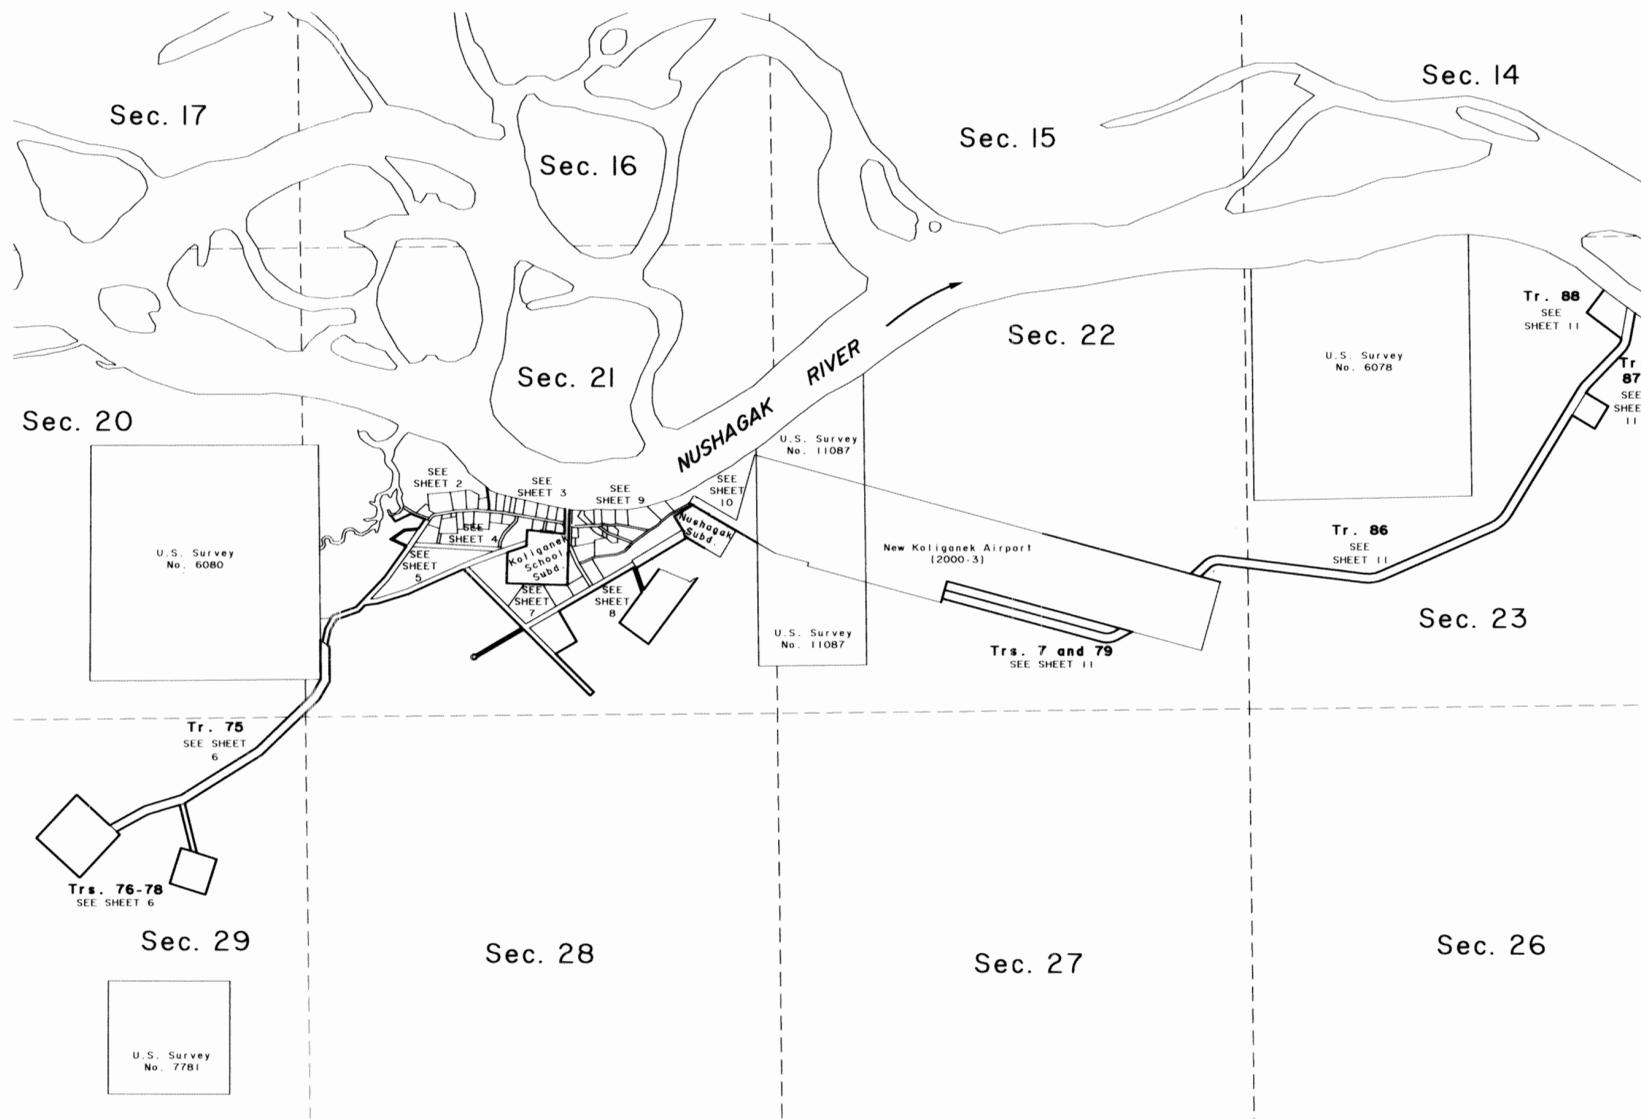

True Meridian
Mean Magnetic Declination 17 3/4° E.

1320 0 660 1320 1980 2640
Feet

Note: During the survey Tract 1 was expanded to include the Plan of Survey Tracts 1, 2, and 7. Tract numbers for Tracts 2 and 7 were reassigned to new Tracts. Tracts 89 thru 93 were added during the survey.

I, STANLEY E. SEARS, Registered Alaska Land Surveyor No. 2087-S, for Bristol Bay Native Corporation, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-12, in conformity with the Special Instructions approved May 31, 2002, Contract No. NAC-020125, awarded August 16, 2002, the principles of survey described in the Manual of Instructions for the Survey of Public Lands of the United States, 1973, and in the specific manner described on this plat.

March 16, 2004
Date

Stanley E. Sears
Registered Land Surveyor



I hereby certify that Tracts 1 through 73 and 75 through 93, represented on this plat of survey are on lands Interim Conveyed to Koliganek Natives Limited, by Interim Conveyance No. 228, issued by the United States of America, said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Koliganek Natives Limited ANCSA 14(c) Map of Boundaries accepted May 29, 2001.

5-11-2004
Date

A Herman J. Nelson Sr.
President, Koliganek Natives Limited

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS 1 THROUGH 73 AND 75 THROUGH 93
P.L. 92-203 (85 STAT. 688, 702, 703)

KOLIGANEK NATIVES, LIMITED
AT
KOLIGANEK, ALASKA

AND THE DEPENDENT RESURVEY
OF A PORTION OF U.S. SURVEY No. 3509,
AND A PORTION OF U.S. SURVEY No. 6080

History of surveys

The exterior boundaries of Township 5 South, Range 47 West, Seward Meridian, Alaska, were surveyed by Timothy A. Kent, Cadastral Surveyor, in 1978.

U.S. Survey No. 3509 was surveyed by Hobart B. Hyatt, Supervisory Cadastral Surveyor, in 1963.

U.S. Survey No. 6078 was surveyed by William A. Wiley, Cadastral Surveyor, in 1978.

U.S. Survey No. 6080 was surveyed by Frederick W. Ward, Cadastral Surveyor, in 1981.

U.S. Survey No. 7781 was surveyed by Stanley E. Sears, Registered Alaska Land Surveyor No. 2087-S, in 1995.

U.S. Survey No. 11087 was surveyed by Michael E. Miller, Registered Alaska Land Surveyor No. LS-7222, in 1993.

Plat No. 98-17, Nushagak Subdivision, was surveyed by Donald C. Black, Registered Alaska Land Surveyor No. LS-8851, in 1998, recorded in the Bristol Bay Recording District on December 28, 1998.

Plat No. 2000-03, New Koliganek Airport, was surveyed by William D. Cohen, Registered Alaska Land Surveyor No. LS-7537, in 2000, recorded in the Bristol Bay Recording District on May 22, 2000.

The unrecorded plat of Koliganek School Subdivision, was surveyed by Stanley E. Sears, Registered Alaska Land Surveyor No. 2087-S, between 1998 and 2000.

TRACT 9
MEANDER

Along a well-defined bank, 2 to 5 ft. high, at the line of ordinary high water.

- 1. S. 44°53' E., 24.50 ft.

TRACT 1
MEANDERS

Along a well-defined bank of Noley Creek (local name), 1 to 3 ft. high, at the line of ordinary high water.

- 1. N. 17°23' W., 90.43 ft.
- 2. N. 19°52' E., 47.68 ft.
- 3. N. 22°23' W., 104.01 ft.
- 4. N. 1°37' E., 134.01 ft.
- 5. N. 25°23' W., 102.01 ft.
- 6. N. 35°38' W., 66.01 ft.
- 7. N. 24°22' E., 52.00 ft.
- 8. N. 10°07' E., 89.01 ft.
- 9. N. 35°22' E., 174.01 ft.
- 10. N. 52°22' E., 66.01 ft.

Thence along a well-defined bank of a channel of the Nushagak River, 2 to 5 ft. high, at the line of ordinary high water.

- 11. S. 70°53' E., 220.02 ft.
- 12. S. 73°38' E., 163.51 ft.
- 13. S. 57°23' E., 81.01 ft.
- 14. S. 41°38' E., 292.02 ft.
- 15. S. 27°53' E., 96.42 ft.
- 16. S. 51°38' E., 239.83 ft.

TRACT 61
MEANDERS

Along a well-defined bank, 1 to 3 ft. high, at the line of ordinary high water.

- 1. N. 74°07' E., 99.89 ft.
- 2. N. 43°52' E., 40.50 ft.
- 3. N. 20°07' E., 29.59 ft.

TRACT 59
MEANDER

Along a well-defined bank, 1 to 3 ft. high, at the line of ordinary high water.


- 1. N. 20°07' E., 30.62 ft.

LEGEND

- Set an ANCSA 14(c) primary monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap, mkd. 'ANCSA 14(c), KNL,' the appropriate corner numbers, tract identifiers, tract lines, and '2002'. Witness cors. and witness cor. to meander cors. have additional mks. MC and/or WC and an arrow pointing to the true point. Deposit a magnet, in a clear plastic case at the base of the stainless steel post.
- Drive an ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with alum. cap, 2 1/2 ins. diam., mkd. 'KNL,' the appropriate lines, corner numbers, tract identifiers, and '2002'.

Note: During the survey Tract 1 was expanded to include the Plan of Survey Tracts 1, 2, and 7. Tract numbers for Tracts 2 and 7 were reassigned to new Tracts. Tracts 89 thru 93 were added during the survey.

REFERENCE SHOULD BE MADE TO SHEET NOS. 1 AND 12 FOR ADDITIONAL SURVEY INFORMATION.

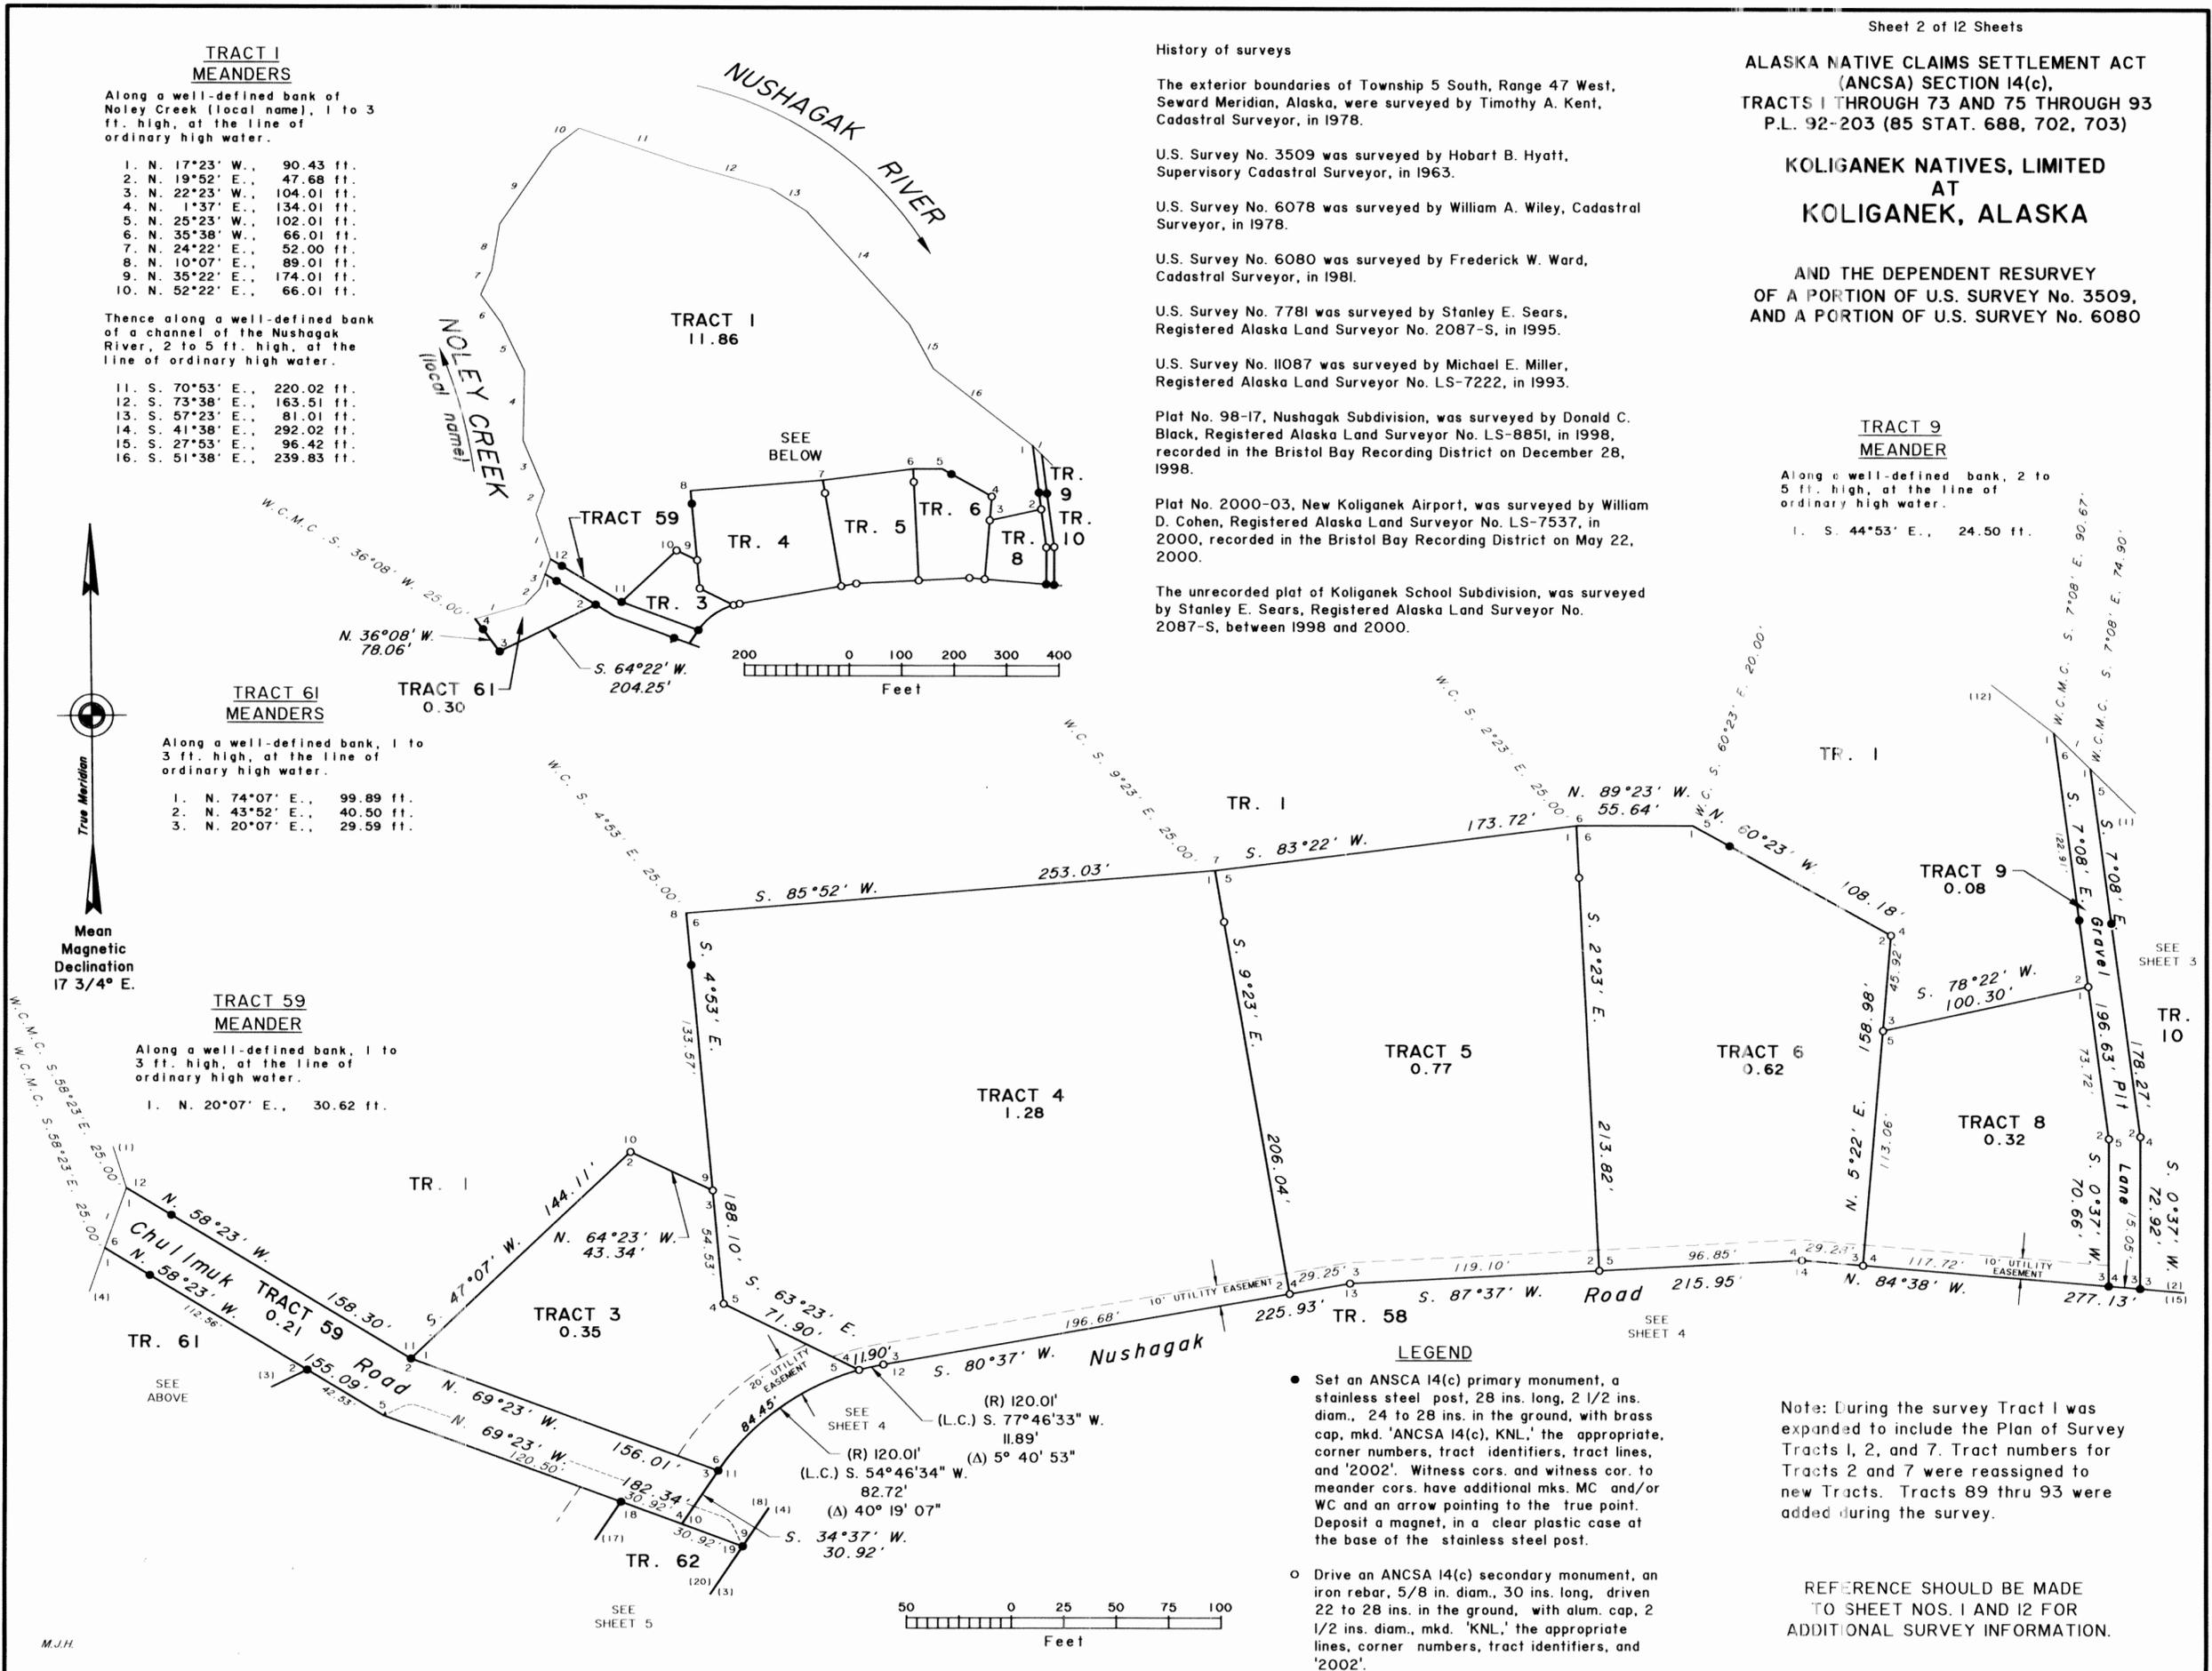

2004-6
BRISTOL BAY RECORDING
DISTRICT


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 73 AND 75 THROUGH 93 P.L. 92-203 (85 STAT. 688, 702, 703)

KOLIGANEK NATIVES, LIMITED AT KOLIGANEK, ALASKA

TRACTS 10 - 18 MEANDERS

Along a well-defined bank, 2 to 5 ft. high, at the line of ordinary high water.

NUSHAGAK RIVER

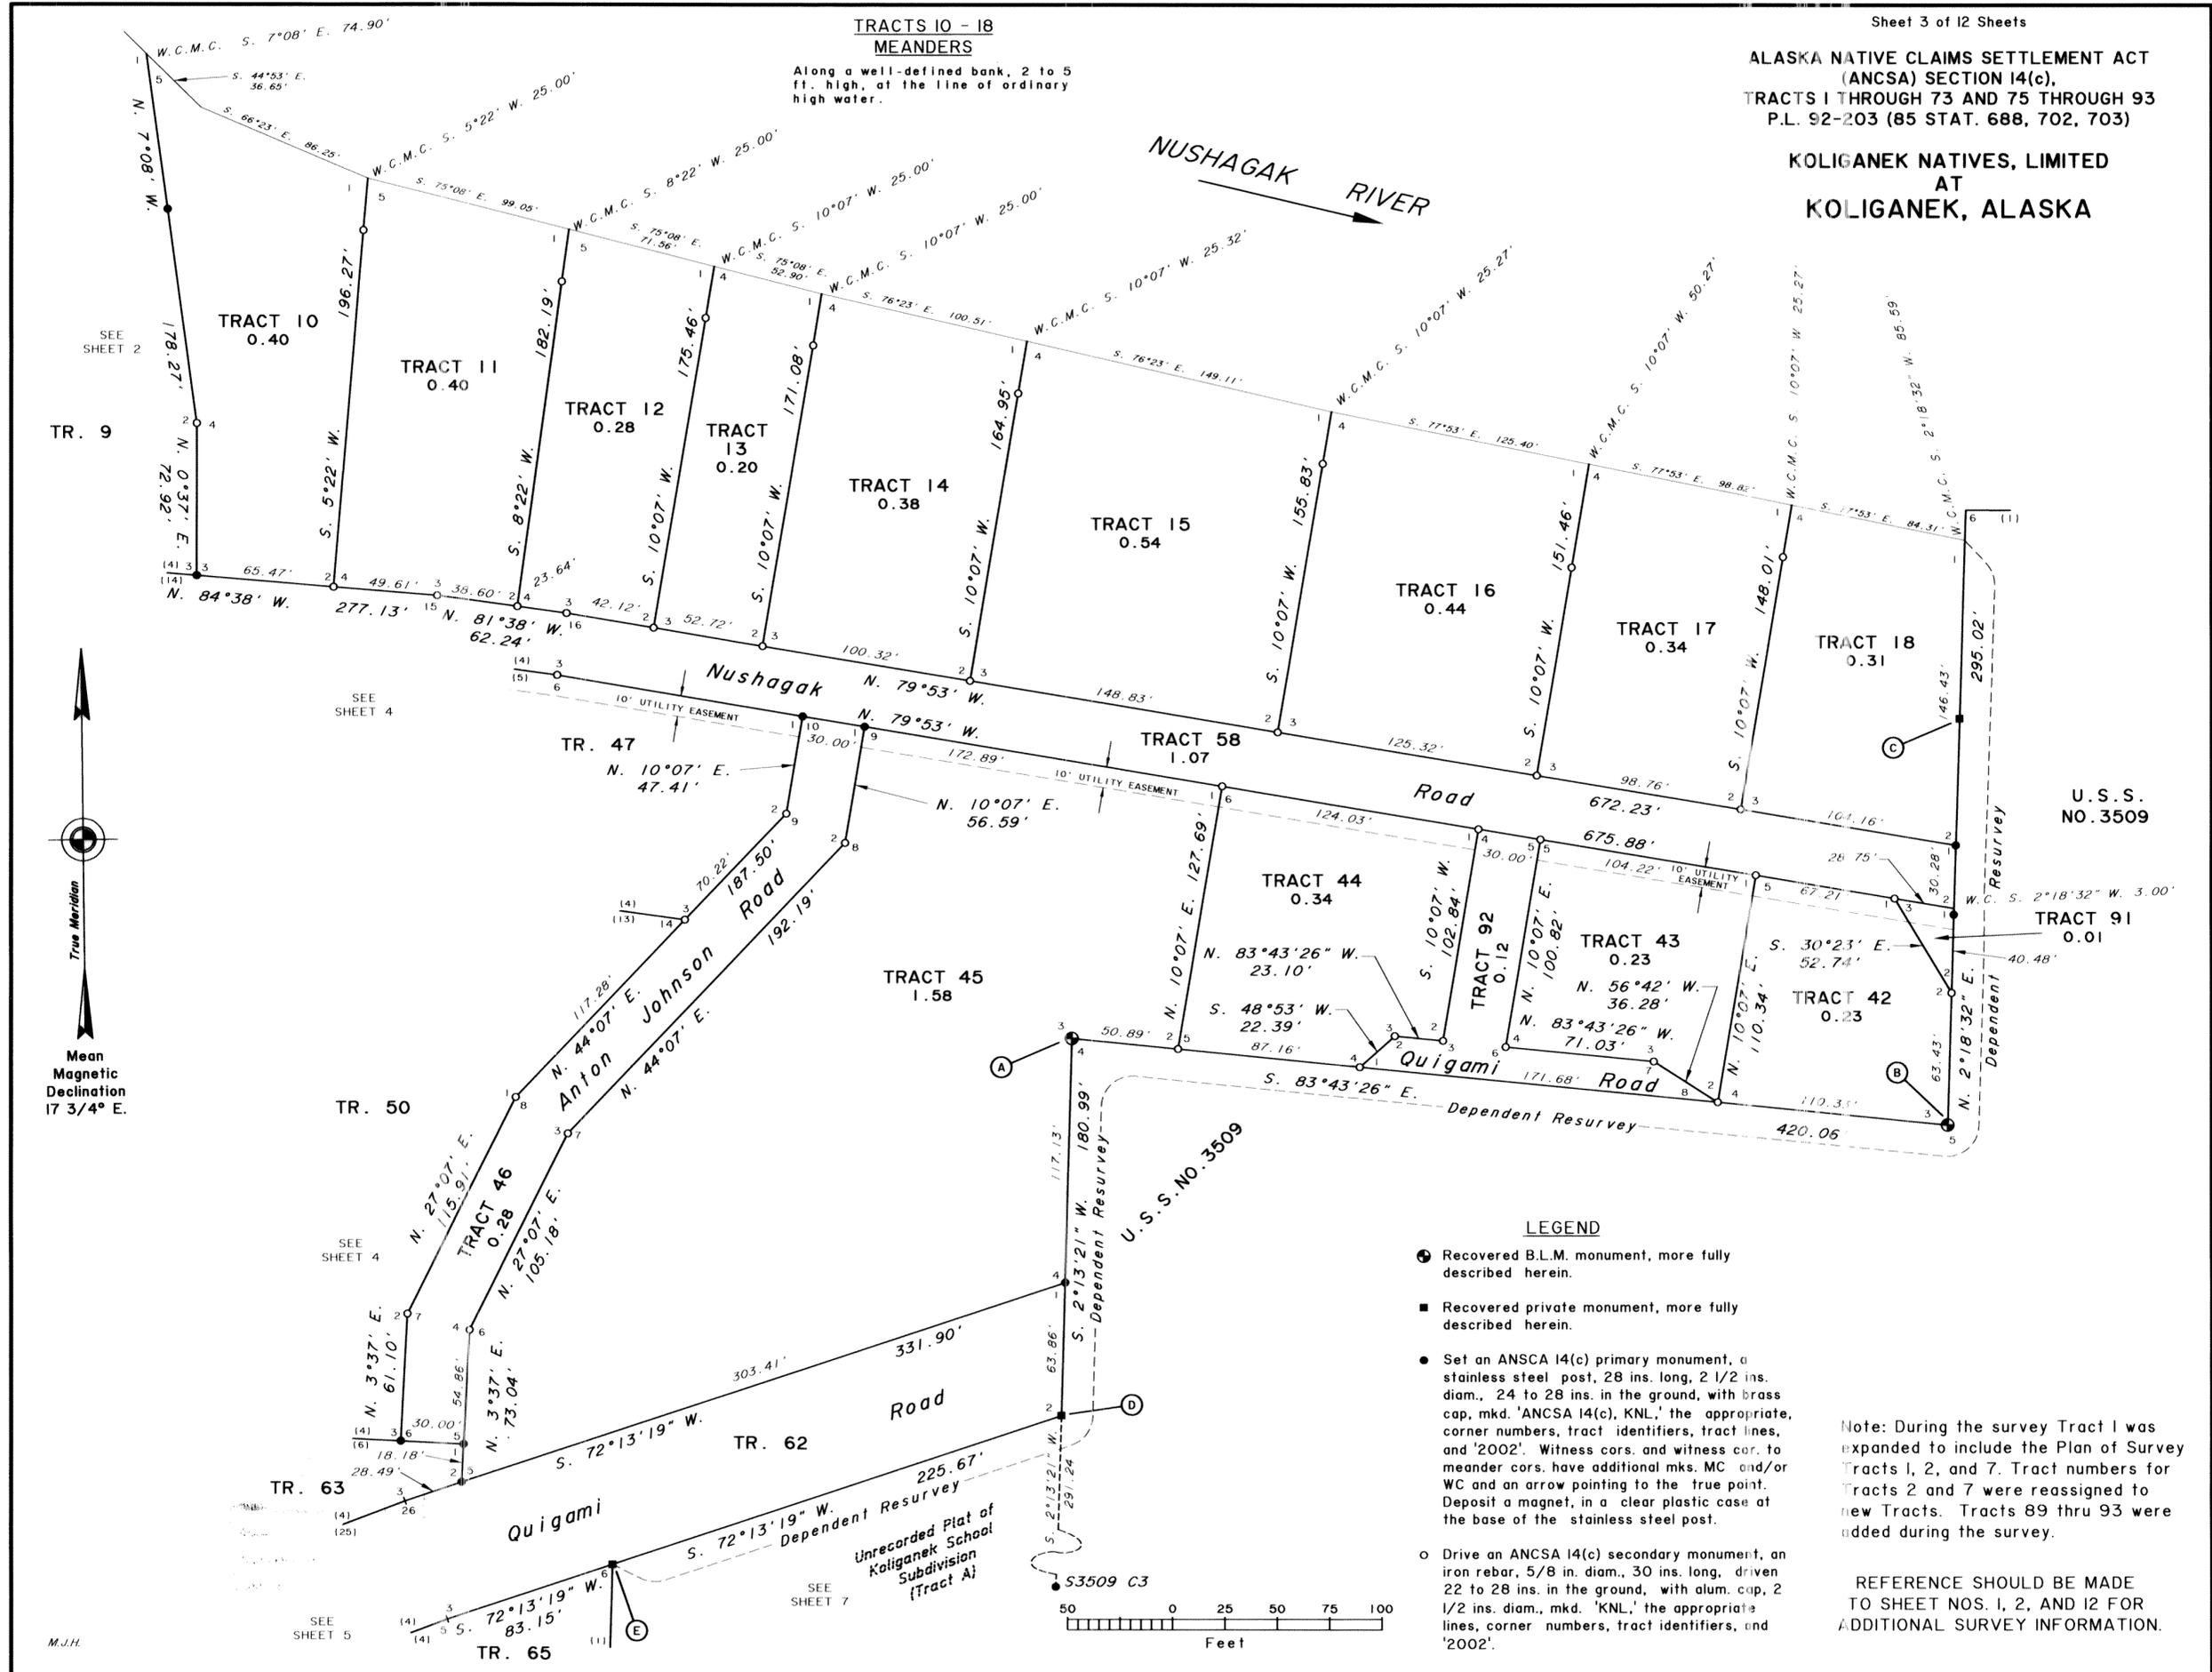

U.S.S. NO. 3509


TRACT 91 0.01

LEGEND

- Recovered B.L.M. monument, more fully described herein.
- Recovered private monument, more fully described herein.
- Set an ANCSA 14(c) primary monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap, mkd. 'ANCSA 14(c), KNL,' the appropriate corner numbers, tract identifiers, tract lines, and '2002'. Witness cors. and witness cor. to meander cors. have additional mks. MC and/or WC and an arrow pointing to the true point. Deposit a magnet, in a clear plastic case at the base of the stainless steel post.
- Drive an ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with alum. cap, 2 1/2 ins. diam., mkd. 'KNL,' the appropriate lines, corner numbers, tract identifiers, and '2002'.

Note: During the survey Tract 1 was expanded to include the Plan of Survey Tracts 1, 2, and 7. Tract numbers for Tracts 2 and 7 were reassigned to new Tracts. Tracts 89 thru 93 were added during the survey.


REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, AND 12 FOR ADDITIONAL SURVEY INFORMATION.



2004-6
BRISTOL BAY RECORDING
DISTRICT


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS 1 THROUGH 73 AND 75 THROUGH 93
P.L. 92-203 (85 STAT. 688, 702, 703)

KOLIGANEK NATIVES, LIMITED
AT
KOLIGANEK, ALASKA

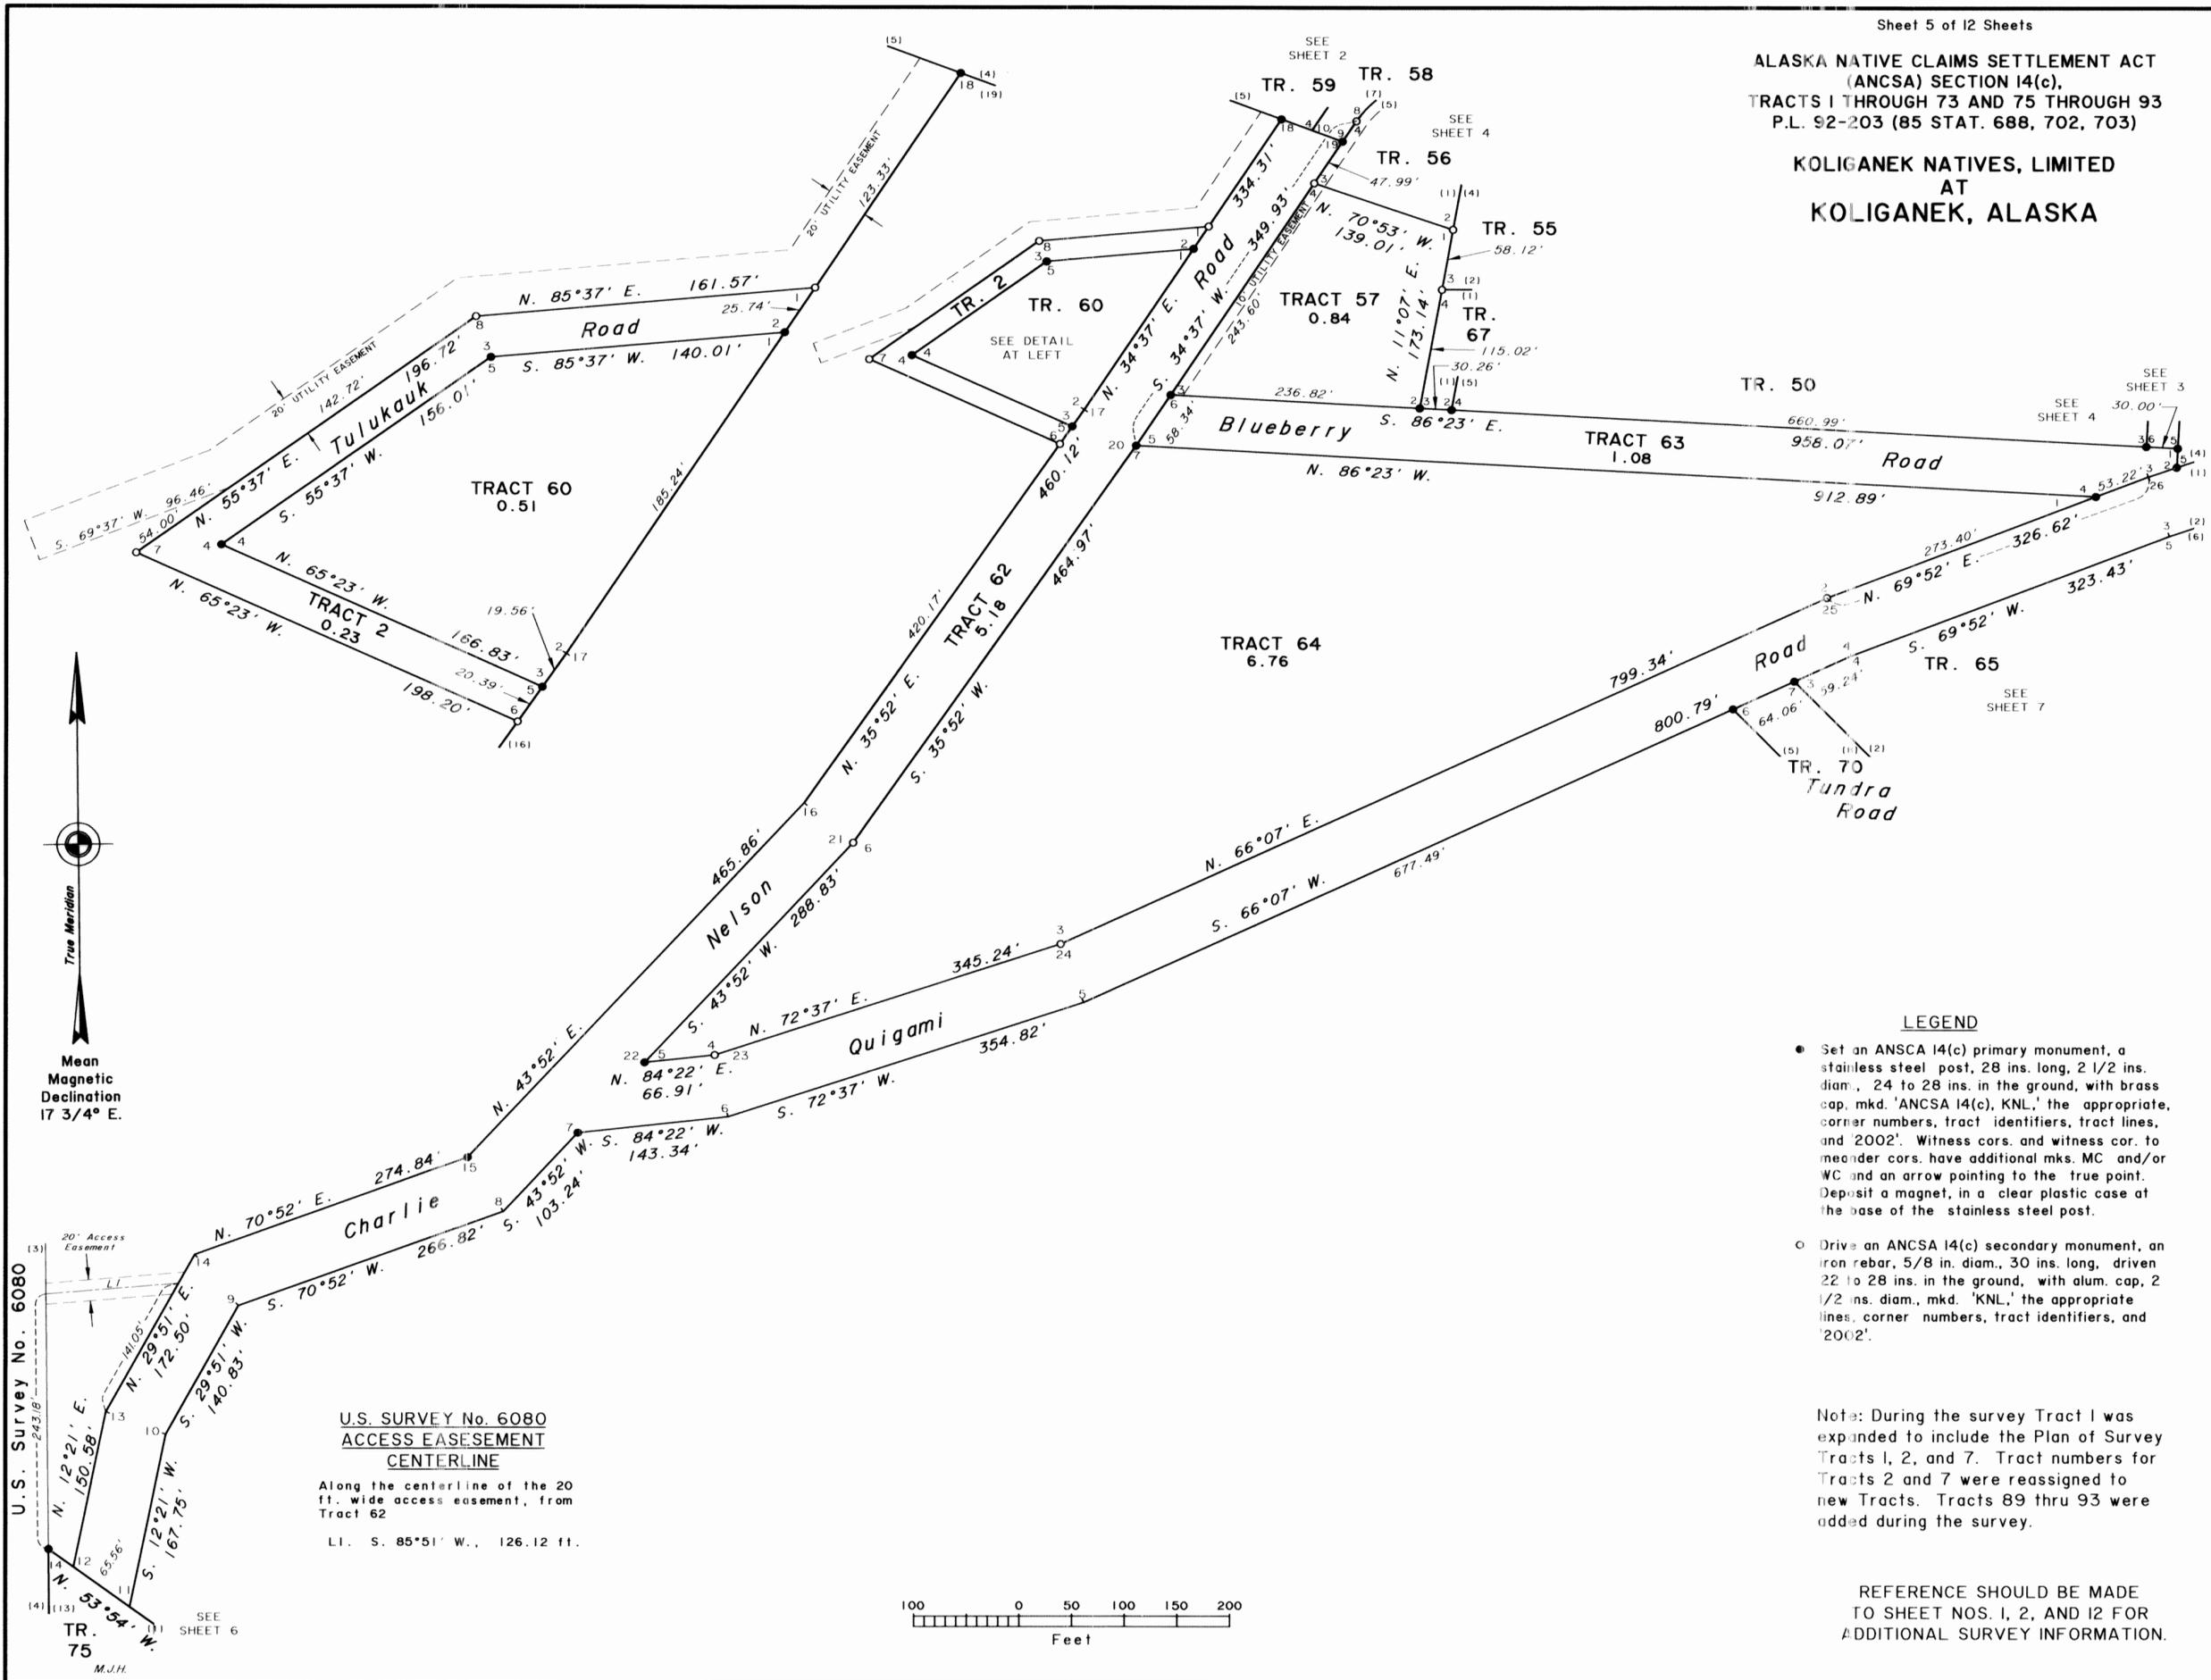

True Meridian
Mean
Magnetic
Declination
17 3/4° E.

U.S. SURVEY No. 6080
ACCESS EASEMENT
CENTERLINE
Along the centerline of the 20
ft. wide access easement, from
Tract 62
LI. S. 85°51' W., 126.12 ft.



- LEGEND**
- Set an ANCSA 14(c) primary monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap, mkd. 'ANCSA 14(c), KNL,' the appropriate corner numbers, tract identifiers, tract lines, and '2002'. Witness cors. and witness cor. to meander cors. have additional mks. MC and/or WC and an arrow pointing to the true point. Deposit a magnet, in a clear plastic case at the base of the stainless steel post.
 - Drive an ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with alum. cap, 2 1/2 ins. diam., mkd. 'KNL,' the appropriate lines, corner numbers, tract identifiers, and '2002'.

Note: During the survey Tract 1 was expanded to include the Plan of Survey Tracts 1, 2, and 7. Tract numbers for Tracts 2 and 7 were reassigned to new Tracts. Tracts 89 thru 93 were added during the survey.

REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, AND 12 FOR ADDITIONAL SURVEY INFORMATION.






2004-G
BRISTOL BAY RECORDING
DISTRICT

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS 1 THROUGH 73 AND 75 THROUGH 93
P.L. 92-203 (85 STAT. 688, 702, 703)

KOLIGANEK NATIVES, LIMITED
AT
KOLIGANEK, ALASKA

SEE
SHEET 5

U.S. Survey
No. 6080

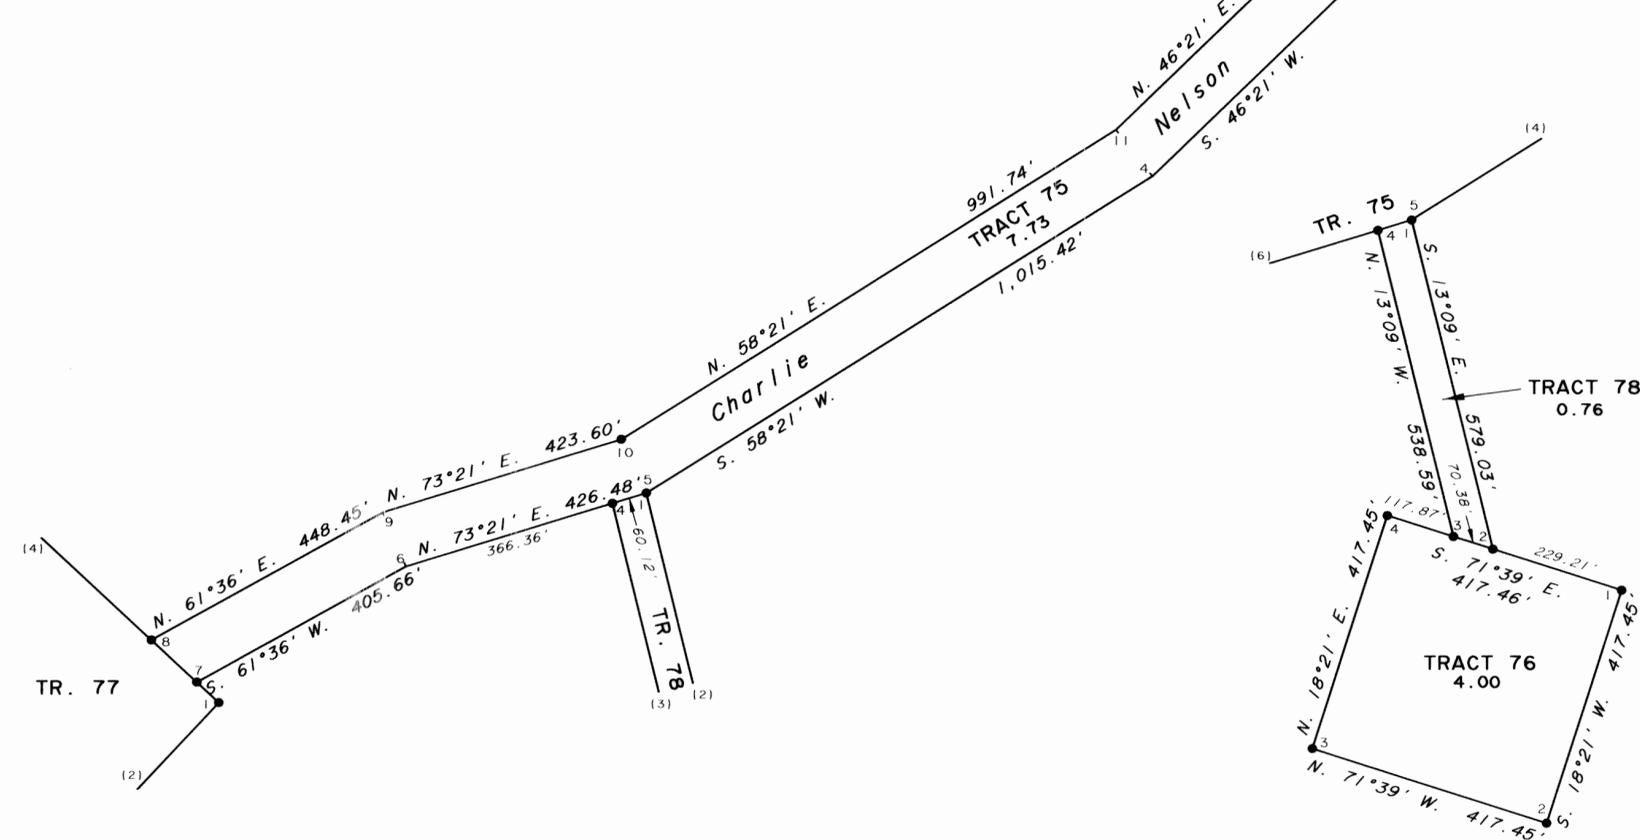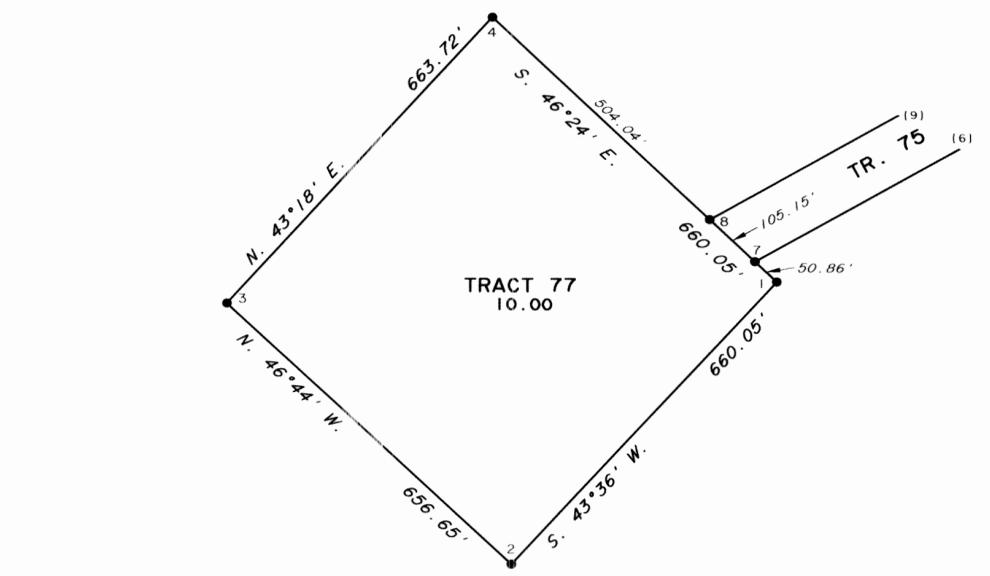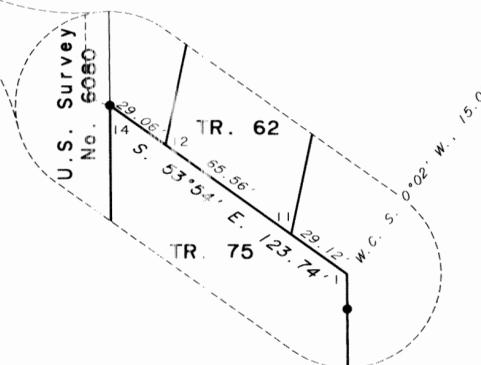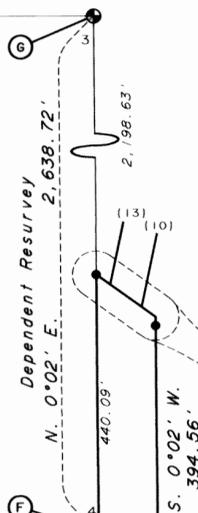

M.J.H.

LEGEND


- Recovered B.L.M. monument, more fully described herein.
- Set an ANCSA 14(c) primary monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap, mkd. 'ANCSA 14(c), KNL,' the appropriate corner numbers, tract identifiers, tract lines, and '2002'. Witness cors. and witness cor. to meander cors. have additional mks. MC and/or WC and an arrow pointing to the true point. Deposit a magnet, in a clear plastic case at the base of the stainless steel post.
- Drive an ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with alum. cap, 2 1/2 ins. diam., mkd. 'KNL,' the appropriate lines, corner numbers, tract identifiers, and '2002'.

REFERENCE SHOULD BE MADE
TO SHEET NOS. 1, 2, AND 12 FOR
ADDITIONAL SURVEY INFORMATION.


2004-6
BRISTOL BAY RECORDING
DISTRICT

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS 1 THROUGH 73 AND 75 THROUGH 93
P.L. 92-203 (85 STAT. 688, 702, 703)

KOLIGANEK NATIVES, LIMITED
AT
KOLIGANEK, ALASKA

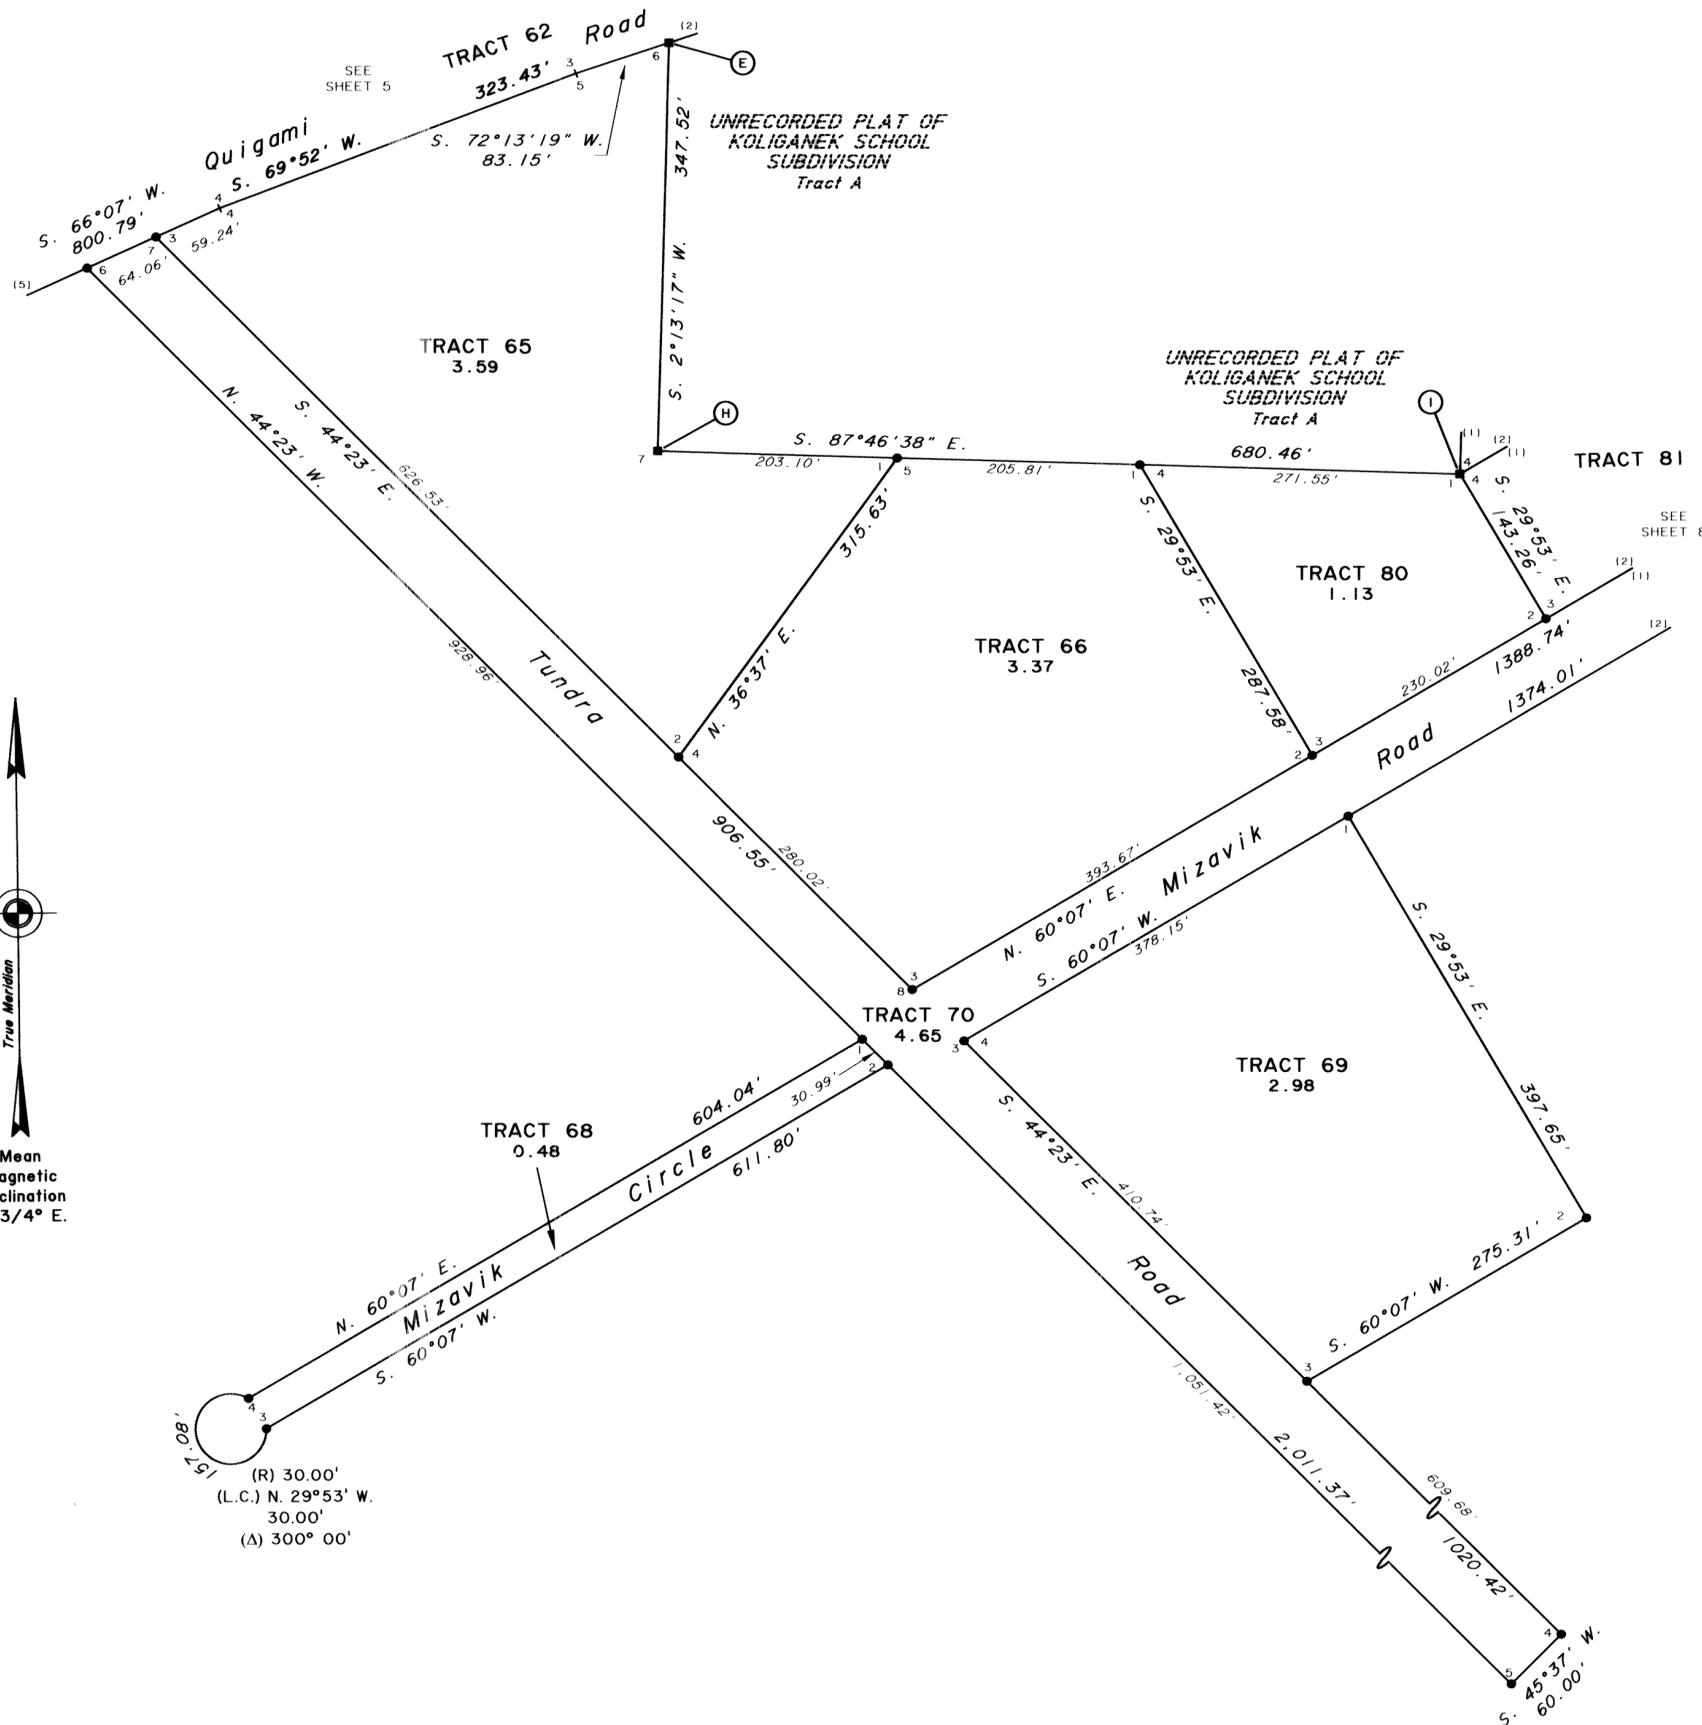

- LEGEND**
- Recovered private monument, more fully described herein.
 - Set an ANCSA 14(c) primary monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap, mkd. 'ANCSA 14(c), KNL,' the appropriate corner numbers, tract identifiers, tract lines, and '2002'. Witness cors. and witness cor. to meander cors. have additional mks. MC and/or WC and an arrow pointing to the true point. Deposit a magnet, in a clear plastic case at the base of the stainless steel post.
 - Drive an ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with alum. cap, 2 1/2 ins. diam, mkd. 'KNL,' the appropriate lines, corner numbers, tract identifiers, and '2002'.



REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, AND 12 FOR ADDITIONAL SURVEY INFORMATION.

2004-6
BRISTOL BAY RECORDING DISTRICT

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 73 AND 75 THROUGH 93 P.L. 92-203 (85 STAT. 688, 702, 703)

KOLIGANEK NATIVES, LIMITED AT KOLIGANEK, ALASKA

TRACT 26 MEANDER

Along a well-defined bank, 2 to 5 ft. high, at the line of ordinary high water.

1. N. 80°37' E., 225.84 ft.

TRACT 27 MEANDER

Along a well-defined bank, 2 to 5 ft. high, at the line of ordinary high water.

1. N. 73°22' E., 210.81 ft.

LEGEND

- Recovered B.L.M. monument, more fully described herein.
- Recovered private monument, more fully described herein.
- Set an ANCSA 14(c) primary monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap, mkd. 'ANCSA 14(c), KNL,' the appropriate, corner numbers, tract identifiers, tract lines, and '2002'. Witness cors. and witness cor. to meander cors. have additional mks. MC and/or WC and an arrow pointing to the true point. Deposit a magnet, in a clear plastic case at the base of the stainless steel post.
- Drive an ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with alum. cap, 2 1/2 ins. diam., mkd. 'KNL,' the appropriate lines, corner numbers, tract identifiers, and '2002'.



Mean Magnetic Declination 17 3/4° E.

UNRECORDED PLAT OF KOLIGANEK SCHOOL SUBDIVISION Tract A


U.S. Survey 3509

N. 2°18'23" E., 75.01'

SEE SHEET 7

TR. 69


M.J.H.

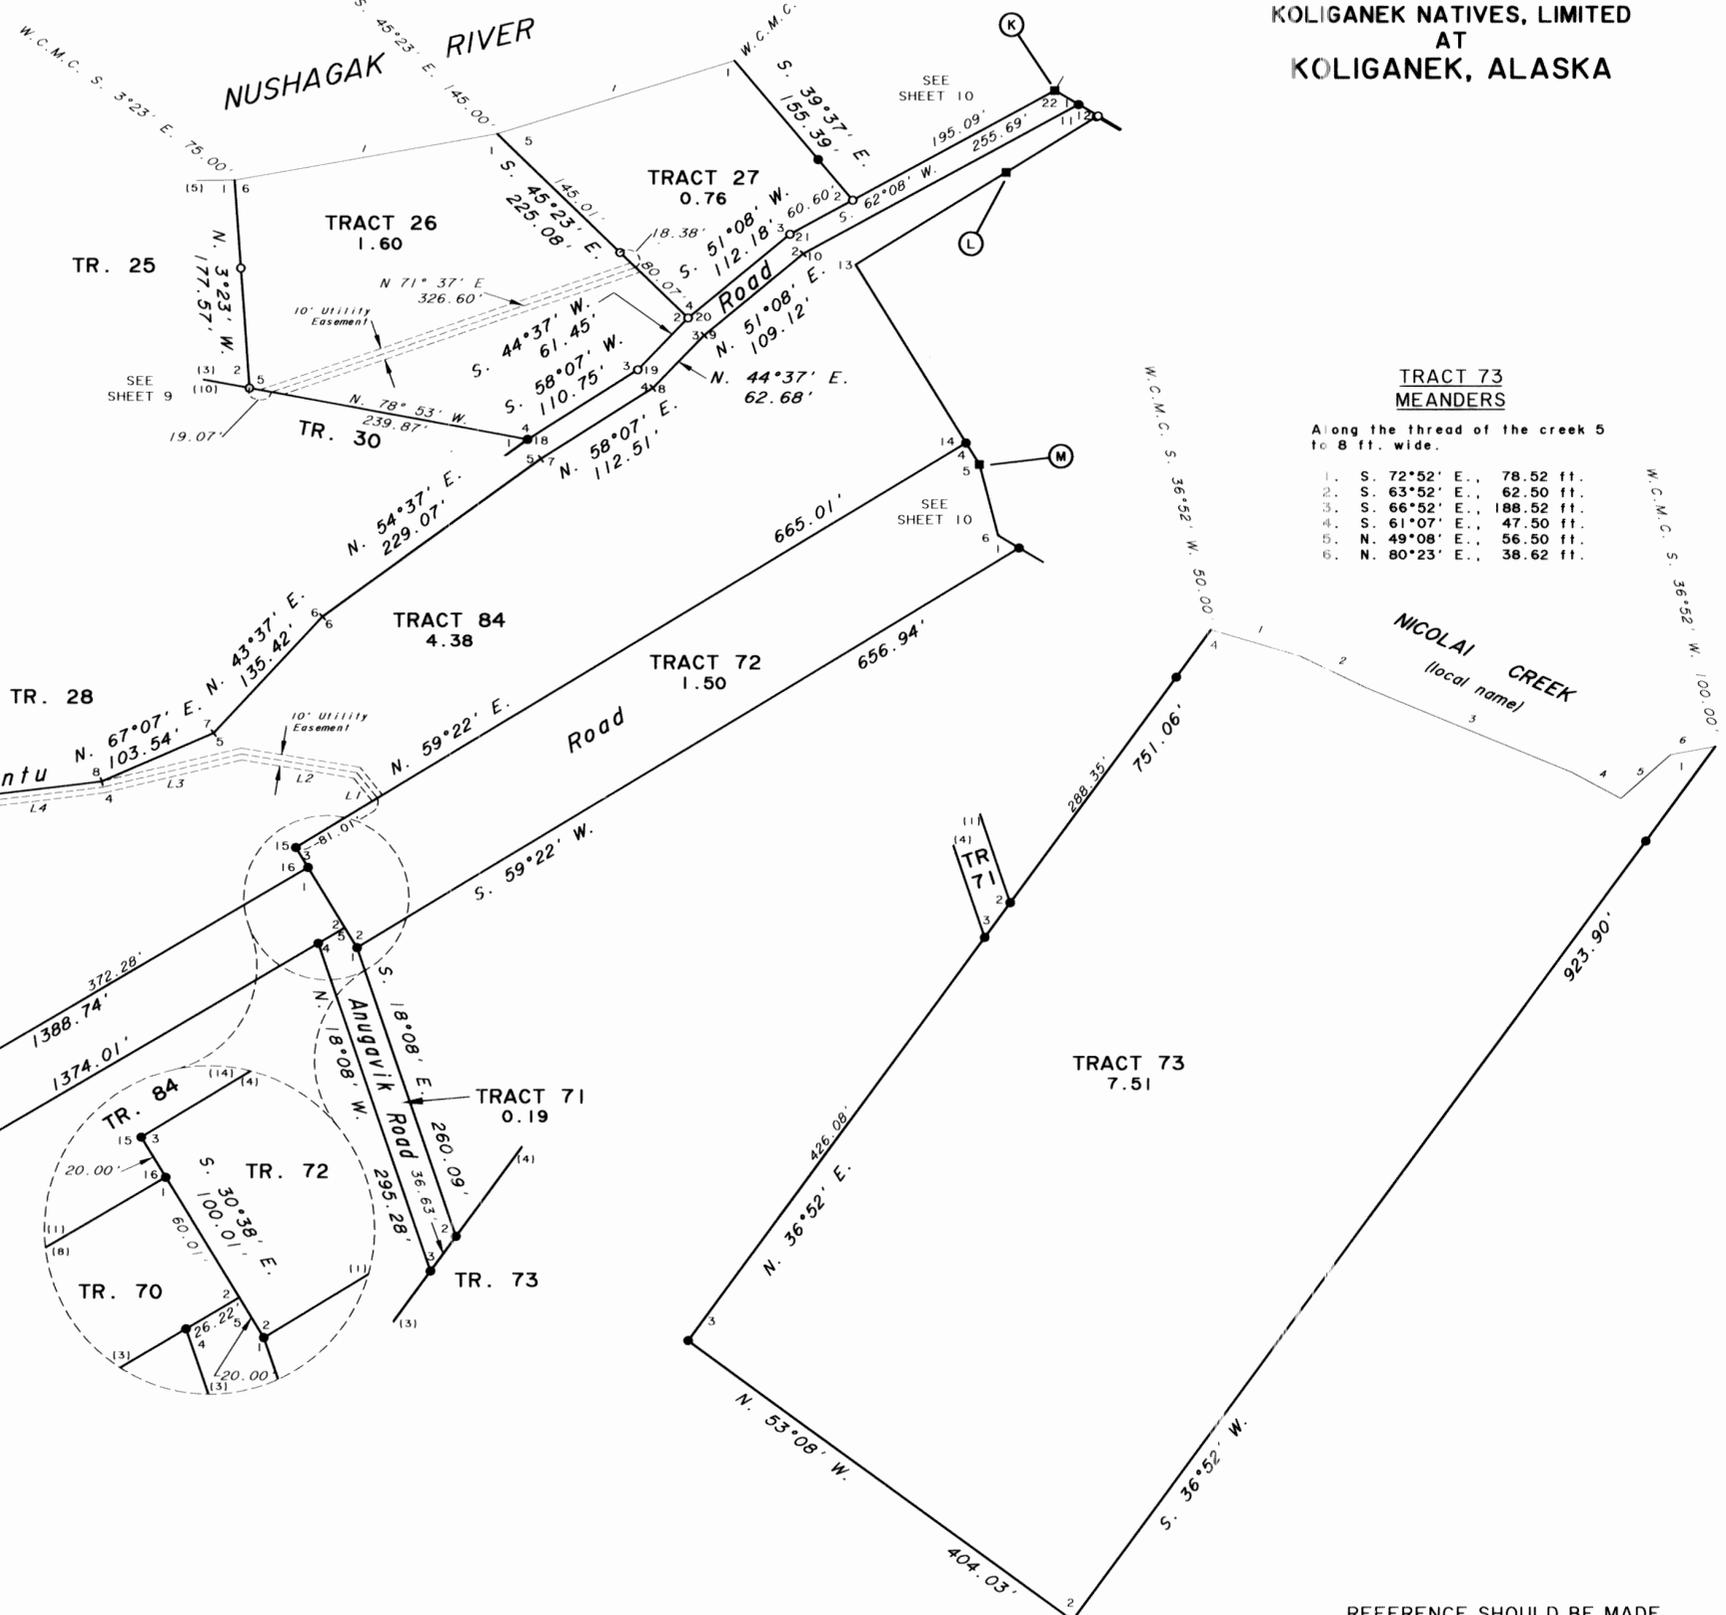

TRACT 84 CENTERLINE OF UTILITY EASEMENT

Along the centerline of the 10 ft. wide utility easement.

- L1. N. 38°23' W., 27.98 ft.
- L2. N. 80°08' W., 98.85 ft.
- L3. S. 77°07' W., 121.16 ft.
- L4. S. 83°37' W., 103.50 ft.
- L5. N. 32°08' W., 5.55 ft.



TRACT 73 MEANDERS

Along the thread of the creek 5 to 8 ft. wide.

- 1. S. 72°52' E., 78.52 ft.
- 2. S. 63°52' E., 62.50 ft.
- 3. S. 66°52' E., 188.52 ft.
- 4. S. 61°07' E., 47.50 ft.
- 5. N. 49°08' E., 56.50 ft.
- 6. N. 80°23' E., 38.62 ft.

REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, AND 12 FOR ADDITIONAL SURVEY INFORMATION.

2004-6 BRISTOL BAY RECORDING DISTRICT


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 73 AND 75 THROUGH 93 P.L. 92-203 (85 STAT. 688, 702, 703)

KOLIGANEK NATIVES, LIMITED AT KOLIGANEK, ALASKA

TRACTS 19 - 25 MEANDERS

A well-defined bank, 2 to 5 ft. high, at the line of ordinary high water.

NUSHAGAK RIVER

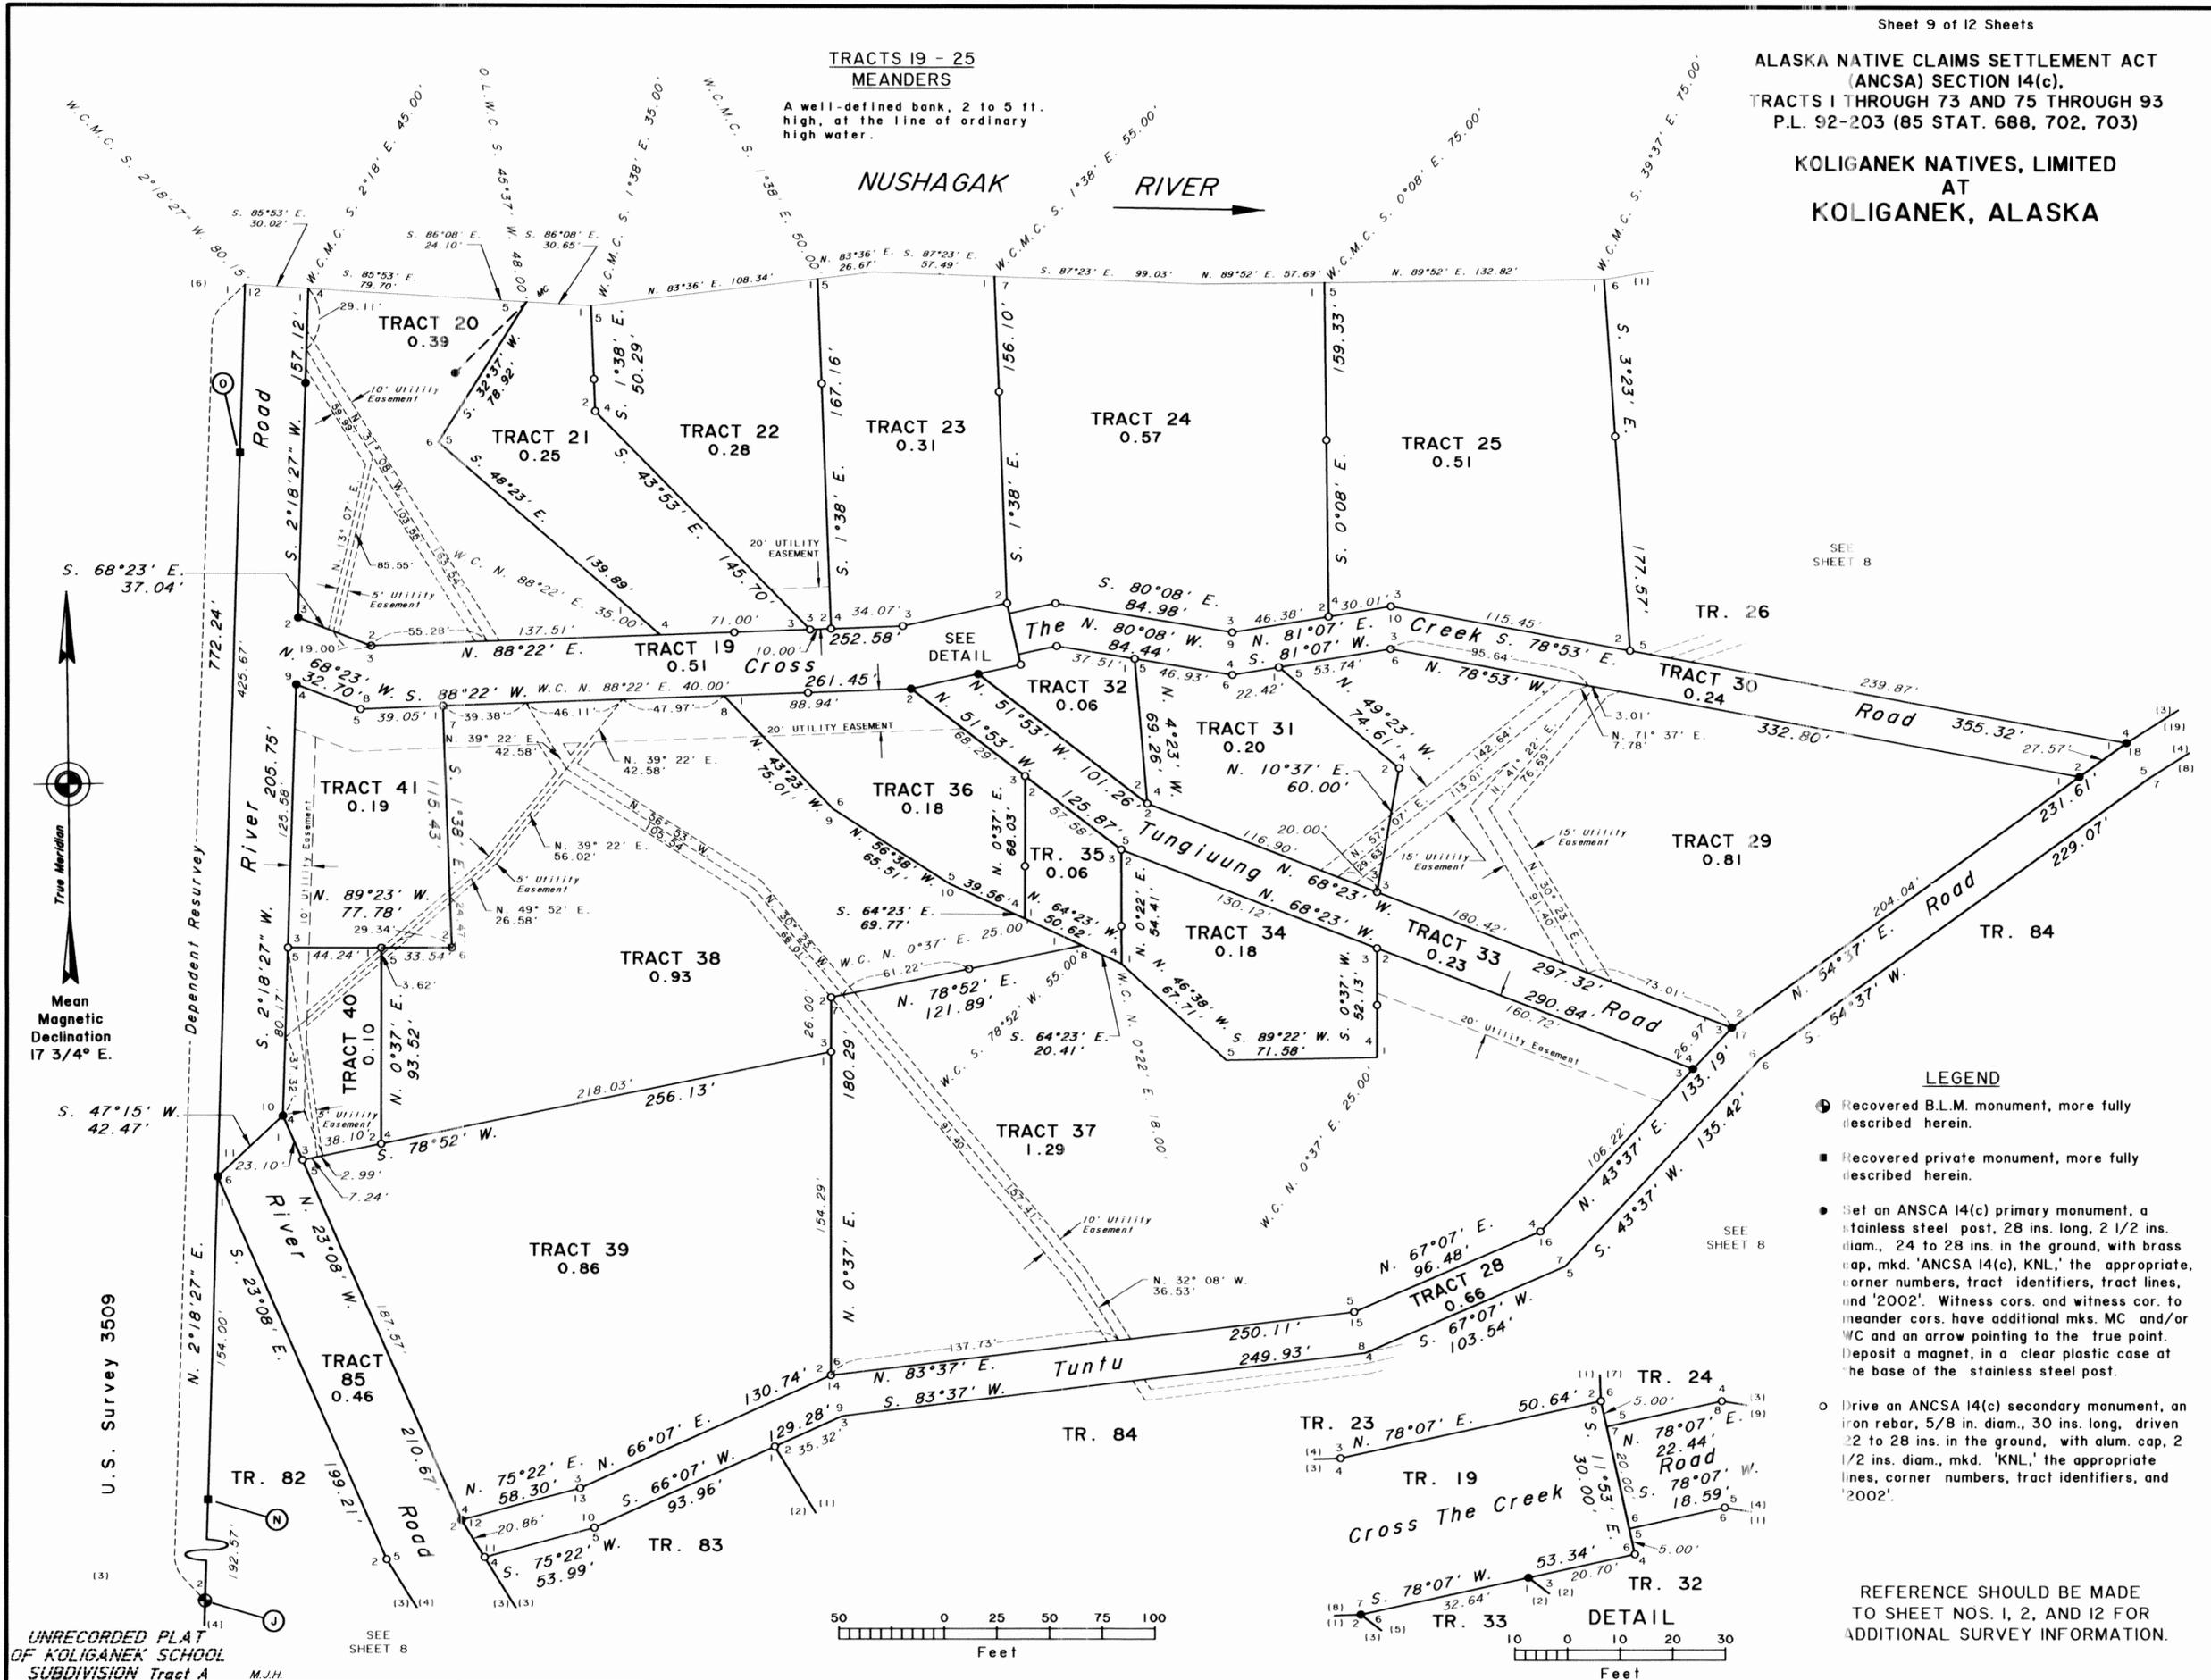



SEE SHEET 8

SEE SHEET 8

- LEGEND**
- Recovered B.L.M. monument, more fully described herein.
 - Recovered private monument, more fully described herein.
 - Set an ANCSA 14(c) primary monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap, mkd. 'ANCSA 14(c), KNL,' the appropriate corner numbers, tract identifiers, tract lines, and '2002'. Witness cors. and witness cor. to meander cors. have additional mks. MC and/or WC and an arrow pointing to the true point. Deposit a magnet, in a clear plastic case at the base of the stainless steel post.
 - Drive an ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with alum. cap, 2 1/2 ins. diam., mkd. 'KNL,' the appropriate lines, corner numbers, tract identifiers, and '2002'.

REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, AND 12 FOR ADDITIONAL SURVEY INFORMATION.

UNRECORDED PLAT OF KOLIGANEK SCHOOL SUBDIVISION Tract A M.J.H.




2004-6

BRISTOL BAY RECORDING DISTRICT

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS 1 THROUGH 73 AND 75 THROUGH 93
P.L. 92-203 (85 STAT. 688, 702, 703)

KOLIGANEK NATIVES, LIMITED
AT
KOLIGANEK, ALASKA

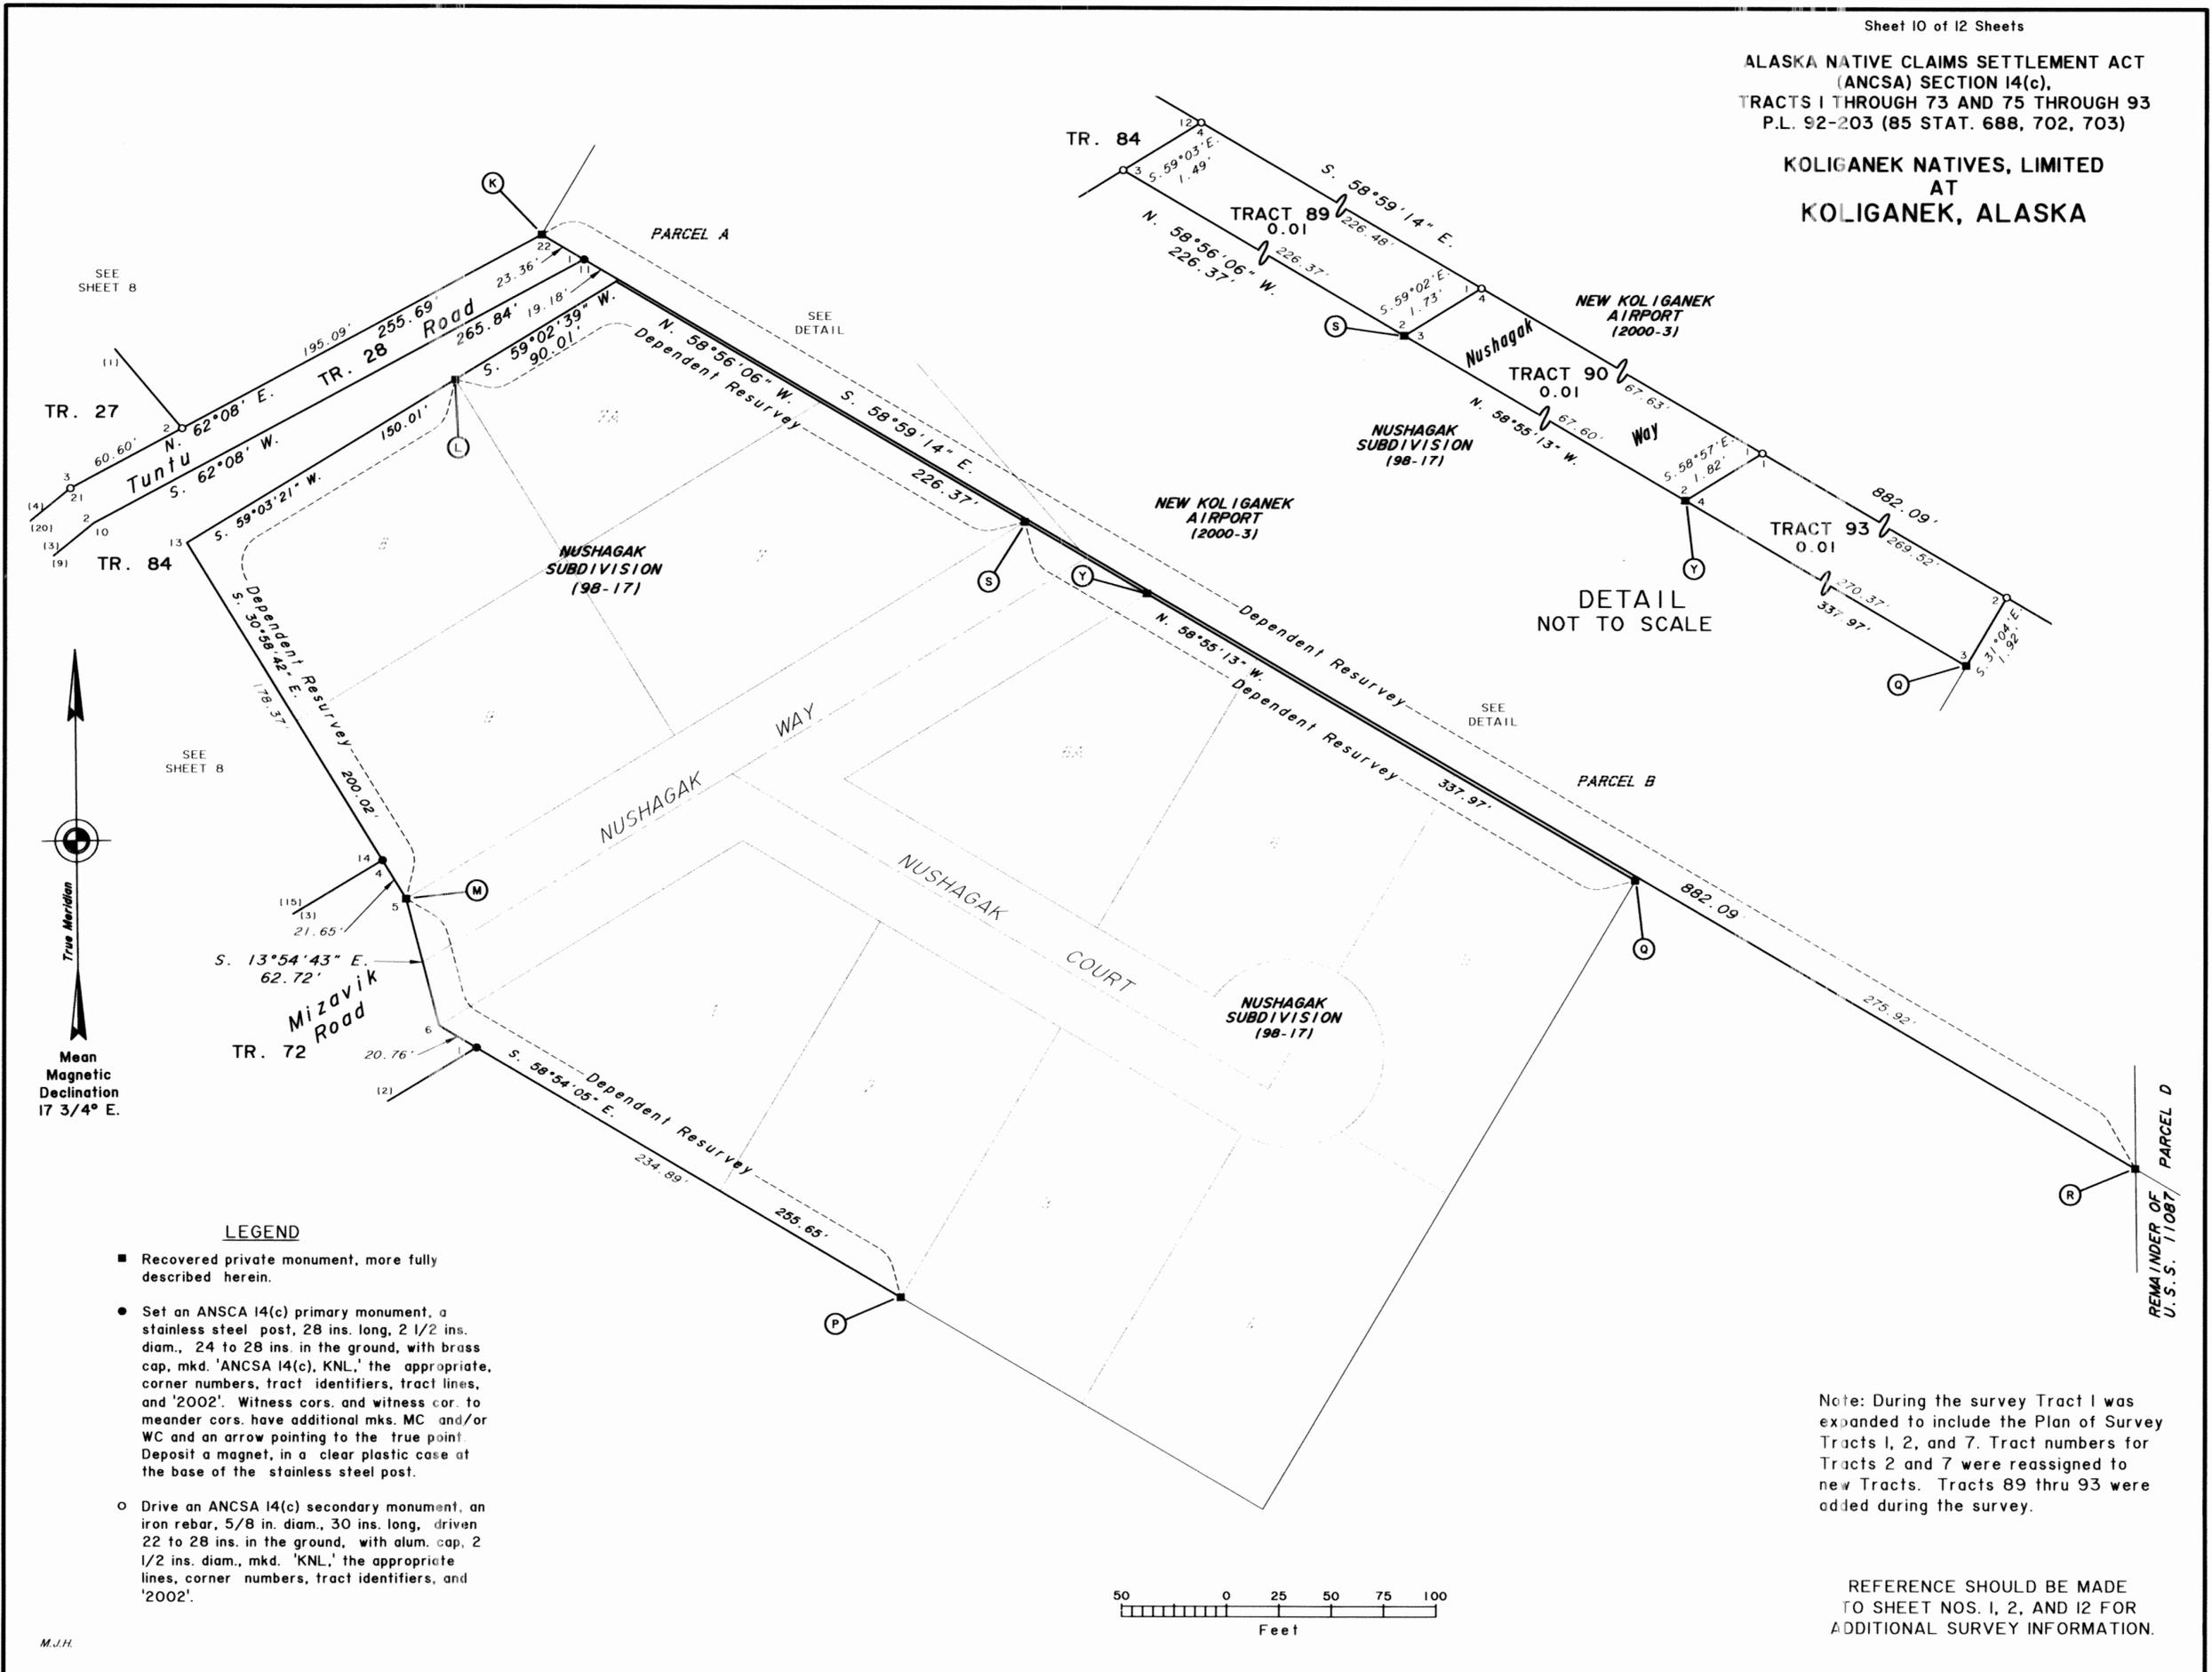


LEGEND

- Recovered private monument, more fully described herein.
- Set an ANCSA 14(c) primary monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap, mkd. 'ANCSA 14(c), KNL,' the appropriate corner numbers, tract identifiers, tract lines, and '2002'. Witness cors. and witness cor. to meander cors. have additional mks. MC and/or WC and an arrow pointing to the true point. Deposit a magnet, in a clear plastic case at the base of the stainless steel post.
- Drive an ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with alum. cap, 2 1/2 ins. diam., mkd. 'KNL,' the appropriate lines, corner numbers, tract identifiers, and '2002'.

Note: During the survey Tract 1 was expanded to include the Plan of Survey Tracts 1, 2, and 7. Tract numbers for Tracts 2 and 7 were reassigned to new Tracts. Tracts 89 thru 93 were added during the survey.

REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, AND 12 FOR ADDITIONAL SURVEY INFORMATION.



M.J.H.

2004-G
BRISTOL BAY RECORDING DISTRICT

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS 1 THROUGH 73 AND 75 THROUGH 93
P.L. 92-203 (85 STAT. 688, 702, 703)

KOLIGANEK NATIVES, LIMITED
AT
KOLIGANEK, ALASKA

TRACT 88
MEANDERS




Along a well-defined grass and
silt bank, 2 to 5 ft. high, at
the line of ordinary high water.

1. S. 51°35' E., 31.75 ft.
2. S. 52°04' E., 214.02 ft.
3. S. 53°04' E., 77.88 ft.

TRACT 86
MEANDER



Along a well-defined grass and
silt bank, 2 to 5 ft. high, at
the line of ordinary high water.

1. S. 53°04' E., 111.51 ft.

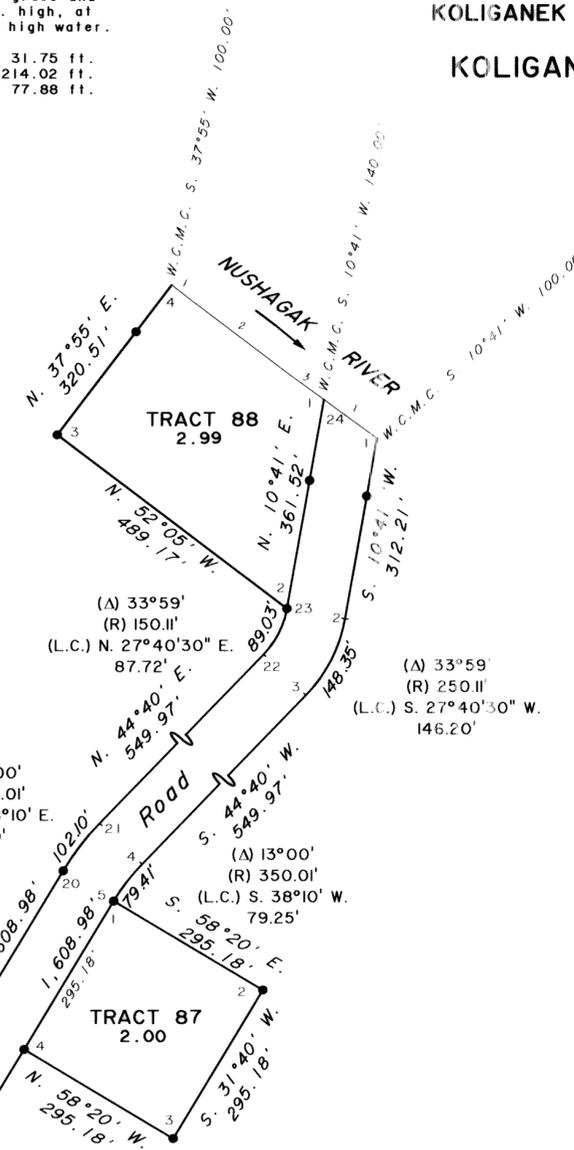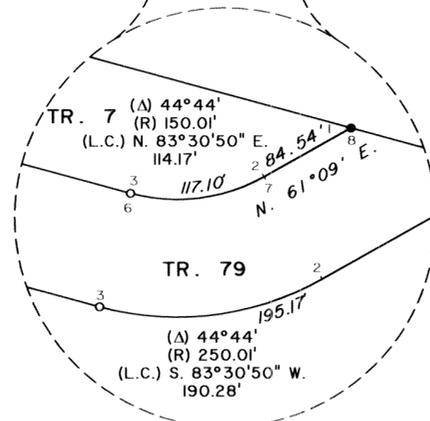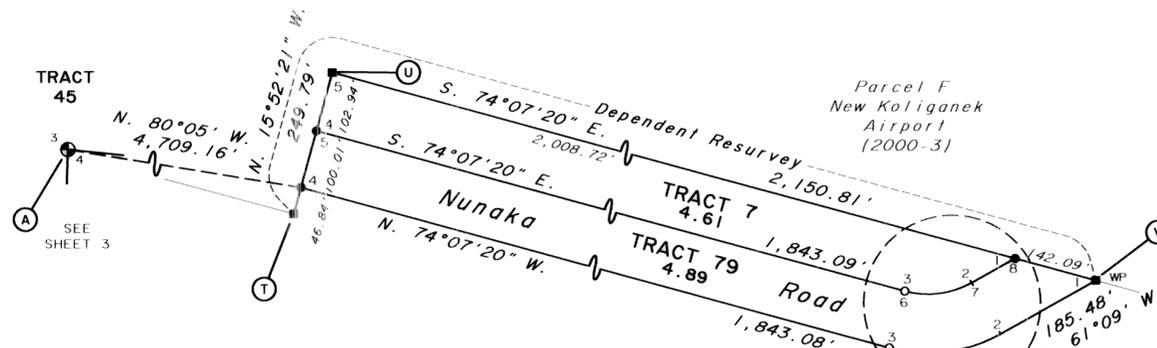

LEGEND

- Recovered B.L.M. monument, more fully described herein.
- Recovered private monument, more fully described herein.
- Set an ANCSA 14(c) primary monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 to 28 ins. in the ground, with brass cap, mkd. 'ANCSA 14(c), KNL,' the appropriate corner numbers, tract identifiers, tract lines, and '2002'. Witness cors. and witness cor. to meander cors. have additional mks. MC and/or WC and an arrow pointing to the true point. Deposit a magnet, in a clear plastic case at the base of the stainless steel post.
- Drive an ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with alum. cap, 2 1/2 ins. diam., mkd. 'KNL,' the appropriate lines, corner numbers, tract identifiers, and '2002'.

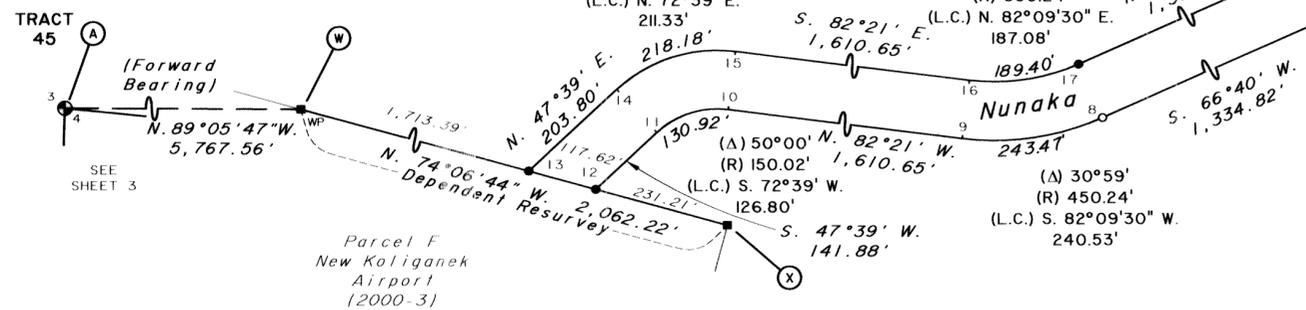


Note: During the survey Tract 1 was expanded to include the Plan of Survey Tracts 1, 2, and 7. Tract numbers for Tracts 2 and 7 were reassigned to new Tracts. Tracts 89 thru 93 were added during the survey.


REFERENCE SHOULD BE MADE TO SHEET NOS. 1, 2, AND 12 FOR ADDITIONAL SURVEY INFORMATION.

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS 1 THROUGH 73 AND 75 THROUGH 93
P.L. 92-203 (85 STAT. 688, 702, 703)


KOLIGANEK NATIVES, LIMITED
AT
KOLIGANEK, ALASKA




Recovered an iron post, 2 1/2 in. diam., firmly set, projecting 6 ins. above the ground, with a brass cap mkd. as shown, from which;
No evidence of the record cabin accessory was found.
Record pits are indistinguishable from surrounding ground.
No new accessories taken.




Recovered an iron rebar, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, with an alum. cap mkd. TRA 2000, added mks. as shown.
No record accessories.
No new accessories taken.




Recovered an iron rebar, 5/8 in. diam., firmly set, 1 in. below the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.



Recovered an iron post, 2 1/2 in. diam., firmly set, projecting 4 ins. above the ground, with a brass cap mkd. as shown, from which;
Record pits are indistinguishable from surrounding ground.
No new accessories taken.




Recovered an iron rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, with an alum. cap mkd. TRA 2000, added mks. as shown.
No record accessories.
No new accessories taken.




Recovered an iron rebar, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, with a yellow plastic cap mkd. as shown.
No record accessories.
No new accessories taken.




Recovered an alum. post, 2 1/2 in. diam., firmly set, projecting 8 ins. above the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.



Recovered an iron rebar, 5/8 in. diam., firmly set, 1 in. below the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.




Recovered an iron post, 2 1/2 in. diam., firmly set, projecting 4 ins. above the ground, with a wood stake alongside and with a brass cap mkd. as shown, from which;
Record pits are indistinguishable from surrounding ground.
No new accessories taken.



Recovered an iron rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.




Recovered an alum. post, 2 1/2 in. diam., firmly set, projecting 4 ins. above the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.



Recovered an iron rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, with an alum. cap mkd. L2 TRA L1 2000, added mks. as shown.
No record accessories.
No new accessories taken.




Recovered an alum. post, 2 1/2 in. diam., firmly set, projecting 2 ins. above the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.




Recovered an alum. post, 2 1/2 in. diam., firmly set, projecting 2 ins. above the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.




Recovered an alum. post, 2 1/2 in. diam., firmly set, projecting 5 ins. above the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.




Recovered an iron rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, with an alum. cap mkd. TRA 2000, added mks. as shown.
No record accessories.
No new accessories taken.




Recovered an iron rebar, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.




Recovered an iron rebar, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, with a yellow plastic cap mkd. as shown.
No record accessories.
No new accessories taken.




Recovered an iron rebar, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, with a yellow plastic cap mkd. as shown.
No record accessories.
No new accessories taken.




Recovered an alum. rod, 3/4 in. diam., firmly set, projecting 3 ins. above the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.




Recovered an iron rebar, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, with a yellow plastic cap mkd. as shown.
No record accessories.
No new accessories taken.




Recovered an alum. post, 2 1/2 in. diam., firmly set, projecting 5 ins. above the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.



Recovered an iron post, 2 1/2 in. diam., firmly set, projecting 4 ins. above ground with brass cap mkd. as shown, from which;
Record pits are indistinguishable from surrounding ground.
New accessories added.



Recovered an alum. rod, 3/4 in. diam., firmly set, projecting 18 ins. above the ground, with an alum. cap mkd. as shown, from which the original bearing trees:
A spruce 10 in. diam., bears S. 37° W., 38.2' dist., with a partially healed blaze.
A birch 6 in. diam., bears N. 51° W., 35.6' dist., with marks X B T visible.
No new accessories taken.




Recovered an iron rebar, 5/8 in. diam., firmly set, projecting 1 in. above the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.



Recovered an alum. post, 2 1/2 in. diam., firmly set, projecting 4 ins. above the ground, with an alum. cap mkd. as shown.
No record accessories.
No new accessories taken.



TYPICAL CAP MARKING

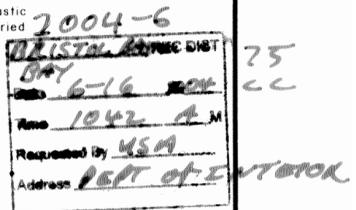

REFERENCE SHOULD BE MADE TO SHEET NOS. 1 AND 2 FOR ADDITIONAL SURVEY INFORMATION.

2004-6
BRISTOL BAY RECORDING DISTRICT