

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH J P.L. 92-203 (85 STAT. 688, 702, 703)

GANa-A'YOO, LTD. AT KOYUKUK, ALASKA

This plat contains the entire survey record.

U.S. Survey No. 4488 was surveyed by Ralph J. Ellis, Supervisory Cadastral Surveyor, in 1969, and subdivided by Douglas A. Graether, Registered Alaska Land Surveyor No. 7835, as Plat No. 96-2, Nulato Recording District, in 1992.

U.S. Survey No. 8520 was surveyed by Eric Stahlke, Registered Alaska Land Surveyor No. 6945, under Contract No. YA551-CTB-340034, in 1989.

The Koyukuk Airport, Plat No. 93-2-RS, Nulato Recording District, was surveyed by H. Lee Saylor, Registered Alaska Land Surveyor No. 4922, in 1992.

The Koyukuk Road Improvements, which include the Cemetery Road design alignment, were completed by ASCG, Inc. under contract to the Bureau of Indian Affairs in 1993, construction completed in 1997.

This survey was executed by Eric Stahlke, Registered Alaska Land Surveyor No. LS-6945, for Tanana Chiefs Conference, Inc., August 19, 1997 through September 5, 1997, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated January 13, 1997 and approved February 5, 1997, the Gana-a' Yoo Ltd. ANCSA 14 (c) Map of Boundaries accepted September 14, 1995, and Contract No. 1422-N660-C97-3061, dated July 28, 1997.

Field assistants were:

- Albert G. Macica, Land Surveyor
Victor J. DeWilde, Land Surveyor
Alvin W. Dayton, Survey Technician
David Dayton, Survey Technician

Area: 539.75 Acres.

The azimuth for Tracts A through J was obtained from the Global Positioning System, using static relative positioning techniques and refers to the true meridian.

The geographic position of corner No. 2, Tract D, identical with corner No. 6, U.S. Survey No. 8520, is:

Latitude: 64°53'05.72" North NAD 27
Longitude: 157°41'31.08" West

The magnetic declination was observed during the execution of this survey.



The topography is varied and contains steep bluffs, rolling hills and a level river plain, with vegetation consisting of spruce, birch, alder and willow with low shrubs and grasses. The soils consist of sand and sandy loam with areas of permafrost.

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT Anchorage, Alaska

The survey represented by this plat, sheets 1-6 having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

Deputy State Director for Cadastral Survey, Alaska (Signature and Date: July 17, 1998)

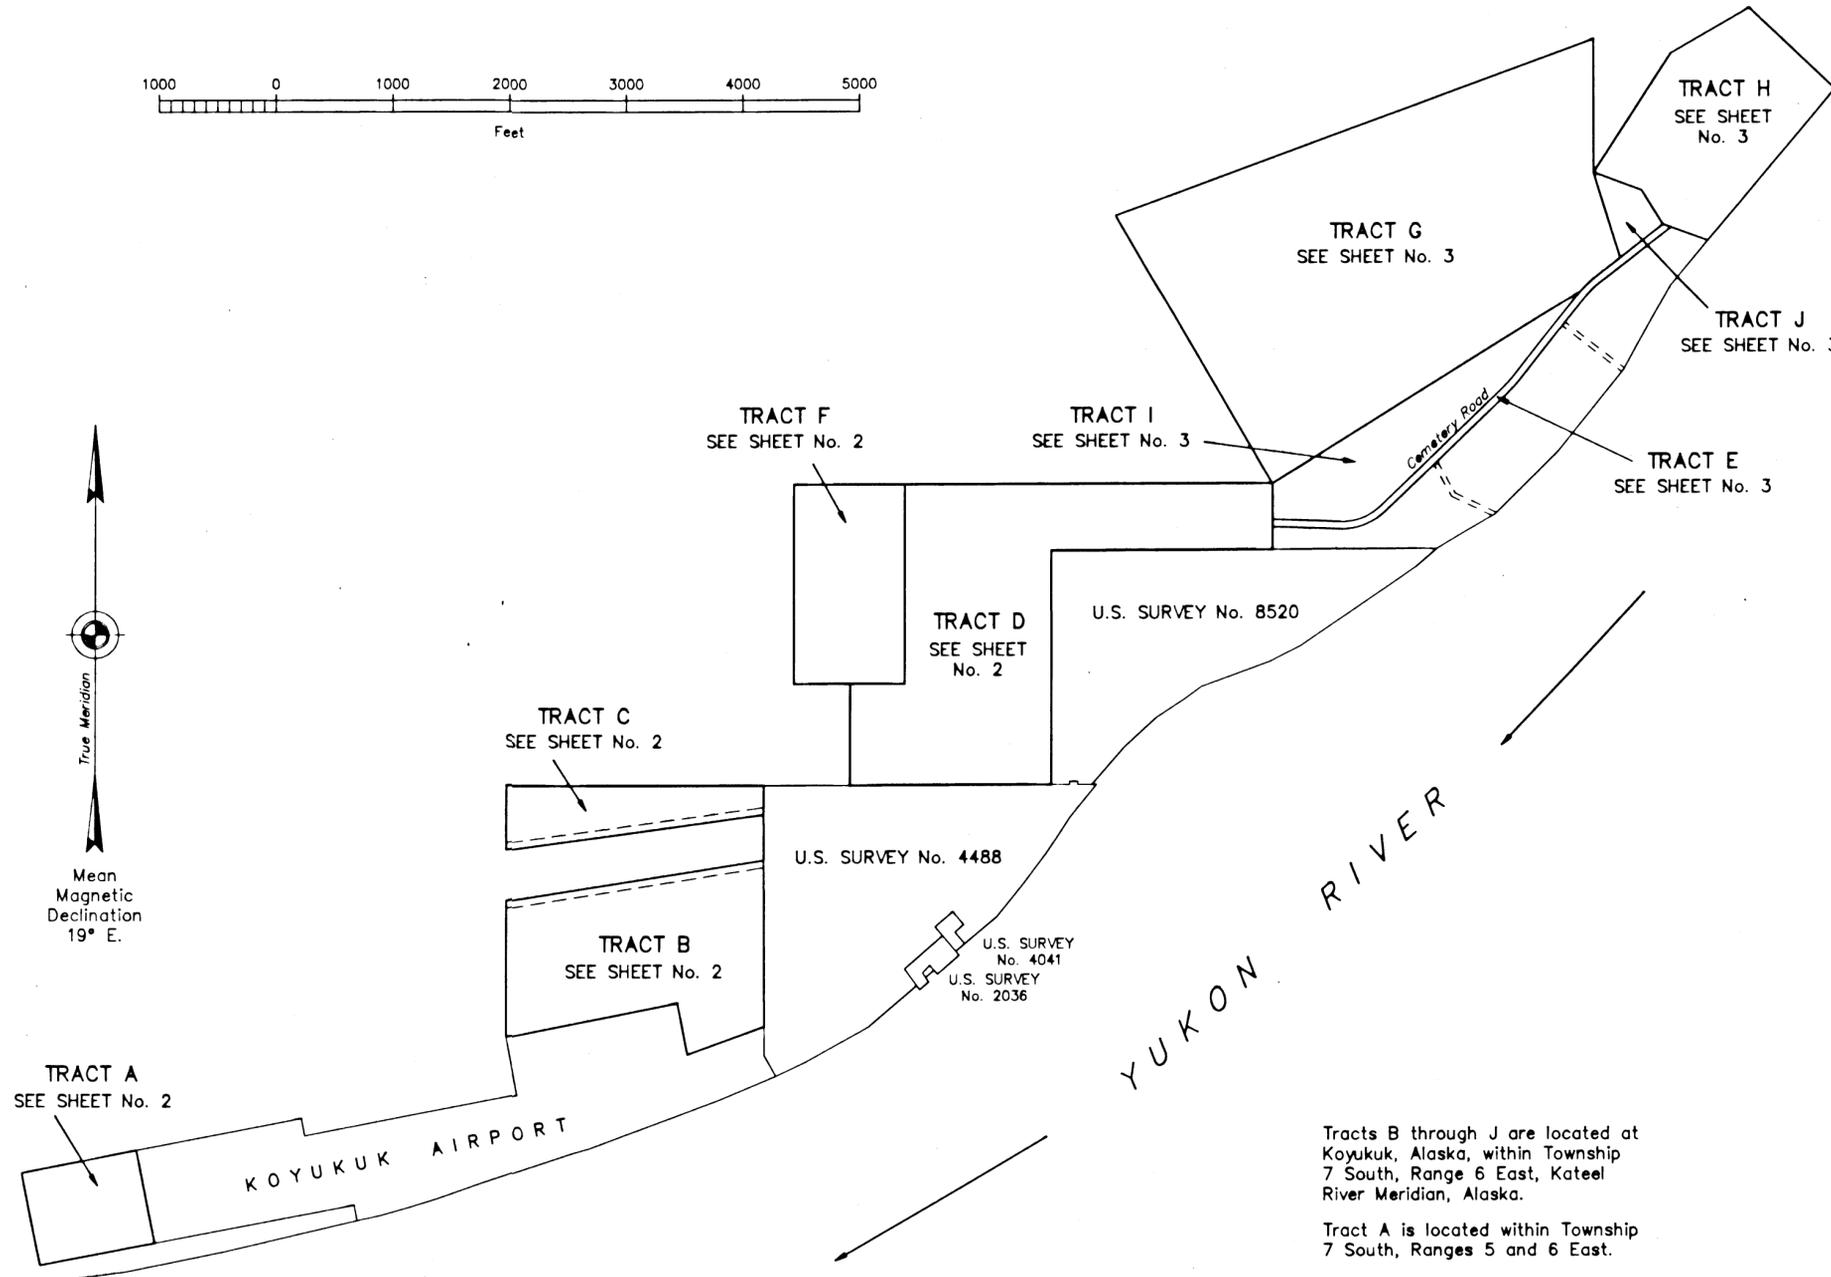

Tracts B through J are located at Koyukuk, Alaska, within Township 7 South, Range 6 East, Kateel River Meridian, Alaska.

Tract A is located within Township 7 South, Ranges 5 and 6 East.

I, ERIC STAHLKE, Registered Alaska Land Surveyor No. LS-6945, for Tanana Chiefs Conference, Inc., HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-6, in conformity with the Special Instructions approved January 13, 1997, Contract No. 1422-N660-C97-3061, awarded July 28, 1997, the principles of survey described in the Manual of Instructions for the Survey of Public Lands of the United States, 1973, and in the specific manner described on this plat.



I hereby certify that Tracts A through J, represented on this plat of survey are on lands Interim Conveyed to Gana-a'Yoo, Ltd, by Interim Conveyance No. 698 issued by the United States of America, said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Gana-a'Yoo, Ltd. Board Resolution No. 94-16 and the Gana-a'Yoo, Ltd. ANCSA 14 (c) Map of Boundaries approved September 14, 1995.

June 9, 1998 Date (Signature of President, Gana-a'Yoo, Ltd.)

MAY 14 1998 Date (Signature of Eric Stahlke, Registered Land Surveyor)

JLK


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH J P.L. 92-203 (85 STAT. 688, 702, 703)

GANA-A'YOO, LTD. AT KOYUKUK, ALASKA


LEGEND

- ⊕ BLM monument recovered this survey.
- ⊕ State of Alaska D.O.T./P.F. monument, recovered this survey.
- 5/8 in. rebar and alum. cap recovered this survey.
- ANCSA primary monument set this survey.
- ANCSA secondary monument set this survey.

REFER TO SHEETS 4 AND 5 FOR MONUMENT DETAILS AND ACCESSORIES











Typical cap marking for primary monument set this survey.



Typical cap marking for secondary monument set this survey.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

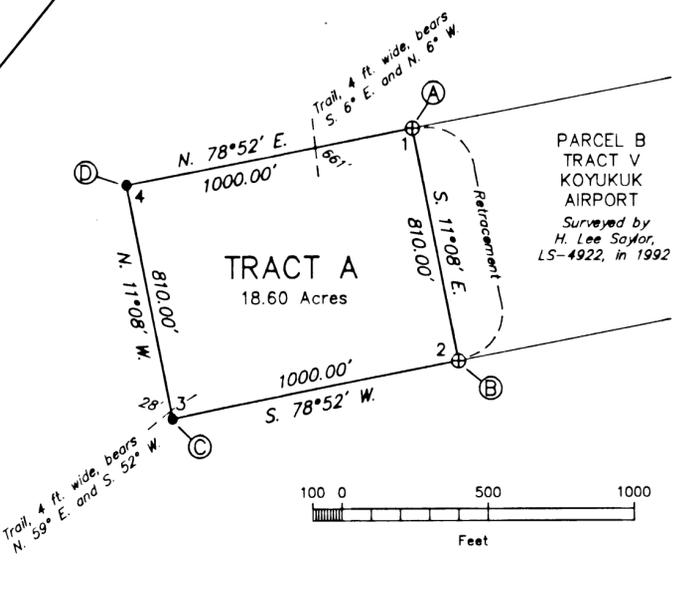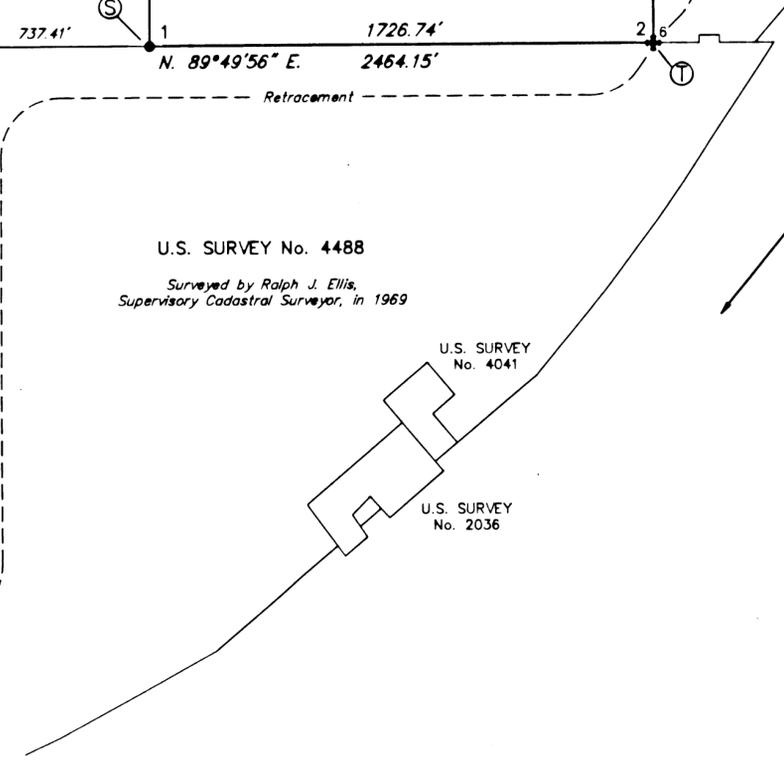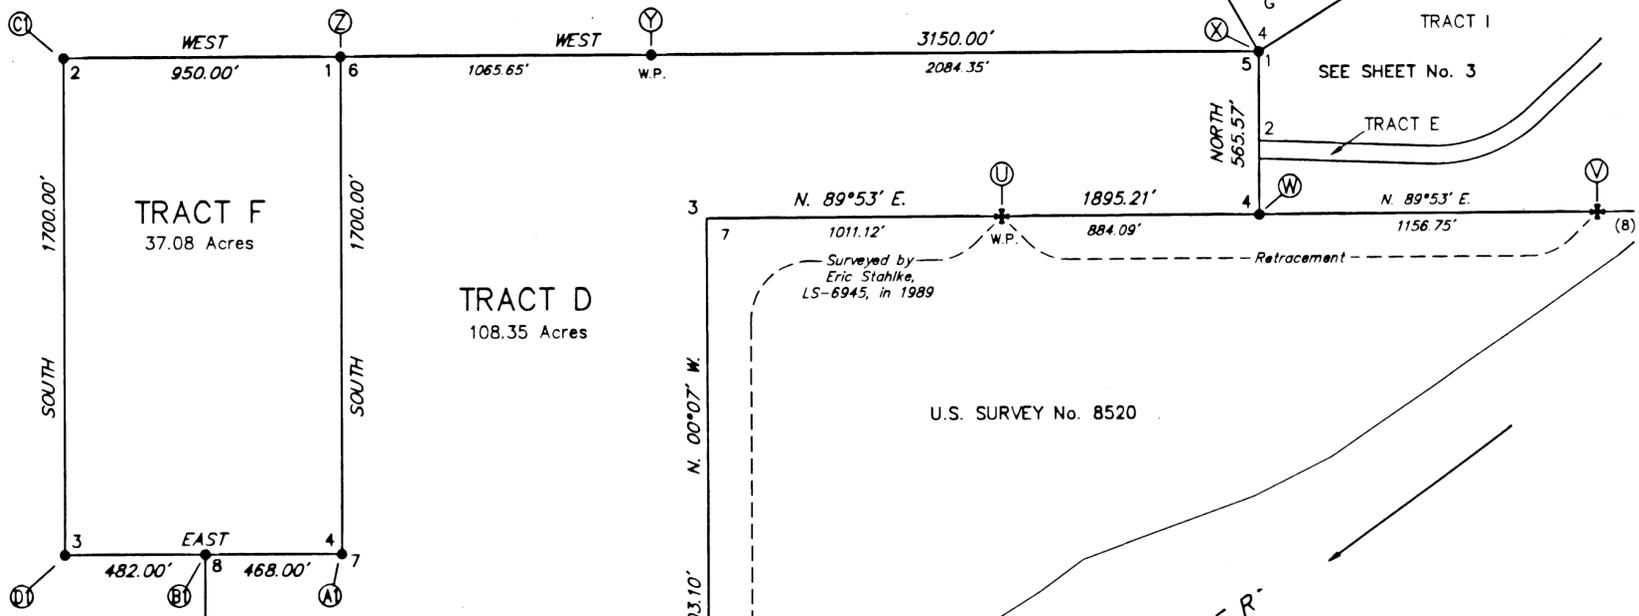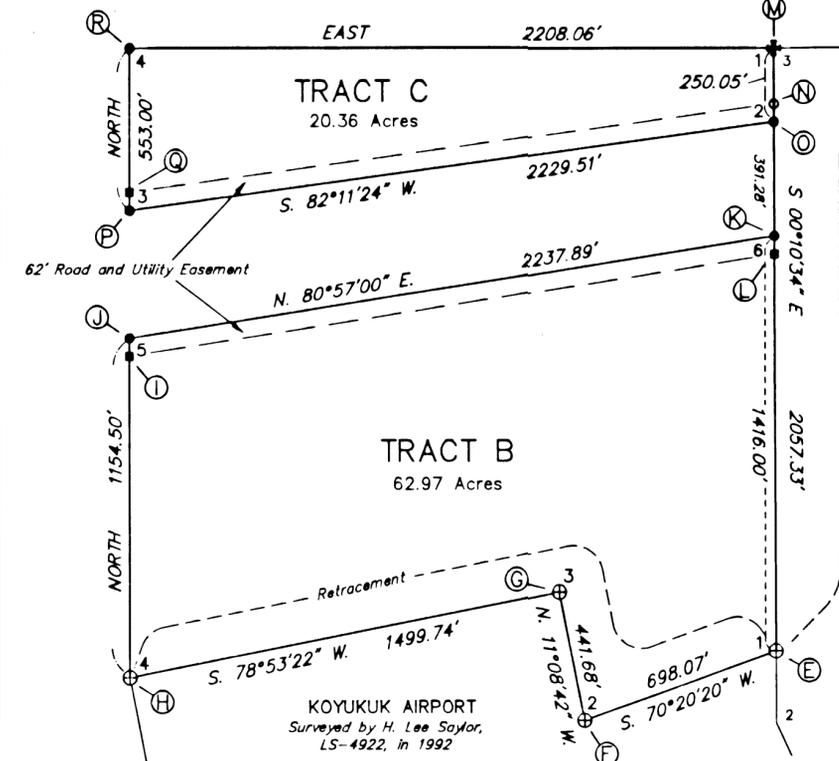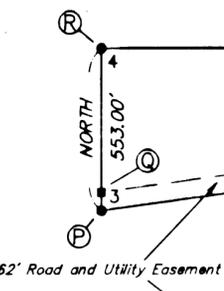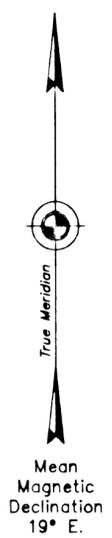

ES

COPY

Nulato 98-3

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A THROUGH J
P.L. 92-203 (85 STAT. 688, 702, 703)


GANA-A'YOO, LTD.
AT
KOYUKUK, ALASKA

REFERENCE SHOULD BE MADE
TO SHEET No. 1
FOR SURVEY INFORMATION

LEGEND

- ANCSA primary monument set this survey.
- ANCSA secondary monument set this survey.


REFER TO SHEETS 5 AND 6 FOR
MONUMENT DETAILS AND ACCESSORIES



MEANDERS TRACT H

Along a well defined sloping bank, 8 ft.
high, at the line of ordinary high water.

- | | | |
|----|--------------|---------|
| 1. | S. 39°42' W. | 470.75' |
| 2. | S. 40°15' W. | 543.59' |
| 3. | S. 40°06' W. | 679.30' |

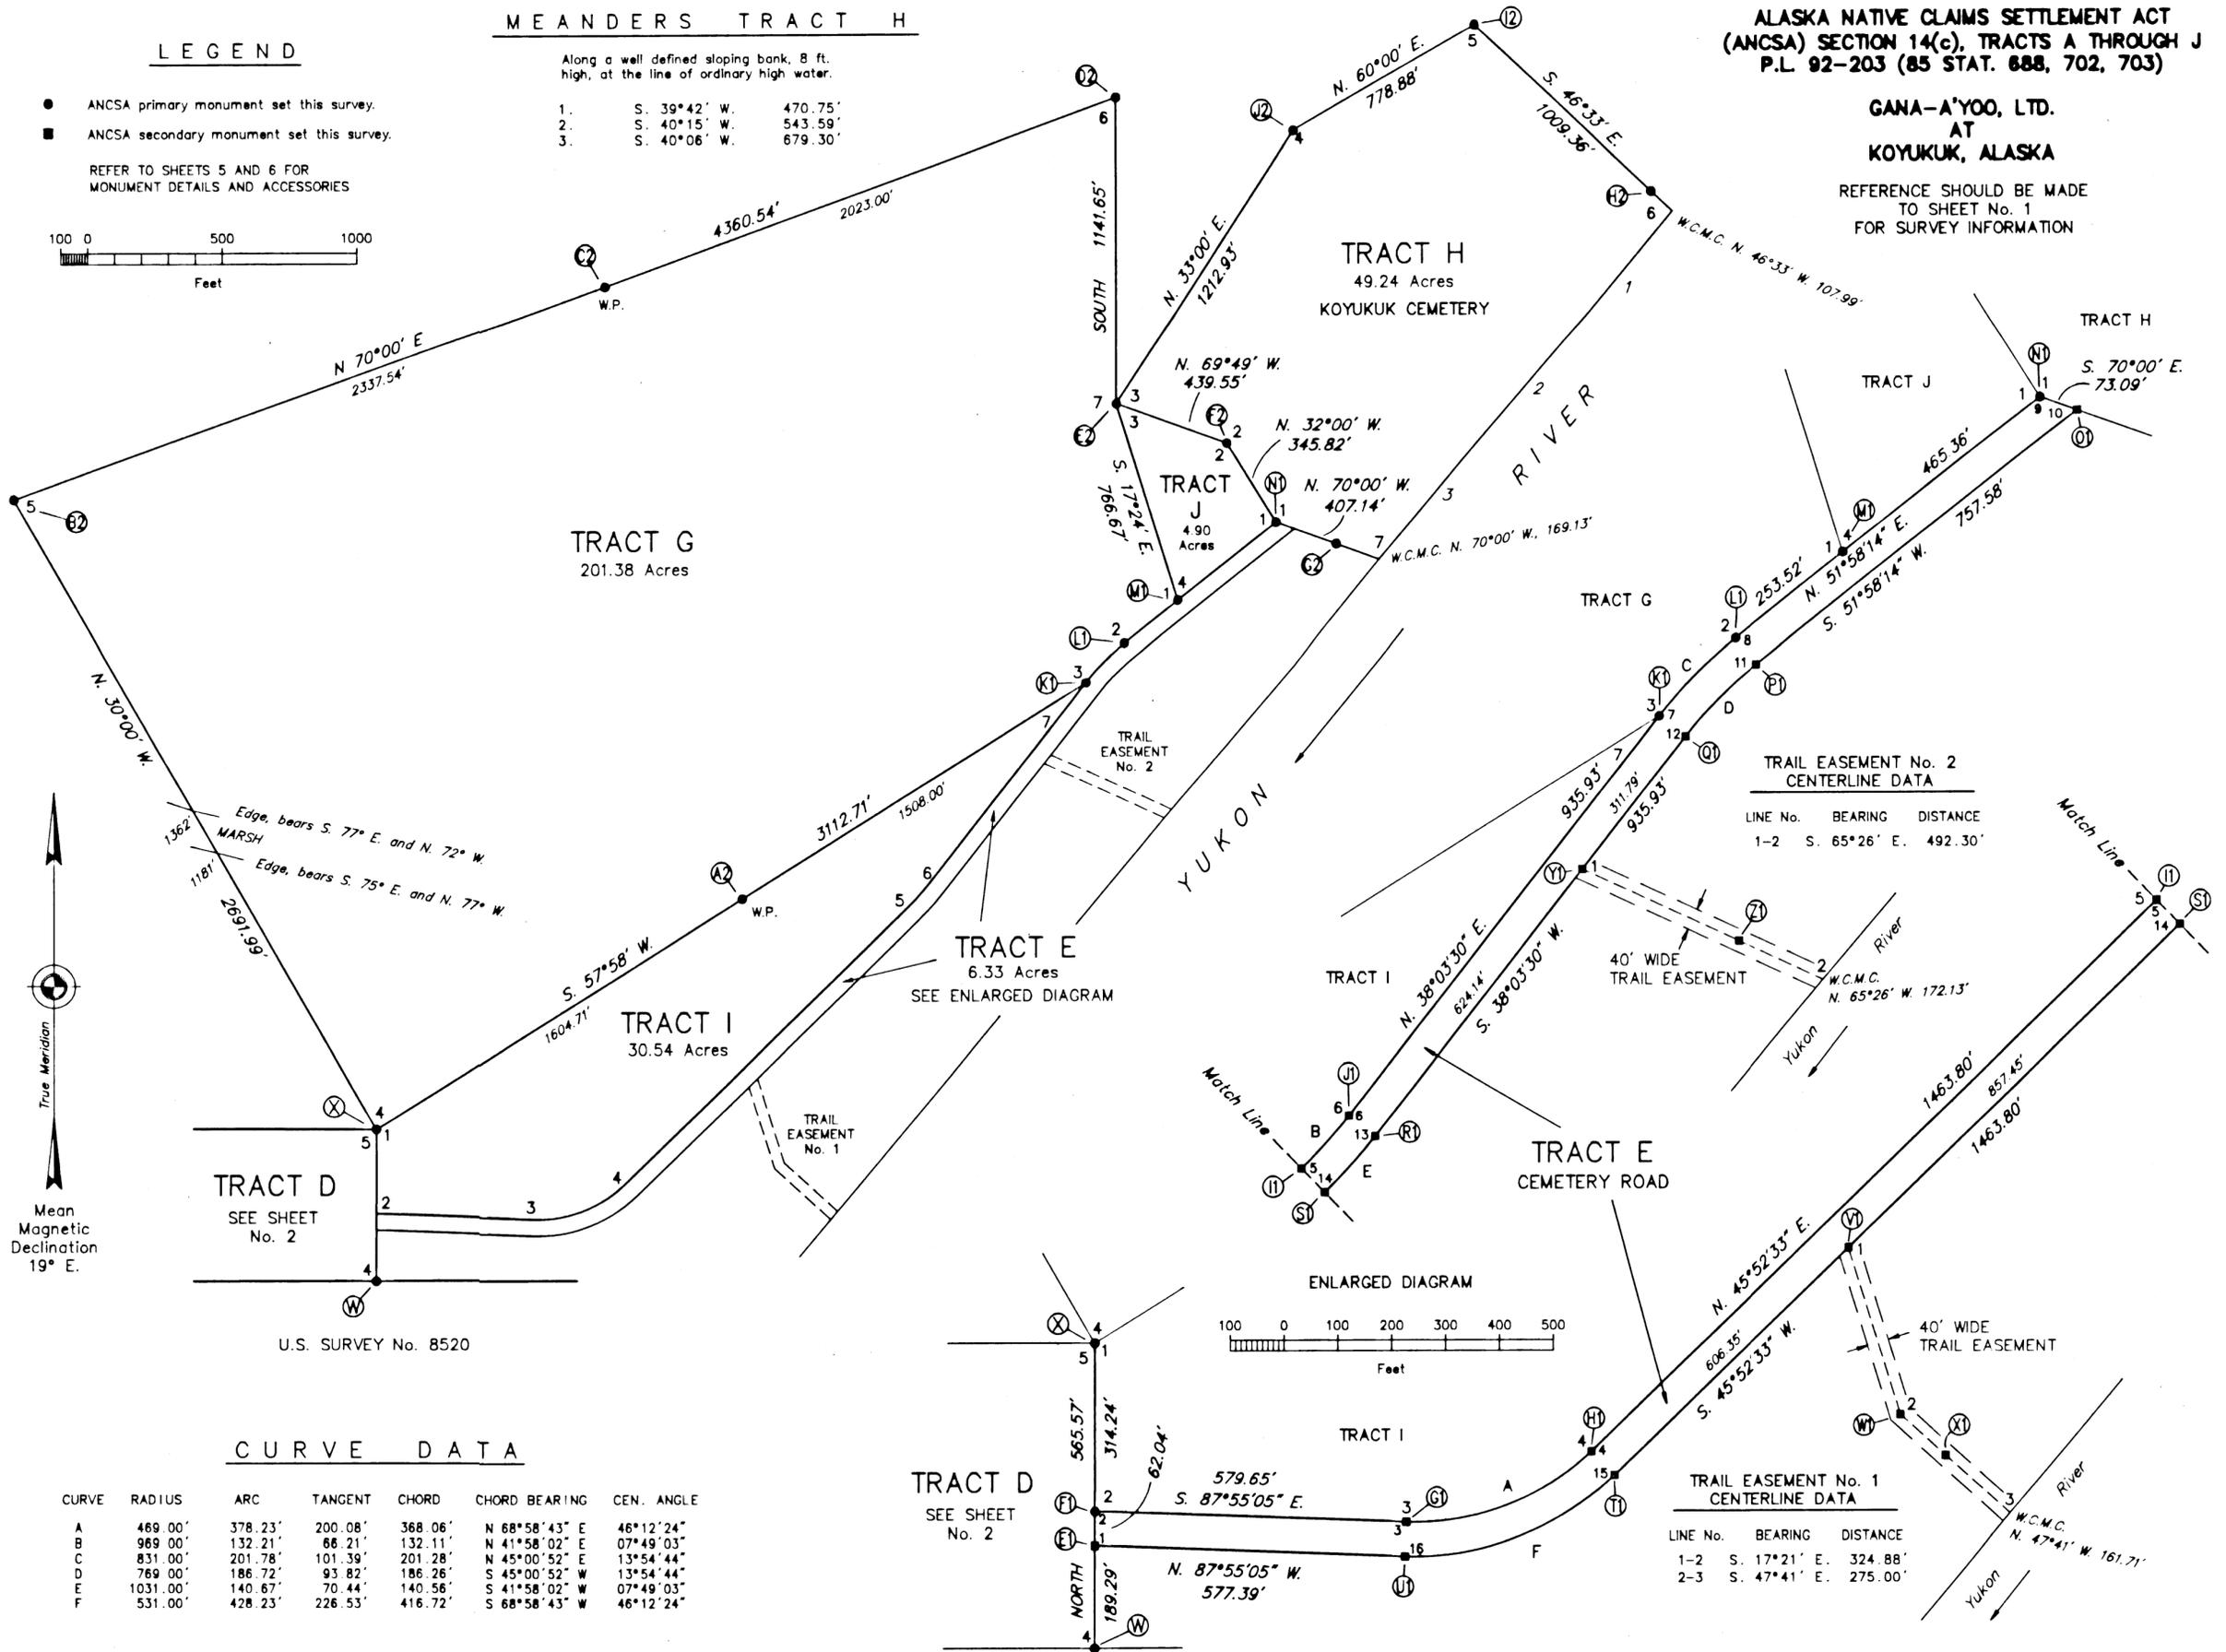

TRAIL EASEMENT No. 2
CENTERLINE DATA



LINE No.	BEARING	DISTANCE
1-2	S. 65°26' E.	492.30'

TRAIL EASEMENT No. 1
CENTERLINE DATA

LINE No.	BEARING	DISTANCE
1-2	S. 17°21' E.	324.88'
2-3	S. 47°41' E.	275.00'

CURVE DATA

CURVE	RADIUS	ARC	TANGENT	CHORD	CHORD BEARING	CEN. ANGLE
A	469.00'	378.23'	200.08'	368.06'	N 68°58'43" E	46°12'24"
B	969.00'	132.21'	66.21'	132.11'	N 41°58'02" E	07°49'03"
C	831.00'	201.78'	101.39'	201.28'	N 45°00'52" E	13°54'44"
D	769.00'	186.72'	93.82'	186.26'	S 45°00'52" W	13°54'44"
E	1031.00'	140.67'	70.44'	140.56'	S 41°58'02" W	07°49'03"
F	531.00'	428.23'	226.53'	416.72'	S 68°58'43" W	46°12'24"

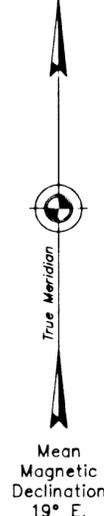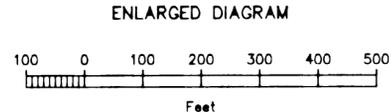

U.S. SURVEY No. 8520

COPY

Nulato 98-3

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A THROUGH J
P.L. 92-203 (85 STAT. 688, 702, 703)

GANa-A'YOO, LTD.
AT
KOYUKUK, ALASKA


REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown.



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. as shown, from which the original accessories

A spruce, 14 ins. diam., bears S. 35 1/2° E., 29 ft. dist., mkd. S4488 C3.
A spruce, 10 ins. diam., bears S. 2 1/2° E., 30 ft. dist., mkd. with fully healed blaze.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.




Recovered a rebar, 5/8 in. diam., firmly set, projecting 12 ins. above ground, with 2 in. diam. alum. cap mkd. as shown.




Recovered a rebar, 5/8 in. diam., firmly set, projecting 12 ins. above ground, with 2 in. alum. cap mkd. ASCG B18 ROW S7835 1992. At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown.


Deposit a magnet in a white plastic case at the base, and bury original monument inverted alongside the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 12 ins. diam., bears N. 5 1/4° E., 58.0 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears N. 75 3/4° W., 59.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a rebar, 30 ins. long, 5/8 in. diam., 27 ins. in the ground, with alum. cap mkd. as shown.




Recovered a rebar, 5/8 in. diam., firmly set, projecting 12 ins. above ground, with 2 in. alum. cap mkd. ASCG ROW LB B3 S7835 1992. At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown.


Deposit a magnet in a white plastic case at the base, and bury original monument inverted alongside the stainless steel post.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown, from which the original accessories
A spruce, 7 ins. diam., bears N. 55 1/2° E., 42.9 ft. dist., mkd. X BT.
A spruce, 11 ins. diam., bears S. 89° W., 110.9 ft. dist., mkd. X BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 14 ins. diam., bears N. 89 1/4° E., 77.0 ft. dist., mkd. X BT.
A spruce, 9 ins. diam., bears S. 27 1/2° W., 77.0 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 13 ins. diam., bears N. 28 3/4° E., 67.9 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears N. 46 1/2° W., 43.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 8 1/2 ins. diam., bears S. 46 1/2° E., 21.2 ft. dist., mkd. X BT.
A spruce, 13 ins. diam., bears S. 69 1/2° W., 36.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown, from which the original accessories
A spruce, 11 ins. diam., bears S. 44° E., 23.1 ft. dist., mkd. X BT.
A spruce, 9 ins. diam., bears N. 23 1/2° W., 15.8 ft. dist. (Rec. 18.5 ft.), mkd. X BT.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.



Recovered an iron rod, 5/8 in. diam., firmly set, projecting 7 ins. above ground, with alum. cap incorrectly mkd. USDI-BLM SURVEY COR BL3 L1 L2. At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base, and bury original monument inverted alongside the stainless steel post.




Set a rebar, 30 ins. long, 5/8 in. diam., 27 ins. in the ground, with alum. cap mkd. as shown.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd. as shown. No original accessories (magnets) were recovered.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown.



Set a rebar, 30 ins. long, 5/8 in. diam., 27 ins. in the ground, with alum. cap mkd. as shown.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.
A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N. 43° E., 41.3 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears N. 36 3/4° W., 40.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH J P.L. 92-203 (85 STAT. 688, 702, 703)

GANNA-A'YOO, LTD. AT KOYUKUK, ALASKA


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 18 ins. diam., bears S. 30 1/2° W., 55.0 ft. dist., mkd. X BT.
A spruce, 13 ins. diam., bears N. 49 1/4° W., 72.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 12 ins. diam., bears N. 58° E., 28.3 ft. dist., mkd. X BT.
A spruce, 11 ins. diam., bears N. 80 1/2° W., 28.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 10 ins. diam., bears S. 76 3/4° W., 50.9 ft. dist., mkd. X BT.
A spruce, 12 ins. diam., bears N. 9° W., 51.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 12 ins. diam., bears N. 12° E., 88.2 ft. dist., mkd. X BT.
A spruce, 19 ins. diam., bears S. 54 1/4° E., 70.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 8 ins. diam., bears S. 23 1/4° E., 43.4 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears S. 43 3/4° W., 29.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 10 ins. diam., bears S. 57 1/4° E., 43.1 ft. dist., mkd. X BT.
A spruce, 12 ins. diam., bears S. 33 1/2° W., 64.2 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 18 ins. diam., bears N. 30 3/4° E., 185.5 ft. dist., mkd. X BT.
A spruce, 23 ins. diam., bears N. 80° W., 170.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 14 ins. diam., bears S. 59 1/2° E., 54.5 ft. dist., mkd. X BT.
A birch, 5 ins. diam., bears S. 45 3/4° W., 19.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 10 ins. diam., bears N. 9 3/4° E., 83.7 ft. dist., mkd. X BT.
A spruce, 10 ins. diam., bears N. 56° W., 105.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 10 ins. diam., bears S. 77 1/4° E., 49.5 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears N. 3 3/4° W., 57.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.



Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.




Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A THROUGH J
P.L. 92-203 (85 STAT. 888, 702, 703)

GANA-A'YOO, LTD.
AT
KOYUKUK, ALASKA


REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

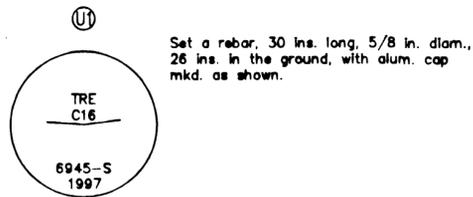


Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.

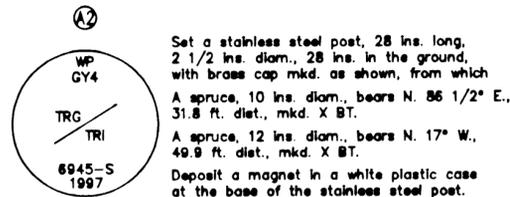


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 10 ins. diam., bears N. 86 1/2° E., 31.8 ft. dist., mkd. X BT.
A spruce, 12 ins. diam., bears N. 17° W., 49.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

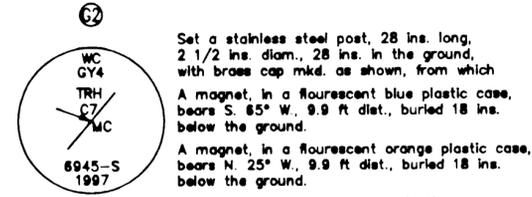


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a fluorescent blue plastic case, bears S. 85° W., 9.9 ft. dist., buried 18 ins. below the ground.
A magnet, in a fluorescent orange plastic case, bears N. 25° W., 9.9 ft. dist., buried 18 ins. below the ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

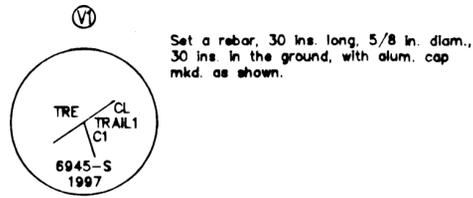


Set a rebar, 30 ins. long, 5/8 in. diam., 30 ins. in the ground, with alum. cap mkd. as shown.

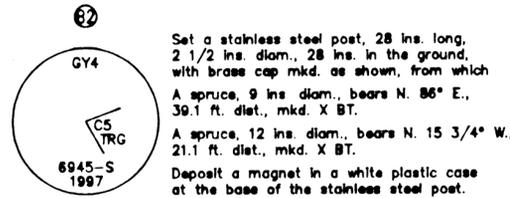


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 9 ins. diam., bears N. 86° E., 39.1 ft. dist., mkd. X BT.
A spruce, 12 ins. diam., bears N. 15 3/4° W., 21.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

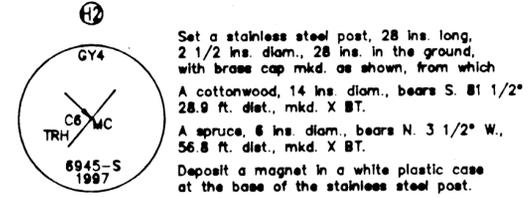


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A cottonwood, 14 ins. diam., bears S. 81 1/2° W., 28.9 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears N. 3 1/2° W., 56.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

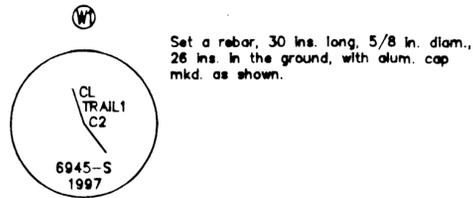


Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.

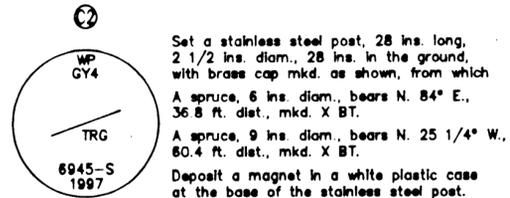


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears N. 84° E., 36.8 ft. dist., mkd. X BT.
A spruce, 9 ins. diam., bears N. 25 1/4° W., 60.4 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

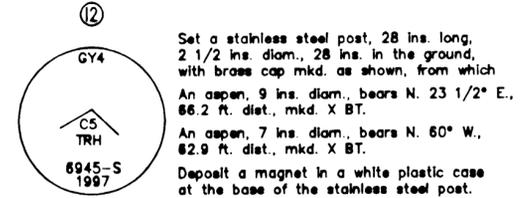


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
An aspen, 9 ins. diam., bears N. 23 1/2° E., 66.2 ft. dist., mkd. X BT.
An aspen, 7 ins. diam., bears N. 60° W., 62.9 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

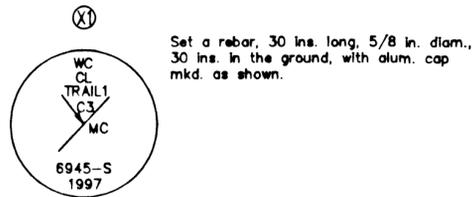


Set a rebar, 30 ins. long, 5/8 in. diam., 30 ins. in the ground, with alum. cap mkd. as shown.

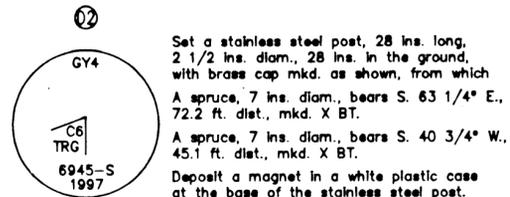


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 7 ins. diam., bears S. 63 1/4° E., 72.2 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears S. 40 3/4° W., 45.1 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

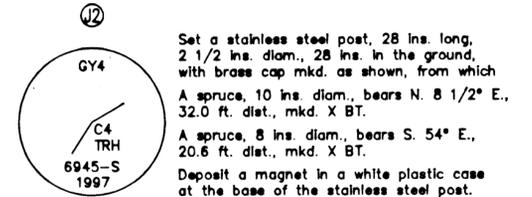


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 10 ins. diam., bears N. 8 1/2° E., 32.0 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears S. 54° E., 20.6 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

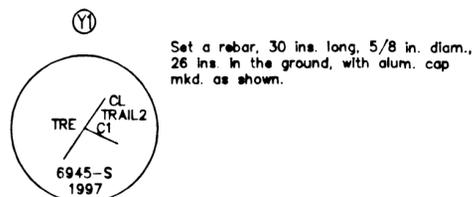


Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.

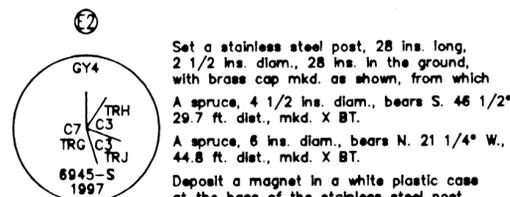

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 4 1/2 ins. diam., bears S. 46 1/2° W., 29.7 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears N. 21 1/4° W., 44.8 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

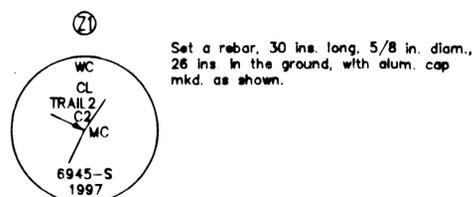

Set a rebar, 30 ins. long, 5/8 in. diam., 26 ins. in the ground, with alum. cap mkd. as shown.

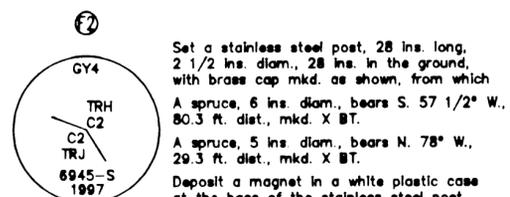

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 6 ins. diam., bears S. 57 1/2° W., 80.3 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 78° W., 29.3 ft. dist., mkd. X BT.
Deposit a magnet in a white plastic case at the base of the stainless steel post.

98-3

RECORDED - FILED 45
NULATO DIST
CASE 7:24-98
TIME 3:08 P.M.
REGISTERED BY BLM