

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) TRACT A  
P.L. 92-203 (85 STAT. 688, 702, 703)

GANa-A'YOO, LIMITED  
AT  
KALTAG, ALASKA

AND  
THE DEPENDENT RESURVEY OF A PORTION OF  
LOT 1, U.S. SURVEY NO. 9623  
A PORTION OF  
LOT 5, U.S. SURVEY NO. 7358  
AND A PORTION OF  
U.S. SURVEY NO. 3772

This plat in 3 sheets contains the entire survey record.

U.S. Survey No. 3722 was surveyed by Ray Harpin, Cadastral Surveyor, in 1960.

U.S. Survey No. 7358 was surveyed by Frank A. Hardt and Ronald J. Davis, Cadastral Surveyors, in 1984.

U.S. Survey No. 9623 was surveyed under contract, in 1988.

The retracement of a portion of U.S. Survey No. 3772 and the survey of the Kateel River Meridian through Township 13 South between Range 1 East and Range 1 West, the south boundary, and the meanders of Township 13 South, Range 1 East, Kateel River Meridian, Alaska, were surveyed under contract in 1980.

This survey was executed by Michael R. Stephen, Cadastral Surveyor, October 16 through October 19, 2006, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, The Alaska State Office, ANCSA 14(c) Handbook, Rev. March, 1992, Special Instructions dated August 24, 2004, approved October 6, 2004, and Assignment Instructions dated September 28, 2006.

Field assistant was:

Nathan H. Price, Land Surveyor

Area: 96.56 Acres.

The azimuth was obtained from the Global Positioning System, utilizing static relative and real-time kinematic techniques, and refers to the true meridian.

All surveyed lines and ties between corners are mean bearings.

The geographic position of corner No. 1 as determined by a tie to the corner of Townships 13 and 14 South, Ranges 1 East and 1 West, Kateel River Meridian, Alaska, is:

Latitude: 64°19'09.18" North (NAD 27)  
Longitude: 158°44'56.76" West

The mean magnetic declination was determined using a hand held autonomous G.P.S. unit, and verified with the U.S. Department of Defense World Magnetic Model 1995.


This survey is situated in the village of Kaltag, Alaska, within Sections 29, 30, and 31, Township 13 South, Range 1 East, Kateel River Meridian.

The land is generally level, containing spruce, birch and alder.


UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Anchorage, Alaska

The survey represented by this plat, sheets 1-3, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director 4/30/2008  
Date  
Deputy State Director for Cadastral Survey, Alaska

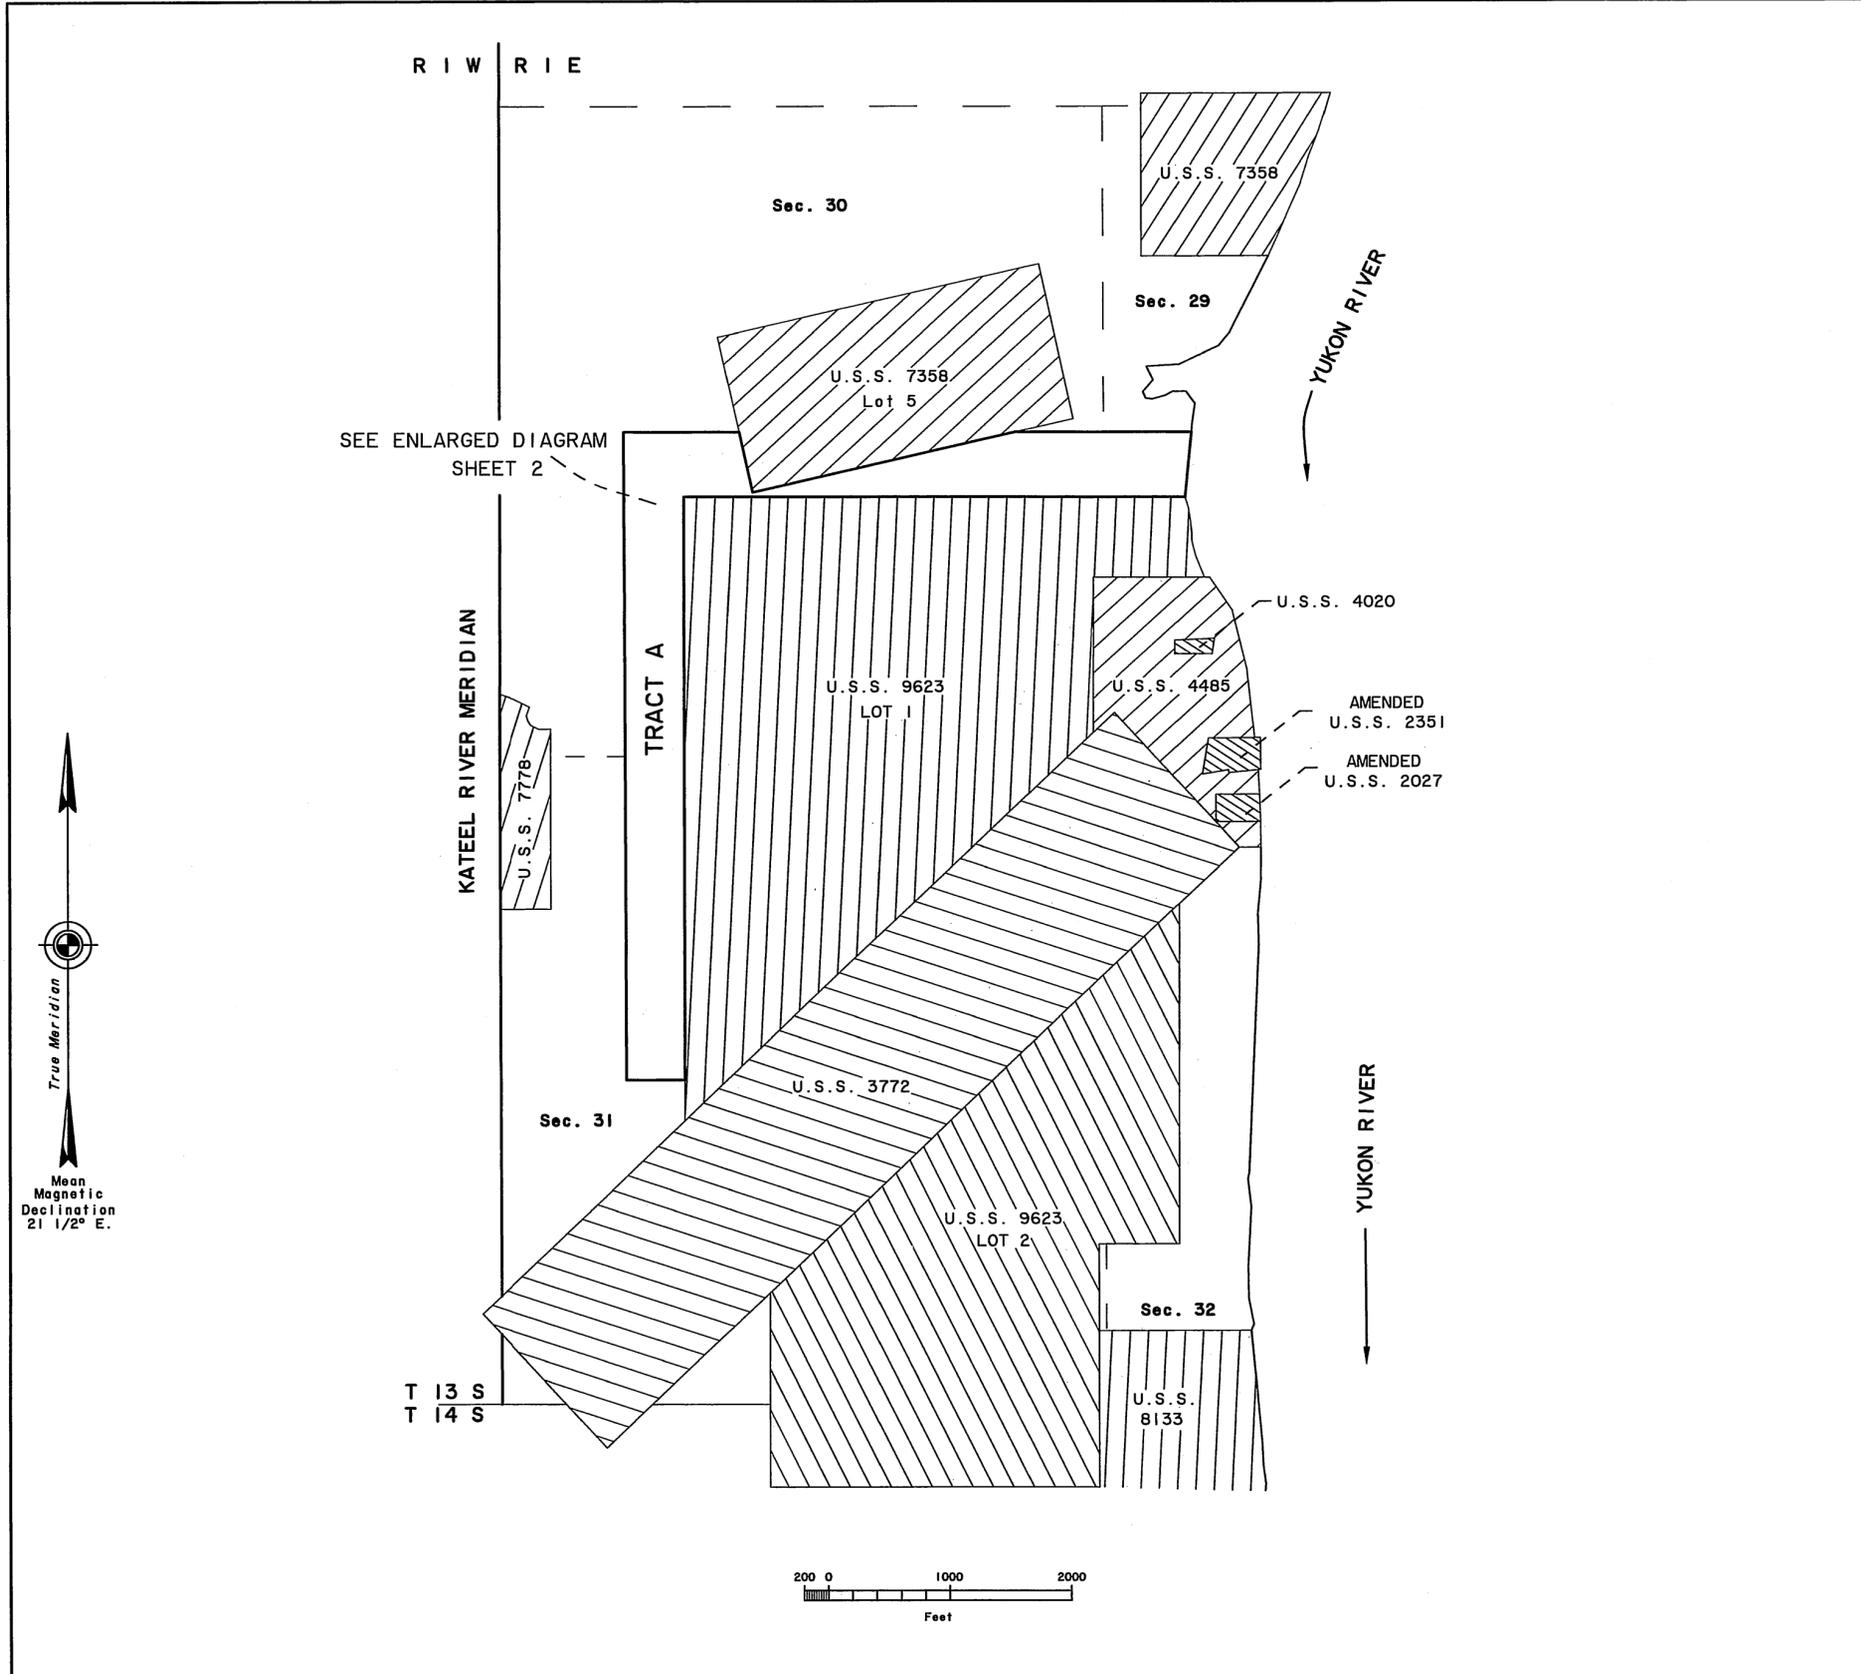

SEE ENLARGED DIAGRAM SHEET 2



I, Michael R. Stephen, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, in conformity with the Special Instructions approved October 6, 2004, the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.

April 21, 2008  
Date  
Michael Stephen  
Cadastral Surveyor

I hereby certify that Tract A represented on this plat of survey is on lands transferred to Gana-a'yoo, Limited, by patent No. 50-95-0013 issued by the United States of America; said tract also fulfills all entitlements under the provisions of ANCSA 14(c) as requested by Gana-a'yoo, Limited, and the request for additional ANCSA 14(c) survey work in order to accurately identify 14(c)(3) entitlements to the City of Kaltag, dated June 30, 2004.

Date  
Kiri Sashina  
President, Gana-a'yoo, Limited

MRS

NUlato 2008-2

mra

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14 (C) TRACT A  
 P.L. 92-203 (85 STAT. 688, 702, 703)  
 GANA-A'YOO, LIMITED  
 AT  
 KALTAG, ALASKA

AND  
 THE DEPENDENT RESURVEY OF A PORTION OF  
 LOT 1, U.S. SURVEY NO. 9623  
 A PORTION OF  
 LOT 5, U.S. SURVEY NO. 7358  
 AND A PORTION OF  
 U.S. SURVEY NO. 3772

REFERENCE SHOULD BE MADE  
 TO  
 SHEET No. 1  
 FOR SURVEY INFORMATION

1980 RECORD DIGITIZED MEANDERS


From the true point for cor. No. 7, Tract A, a meander cor., on the right bank of the Yukon River, at the line of ordinary high water; not monumented due to the liability of destruction by ice and water action.

Thence downstream with a meander of the right bank of the Yukon River, along a gently sloping sand and gravel beach, at the line of ordinary high water.

I. S. 5°48' W., 527.25 ft. At end of course, the true point for cor. No. 8, identical with the true point for cor. No. 6, Lot 1, U.S. Survey 9623, both meander cors.; not monumented due to the liability of destruction by ice and water action.

LEGEND

- ⊗ - Recovered B.L.M. monument, more fully described on Sheet No. 3.
- - Set ANCSA 14(c) monument, more fully described on Sheet No. 3.

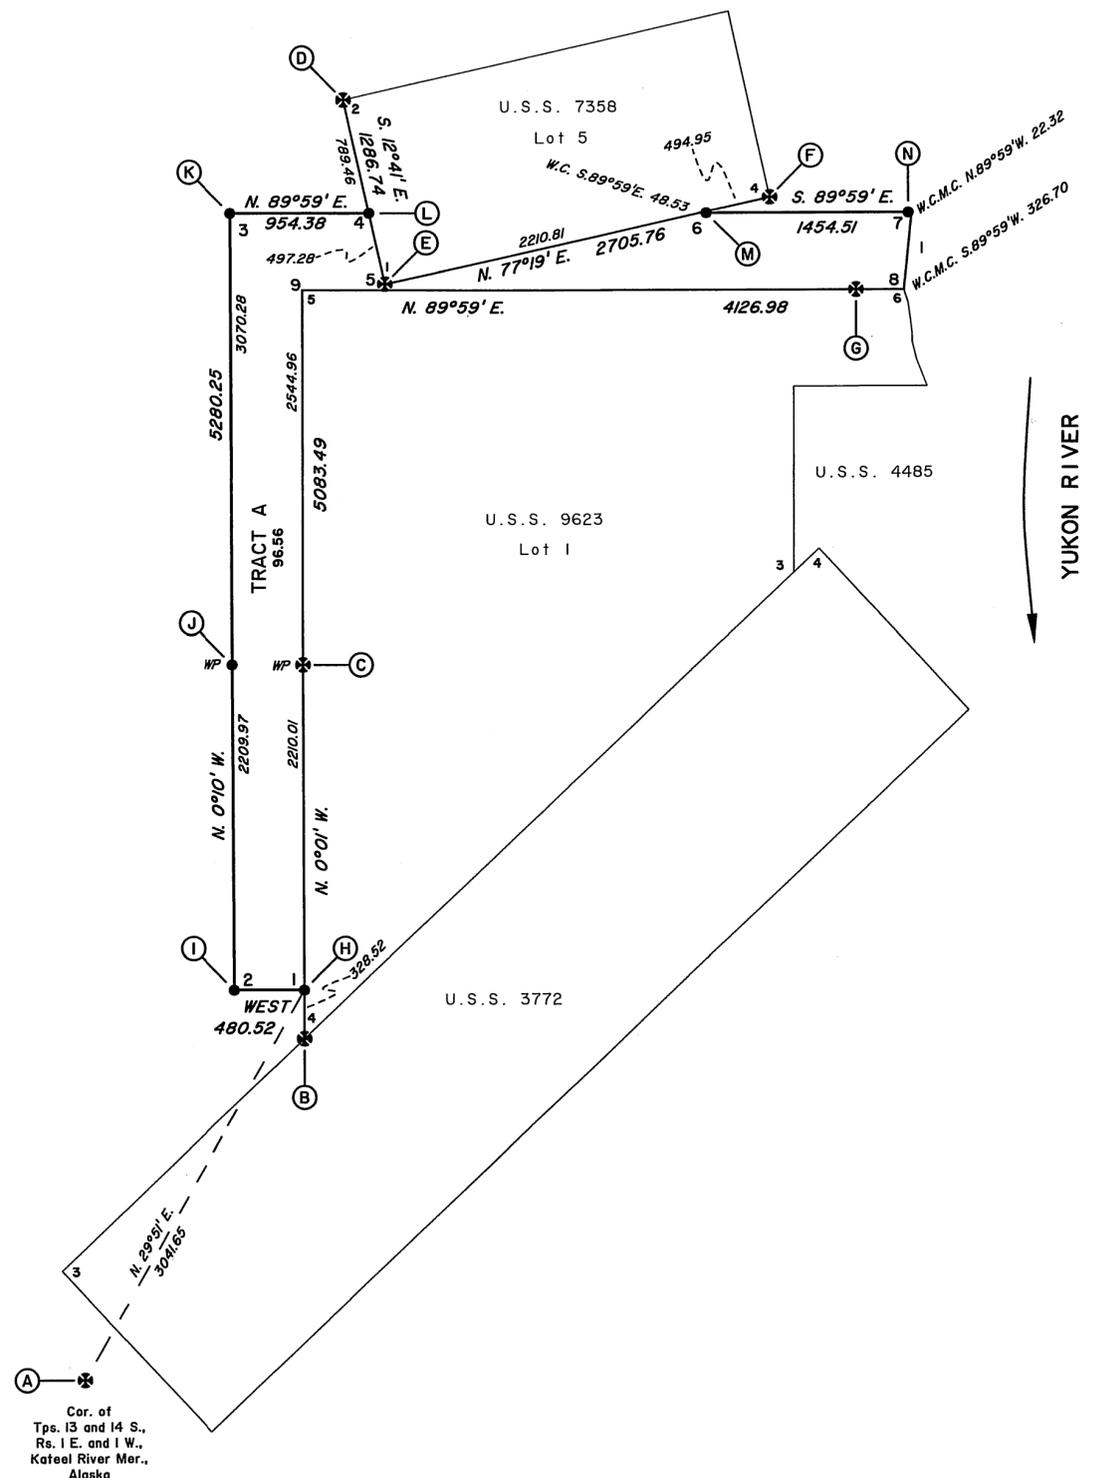


True Meridian  
 Mean Magnetic Declination  
 21 1/2° E.

200 0 1000 2000  
 Feet

Cor. of  
 Tps. 13 and 14 S.,  
 Rs. 1 E. and 1 W.,  
 Katal River Mer.,  
 Alaska

*Dulate 2008-2*

RECOVERED MONUMENTS



Recovered an alum. rod, 3/4 in. diam., firmly set, projecting 5 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 4 ins. diam., bears N. 45° E., 57.4 ft. dist., with scribe marks X BT visible on a partially healed blaze.


A spruce, 5 ins. diam., bears S. 52 1/4° E. (Record S. 60° E.), 49.5 ft. dist., with scribe marks X BT visible on a partially healed blaze.

A birch, 8 ins. diam., bears S. 85° W. (Record S. 59° W.), 147.2 ft. dist., with scribe marks TI4S RIW SI BT visible on a partially healed blaze.

A birch, 9 ins. diam., bears N. 63 1/4° W. (Record N. 69° W.), 139.9 ft. dist., with scribe marks TI3S RIW S36 BT visible on a partially healed blaze.

The original triangle marker alum. rod, 3/4 in. diam., firmly set, 6.6 ft. S. of cor., with an orange alum. triangular marker bolted on top.

Located in tussocks, with spruce, birch and ground brush.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees

A spruce, 6 ins. diam., bears N. 33 1/2° E. (Record N. 22° E.), 7.9 ft. dist., with scribe marks C4 LI S 9623 BT visible on a partially healed blaze.

A spruce, 7 ins. diam., bears S. 80° W., 4.0 ft. dist., with no marks visible on a fully healed blaze.

Located amongst spruce, birch and ground brush.



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees


A spruce, 4 ins. diam., bears S. 75 1/2° E. (Record S. 81° E.), 24.4 ft. dist., with scribe marks BT visible on a partially healed blaze.

A spruce, 5 ins. diam., bears S. 52 1/2° W. (Record S. 41° W.), 27.0 ft. dist., with no marks visible on a fully healed blaze.

and a new bearing tree

A spruce, 4 ins. diam., bears S. 22° W., 15.8 ft. dist., mkd. X BT.

Located amongst spruce, birch and ground brush.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

An aspen, 7 ins. diam., bears N. 19 1/2° E., 16.5 ft. dist., with no marks or blaze visible.


An aspen, 6 ins. diam., bears N. 82 1/2° W., 31.0 ft. dist., with no marks or blaze visible.

Located amongst spruce, birch and ground brush.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown; there is no remaining evidence of the original bearing trees or collar of stone.


Located amongst dense alder.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.

There are no accessories of record.


Located amongst spruce, birch and ground brush.



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown; there is no remaining evidence of the original bearing trees.

Located amongst spruce, birch and ground brush.

SET MONUMENTS




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears N. 72 3/4° E., 72.3 ft. dist., mkd. X BT.

A spruce, 6 ins. diam., bears N. 8 3/4° W., 52.4 ft. dist., mkd. TR A ANCSA 14C BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Located on level ground amongst grass in wet soil, with nearby spruce.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears S. 40 1/4° W., 31.1 ft. dist., mkd. X BT.

A spruce, 11 ins. diam., bears N. 26° W., 48.7 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Located on level ground amongst grass, spruce and alder in wet soil, near the base of a spruce stump.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears N. 50° E., 11.8 ft. dist., mkd. X BT.

A spruce, 5 ins. diam., bears N. 54° W., 13.1 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Located on level ground amongst scattered spruce.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown.

No accessories available.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Located on level ground amongst dwarf spruce and willow brush.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears N. 86° W., 33.0 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 14 1/2° W., 42.3 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Located on level ground amongst spruce, birch and willow brush.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown.

No accessories available.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Located on level ground amongst alder, 27 ft. East of the right bank of the Kaltag River. The Kaltag River is 100 ft. wide and the bank bears N. 40° W. and S. 40° E.

True point falls in the Kaltag River.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown.

No accessories available.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Located on level ground amongst dead willow and alder, 22 ft. West of the right bank of the Yukon River, bank bears N. 6° E and S. 6° W.

True point falls on the right bank of the Yukon River.

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14 (C) TRACT A  
P.L. 92-203 (85 STAT. 688, 702, 703)  
GANA-A'YOO, LIMITED  
AT  
KALTAG, ALASKA

AND  
THE DEPENDENT RESURVEY OF A PORTION OF  
LOT 1, U.S. SURVEY NO. 9623  
A PORTION OF  
LOT 5, U.S. SURVEY NO. 7358  
AND A PORTION OF  
U.S. SURVEY NO. 3772

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

2008-2  
Dulato REC DIST 30-22  
DATE 5-5 2008  
TIME 2:26 P M  
Requested By us/BLM  
Address \_\_\_\_\_

Nulato 2008-2



# United States Department of the Interior



## BUREAU OF LAND MANAGEMENT

Alaska State Office  
222 West Seventh Avenue, #13  
Anchorage, Alaska 99513-7504  
<http://www.blm.gov/ak>

In Reply Refer To:  
KALTAG  
ANCSA 14(c)  
9600 (927)

April 30, 2008

NULATO RECORDING DISTRICT  
1648 S. Cushman St., #201  
Fairbanks, AK 99701-6206

Dear District Recorder:

The ANCSA 14(c) plat for KALTAG, TRACT A, consisting of three (3) original sheets, transmitted to you by this letter of compliance, portrays a Cadastral Survey conducted to fulfill statutory requirements mandated by the Alaska Native Claims Settlement Act (ANCSA), pursuant to Public Law 92-203 (Stat. 688, 702, 703), and satisfies the federal guidelines and requirements proclaimed for ANCSA 14(c) Surveys.

The plat represents surveyed parcels of land selected for ANCSA 14(c) reconveyances situated on portions of surface estate lands transferred from the United States of America by Patent No. 50-95-0013 issued to Gana-a'yoo Limited.

ANCSA 14(c) Surveys have been authorized as federally mandated surveys, under the provisions of Section 13 of ANCSA, 43 U.S.C. Stat. 1612. The authority to execute all federal land surveys in Alaska is delegated by the Secretary of the Interior to the Director, Bureau of Land Management (BLM) and subsequently redelegated to the Deputy State Director for Cadastral Survey, Alaska State Office. Accordingly, BLM requests that this plat be filed with the NULATO RECORDING DISTRICT to comply with the federal platting regulations and the agreements set forth between the Bureau of Land Management and the State Recording Authority.

Sincerely,

FOR

John A. Sroufe  
Deputy State Director  
for Cadastral Survey, Alaska