


COPY

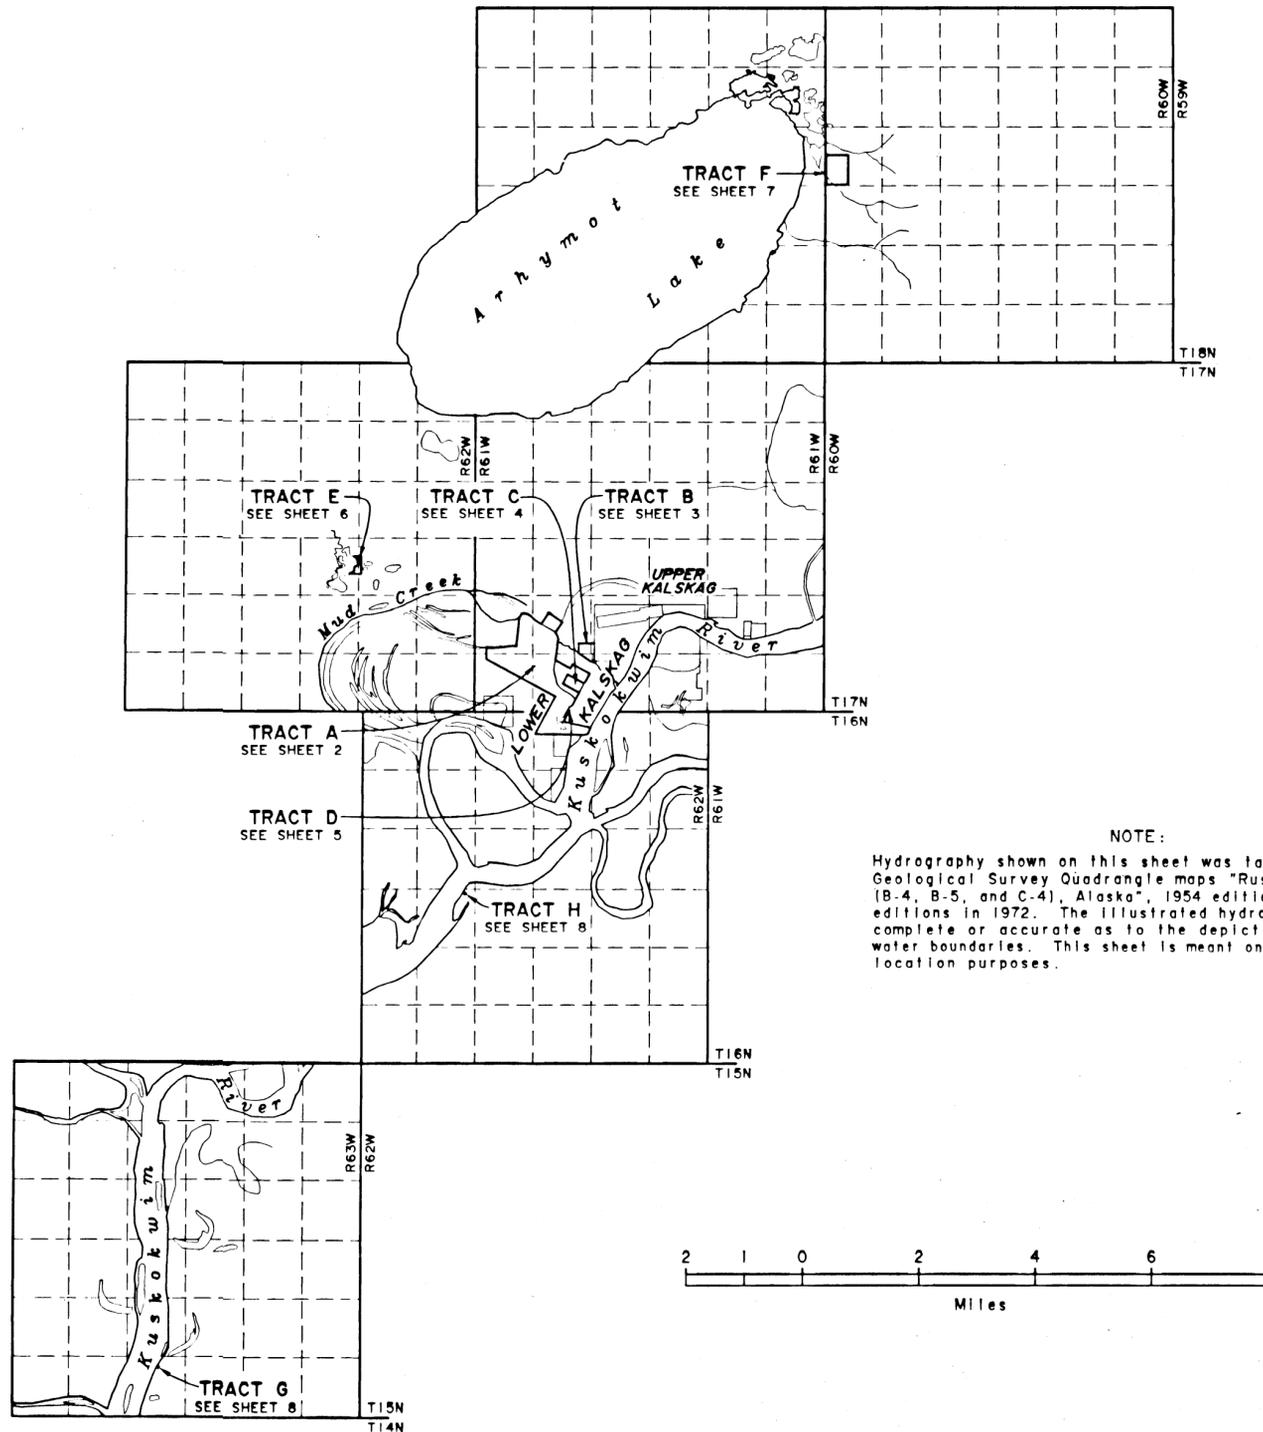

NOTE:
Hydrography shown on this sheet was taken from U.S. Geological Survey Quadrangle maps "Russian Mission (B-4, B-5, and C-4), Alaska", 1954 edition, with minor editions in 1972. The illustrated hydrography is not complete or accurate as to the depiction of actual water boundaries. This sheet is meant only for general location purposes.

I, HOWARD C. HOLTAN, Registered Alaska Land Surveyor No. LS-3323, for the Kuskokwim Corporation, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-9, in conformity with the Special Instructions, approved April 14, 1998, Contract No. 1422-N660-C98-3042, awarded September 16, 1998, the principles of survey described in the Manual of Instructions for the Survey of Public Lands of the United States, 1973, and in the specific manner described on this plat.

I hereby certify that Tracts A through H represented on this plat of survey are on lands Interim Conveyed to The Kuskokwim Corporation (Successor In Interest to Lower Kalskag, Incorporated) by Interim Conveyance Nos. 745 and 749, both issued by the United States of America, said tracts also fulfill all entitlements under the provisions of ANCSA 14 (c) as requested by The Kuskokwim Corporation ANCSA 14 (c) (1) Map of Boundaries accepted January 18, 1994, The Kuskokwim Corporation ANCSA 14 (c) (3) Map of Boundaries for Lower Kalskag, accepted April 19, 1996, and the city of Lower Kalskag 14 (c) (3) Settlement Agreement, dated March 15, 1996.

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A THROUGH H,
P.L. 92-203 (85 STAT. 688, 702, 703)
THE KUSKOKWIM CORPORATION
AT
LOWER KALSKAG, ALASKA
AND THE DEPENDENT RESURVEY OF PORTIONS OF
U.S SURVEY NOS. 4413, 4414, 10126, AND 10202;
AND PLATS 85-5 AND 85-6.

This plat, sheets 1-9, contains the entire survey record.
U.S. Survey No. 4413, the townsite of Upper Kalskag was surveyed by Mason W. Thayer, Supervisory Cadastral Surveyor in 1966. The retracement and subdivision of Tract D was surveyed by Brock Clifford, Cadastral Surveyor, in 1989.
U.S. Survey No. 4414, the townsite of Lower Kalskag, was surveyed by Ralph J. Ellis, Supervisory Cadastral Surveyor, in 1967. The Dependent Resurvey and Subdivision of Tract B, U.S. Survey No. 4414 was surveyed by John A. Pex, in 1990.

U.S. Survey No. 6558 was surveyed by Donald E. Mullikin, Registered Alaska Surveyor No. LS-4469, in 1991 under Contract No. N651-CI-3022.
See Sheet No. 9 for additional notes.

This survey was executed by Howard C. Holtan, Registered Alaska Land Surveyor No. LS-3323, for The Kuskokwim Corporation, September 29, 1998 through October 15, 1998, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated March 23, 1998, approved April 14, 1998, the Kuskokwim Corporation ANCSA 14 (c) (1) Map of Boundaries accepted January 18, 1994, the Lower Kalskag Corporation ANCSA 14 (c) (3) Map of Boundaries accepted April 19, 1996, and Contract No. 1422-N660-C98-3042, dated September 16, 1998.

Field assistants were:
Thomas J. Reber, Registered Land Surveyor
William C. McCreary, Registered Land Surveyor
Derek S. Nations, Registered Land Surveyor
Jason A. Madsen, Party Chief
Ralph J. Sousa, Party Chief
Simeon Nook, Survey Technician
Debra K. Ovitt, Survey Technician
Sam Parent, Survey Technician

Area: 1266.93 Acres
The corner positions for this survey were determined using GPS Real-Time Kinematic techniques (RTK) and were verified using GPS Rapid Static methodology.

The azimuth was obtained from Global Positioning System (GPS) observations and refers to the true meridian.

The geographic position of corners of this survey were determined by ties to various existing surveys as shown in this survey record.

The mean magnetic declination was obtained from the U.S. Geological Survey quadrangle map "Russian Mission (C-4)," Alaska, 1954 edition, and indicates a mean value of 20° East.

This survey is situated in the vicinity of Lower and Upper Kalskag, Alaska, within Townships 16 North, Range 62 West and Township 17 North, Range 61 West, Seward Meridian and also includes ANCSA 14(c) claims situated within Township 15 North, Range 63 West, Township 17 North, Range 62 West, and Township 18 North, Range 60 West, Seward Meridian, Alaska.

The land is composed of gentle rolling hills, with spruce and birch timber, with alder and willow brush. The soil is sandy and silty loam.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, sheets 1-9, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director
Debra K. Ovitt 30 AUGUST 1999
Deputy State Director for Cadastral Survey, Alaska


8/10/99 Date
Howard C. Holtan
Registered Land Surveyor

August 24, 1999 Date
Michael C. Hays
President, The Kuskokwim Corporation

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS A THROUGH H,
 P.L. 92-203 (85 STAT. 688, 702, 703)
 THE KUSKOKWIM CORPORATION
 AT
LOWER KALSAG, ALASKA

AND THE DEPENDENT RESURVEY OF PORTIONS OF
 U.S. SURVEY NOS. 4413, 4414, 10126, AND 10202;
 AND PLATS 85-5 AND 85-6.

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

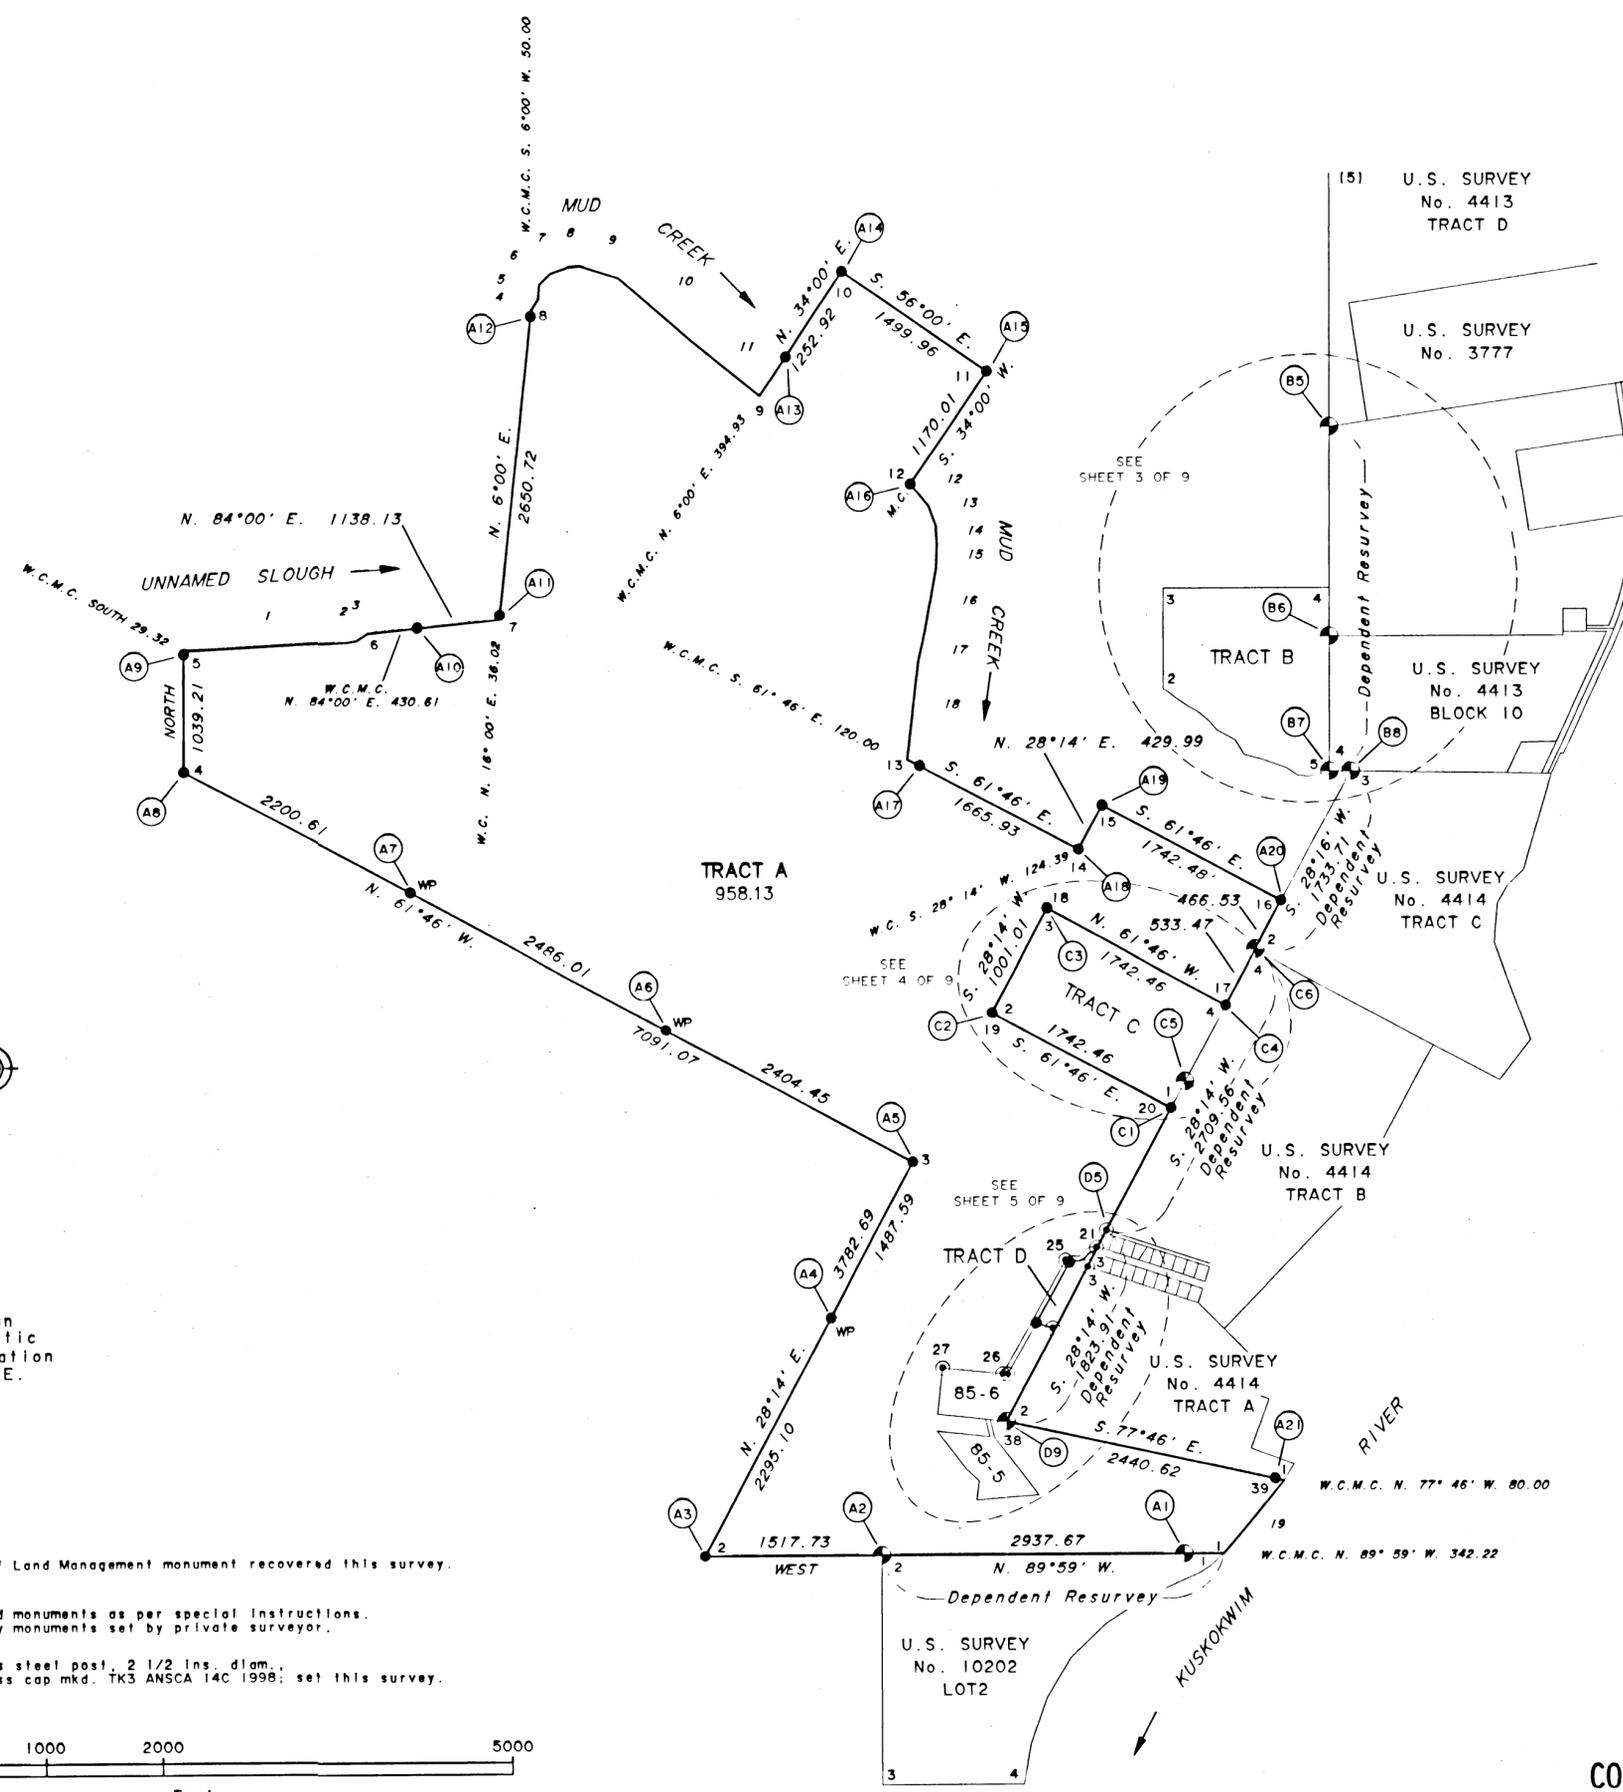

MEANDERS

TRACT A

Along the right bank of an unnamed slough, a well-defined bank 1 to 4 ft. high at the line of ordinary high water. Beginning at the South bank of the slough

1. N. 86°52' E., 1402.03 ft.
2. N. 79°31' E., 84.88 ft.
3. N. 56°31' E., 110.74 ft.

Along the rightbank of Mud Creek, a well-defined bank 1 to 4 ft. high at the line of ordinary high water. Beginning at the South bank of Mud Creek

4. N. 31°54' E., 114.48 ft.
5. N. 3°30' E., 118.98 ft.
6. N. 45°08' E., 133.97 ft.
7. N. 70°51' E., 153.07 ft.
8. N. 84°59' E., 108.68 ft.
9. S. 73°05' E., 346.36 ft.
10. S. 49°54' E., 818.30 ft.
11. S. 51°34' E., 750.11 ft.

Along the rightbank of Mud Creek, a well-defined bank 1 to 4 ft. high at the line of ordinary high water. Beginning at the West bank of Mud Creek


12. S. 39°31' E., 243.61 ft.
13. S. 20°47' E., 177.73 ft.
14. S. 3°27' E., 157.24 ft.
15. S. 1°44' W., 189.31 ft.
16. S. 9°50' W., 579.38 ft.
17. S. 12°44' W., 259.89 ft.
18. S. 6°29' W., 847.94 ft.

Along the westerly shore of the Kuskokwim River a well-defined eroding bank 8 to 10 ft. high at the line of ordinary high water.

19. S. 39°55' W., 806.61 ft.



- Bureau of Land Management monument recovered this survey.
- Recovered monuments as per special instructions. Secondary monuments set by private surveyor.
- Stainless steel post, 2 1/2 ins. diam., with brass cap mkd. TK3 ANCSA 14C 1998; set this survey.



ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS A THROUGH H,
 P.L. 92-203 (85 STAT. 688, 702, 703)
 THE KUSKOKWIM CORPORATION
 AT
LOWER KALSKAG, ALASKA




AND THE DEPENDENT RESURVEY OF PORTIONS OF
 U.S. SURVEY NOS. 4413, 4414, 10126, AND 10202;
 AND PLATS 85-5 AND 85-6.

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION


No. 4413
 U.S. SURVEY
 BLOCK 7
 TRACT D

U.S. SURVEY
 No. 4413
 BLOCK 10
 TRACT D


U.S. SURVEY
 No. 4414
 TRACT C

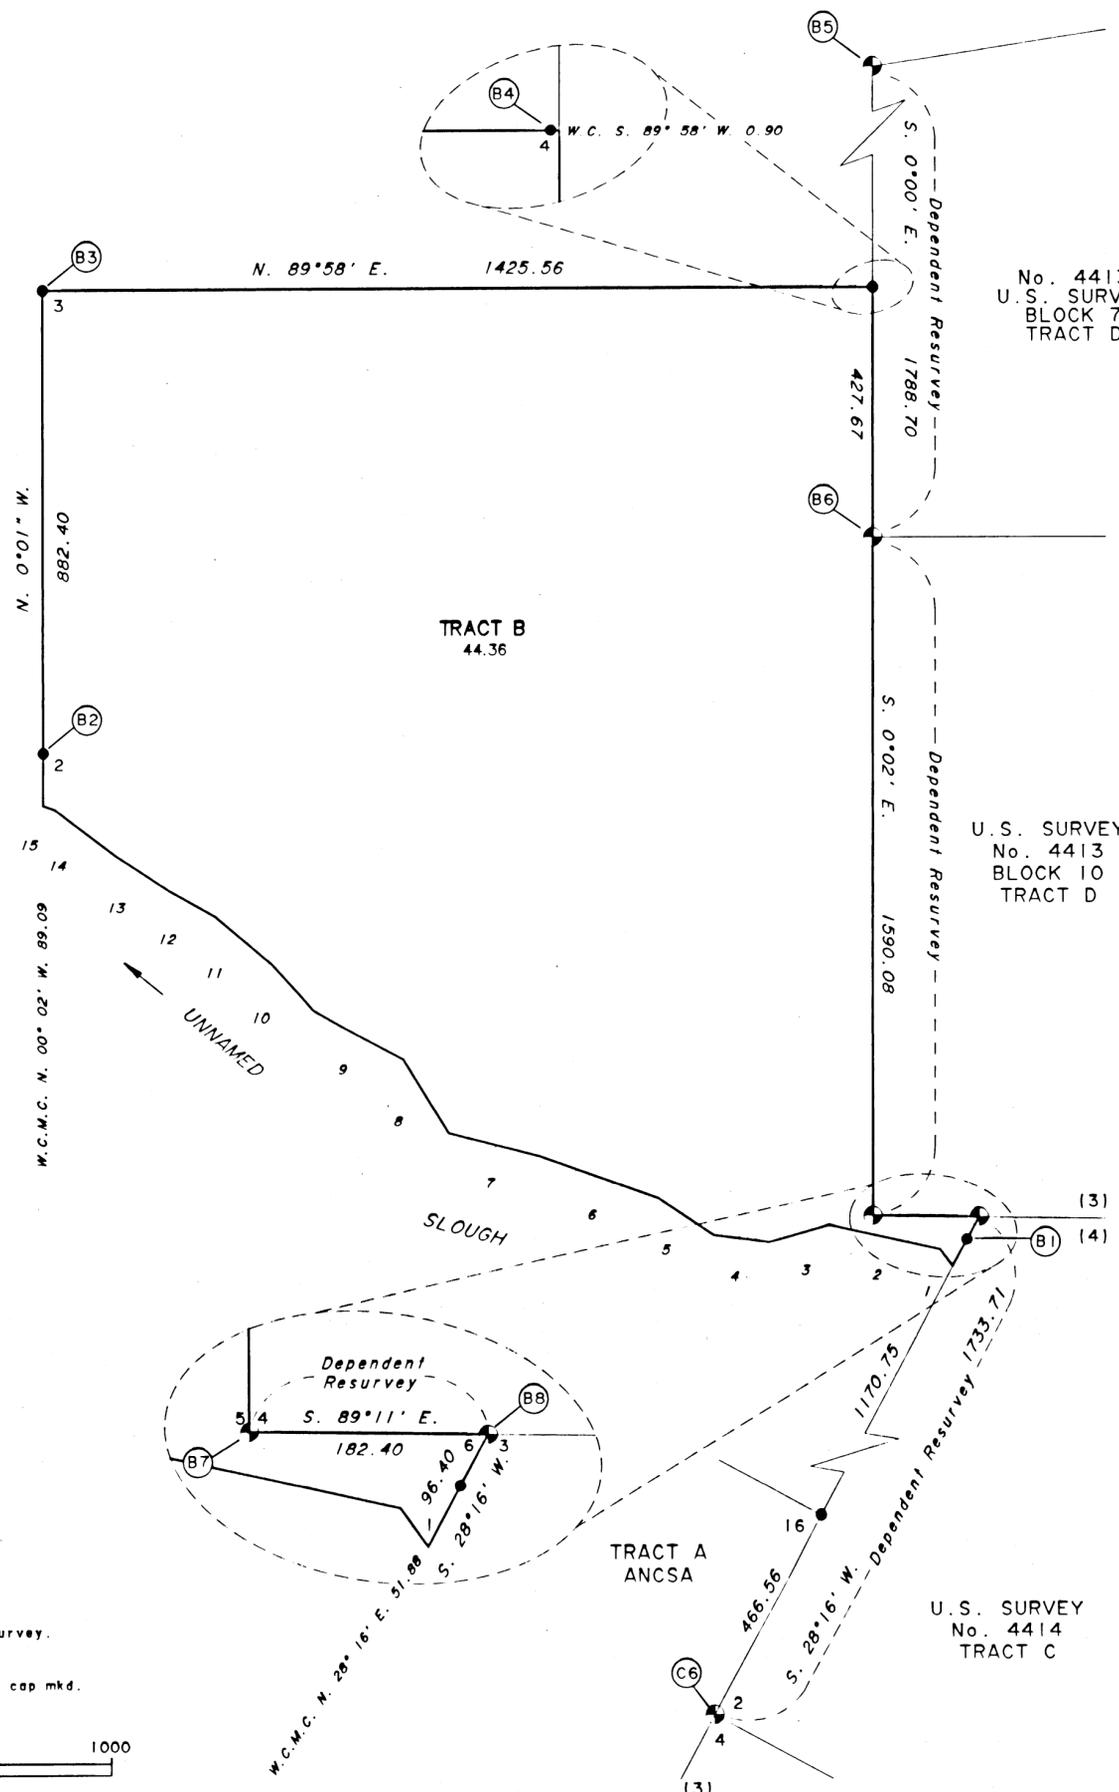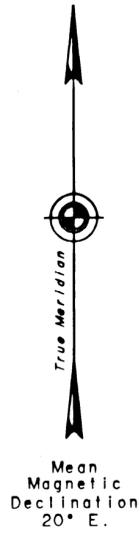


Recovered a stainless steel post 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap as shown.



Recovered a stainless steel post 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap as shown.





Recovered a stainless steel post 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap as shown.




Recovered a stainless steel post 3 1/4 ins. diam., firmly set, flush with the ground, with brass cap as shown.

● Bureau of Land Management monument recovered this survey.


● Stainless steel post, 2 1/2 ins. diam., with brass cap mkd. TK3 ANCSA 14C 1998; set this survey.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with brass cap mkd. as shown, from which
 A birch, 9 ins. diam., bears N. 66° W., 69.3 ft. dist., mkd. X BT.
 A spruce, 7 ins. diam., bears N. 51° E., 53.2 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with brass cap mkd. as shown, from which
 A birch, 8 ins. diam., bears N. 34° E., 58.0 ft. dist., mkd. X BT.
 A spruce, 12 ins. diam., bears S. 45° E., 14.4 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 10 ins. diam., bears N. 86° E., 37.1 ft. dist., mkd. X BT.
 A spruce, 13 ins. diam., bears N. 58° W., 44.9 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 10 ins. diam., bears N. 84° W., 31.8 ft. dist., mkd. X BT.
 A spruce, 12 ins. diam., bears N. 32° E., 23.0 ft. dist., mkd. X BT.
 This corner was inadvertently marked without the WC and an arrow pointing to the true corner.

MEANDERS

TRACT B

On the northerly shore of an unnamed slough, poorly defined bank, 0 to 1 ft. high at the line of ordinary high water.

1. N. 36°11' W., 35.73 ft.
2. N. 77°37' W., 195.32 ft.
3. S. 74°22' W., 106.92 ft.
4. N. 82°39' W., 95.73 ft.

On the northerly shore of an unnamed slough, a well defined bank, 1 to 2 ft. high at the line of ordinary high water.

5. N. 56°13' W., 116.06 ft.
6. N. 70°19' W., 213.02 ft.
7. N. 75°35' W., 163.92 ft.
8. N. 31°24' W., 150.24 ft.
9. N. 61°48' W., 175.04 ft.
10. N. 42°27' W., 104.52 ft.
11. N. 49°56' W., 127.68 ft.
12. N. 60°43' W., 90.89 ft.
13. N. 56°19' W., 108.18 ft.
14. N. 52°27' W., 132.89 ft.
15. N. 70°23' W., 22.17 ft.

COPY

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS A THROUGH H,
 P.L. 92-203 (85 STAT. 688, 702, 703)
 THE KUSKOKWIM CORPORATION
 AT
LOWER KALSKAG, ALASKA

AND THE DEPENDENT RESURVEY OF PORTIONS OF
 U.S. SURVEY NOS. 4413, 4414, 10126, AND 10202;
 AND PLATS 85-5 AND 85-6.

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

U.S. SURVEY
 No. 4414
 TRACT C



TRACT A
 ANCSA

TRACT A
 ANCSA



TRACT C
 40.00

U.S. SURVEY
 No. 4414
 TRACT B


TRACT A
 ANCSA

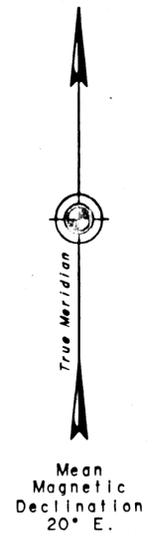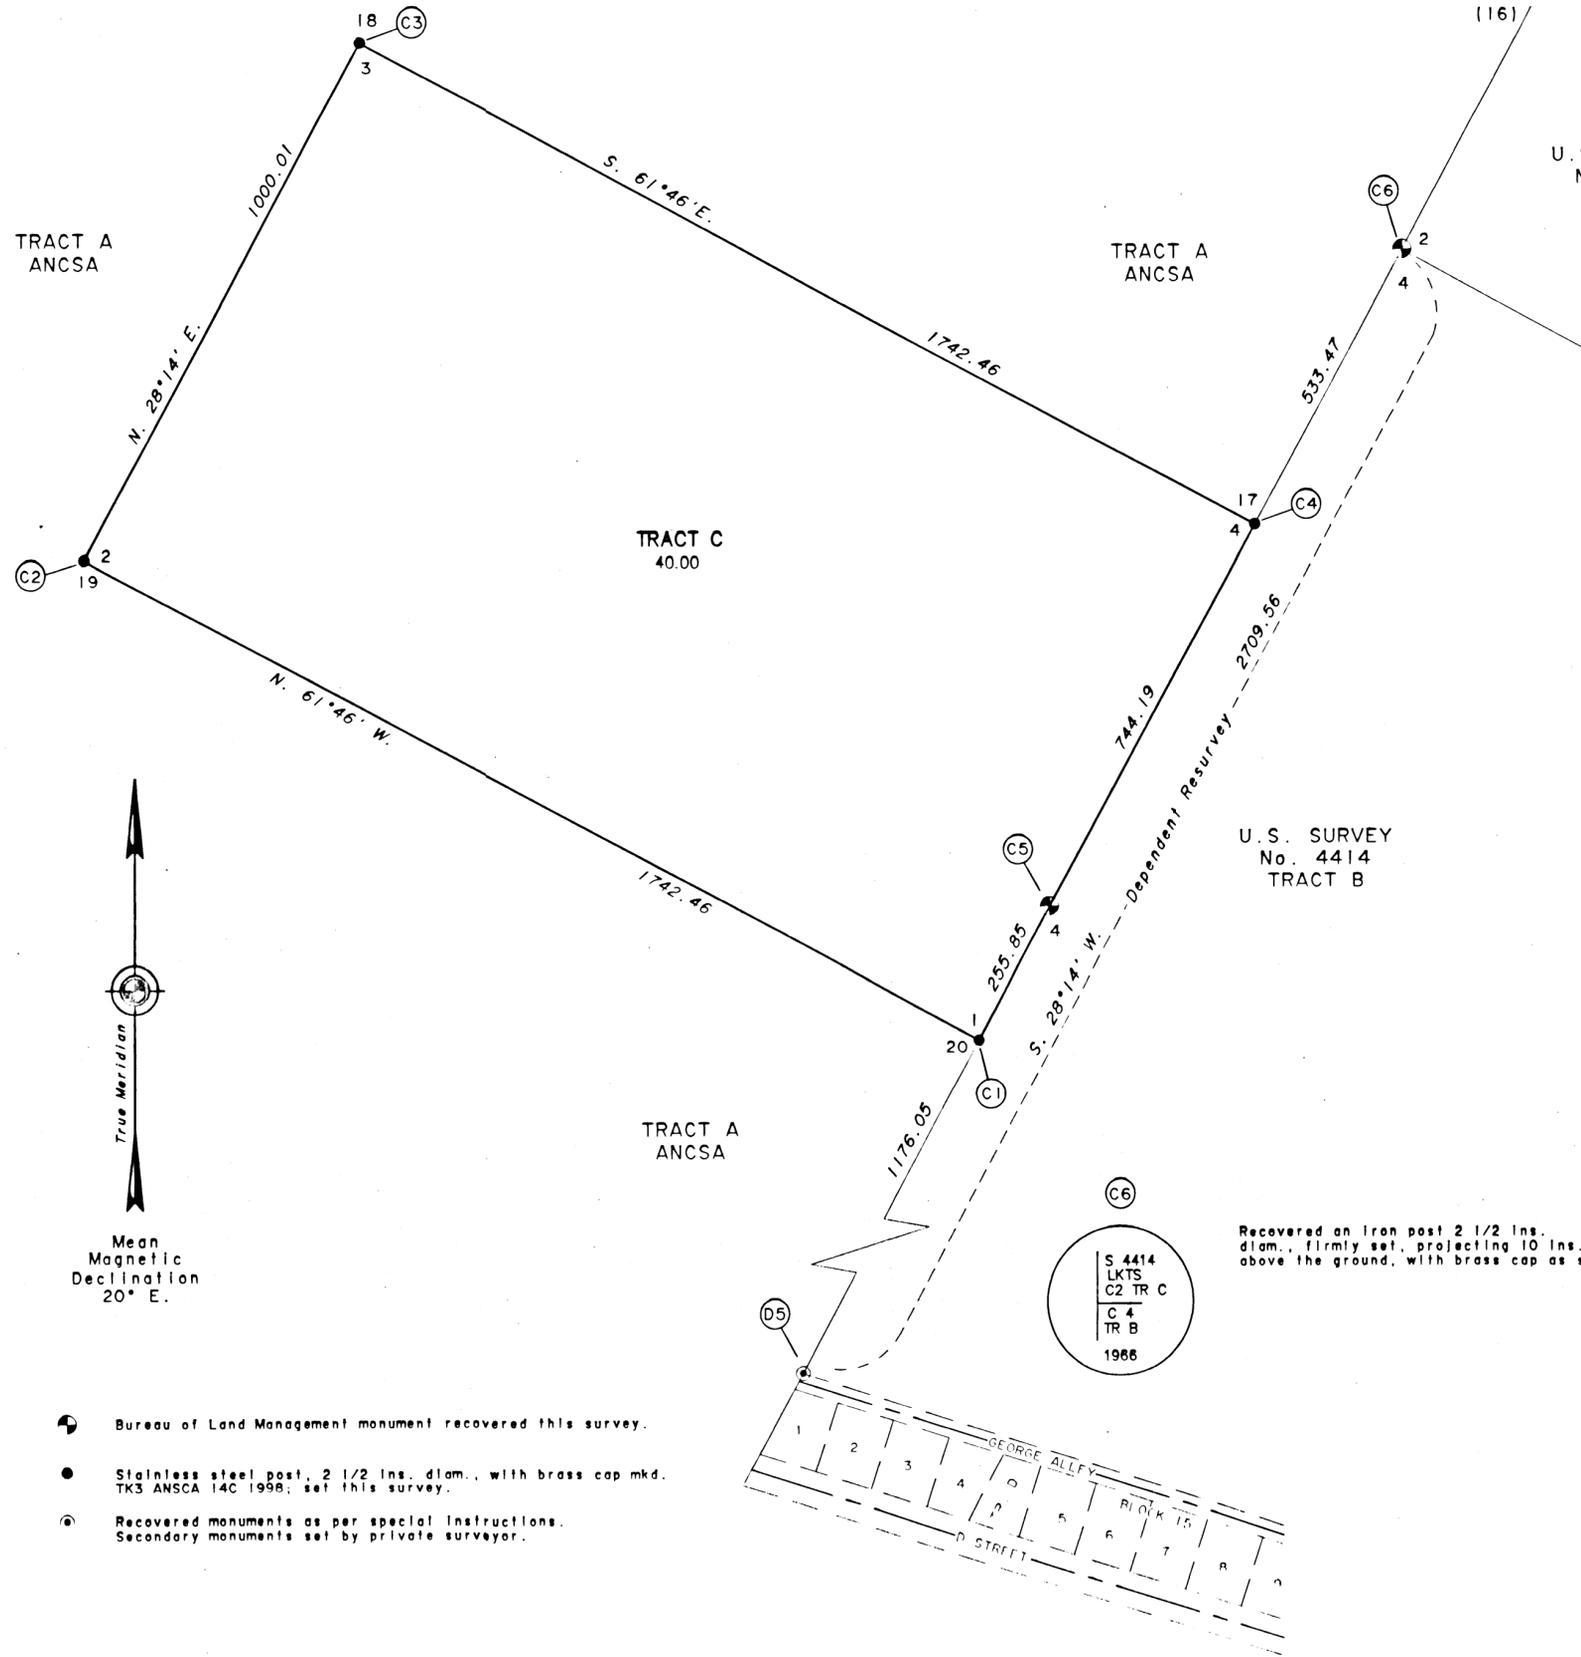


- Bureau of Land Management monument recovered this survey.
- Stainless steel post, 2 1/2 ins. diam., with brass cap mkd. TK3 ANCSA 14C 1998; set this survey.
- Recovered monuments as per special instructions. Secondary monuments set by private surveyor.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 13 ins. diam., bears N. 77° E., 23.9 ft. dist., mkd. X BT.
 A spruce, 7 ins. diam., bears N. 21° W., 27.0 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 10 ins. diam., bears N. 78 3/4° E., 50.3 ft. dist., mkd. X BT.
 A spruce, 14 ins. diam., bears S. 4 3/4° E., 24.6 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 8 ins. diam., bears S. 47 1/2° E., 79.5 ft. dist., mkd. X BT.
 A spruce, 4 ins. diam., bears S. 36° W., 40.4 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 8 ins. diam., bears N. 10° E., 38.9 ft. dist., mkd. X BT.
 A spruce, 6 ins. diam., bears S. 86° W., 24.6 ft. dist., mkd. X BT.



Recovered an iron post 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, with brass cap as shown.



Recovered a stainless steel post 2 1/2 ins. diam., firmly set, projecting 7 in. above the ground, with brass cap as shown.
 Refurbished existing monument by adding soil. Brass cap projects 2 ins. above mound.

COPY

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS A THROUGH H,
 P.L. 92-203 (85 STAT. 688, 702, 703)
 THE KUSKOKWIM CORPORATION
 AT
 LOWER KALSAG, ALASKA

AND THE DEPENDENT RESURVEY OF PORTIONS OF
 U.S SURVEY NOS. 4413, 4414, 10126, AND 10202;
 AND PLATS 85-5 AND 85-6.


REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

LINE DATA










LINE	DIRECTION	LENGTH
L1	N. 42°30'23" E.	38.87'
L2	S. 42°30'23" W.	38.87'
L3	N. 72°09'37" W.	7.52'
L4	N. 28°14' W.	15.25'
L5	N. 28°14' W.	15.25'
L6	N. 28°14' W.	126.96'
L7	N. 28°14' W.	9.85'
L8	N. 28°14' W.	20.78'
L9	N. 28°14' W.	19.92'
L10	N. 28°14' W.	10.45'
L11	N. 28°14' W.	127.28'

CURVE DATA

CURVE No.	RADIUS	LENGTH	TANGENT	CHORD	BEARING	DELTA
1	54.16'	61.76'	34.73'	58.47'	S. 75°10'23" W.	65°20'00"
2	95.00'	105.23'	58.75'	99.93'	S. 74°14'23" W.	63°28'00"
3	36.36'	48.46'	28.60'	44.96'	S. 67°47'17" W.	76°22'11"
4	76.36'	101.78'	60.06'	94.41'	N. 67°47'17" E.	76°22'11"
5	55.00'	60.92'	34.01'	57.86'	S. 74°14'23" W.	63°28'00"
6	94.16'	107.37'	60.37'	101.65'	S. 75°10'23" W.	65°20'00"




- Bureau of Land Management monument recovered this survey.
- ⊙ Recovered monuments as per special instructions. Secondary monuments set by private surveyor.
- Stainless steel post, 2 1/2 ins. diam., with brass cap mkd. TK3 ANCSA 14C 1998; set this survey.
- Recovered 5/8" ins. dia. rebar

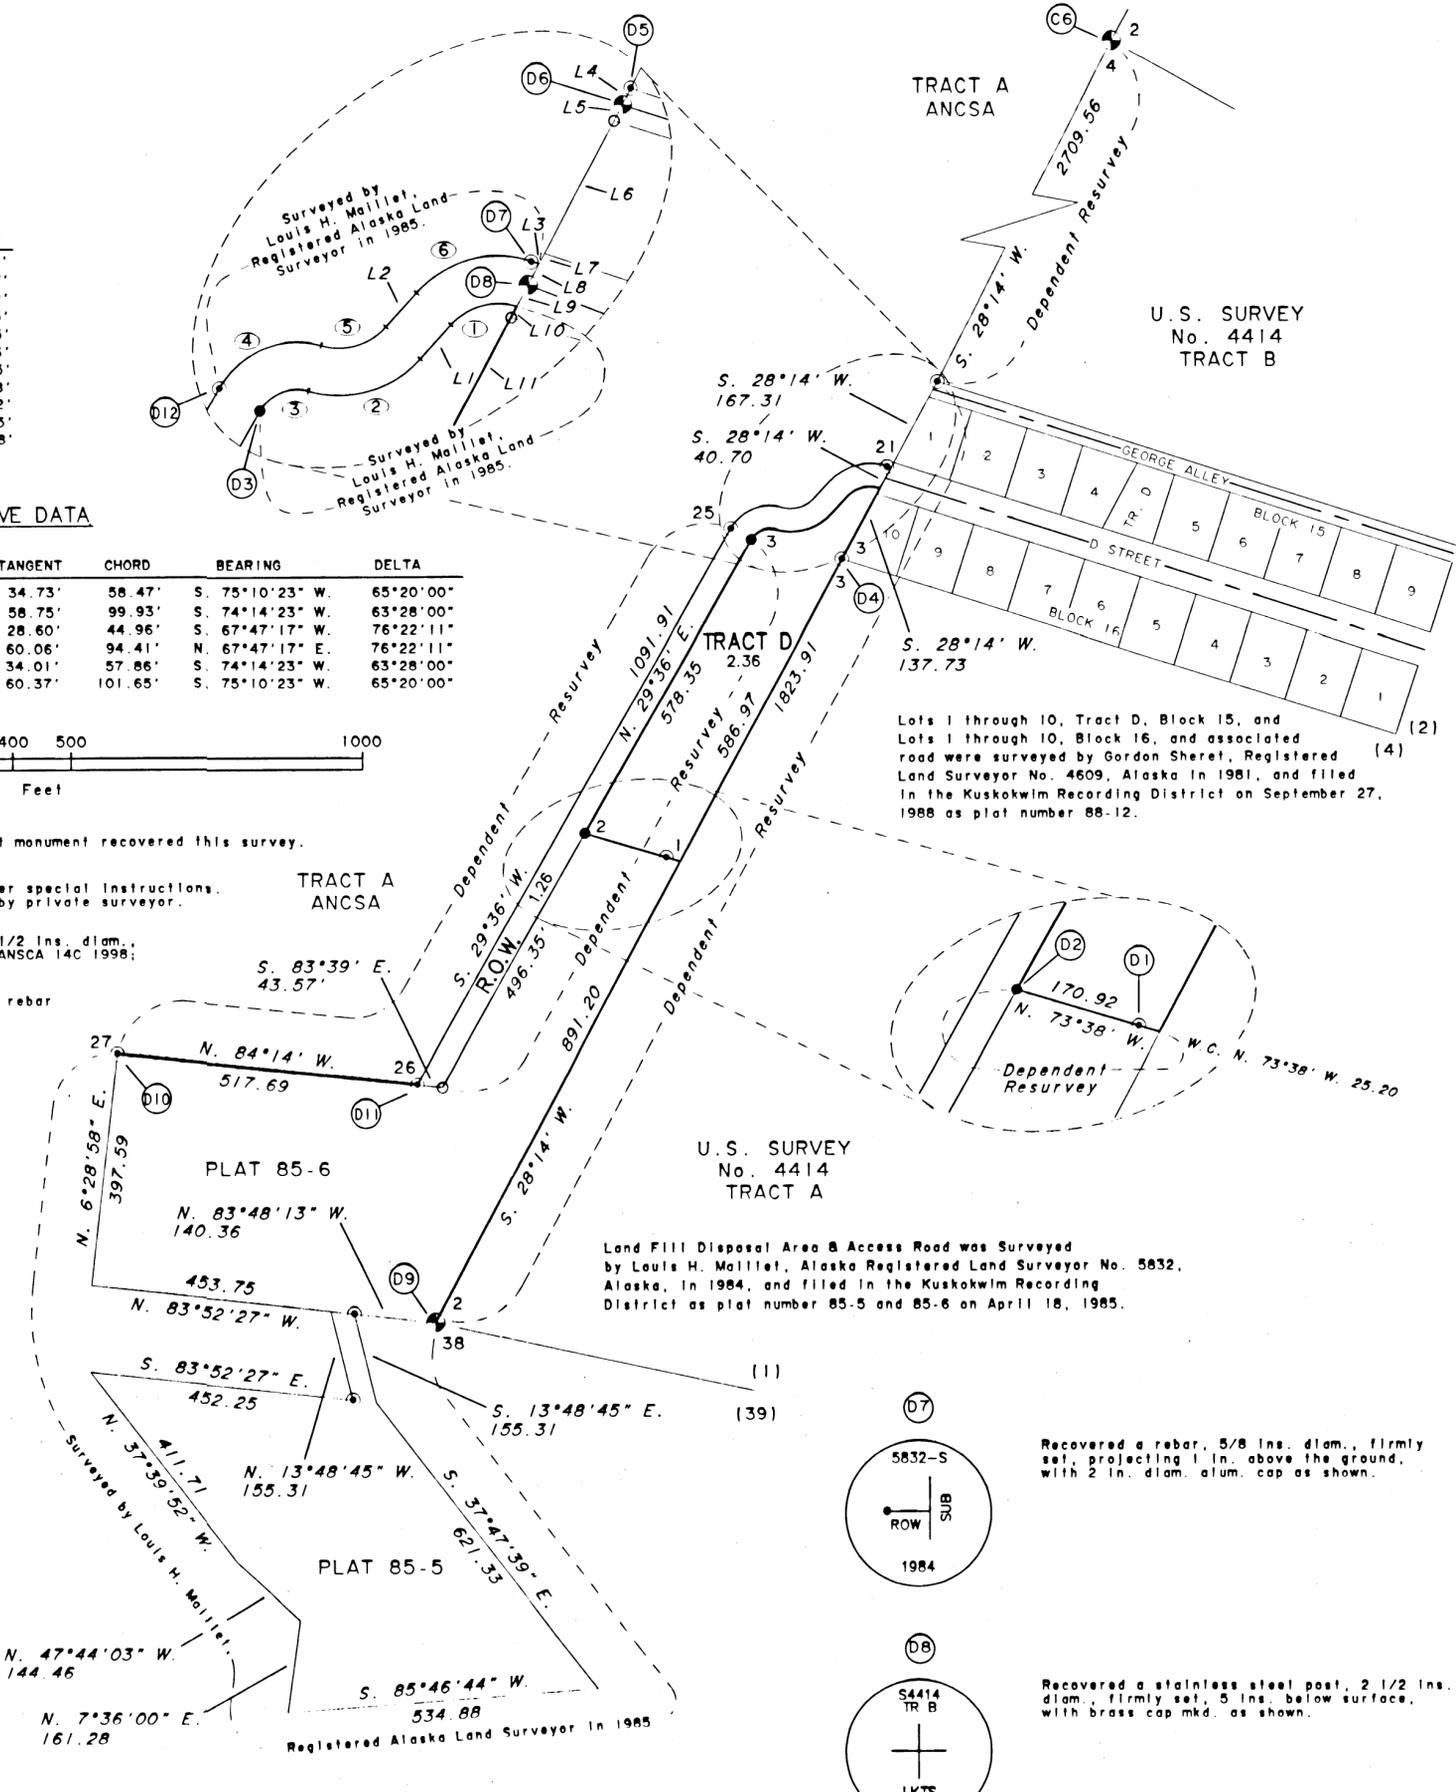


COPY

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS A THROUGH H,
 P.L. 92-203 (85 STAT. 688, 702, 703)
 THE KUSKOKWIM CORPORATION
 AT
LOWER KALSKAG, ALASKA

AND THE DEPENDENT RESURVEY OF PORTIONS OF
 U.S. SURVEY NOS. 4413, 4414, 10126, AND 10202;
 AND PLATS 85-5 AND 85-6.
 REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION



Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as shown.
 Record accessories were not recovered.






Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. as shown.
 Record accessories were not recovered.

MEANDERS


TRACT E

On the easterly shore of an unnamed lake, along a well-defined bank, 1 to 5 ft. high at the line of ordinary high water.


1. N. 56°11' E., 49.01 ft.
2. N. 72°20' E., 92.79 ft.
3. N. 52°42' E., 153.31 ft.
4. N. 22°39' E., 118.55 ft.
5. N. 6°28' E., 82.50 ft.
6. N. 19°48' W., 77.07 ft.
7. N. 4°03' W., 59.55 ft.
8. N. 10°03' E., 53.66 ft.
9. N. 23°12' E., 78.27 ft.
10. N. 41°55' E., 88.84 ft.
11. N. 72°00' E., 83.53 ft.
12. N. 77°07' E., 117.73 ft.
13. N. 59°35' E., 90.11 ft.
14. N. 16°18' E., 100.16 ft.
15. N. 38°13' W., 73.21 ft.
16. N. 6°06' E., 102.57 ft.
17. N. 23°25' W., 112.44 ft.
18. N. 26°51' W., 104.71 ft.
19. N. 23°42' W., 138.87 ft.
20. N. 51°46' W., 53.40 ft.
21. N. 27°01' W., 83.37 ft.
22. N. 55°09' W., 98.97 ft.
23. N. 66°05' W., 58.51 ft.
24. N. 82°20' W., 126.10 ft.
25. S. 89°40' W., 97.52 ft.
26. N. 63°20' W., 112.01 ft.
27. N. 20°57' E., 22.04 ft.

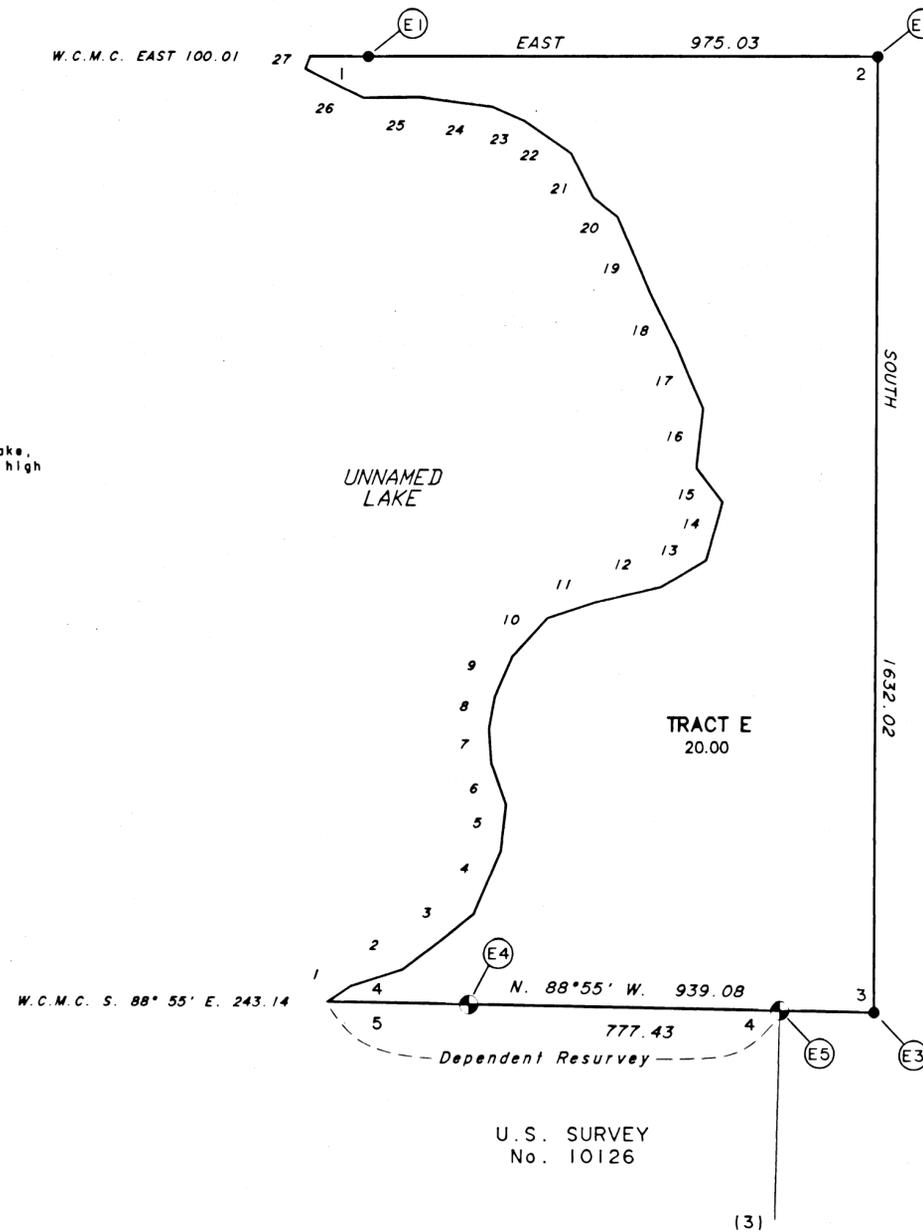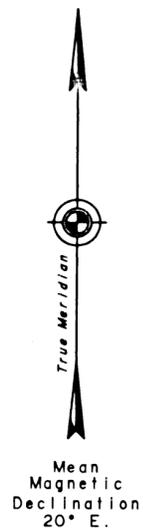

Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 dist., buried 18 ins. below ground.
 A spruce, 6 ins. diam., bears S. 61° E., 111.0 ft. dist., mkd. X BT.
 A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 dist., buried 18 ins. below ground.
 A spruce, 6 ins. diam., bears S. 24° E., 63.4 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with brass cap mkd. as shown, from which
 A triangular marker on a 3/4 in. diam. rod, 3 ft. 6 ins. long, 2 ft. 6 ins. in the ground bears S. 45° W., 6.6 dist.
 A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 dist., buried 18 ins. below ground.
 A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 dist., buried 18 ins. below ground.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
 A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 dist., buried 18 ins. below ground.
 A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 dist., buried 18 ins. below ground.

- Bureau of Land Management monument recovered this survey.
- Stainless steel post, 2 1/2 ins. diam., with brass cap mkd. TK3 ANCSA 14C 1998; set this survey.



COPY

Tract E is located within Township 17 North, Range 62 West, Seward Meridian, Alaska, approximately 5 miles northwest of the village of Lower Kalskag, Alaska.


99-4 KUSKOKWIM

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS A THROUGH H,
 P.L. 92-203 (85 STAT. 688, 702, 703)
 THE KUSKOKWIM CORPORATION
 AT
 LOWER KALSKAG, ALASKA




AND THE DEPENDENT RESURVEY OF PORTIONS OF
 U.S. SURVEY NOS. 4413, 4414, 10126, AND 10202;
 AND PLATS 85-5 AND 85-6.

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION


Cor 3, Lot 1,
 U.S. Survey No. 10087




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, 1 in. below water surface, with brass cap mkd. as shown.
 Record accessories were not recovered.

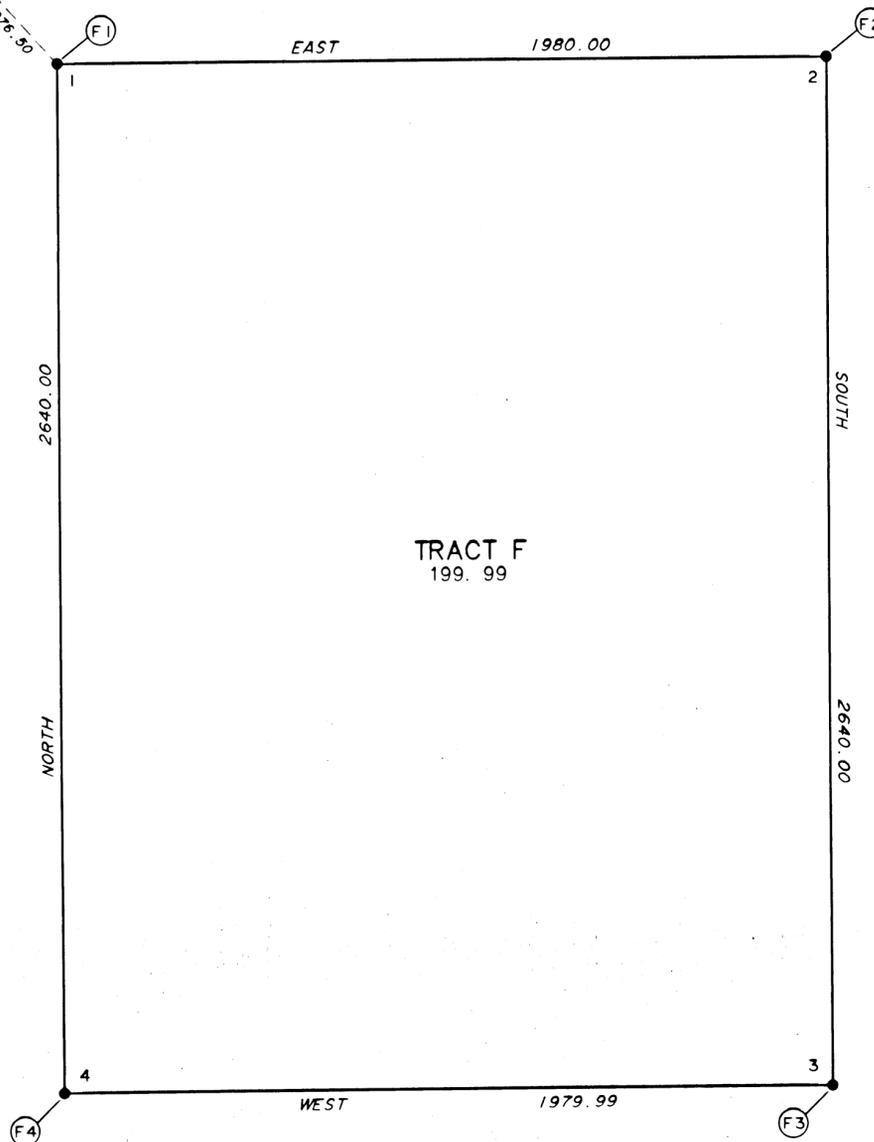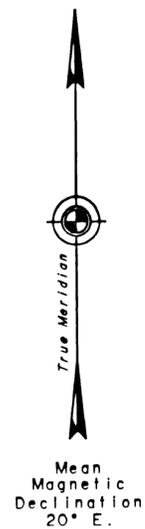


Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground with brass cap mkd. as shown, from which
 A triangular marker on a 3/4 in. alum. rod, 3 ft. 6 ins. long, 3 ft. in the ground bears S. 45° E., 6.6 dist.
 A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 dist., buried 18 ins. below ground.
 A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 dist., buried 18 ins. below ground.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground with brass cap mkd. as shown, from which
 A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 dist., buried 18 ins. below ground.
 A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 dist., buried 18 ins. below ground.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground with brass cap mkd. as shown, from which
 A magnet, in a fluorescent silver plastic case, bears S. 45° E., 9.9 dist., buried 18 ins. below ground.
 A spruce, 4 ins. diam., bears S. 60° E., 167.4 ft. dist., mkd. X BT.
 A spruce, 6 ins. diam., bears S. 70° W., 75.3 ft. dist., mkd. X BT.
 A magnet, in a fluorescent orange plastic case, bears S. 45° W., 9.9 dist., buried 18 ins. below ground.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
 A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 dist., buried 18 ins. below ground.
 A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 dist., buried 18 ins. below ground.



- Bureau of Land Management monument recovered this survey.
- Stainless steel post, 2 1/2 ins. diam., with brass cap mkd. TK3 ANCSA 14C 1998; set this survey.

Tract F is located within Township 18 North, Range 60 West, Seward Meridian, Alaska, approximately 10 miles northeasterly of the village of Lower Kalskag, Alaska.

The geographic position of corner No. 1 Tract F, as determined from a tie to corner No. 3, Lot 1, U.S. Survey No. 10087, is:

Latitude: 61° 38' 55.95" North
 Longitude: 160° 14' 21.87" West
 NAD 27

COPY

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS A THROUGH H,
 P.L. 92-203 (85 STAT. 688, 702, 703)
 THE KUSKOKWIM CORPORATION
 AT
 LOWER KALSAG, ALASKA



AND THE DEPENDENT RESURVEY OF PORTIONS OF
 U.S SURVEY NOS. 4413, 4414, 10126, AND 10202;
 AND PLATS 85-5 AND 85-6.

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION


The witness corner to corner
 No. 1, Lot 1, identical with
 the witness corner to corner
 No. 4, Lot 2, U.S. Survey No.
 6558, both meander corners.




Mean
 Magnetic
 Declination
 20° E.

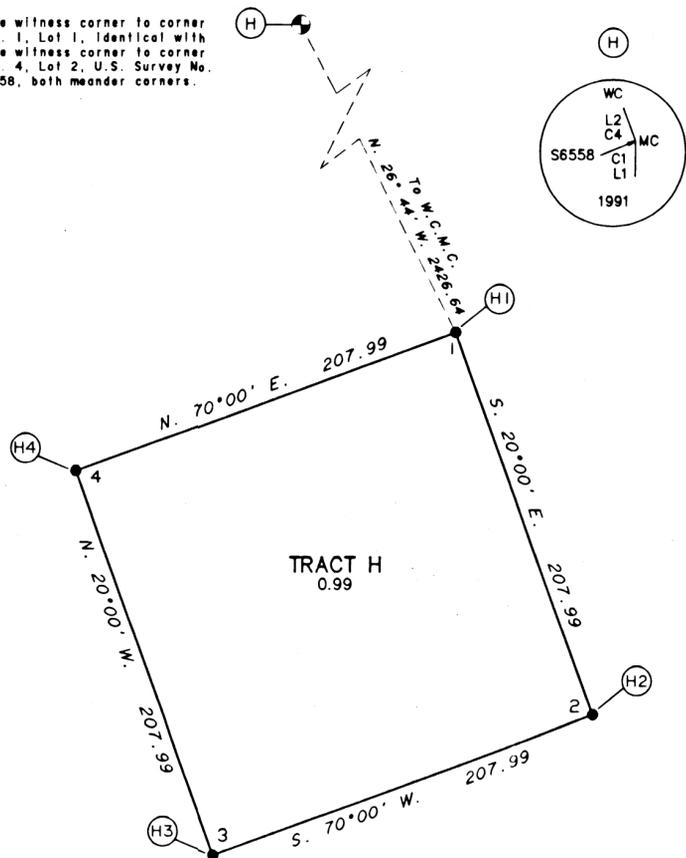

Recovered a stainless steel post, 2 1/2 ins.
 diam., firmly set, projecting 5 ins. above the
 ground, with brass cap mkd. as shown.
 Record accessories were not recovered.




Set a stainless post, 28 ins. long,
 2 1/2 ins. diam., 26 ins. in the ground
 with brass cap mkd. as shown, from which
 A cottonwood, 10 ins. diam., bears
 S. 77° E., 40.0 ft. dist., mkd. X BT.
 A cottonwood, 11 ins. diam., bears
 S. 9° E., 64.1 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long,
 2 1/2 ins. diam., 26 ins. in the ground
 with brass cap mkd. as shown, from which
 A spruce, 7 ins. diam., bears N. 31° E.,
 53.2 ft. dist., mkd. X BT.
 A cottonwood, 10 ins. diam., bears
 N. 44 1/2° W., 25.1 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long,
 2 1/2 ins. diam., 26 ins. in the ground
 with brass cap mkd. as shown, from which
 A cottonwood, 9 ins. diam., bears
 N. 65 3/4° E., 52.2 ft. dist., mkd. X BT.
 A cottonwood, 9 ins. diam., bears
 S. 30 3/4° E., 42.8 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long,
 2 1/2 ins. diam., 25 ins. in the ground
 with brass cap mkd. as shown, from which
 A cottonwood, 11 ins. diam., bears
 S. 47 1/2° E., 82.6 ft. dist., mkd. X BT.
 A cottonwood, 5 ins. diam., bears
 S. 31° W., 183.8 ft. dist., mkd. X BT.

Tract H is located within Township 16 North,
 Range 62 West, Seward Meridian, Alaska,
 approximately 4 miles southwesterly of the
 village of Lower Kalsag, Alaska.

The geographic position of corner No.1, Tract H,
 as determined from a tie to the witness corner
 to corner No. 1, Lot 1, U.S. Survey No. 6558,
 a meander corner, is:



Latitude: 61° 28' 12.39" North
 Longitude: 160° 25' 34.20" West
 NAD 27

MEANDERS


TRACT G

Along an eroding 8 ft. high bank,
 at the line of ordinary high water.

1. N. 16°51' E., 208.04 ft.

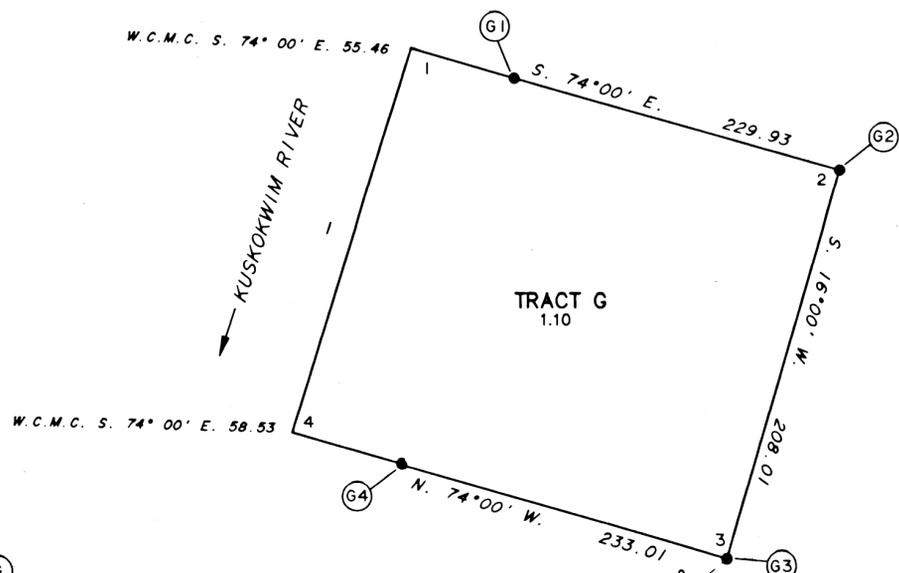

Set a stainless post, 28 ins. long,
 2 1/2 ins. diam., 25 ins. in the ground
 with brass cap mkd. as shown, from which
 A cottonwood, 10 ins. diam., bears
 N. 67 1/2° E., 13.8 ft. dist., mkd. X BT.
 A cottonwood, 7 ins. diam., bears
 S. 18 1/2° E., 30.4 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long,
 2 1/2 ins. diam., 25 ins. in the ground
 with brass cap mkd. as shown, from which
 A cottonwood, 6 ins. diam., bears
 S. 8 1/4° W., 53.2 ft. dist., mkd. X BT.
 A cottonwood, 8 ins. diam., bears
 S. 42 1/2° W., 40.4 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long,
 2 1/2 ins. diam., 27 ins. in the ground
 with brass cap mkd. as shown, from which
 A cottonwood, 9 ins. diam., bears
 N. 26° E., 103.1 ft. dist., mkd. X BT.
 A cottonwood, 14 ins. diam., bears
 N. 64° W., 94.2 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long,
 2 1/2 ins. diam., 26 ins. in the ground
 with brass cap mkd. as shown, from which
 A cottonwood, 12 ins. diam., bears
 N. 80 1/2° E., 11.7 ft. dist., mkd. X BT.
 A cottonwood, 17 ins. diam., bears
 S. 47 1/4° E., 15.5 ft. dist., mkd. X BT.

Tract G is located within Township 15 North,
 Range 63 West, Seward Meridian, Alaska,
 approximately 14 miles southwesterly of the
 village of Lower Kalsag, Alaska.

The geographic position of corner No.3, Tract G,
 as determined from a tie to the witness corner
 to corner No. 1, U.S. Survey No. 10072, a
 meander corner, is:


Latitude: 61° 21' 21.11" North
 Longitude: 160° 34' 38.54" West
 NAD 27

Recovered a stainless steel post,
 2 1/2 ins. diam., firmly set,
 projecting 2 ins. above the ground,
 with brass cap mkd. as shown.
 Record accessories were not recovered.



The witness corner to
 corner No. 1, U.S. Survey
 No. 10072, a meander corner.

- Bureau of Land Management monument recovered this survey.
- Stainless steel post, 2 1/2 ins. diam., with brass cap mkd.
 TK3 ANCSA 14C 1998; set this survey.



COPY


99-4 KUSKOKWIM

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS A THROUGH H,
 P.L. 92-203 (85 STAT. 688, 702, 703)
 THE KUSKOKWIM CORPORATION
 AT
LOWER KALSKAG, ALASKA


AND THE DEPENDENT RESURVEY OF PORTIONS OF
 U.S SURVEY NOS. 4413, 4414, 10126, AND 10202;
 AND PLATS 85-5 AND 85-6.

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION


U.S. Survey No. 10072 was surveyed by Donald E. Mullikin, Registered Alaska Surveyor No. LS-4469, in 1991 under Contract No. N651-CI-3022.
 U.S. Survey No. 10087 was surveyed by Donald E. Mullikin, Registered Alaska Surveyor No. LS-4469, in 1991 under Contract No. N651-CI-3022.
 U.S. Survey No. 10126 was surveyed by Donald E. Mullikin, Registered Alaska Surveyor No. LS-4469, in 1991 under Contract No. N651-CI-3022.
 U.S. Survey No. 10202 was surveyed by Donald E. Mullikin, Registered Alaska Surveyor No. LS-4469, in 1991 under Contract No. N651-CI-3022.
 Land Fill Disposal Area & Access Road was Surveyed by Louis H. Maillet, Alaska Registered Land Surveyor No. 5832, in 1984, and filed in the Kuskokwim Recording District as plat number 85-5 and 85-6 on April 18, 1985
 Lots 1 through 10, Tract D, Block 15, and Lots 1 through 10, Block 16, and associated road were surveyed by Gordon Sheret, Registered Land Surveyor No. 4609, Alaska in 1981, and filed in the Kuskokwim Recording District on September 27, 1988 as plat number 88-12.




Recovered an iron post 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground with brass cap mkd. as shown, from which the original accessories
 A cottonwood, 14 ins. diam., bears S. 52° W., 8.58 ft. dist., mkd. X BT.
 A cottonwood, 11 ins. diam., bears N. 49 1/2° W., 26.4 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 6 ins. diam., bears S. 78° E., 43.3 ft. dist., mkd. X BT.
 A spruce, 8 ins. diam., bears S. 22 1/2° W., 17.7 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 14 ins. diam., bears S. 67 1/2° W., 20.6 ft. dist., mkd. X BT.
 A spruce, 10 ins. diam., bears N. 3° W., 56.4 ft. dist., mkd. X BT.




Recovered an iron post 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground with brass cap mkd. as shown,




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 13 ins. diam., bears S. 24° E., 33.9 ft. dist., mkd. X BT.
 A spruce, 11 ins. diam., bears S. 34 1/2° W., 52.9 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 8 ins. diam., bears S. 28° W., 31.5 ft. dist., mkd. X BT.
 A spruce, 12 ins. diam., bears N. 71° W., 18.8 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 16 ins. diam., bears N. 20° E., 41.6 ft. dist., mkd. X BT.
 A spruce, 9 ins. diam., bears S. 88° W., 42.1 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A birch, 6 ins. diam., bears S. 42° E., 80.4 ft. dist., mkd. X BT.
 A spruce, 9 ins. diam., bears S. 8° W., 68.0 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 14 ins. diam., bears N. 86° E., 34.9 ft. dist., mkd. X BT.
 A spruce, 10 ins. diam., bears S. 10° W., 4.3 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 10 ins. diam., bears N. 11° E., 9.9 ft. dist., mkd. X BT.
 A spruce, 6 ins. diam., bears N. 60° W., 33.6 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 10 ins. diam., bears N. 56° E., 67.6 ft. dist., mkd. X BT.
 A spruce, 8 ins. diam., bears N. 11° W., 18.0 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 8 ins. diam., bears S. 60° E., 23.9 ft. dist., mkd. X BT.
 A spruce, 16 ins. diam., bears S. 24° W., 12.9 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 10 ins. diam., bears S. 16 3/4° E., 18.8 ft. dist., mkd. X BT.
 A spruce, 8 ins. diam., bears N. 86 1/4° W., 47.2 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 11 ins. diam., bears S. 42° E., 46.2 ft. dist., mkd. X BT.
 A spruce, 14 ins. diam., bears S. 34° W., 69.9 ft. dist., mkd. X BT.



Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 18 ins. diam., bears S. 15° W., 50.9 ft. dist., mkd. X BT.
 A birch, 16 ins. diam., bears S. 85° W., 41.9 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 8 ins. diam., bears N. 81 1/2° E., 68.0 ft. dist., mkd. X BT.
 A spruce, 10 ins. diam., bears S. 1° E., 43.1 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 11 ins. diam., bears S. 77° E., 69.2 ft. dist., mkd. X BT.
 A spruce, 8 ins. diam., bears N. 13° E., 27.9 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 7 ins. diam., bears S. 79° E., 45.7 ft. dist., mkd. X BT.
 A spruce, 11 ins. diam., bears S. 25 1/2° W., 82.2 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A birch, 5 ins. diam., bears N. 66 1/2° E., 47.1 ft. dist., mkd. X BT.
 A spruce, 10 ins. diam., bears S. 27° E., 46.1 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground with brass cap mkd. as shown, from which
 A spruce, 6 ins. diam., bears N. 39° E., 73.6 ft. dist., mkd. X BT.
 A spruce, 6 ins. diam., bears S. 22° E., 12.1 ft. dist., mkd. X BT.




Set a stainless post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with brass cap mkd. as shown, from which
 A birch, 12 ins. diam., bears S. 49° W., 21.3 ft. dist., mkd. X BT.
 A birch, 8 ins. diam., bears N. 47° W., 50.9 ft. dist., mkd. X BT.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap as shown.



Recovered 2 1/2 in. diam., alum post, firmly set, projecting 6 ins. above the ground, with a 2 1/2 in. alum. cap as shown.



Recovered a rebar, 5/8 ins. diam., firmly set, projecting 1 in. above the ground with 2 in. diam. alum. cap as shown.



Recovered a rebar, 5/8 ins. diam., firmly set, flush the ground, with a 2 in. diam. alum. cap as shown.

COPY

99-4
 RECORDED - FILED 60
 KUSKOKWIM REC. DIST. 54
 SEPT. 21 99
 TIME 10:00 AM
 Requested by USA/BLM
 Address _____