

SHEET 1 OF 7

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 4(c), LOTS 1 THROUGH 4
AND LOTS 6 THROUGH 14
(P.L. 92-203, 85 STAT. 688, 702, 703)
STUYAHOK, LIMITED
AT
NEW STUYAHOK, ALASKA
AND
THE RETRACEMENT OF PORTIONS OF
U.S. SURVEY NOS. 4495, 6094, 6097,
6098, 6099, 7707, 7727, AND 9621

This plat contains the entire survey record.
The history of surveys is referenced on sheet number 2.

This survey was executed by Timothy A. Quincy, Cadastral Surveyor, August 29 through October 20, 1989, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions approved September 8, 1988, the New Stuyahok ANCSA 14(c) Map of Boundaries approved July 8, 1988, and Assignment Instructions dated August 21, 1989.

Lot 5 was determined to be inaccessible by the Bureau of Land Management and authorized to be cancelled by written agreement from the President of Stuyahok, Limited, and the Mayor of New Stuyahok, Alaska.

Field assistants were:

- Brock R. Clifford, Cadastral Surveyor
- Craig S. Dukart, Cadastral Surveyor
- Mary J.M. Hartel, Cadastral Surveyor
- Michael O. Harmening, Student Trainee (LS)
- David M. Klein, Student Trainee (LS)
- Matthew A. Yentz, Student Trainee (LS)
- James C. Davis, Surveying Technician
- Bobby G. Hollis, Surveying Technician
- Steven D. Tyler, Surveying Technician
- John M. Winters, Forestry Technician

Area: 985.15 Acres.

The azimuth was obtained from retracement of previous surveys and direct observations of the sun, using the hour angle method, and refers to the true meridian.

The geographic position of corner No. 1, Lot 1, identical with the standard corner of sections 31 and 36, Township 8 South, Ranges 47 and 48 West, Seward Meridian, Alaska, is:

Latitude: 59° 26' 00.82" North NAD 27
Longitude: 157° 21' 13.93" West

The mean magnetic declination was observed during the execution of this survey.

This survey is situated within Townships 8 and 9 South, Range 47 West, and Township 8 South, Range 48 West, Seward Meridian, in the proximity of New Stuyahok, Alaska.

The land is tundra with rolling hills and stands of spruce and birch; with lots 6, 7, 8, 9, and 13 containing some marsh land. The soil is generally sandy loam.

The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container, 1 inch in diameter and 2 1/2 inches long.

Access to the survey was by foot, boat, and all-terrain vehicle.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, sheets 1 - 7, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

George J. Pruitt 24 NOVEMBER 1992
Date

Deputy State Director for Cadastral Survey, Alaska

SEE SHEET 6 OF 7


14

11


KOLIGANEK - STUYAHOK TRAIL

10

SEE SHEET 7 OF 7

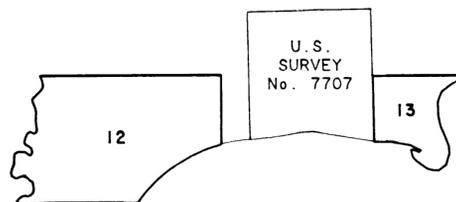

Mean Magnetic Declination 20 1/2° E.



I hereby certify that Lots 1 through 4 and Lots 6 through 14 represented on this plat of survey are on lands Interim Conveyed to Stuyahok, Limited, by Interim Conveyance No. 290 issued by the United States of America; said lots also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Stuyahok, Limited, Resolution Agreement Nos. 88-01 and 88-02, and the New Stuyahok ANCSA 14(c) Map of Boundaries approved July 8, 1988.

11/2/92 Date George J. Pruitt President, Stuyahok, Limited

I, Timothy A. Quincy, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 - 7, in conformity with the Special Instructions approved September 8, 1988, the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.

7. U.S. 1992 Date Timothy A. Quincy Cadastral Surveyor

92-19
RECORDED - FILED 50
Bristol Bay DIST.
DATE 12/1 19 92
TIME 9:30 A.M.
Prepared by (USA/BLM)
Address

SEE SHEETS 3 AND 4 OF 7

SEE SHEET 2 OF 7

SEE SHEET 5 OF 7

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 4(c), LOTS 1 THROUGH 4 AND LOTS 6 THROUGH 14 (P.L. 92-203, 85 STAT. 688, 702, 703) STUYAHOK, LIMITED AT NEW STUYAHOK, ALASKA

92-19
 RECORDED - FILED 50
 Bristol Bay DISTRICT
 DATE 12/1 1992
 TIME 9:30 A.M.
 Prepared by LUSA/BLM

LOT 2

LOT 2, ENCOMPASSING THE TRAIL TO ARIVAVIK SITE, IS 25 FEET IN WIDTH, 12 1/2 FEET EITHER SIDE OF CENTERLINE. THE SIDE LINES OF WHICH ARE TO BE SHORTENED OR LENGTHENED TO INTERSECTION WITH CONTERMINOUS LINES, CONTAINING 1.93 ACRES, THE CENTERLINE OF WHICH IS DESCRIBED AS FOLLOWS:

- NORTHERLY TERMINUS (E)
- AP-1 S. 15° 26' E., 100.66
 - AP-2 S. 18° 30' E., 222.57
 - AP-3 S. 41° 08' E., 221.06
 - AP-4 S. 30° 41' E., 160.71
 - AP-5 S. 41° 39' E., 353.35
 - AP-6 S. 10° 49' E., 482.15
 - AP-7 S. 2° 01' E., 222.33
 - AP-8 S. 9° 08' W., 161.76
 - AP-9 S. 11° 04' E., 452.20
 - AP-10 S. 32° 21' E., 347.89
 - AP-11 S. 45° 17' E., 290.80
 - AP-12 S. 27° 20' E., 204.79
- SOUTHERLY TERMINUS (F)
- S. 13° 13' E., 132.72

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

HISTORY OF SURVEYS

U.S. Survey No. 4495, Townsite of New Stuyahok, Alaska, was surveyed by Ralph J. Ellis, Supervisory Cadastral Surveyor, in 1966.

U.S. Survey No. 6094 was surveyed by William A. Wiley, Cadastral Surveyor, in 1978, and Lot 7, U.S. Survey No. 6094 was subdivided by Timothy A. Quincy, Cadastral Surveyor, in 1989.

U.S. Survey No. 6096 was surveyed by William A. Wiley, Cadastral Surveyor, in 1978.

U.S. Survey No. 6097 was surveyed by William A. Wiley, Cadastral Surveyor, in 1978.

U.S. Survey No. 6098 was surveyed by William A. Wiley, Cadastral Surveyor, in 1978.

U.S. Survey No. 6099 was surveyed by William A. Wiley, Cadastral Surveyor, in 1978.

The exterior of Township 8 South, Range 47 West, Seward Meridian, Alaska, was surveyed by Timothy A. Kent, Cadastral Surveyor, in 1978.

U.S. Survey No. 7707 was surveyed by Christopher R. Russel, Cadastral Surveyor, in 1986.

U.S. Survey No. 7727 was surveyed by Brian C. Anderson, Cadastral Surveyor, in 1986.

U.S. Survey No. 9600 was surveyed by Timothy A. Quincy, Cadastral Surveyor, in 1989.

U.S. Survey No. 9614 was surveyed by Craig S. Dukart, Cadastral Surveyor, in 1989.



















U.S. Survey No. 9621 was surveyed by Timothy A. Quincy, Cadastral Surveyor, in 1989.

U.S. Survey No. 9846 was surveyed by Craig S. Dukart, Cadastral Surveyor, in 1989.

LOT 2 - TYPICAL CENTERLINE MONUMENT

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., set at various depths, with brass cap mkd. as shown.

No accessories taken.

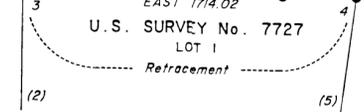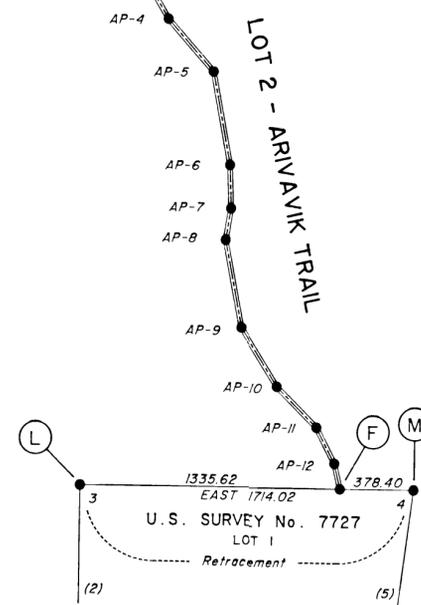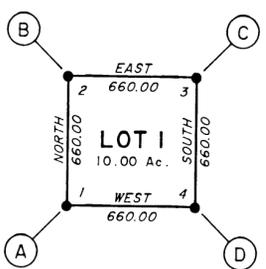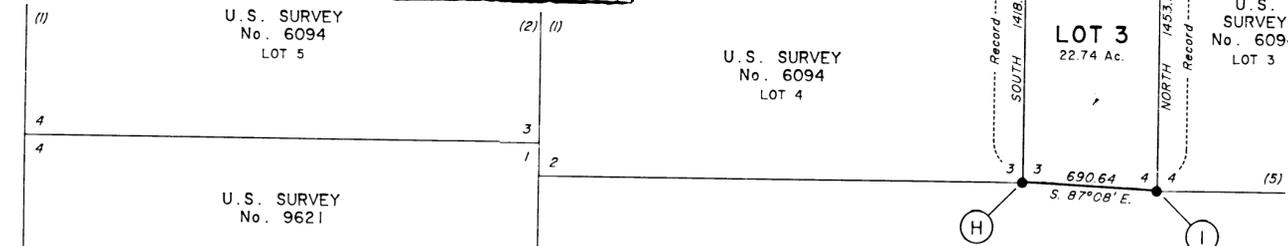

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears S. 75 1/4° W., 37.1 feet dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 11 3/4° W., 74.6 feet dist., mkd. X BT.

Bury a foot-long spike at the base of the stainless steel post.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears N. 49 1/4° E., 115.8 feet dist., mkd. X BT.

A spruce, 9 ins. diam., bears S. 31 1/4° E., 39.7 feet dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 31 ins. in the ground, with brass cap mkd. as shown.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

No accessories taken.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

No accessories taken.

Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 10 ins. above ground, with alum. cap mkd. as shown, from which

An alum. rod, 5/8 in. diam., firmly set, projecting 10 ins. above ground, with a triangular alum. marker on the top, bears North, 6.6 feet dist.

Drive an alum. rod, 15 ft. long, 3/4 in. diam., 14 1/2 ft. in the ground, with alum. cap mkd. as shown, from which

A spruce, 6 ins. diam., bears N. 19° E., 80.9 feet dist., mkd. X BT.

A spruce, 9 ins. diam., bears S. 54 1/4° E., 82.9 feet dist., mkd. X BT.

Bury a foot-long spike alongside the alum. rod.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees


A birch, 6 ins. diam., bears S. 40° E., 11.4 feet dist., mkd. C3 L1 S7727 BT on a partially healed blaze.

A birch, 6 ins. diam., bears N. 6° W., 9.0 feet dist., mkd. X BT on a partially healed blaze.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 9 ins. diam., bears N. 7° E., 21.9 feet dist., mkd. X BT on a partially healed blaze.


A birch, 8 ins. diam., bears S. 77° W., 9.1 feet dist., mkd. C4 L1 S7727 BT on a partially healed blaze.

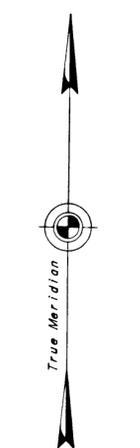

Mean Magnetic Declination 20 1/2° E.


SHEET 4 OF 7
ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 4(c), LOTS 1 THROUGH 4
AND LOTS 6 THROUGH 14
(P.L. 92-203, 85 STAT. 688, 702, 703)
STUYAHOK, LIMITED
AT
NEW STUYAHOK, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET NOS. 1 AND 3
 FOR SURVEY INFORMATION



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 34 ins. in the ground, with brass cap mkd. as shown.


No accessories taken.



Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 12 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 14 ins. diam., bears N. 55 1/4° E., 32.3 ft. dist., with scribe marks X BT visible on a partially healed blaze.

A spruce, 7 ins. diam., bears S. 25 1/4° E., 7.9 ft. dist., with scribe marks X BT visible on a partially healed blaze.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears S. 49 1/4° W., 58.1 ft. dist., mkd. X BT.


A poplar, 6 ins. diam., bears N. 52 1/2° W., 70.4 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 33 ins. in the ground, with brass cap mkd. as shown

No accessories taken.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 13 ins. diam., bears S. 59 1/2° W., 53.8 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears N. 80° W., 43.2 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears S. 56 1/4° E., 31.5 ft. dist., mkd. X BT.

A spruce, 6 ins. diam., bears S. 72° W., 31.5 ft. dist., mkd. X BT.


Bury a clear DEEP-I magnet at the base of the stainless steel post.



Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 6 ins. diam., bears N. 55 1/2° E., 222.4 ft. dist., with scribe marks X BT visible on a partially healed blaze.


A birch, 10 ins. diam., bears N. 71 1/4° E., 276.5 ft. dist., with scribe marks X BT visible on a partially healed blaze.



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap incorrectly mkd. as shown, from which

An alum. rod, 5/8 in. diam., firmly set, projecting 12 ins. above ground, with no cap, bears N. 81°22'24" E., 75.0 ft. dist.

An alum. rod, 5/8 in. diam., firmly set, projecting 12 ins. above ground, with no cap, bears S. 1°18'54" W., 75.0 ft. dist.




Car. No. 2, U.S. Survey No. 6094, is determined from the original bearing tree:

A spruce, 7 ins. diam., bears N. 37 1/2° E., 129.4 ft. dist., with scribe marks X BT visible on a partially healed blaze.

At the corner point

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown


Bury a clear DEEP-I magnet at the base of the stainless steel post.



Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 6 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees

A birch, 7 ins. diam., bears N. 20 1/4° E., 25.1 ft. dist., with scribe marks X BT visible on a partially healed blaze.


A birch, 7 ins. diam., bears N. 70 3/4° E., 59.4 ft. dist., with scribe marks X BT visible on a partially healed blaze.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which


Bury a clear DEEP-I magnet at the base of the stainless steel post.

No accessories taken.



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which


The accessories were not recovered.



Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original bearing trees

A birch, 5 ins. diam., bears S. 64° E., 23.1 ft. dist., with scribe marks S9600 C3 BT visible on a partially healed blaze.

A birch, 5 ins. diam., bears S. 55° W., 22.4 ft. dist., with scribe marks X BT visible on a partially healed blaze.




Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 6 ins. above the ground, with alum. cap mkd. as shown, from which

A spruce, 6 ins. diam., bears S. 72 1/2° W., 123.6 ft. dist., mkd. X BT.


A spruce, 6 ins. diam., bears N. 45 3/4° W., 150.3 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.




Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 8 ins. above the ground, with alum. cap mkd. as shown

The accessories were not recovered.




Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, with alum. cap mkd. as shown



Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 20 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees

A birch, 6 ins. diam., bears S. 25° E., 29.7 ft. dist., with scribe marks X BT visible on a partially healed blaze.

A birch, 7 ins. diam., bears S. 24 1/4° W., 85.1 ft. dist., with scribe marks X BT visible on a partially healed blaze.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 61 1/2° W., 33.8 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears N. 48 1/4° W., 62.8 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears S. 58° E., 12.2 ft. dist., mkd. X BT.


A spruce, 9 ins. diam., bears S. 64 1/2° W., 14.3 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.




Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 6 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees

The accessories were not recovered.



Drive an alum. rod, 8 3/4 ft. long, 3/4 in. diam., 8 ft. in the ground, with alum. cap mkd. as shown

No accessories taken.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears N. 9° E., 14.1 ft. dist., mkd. X BT.


A spruce, 6 ins. diam., bears S. 20° W., 28.9 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.



Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 10 ins. above the ground, with alum. cap mkd. as shown


The accessories were not recovered.




Recovered an alum. rod, 5/8 in. diam., firmly set, flush with the ground, with alum. cap mkd. as shown, from which the original bearing trees

A birch, 7 ins. diam., bears N. 69° W., 28.4 ft. dist., with scribe marks X BT visible on a partially healed blaze.

A birch, 7 ins. diam., bears N. 1/2° W., 17.2 ft. dist., with scribe marks X BT visible on a partially healed blaze.




Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 4 ins. above the ground, with alum. cap mkd. as shown



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-I magnet at the base of the stainless steel post.

No accessories taken.



Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 9 ins. above the ground, with alum. cap mkd. as shown

The accessories were not recovered.

92-19
RECORDED - FILED 50
Bristol Bay REC. DIST.
 DATE 12/1 1992
 TIME 9:30 A
 RECORDED BY (USA/BLM)
 ADDRESS _____

SHEET 5 OF 7
ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 4(c), LOTS 1 THROUGH 4 AND LOTS 6 THROUGH 14
STUYAHOK, LIMITED AT NEW STUYAHOK, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

LOT 9 MEANDERS

Along the well-defined right bank of a side channel of the Nushagak River, 1 to 4 ft. high.

- 1. N. 11° 01' E. 285.52 Ft.
- 2. N. 10° 28' W. 113.52 Ft.
- 3. N. 41° 28' W. 58.74 Ft.
- 4. N. 72° 23' W. 194.70 Ft.
- 5. N. 77° 54' W. 186.78 Ft.
- 6. N. 58° 41' W. 234.96 Ft.
- 7. N. 33° 25' W. 143.88 Ft.
- 8. N. 58° 13' W. 204.60 Ft.
- 9. N. 86° 34' W. 162.36 Ft.
- 10. S. 61° 25' W. 277.20 Ft.
- 11. N. 76° 21' W. 295.02 Ft.
- 12. N. 76° 00' W. 146.52 Ft.
- 13. N. 88° 33' W. 72.60 Ft.

At end of course, left bank of a side channel of the Nushagak River; thence downstream along the left bank of side channel.

- 14. S. 65° 21' W. 60.06 Ft.
- 15. S. 35° 28' W. 130.02 Ft.
- 16. S. 68° 21' W. 58.74 Ft.
- 17. S. 83° 20' W. 302.28 Ft.
- 18. S. 82° 34' W. 366.30 Ft.
- 19. S. 86° 33' W. 289.08 Ft.
- 20. S. 86° 20' W. 256.08 Ft.
- 21. S. 87° 06' W. 237.60 Ft.

At end of course, left bank of the main channel of the Nushagak River, 1 to 4 ft. high; thence downstream along the left bank of the Nushagak River.

- 22. S. 65° 30' W. 84.48 Ft.
- 23. S. 47° 48' W. 580.80 Ft.
- 24. S. 28° 34' W. 145.20 Ft.
- 25. S. 11° 40' W. 206.58 Ft.
- 26. S. 7° 02' W. 415.80 Ft.
- 27. S. 14° 02' W. 483.78 Ft.
- 28. S. 37° 17' W. 508.20 Ft.
- 29. S. 63° 26' W. 351.78 Ft.
- 30. S. 74° 32' W. 512.16 Ft.
- 31. S. 61° 53' W. 546.48 Ft.
- 32. S. 22° 24' W. 245.52 Ft.
- 33. S. 12° 52' W. 370.92 Ft.
- 34. S. 8° 28' E. 273.90 Ft.
- 35. S. 4° 11' E. 350.46 Ft.
- 36. S. 3° 27' W. 706.20 Ft.
- 37. S. 4° 56' E. 349.80 Ft.
- 38. S. 22° 53' E. 239.58 Ft.
- 39. S. 44° 48' E. 221.10 Ft.
- 40. S. 76° 34' E. 70.62 Ft.

At end of course, right bank of a side channel of the Nushagak River, 1 to 4 ft. high; thence upstream along the right bank of the side channel.

- 41. N. 40° 25' E. 201.30 Ft.
- 42. N. 59° 32' E. 151.80 Ft.
- 43. N. 71° 58' E. 169.62 Ft.

At end of course, westerly bank of slough; thence along westerly bank of slough.

- 44. N. 51° 58' E. 364.32 Ft.
- 45. N. 52° 06' E. 527.34 Ft.
- 46. S. 59° 22' E. 47.52 Ft.

At end of course, easterly bank of slough; thence along easterly bank of slough.

- 47. S. 8° 37' W. 143.22 Ft.
- 48. S. 3° 43' W. 119.46 Ft.
- 49. S. 65° 11' W. 246.18 Ft.
- 50. S. 13° 35' W. 60.72 Ft.
- 51. S. 42° 49' E. 48.18 Ft.
- 52. S. 79° 42' W. 73.92 Ft.
- 53. S. 61° 56' W. 198.00 Ft.

At end of course, right bank of a side channel of the Nushagak River, 1 to 4 ft. high; thence upstream along the right bank of the side channel.

- 54. S. 74° 02' E. 246.84 Ft.
- 55. S. 89° 02' E. 304.54 Ft.
- 56. N. 79° 54' E. 175.56 Ft.
- 57. N. 73° 25' E. 190.08 Ft.
- 58. N. 41° 14' E. 376.20 Ft.
- 59. N. 10° 37' E. 250.80 Ft.
- 60. N. 3° 47' W. 120.12 Ft.
- 61. N. 19° 31' W. 452.76 Ft.
- 62. N. 2° 49' W. 415.14 Ft.
- 63. N. 11° 01' E. 396.66 Ft.
- 64. N. 24° 05' E. 233.64 Ft.
- 65. N. 50° 19' E. 219.62 Ft.

LOT 7 MEANDERS

Counter-clockwise along the shore of an unnamed island.

- 1. S. 57° 34' W. 104.28 Ft.
- 2. S. 44° 46' W. 174.24 Ft.
- 3. S. 34° 38' W. 352.44 Ft.
- 4. S. 26° 26' W. 229.68 Ft.
- 5. S. 17° 30' W. 251.46 Ft.
- 6. S. 1° 00' W. 194.70 Ft.
- 7. S. 7° 49' E. 116.82 Ft.
- 8. N. 53° 05' E. 95.04 Ft.
- 9. N. 36° 25' E. 69.96 Ft.
- 10. S. 31° 17' E. 41.58 Ft.
- 11. S. 62° 15' W. 42.24 Ft.
- 12. S. 31° 35' W. 116.82 Ft.
- 13. S. 19° 20' W. 535.26 Ft.
- 14. N. 55° 18' E. 140.58 Ft.
- 15. N. 45° 40' E. 312.18 Ft.
- 16. S. 69° 31' E. 91.74 Ft.
- 17. N. 63° 57' E. 276.54 Ft.
- 18. S. 1° 36' W. 32.34 Ft.
- 19. S. 20° 43' W. 163.68 Ft.
- 20. N. 41° 05' E. 277.20 Ft.
- 21. N. 26° 33' E. 176.88 Ft.
- 22. N. 20° 57' E. 619.08 Ft.
- 23. N. 30° 46' E. 528.66 Ft.
- 24. N. 21° 04' E. 201.96 Ft.
- 25. N. 56° 14' W. 52.03 Ft.
- 26. N. 78° 35' W. 168.96 Ft.
- 27. S. 89° 21' W. 154.44 Ft.
- 28. S. 80° 48' W. 230.34 Ft.
- 29. S. 72° 52' W. 142.56 Ft.



LOT 8 MEANDERS

Downstream along the right bank of a side channel of the Nushagak River, 1 to 3 ft. high.

- 1. S. 56° 06' W. 128.20 Ft.
- 2. S. 59° 51' W. 403.92 Ft.
- 3. S. 66° 39' W. 297.00 Ft.
- 4. S. 73° 00' W. 351.78 Ft.
- 5. N. 76° 21' W. 237.60 Ft.
- 6. S. 84° 50' W. 201.96 Ft.
- 7. N. 24° 31' W. 94.38 Ft.

At end of course, left bank of the main channel of the Nushagak river; thence upstream along the left bank of the main channel of the river.



- 8. N. 43° 22' E. 259.38 Ft.
- 9. N. 45° 27' E. 557.04 Ft.
- 10. N. 41° 10' E. 286.44 Ft.
- 11. N. 43° 47' E. 397.98 Ft.
- 12. N. 44° 38' E. 363.00 Ft.
- 13. N. 41° 25' E. 217.80 Ft.
- 14. N. 38° 16' E. 157.83 Ft.

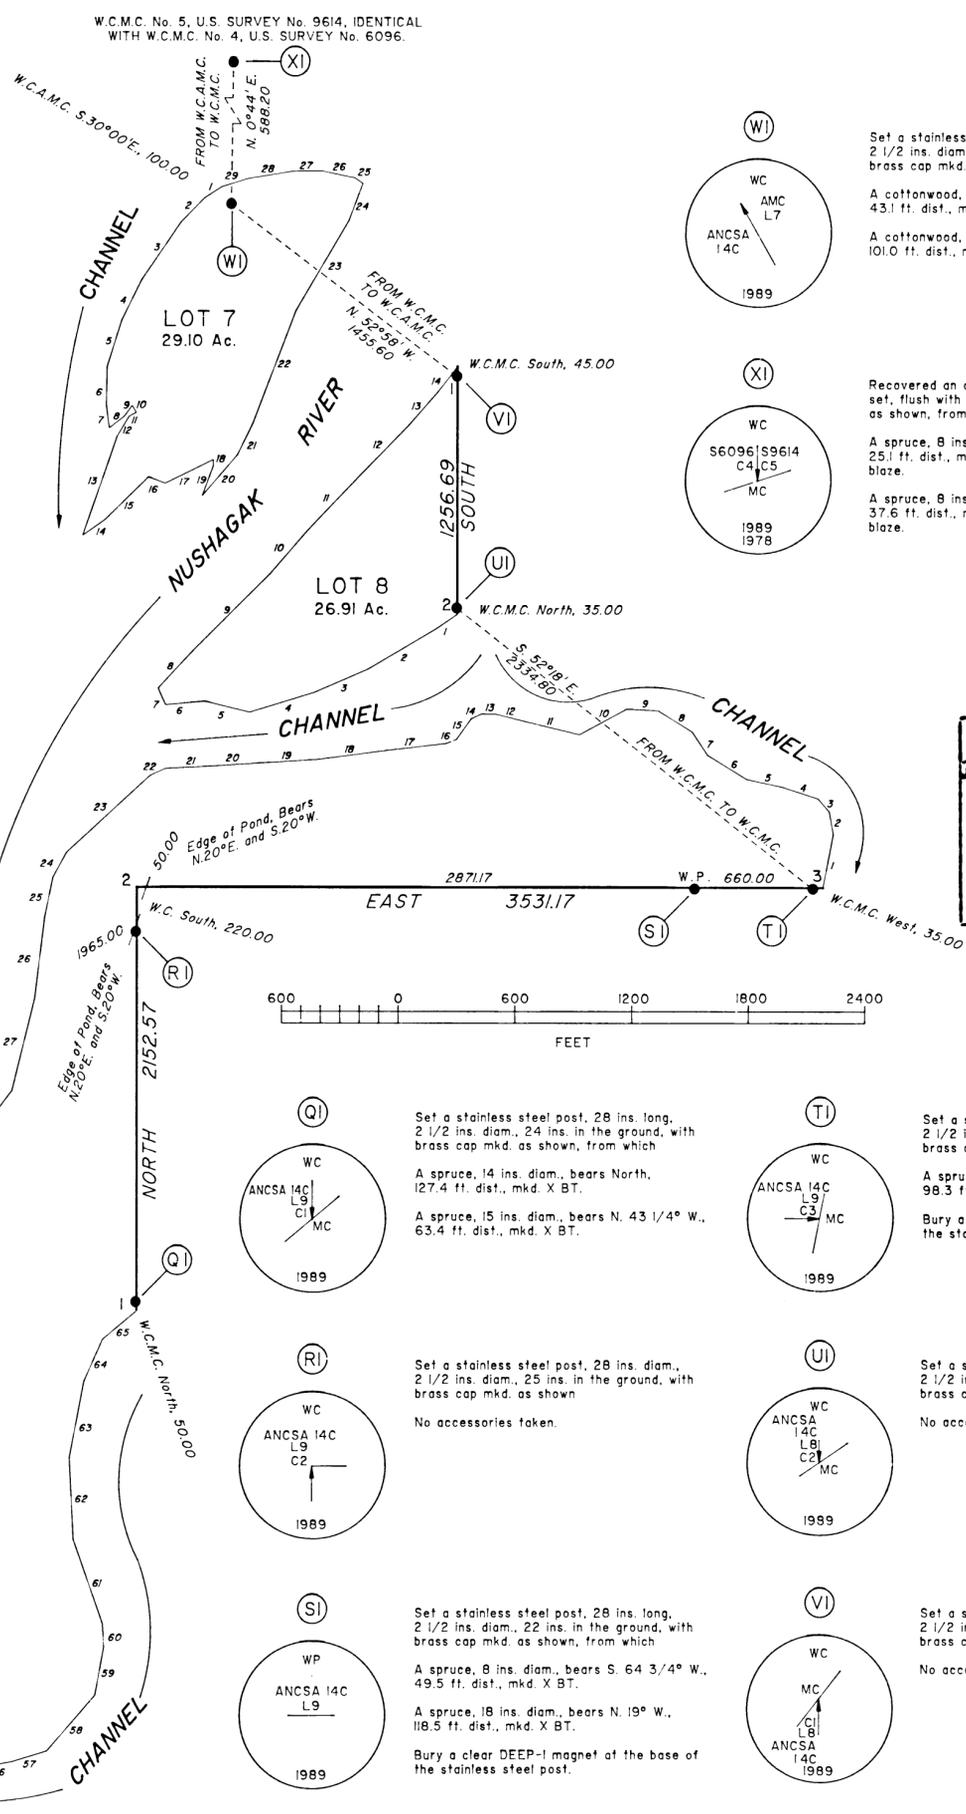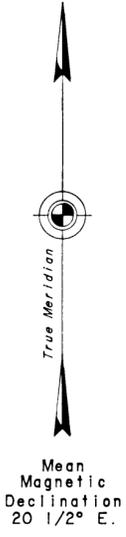

92-19
RECORDED - FILED 50
Bristol Bay
 DATE 12/1 1992
 TIME 9:30 A.M.
 Examined by (USA/BUM)
 Address _____

SHEET 6 OF 7
 ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 4(c), LOTS I THROUGH 4
 AND LOTS 6 THROUGH 14
 (P.L. 92-203, 85 STAT. 688, 702, 703)
 STUYAHOK, LIMITED
 AT
 NEW STUYAHOK, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET NO. 1
 FOR SURVEY INFORMATION





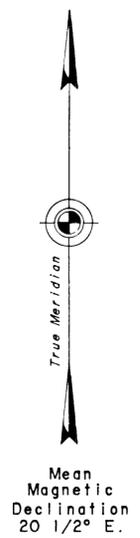
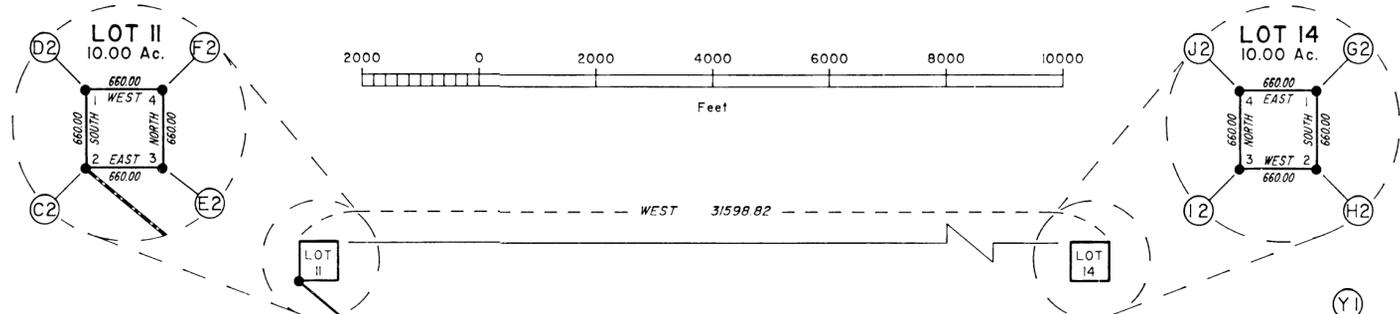


LOT 10
 LOT 10, ENCOMPASSING THE TRAIL TO KOLIGANEK, IS 25 FEET IN WIDTH, 12 1/2 FEET EITHER SIDE OF CENTERLINE, THE SIDE LINES OF WHICH ARE TO BE SHORTENED OR LENGTHENED TO INTERSECTION WITH CONTERMINOUS LINES, CONTAINING 12.58 ACRES, THE CENTERLINE OF WHICH IS DESCRIBED AS FOLLOWS:

SOUTHERLY TERMINUS (A2)
 N. 9°09' E., 241.89 Ft.

AP-1 N. 5°31' W., 404.03 Ft.
 AP-2 N. 13°16' W., 405.95 Ft.
 AP-3 N. 32°35' W., 183.79 Ft.
 AP-4 N. 51°10' W., 181.40 Ft.
 AP-5 N. 85°48' W., 340.47 Ft.
 AP-6 N. 51°18' W., 558.28 Ft.
 AP-7 N. 70°57' W., 321.82 Ft.
 AP-8 N. 39°06' W., 1552.60 Ft.
 AP-9 N. 47°31' W., 1818.82 Ft.
 AP-10 N. 21°18' W., 2854.14 Ft.
 AP-11 N. 28°08' E., 1786.33 Ft.
 AP-12 N. 15°15' E., 2458.48 Ft.
 AP-13 N. 37°45' W., 1266.58 Ft.
 AP-14 N. 26°56' W., 1793.92 Ft.
 AP-15 N. 21°26' W., 1501.83 Ft.
 AP-16 N. 19°59' W., 2073.88 Ft.
 AP-17 N. 49°30' W., 1143.54 Ft.
 AP-18 N. 50°31' W., 1012.75 Ft.

NORTHERLY TERMINUS (C2)



Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 10 ins. diam., bears N. 42 1/2° W., 34.3 ft. dist., with scribe marks X BT visible on partially healed blaze.

A spruce, 14 ins. diam., bears N. 10° W., 48.8 ft. dist., with scribe marks X BT visible on partially healed blaze.







Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A birch, 10 ins. diam., bears S. 48° E., 17.8 ft. dist., with scribe marks S6098 C2 BT visible on partially healed blaze.

A spruce stump, 8 ins. diam., bears N. 60° W., 12.5 ft. dist., with scribe marks X BT visible on partially healed blaze.

and a new bearing tree

A spruce, 9 ins. diam., bears N. 46° W., 44.9 ft. dist., mkd. X BT.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

No accessories available.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

No accessories available.

Recovered an alum. rod, 5/8 in. diam., firmly set, projecting 18 ins. above ground, with alum. cap mkd. as shown, from which

An alum. rod, 5/8 in. diam., firmly set, projecting 18 ins. above ground, with a triangular alum. marker on the top, bears South, 6.6 ft. dist.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 81 1/4° E., 56.1 ft. dist., mkd. X BT.

A spruce, 6 ins. diam., bears S. 9 1/2° W., 114.2 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 45° E., 202.6 ft. dist., mkd. X BT.

A spruce, 6 ins. diam., bears N. 76 1/4° W., 161.0 ft. dist., mkd. X BT.

Bury a clear DEEP-1 magnet at the base of the stainless steel post.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown

Bury a clear DEEP-1 magnet at the base of the stainless steel post.



No accessories available.

LOT 10 - TYPICAL CENTERLINE MONUMENT

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., set at various depths, with brass cap mkd. as shown

No accessories taken.

ENLARGEMENT

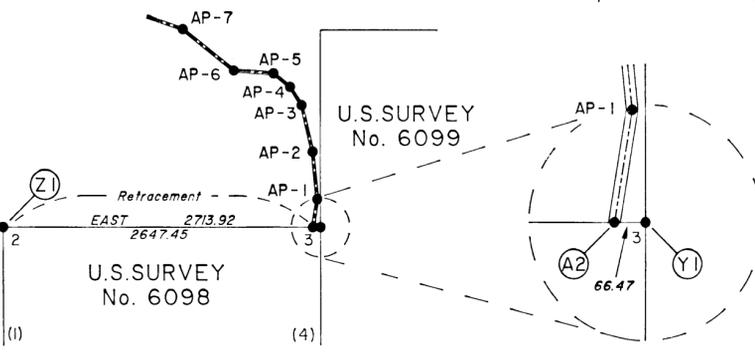


SEE ENLARGEMENT
 U.S. SURVEY No. 6098
 U.S. SURVEY No. 6099

92-19
 RECORDED - FILED 50
 Bristol Bay DIST.
 DATE 12/1 1992
 TIME 9:30 A.M.
 RETURNED BY (USA/BLM)
 ADDRESS

SHEET 7 OF 7
ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 4(c), LOTS 1 THROUGH 4 AND LOTS 6 THROUGH 14
(P.L. 92-203, 85 STAT. 688, 702, 703)
STUYAHOK, LIMITED
AT
NEW STUYAHOK, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

U.S. SURVEY No. 7707

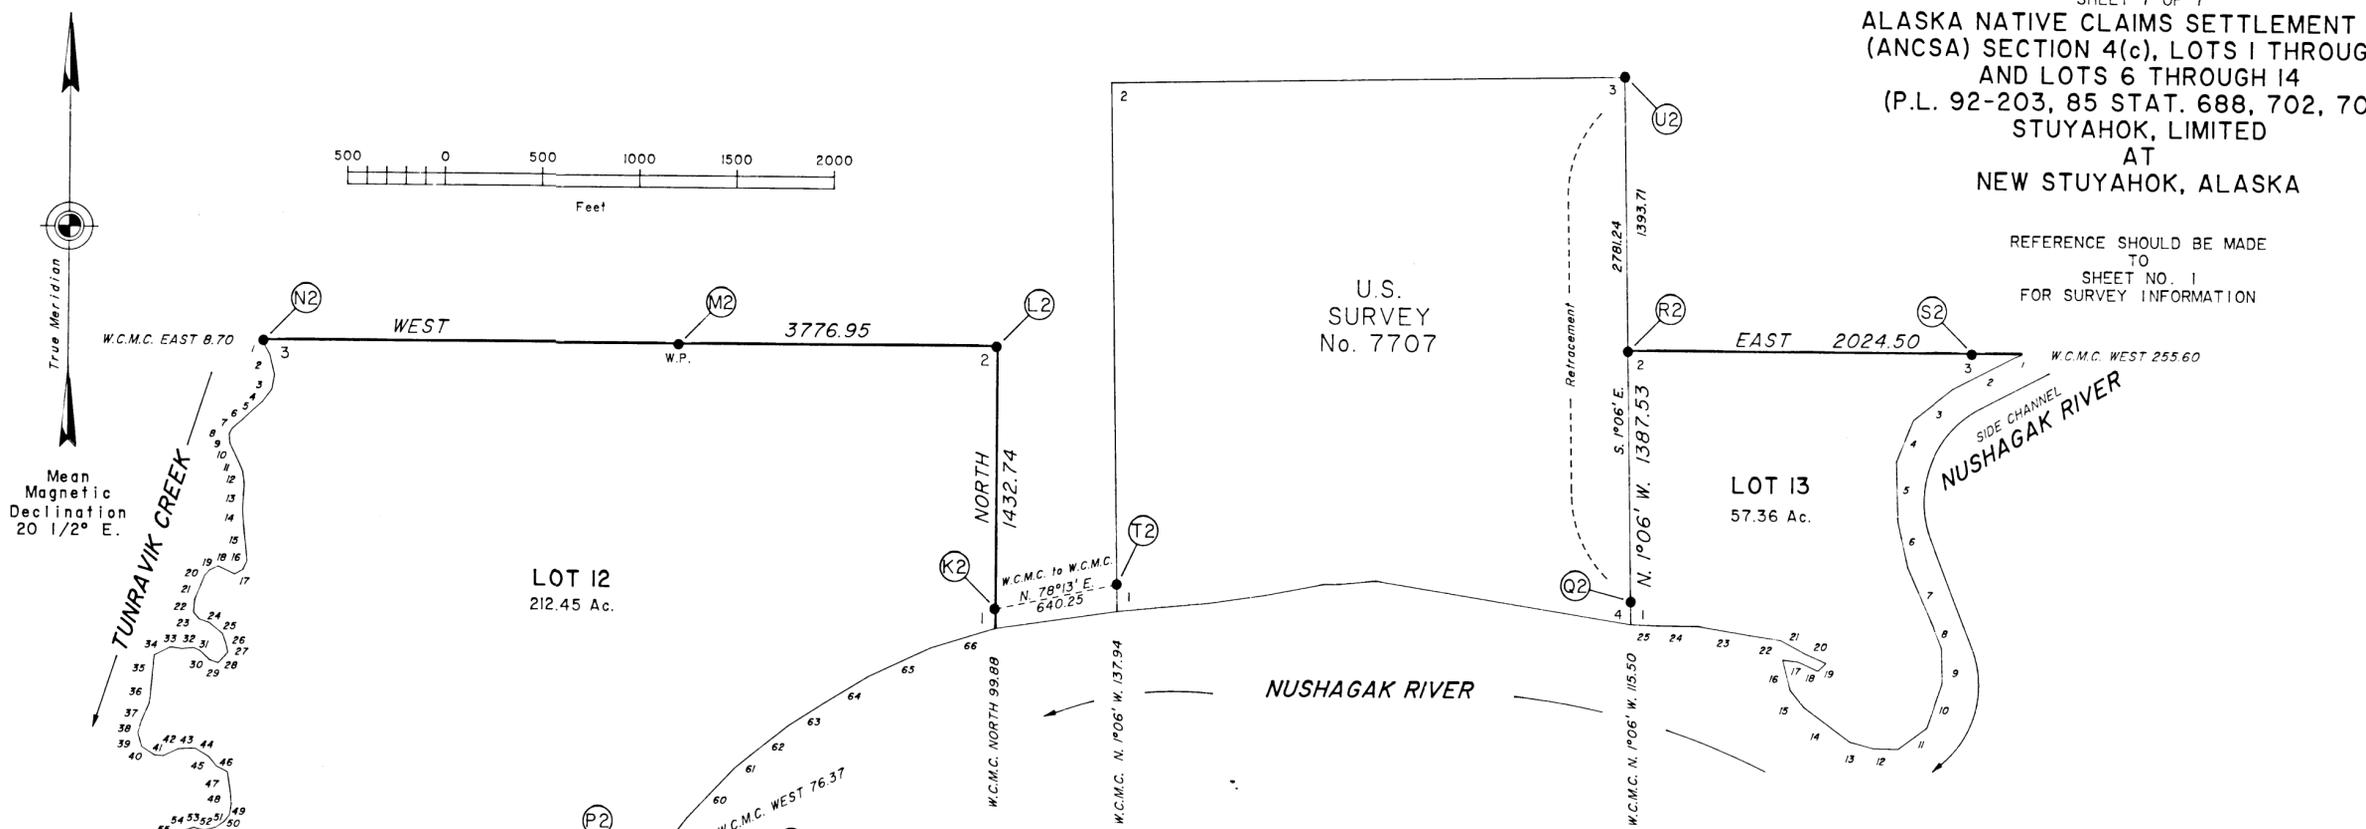

LOT 12 MEANDERS
 Along the well-defined left bank of Tunravik Creek, 2 to 4 feet high.

1.	S. 30°16' E.	80.01 Ft.
2.	S. 14°01' E.	111.87 Ft.
3.	S. 10°09' W.	73.10 Ft.
4.	S. 37°34' W.	78.75 Ft.
5.	S. 48°14' W.	61.15 Ft.
6.	S. 46°42' W.	78.72 Ft.
7.	S. 49°52' W.	66.46 Ft.
8.	S. 29°03' W.	33.32 Ft.
9.	S. 4°28' E.	48.45 Ft.
10.	S. 26°00' E.	109.43 Ft.
11.	S. 23°38' E.	45.69 Ft.
12.	S. 8°28' E.	69.77 Ft.
13.	S. 3°47' W.	125.90 Ft.
14.	S. 3°31' E.	68.08 Ft.
15.	S. 6°18' E.	193.07 Ft.
16.	S. 25°13' W.	47.95 Ft.
17.	S. 61°09' W.	48.90 Ft.
18.	N. 64°49' W.	95.10 Ft.
19.	S. 64°16' W.	46.77 Ft.
20.	S. 41°03' W.	36.41 Ft.
21.	S. 21°55' W.	134.15 Ft.
22.	S. 5°36' W.	66.55 Ft.
23.	S. 40°34' E.	45.72 Ft.
24.	S. 72°02' E.	53.10 Ft.
25.	S. 51°12' E.	88.59 Ft.
26.	S. 19°35' E.	55.29 Ft.
27.	S. 13°23' E.	45.27 Ft.
28.	S. 42°25' W.	71.96 Ft.
29.	N. 71°30' W.	46.91 Ft.
30.	N. 47°04' W.	67.46 Ft.
31.	N. 65°40' W.	37.76 Ft.
32.	S. 84°24' W.	62.72 Ft.
33.	N. 81°09' W.	56.53 Ft.
34.	S. 63°11' W.	92.37 Ft.
35.	S. 5°07' W.	117.72 Ft.
36.	S. 5°29' W.	127.37 Ft.
37.	S. 24°08' W.	99.14 Ft.
38.	S. 16°20' W.	66.16 Ft.
39.	S. 16°26' E.	71.38 Ft.
40.	S. 57°45' E.	80.04 Ft.
41.	S. 85°32' E.	43.98 Ft.
42.	N. 64°35' E.	84.06 Ft.
43.	N. 87°22' E.	87.26 Ft.
44.	S. 59°34' E.	82.08 Ft.
45.	S. 38°48' E.	62.72 Ft.
46.	S. 63°42' E.	64.31 Ft.
47.	S. 9°02' E.	102.49 Ft.
48.	S. 5°46' E.	66.02 Ft.
49.	S. 10°26' W.	54.08 Ft.
50.	S. 39°47' W.	41.92 Ft.
51.	S. 55°59' W.	56.48 Ft.
52.	S. 75°00' W.	58.21 Ft.
53.	N. 76°02' W.	56.66 Ft.
54.	S. 72°03' W.	64.32 Ft.
55.	S. 58°46' W.	71.45 Ft.
56.	S. 38°48' W.	62.66 Ft.
57.	S. 12°27' W.	53.49 Ft.

LOT 12 MEANDERS
 Along the well-defined right bank of Nushagak River, 50 feet high.

58.	N. 34°53' E.	105.10 Ft.
59.	N. 38°10' E.	187.20 Ft.
60.	N. 43°29' E.	347.10 Ft.
61.	N. 50°49' E.	110.40 Ft.
62.	N. 51°50' E.	240.61 Ft.
63.	N. 57°35' E.	220.99 Ft.
64.	N. 58°50' E.	262.05 Ft.
65.	N. 65°12' E.	352.08 Ft.
66.	N. 72°50' E.	344.94 Ft.

LOT 13 MEANDERS
 Along the well-defined right bank of Nushagak River, 2 to 4 feet high.

1.	S. 68°09' W.	31.25 Ft.
2.	S. 62°42' W.	364.32 Ft.
3.	S. 51°49' W.	255.42 Ft.
4.	S. 22°07' W.	230.34 Ft.
5.	S. 1°55' E.	302.94 Ft.
6.	S. 12°54' E.	238.26 Ft.
7.	S. 23°55' E.	318.78 Ft.
8.	S. 27°16' E.	127.38 Ft.
9.	S. 2°11' E.	180.84 Ft.
10.	S. 19°07' W.	238.92 Ft.
11.	S. 53°43' W.	184.14 Ft.

At end of course, right bank of the main channel of the Nushagak River; thence downstream along the right bank of the Nushagak River.

12.	N. 88°54' W.	124.74 Ft.
13.	N. 75°10' W.	126.06 Ft.
14.	N. 53°51' W.	295.68 Ft.
15.	N. 39°35' W.	110.88 Ft.
16.	N. 14°51' W.	159.72 Ft.
17.	S. 83°48' E.	81.84 Ft.
18.	S. 65°13' E.	110.22 Ft.
19.	N. 46°53' E.	57.42 Ft.
20.	N. 66°09' W.	116.16 Ft.
21.	N. 61°59' W.	154.44 Ft.
22.	N. 81°33' W.	154.44 Ft.
23.	N. 80°43' W.	276.54 Ft.
24.	N. 89°41' W.	214.50 Ft.
25.	N. 87°31' W.	130.82 Ft.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 80° E., 7.3 ft. dist., mkd. X BT.

A spruce, 6 ins. diam., bears S. 10° E., 19.5 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears S. 50° W., 50.8 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears N. 20° W., 65.3 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears N. 67 1/4° E., 25.8 ft. dist., mkd. X BT.

A spruce, 10 ins. diam., bears S. 28 3/4° E., 121.1 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears N. 53 1/4° E., 55.2 ft. dist., mkd. X BT.

A spruce, 12 ins. diam., bears S. 52 3/4° W., 69.6 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears N. 5 3/4° E., 60.6 ft. dist., mkd. X BT.

A spruce, 11 ins. diam., bears N. 88 3/4° E., 74.6 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 12 ins. diam., bears N. 61° E., 67.6 ft. dist., mkd. X BT.

A spruce, 12 ins. diam., bears S. 45 3/4° E., 82.6 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears N. 67 1/4° E., 25.8 ft. dist., mkd. X BT.

A spruce, 10 ins. diam., bears S. 28 3/4° E., 121.1 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 8 in. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A birch, 6 ins. diam., bears N. 79° E., 22.4 ft. dist., with scribe marks X BT visible on partially healed blaze.

A birch, 7 ins. diam., bears N. 38° W., 22.4 ft. dist., with scribe marks X BT visible on partially healed blaze.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 82° E., 10.6 ft. dist., mkd. X BT.

A spruce, 6 ins. diam., bears S. 22° E., 27.3 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 8 ins. diam., bears N. 27° E., 20.5 ft. dist., mkd. X BT.

A spruce, 13 ins. diam., bears N. 18° W., 22.5 ft. dist., mkd. X BT.

Bury a clear DEEP-I magnet at the base of the stainless steel post.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 4 ins. diam., bears N. 56 1/2° E., 60.4 ft. dist., with scribe marks X BT visible on a partially healed blaze.

A spruce, 10 ins. diam., bears N. 7° W., 121.4 ft. dist., with scribe marks X BT visible on a partially healed blaze.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 5 ins. diam., bears S. 71 1/2° E., 58.7 ft. dist., with scribe marks X BT visible on partially healed blaze.

A spruce, 7 ins. diam., bears S. 12° W., 44.2 ft. dist., with scribe marks X BT visible on partially healed blaze.

92-19
RECORDED - FILED 50
Bristol Bay
 DATE 12/1 10 92
 TIME 9:30 A.M.
 Registered by (USA/BEM)
 Address _____