

**ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH F  
AND SUBDIVISION OF U.S. SURVEY No. 724  
P.L. 92-203 (85 STAT. 688, 702, 703)**

**GANA-A'YOO, LTD.  
AT  
NULATO, ALASKA**

AND THE DEPENDENT RESURVEY OF PORTIONS OF  
U.S. SURVEY No. 4370  
U.S. SURVEY No. 7384

This plat contains the entire survey record.

The history of surveys is listed on Sheet No. 2.

This survey was executed by Eric Stahlke, Registered Alaska Land Surveyor No. LS-6945, for Tanana Chiefs Conference, Inc., August 15, 1997 through August 30, 1997, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated January 27, 1997 and approved March 18, 1997, the Gana-a'Yoo Ltd. ANCSA 14 (c) Map of Boundaries accepted November 3, 1995, and Contract No. 1422-N660-C97-3061, dated July 28, 1997.

Field assistants were:

Joseph D. Gailey, Land Surveyor  
Lee B. Folger, Land Surveyor  
Todd A. Jantzi, Survey Technician  
Walter J. Stickman, Sr., Survey Technician

Area: 479.85 Acres.

The azimuth for Tracts A through F and Lot 5, U.S. Survey No. 724 was obtained from the Global Positioning System, using static relative positioning techniques and refers to the true meridian.

The geographic position of cor. No. 7, Tract E, identical with cor. No. 3, Lot 7, Tract B, U.S. Survey No. 4370 and cor. No. 1, Tract C, U.S. Survey No. 4370, as determined from the Global Positioning System, is:

Latitude: 64°43'46.27" North NAD 27  
Longitude: 158°06'52.84" West

The magnetic declination was observed during the execution of this survey.

The land is primarily rolling hills surrounding a level river plain, with vegetation consisting of spruce, birch, alder and willow with low shrubs and grasses. The soils consist of sand and sandy loam with areas of permafrost.


UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Anchorage, Alaska

The survey represented by this plat, sheets 1-7 having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

*Deputy State Director for Cadastral Survey, Alaska*  
Date: July 17, 1998

Tracts A through F are located at Nulato, Alaska, within Townships 8 and 9 South, Ranges 3 and 4 East, Katsuei River Meridian, Alaska.

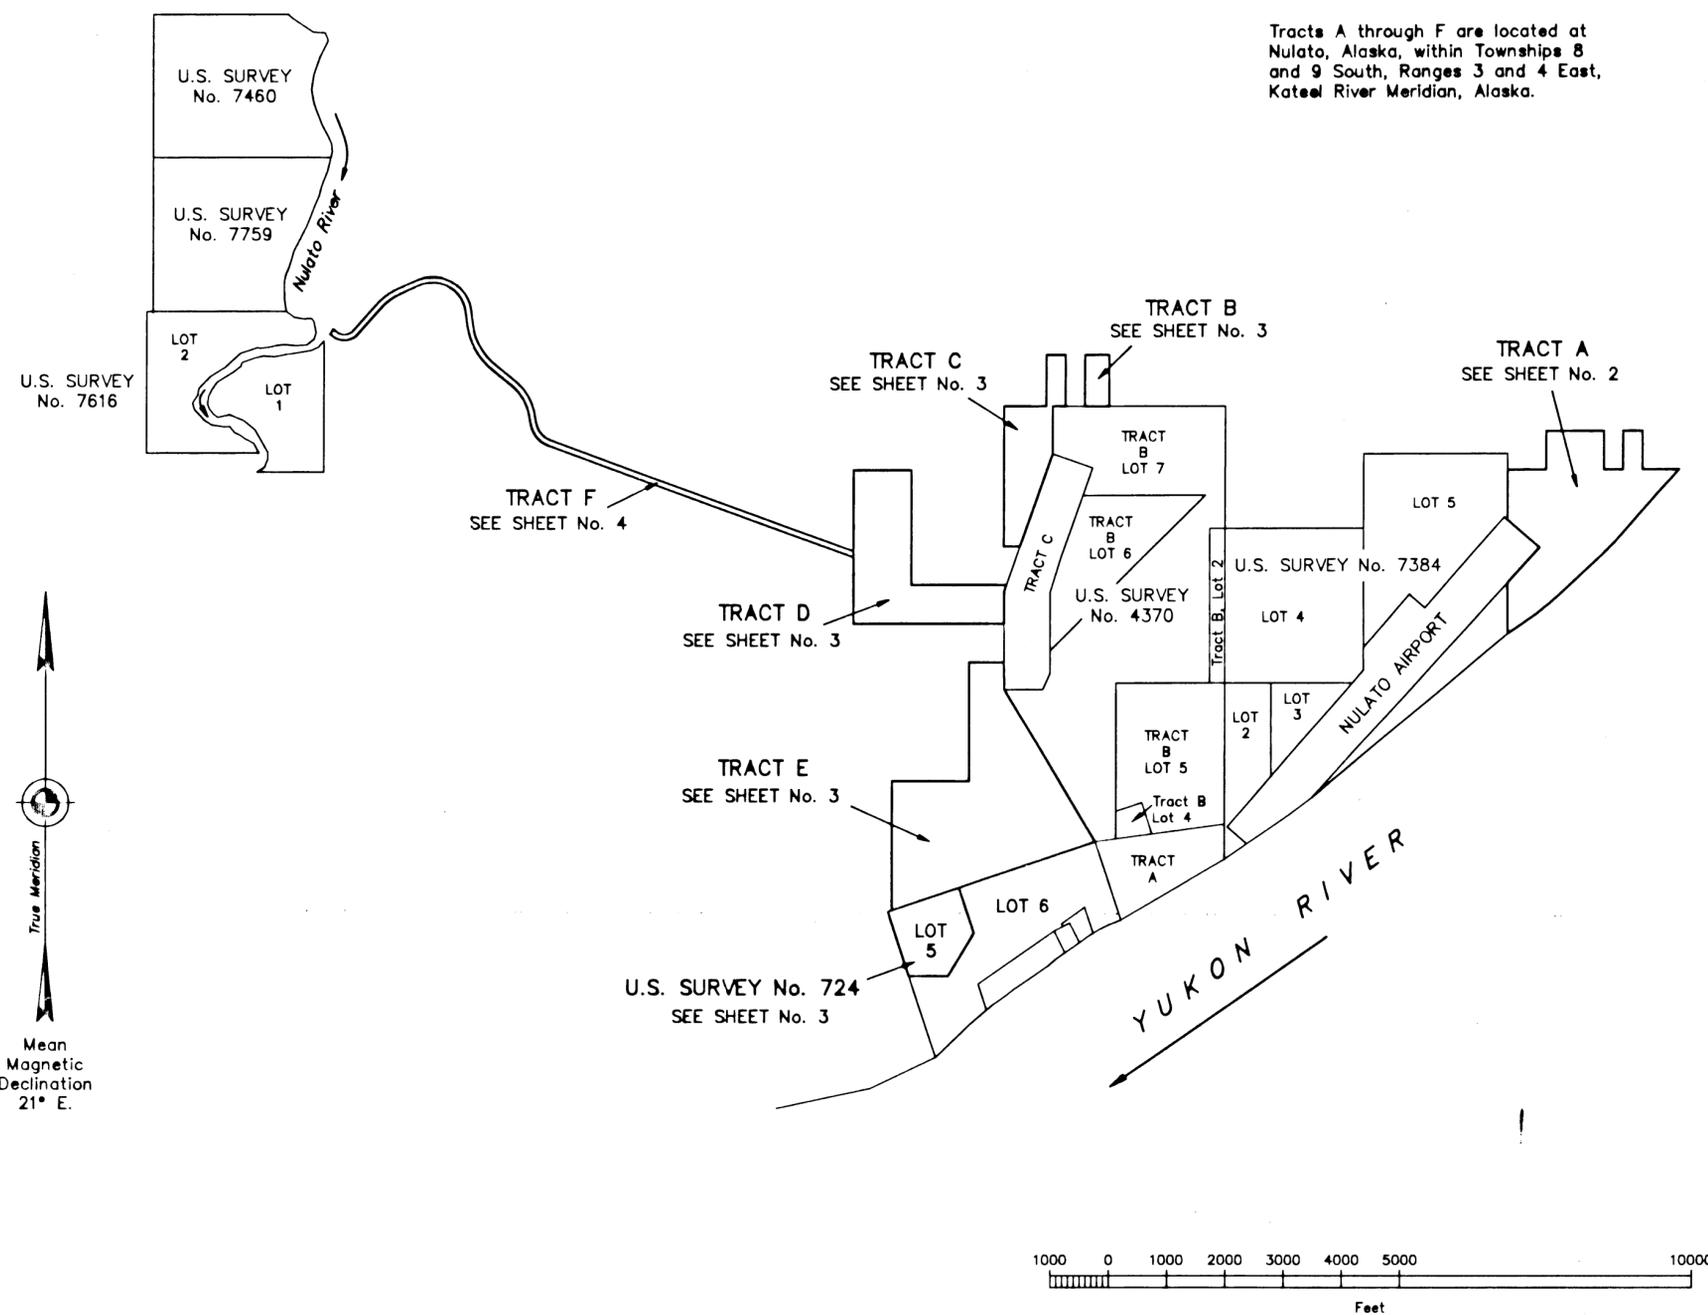

I, ERIC STAHLKE, Registered Alaska Land Surveyor No. LS-6945, for Tanana Chiefs Conference, Inc., HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-7, in conformity with the Special Instructions approved March 18, 1997, Contract No. 1422-N660-C97-3061, awarded July 28, 1997, the principles of survey described in the Manual of Instructions for the Survey of Public Lands of the United States, 1973, and in the specific manner described on this plat.



I hereby certify that Tracts A through F and Lot 5, U.S. Survey No. 724, represented on this plat of survey are on lands Interim Conveyed to Gana-a'Yoo, Ltd. by Interim Conveyance Nos. 680 and 860 issued by the United States of America, said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Gana-a'Yoo, Ltd. Board Resolution No. 95-08 and the Gana-a'Yoo, Ltd. ANCSA 14 (c) Map of Boundaries approved November 3, 1995.

June 9, 1998  
Date  
*Barclay J. Ingham*  
Resident, Gana-a'Yoo, Ltd.

MAY 14, 1998  
Date

*Eric Stahlke*  
Registered Land Surveyor



LEGEND

- ⊕ BLM monument recovered this survey.
- ANCSA primary monument set this survey.

REFER TO SHEETS 5 AND 6 FOR MONUMENT DETAILS AND ACCESSORIES

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH F AND SUBDIVISION OF U.S. SURVEY No. 724 P.L. 92-203 (85 STAT. 688, 702, 703)


GANA-A'YOO, LTD. AT NULATO, ALASKA

AND THE DEPENDENT RESURVEY OF PORTIONS OF U.S. SURVEY No. 4370 AND U.S. SURVEY No. 7384

U.S. SURVEY No. 4370

TRACT B LOT 7

U.S. SURVEY No. 724 LOT 6

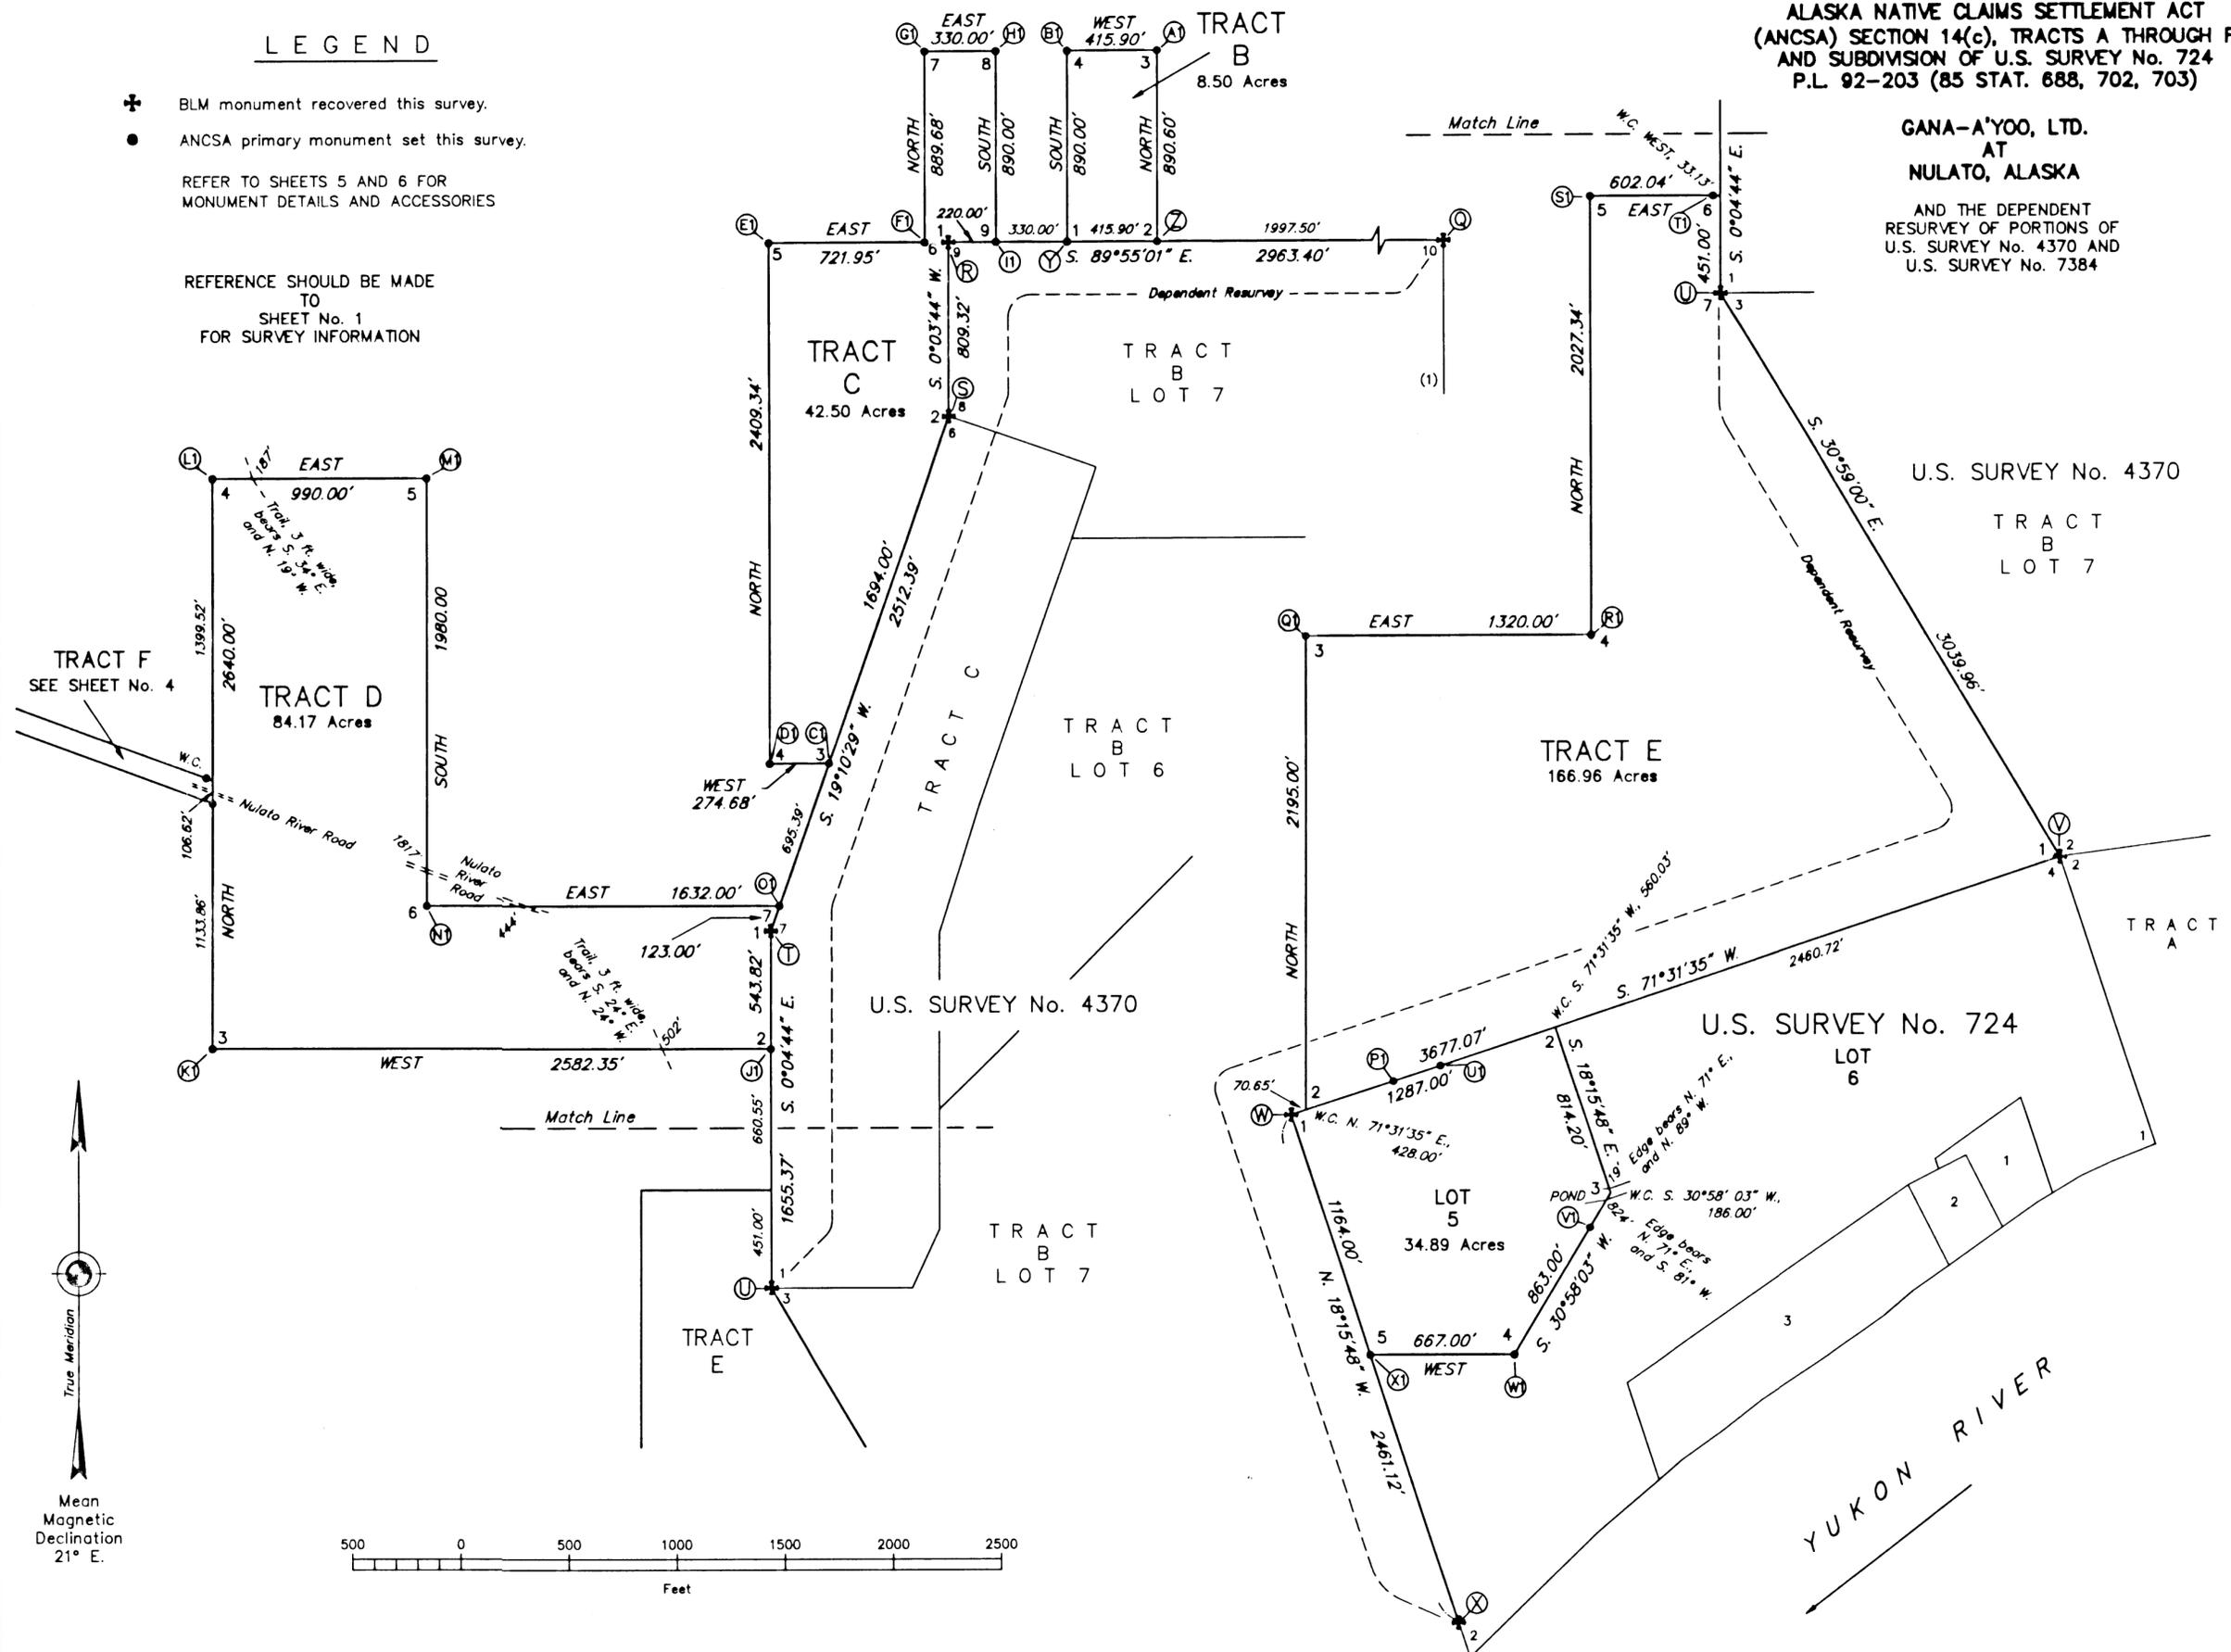

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH F  
AND SUBDIVISION OF U.S. SURVEY No. 724  
P.L. 92-203 (85 STAT. 688, 702, 703)

GANA-A'YOO, LTD.  
AT  
NULATO, ALASKA

AND THE DEPENDENT RESURVEY  
OF PORTIONS OF  
U.S. SURVEY No. 4370 AND  
U.S. SURVEY No. 7384

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

LEGEND




- ⊕ BLM monument recovered this survey.
  - ANCSA primary monument set this survey.
- REFER TO SHEETS 6 AND 7 FOR  
MONUMENT DETAILS AND ACCESSORIES

LINE DATA

| LINE | DIRECTION       | DISTANCE |
|------|-----------------|----------|
| a    | N. 10°04'14" W. | 143.61'  |
| b    | N. 50°33'00" W. | 425.93'  |
| c    | N. 06°54'13" W. | 206.24'  |
| d    | S. 64°29'44" W. | 357.23'  |
| e    | S. 40°59'55" W. | 616.28'  |
| f    | N. 54°06'08" W. | 94.00'   |
| g    | S. 54°06'08" E. | 94.00'   |
| h    | N. 40°59'55" E. | 616.28'  |
| i    | N. 64°29'44" E. | 357.23'  |
| j    | S. 06°54'13" E. | 206.24'  |
| k    | S. 50°33'00" E. | 425.93'  |
| l    | S. 10°04'14" E. | 143.61'  |

CURVE DATA

| CURVE | RADIUS   | ARC      | TANGENT | CHORD    | CHORD BEARING   | CEN. ANGLE |
|-------|----------|----------|---------|----------|-----------------|------------|
| A     | 500.00'  | 520.59'  | 286.67' | 497.39'  | N. 39°53'52" W. | 59°39'18"  |
| B     | 850.00'  | 600.53'  | 313.41' | 588.11'  | N. 30°18'37" W. | 40°28'46"  |
| C     | 1250.00' | 952.22'  | 500.55' | 929.36'  | N. 28°43'36" W. | 43°38'47"  |
| D     | 570.00'  | 1080.40' | 793.25' | 925.78'  | N. 61°12'14" W. | 108°36'03" |
| E     | 950.00'  | 389.60'  | 197.57' | 386.87'  | S. 52°44'50" W. | 23°29'49"  |
| F     | 300.00'  | 444.53'  | 274.41' | 404.96'  | S. 83°26'54" W. | 84°53'57"  |
| G     | 200.00'  | 296.35'  | 182.94' | 269.98'  | N. 83°26'54" E. | 84°53'57"  |
| H     | 1050.00' | 430.60'  | 218.37' | 427.59'  | N. 52°44'50" E. | 23°29'49"  |
| I     | 670.00'  | 1269.95' | 932.42' | 1088.20' | S. 61°12'14" E. | 108°36'03" |
| J     | 1150.00' | 876.04'  | 460.51' | 855.01'  | S. 28°43'36" E. | 43°38'47"  |
| K     | 950.00'  | 671.17'  | 350.28' | 657.30'  | S. 30°18'37" E. | 40°28'46"  |
| L     | 400.00'  | 416.47'  | 229.34' | 397.91'  | S. 39°53'52" E. | 59°39'18"  |

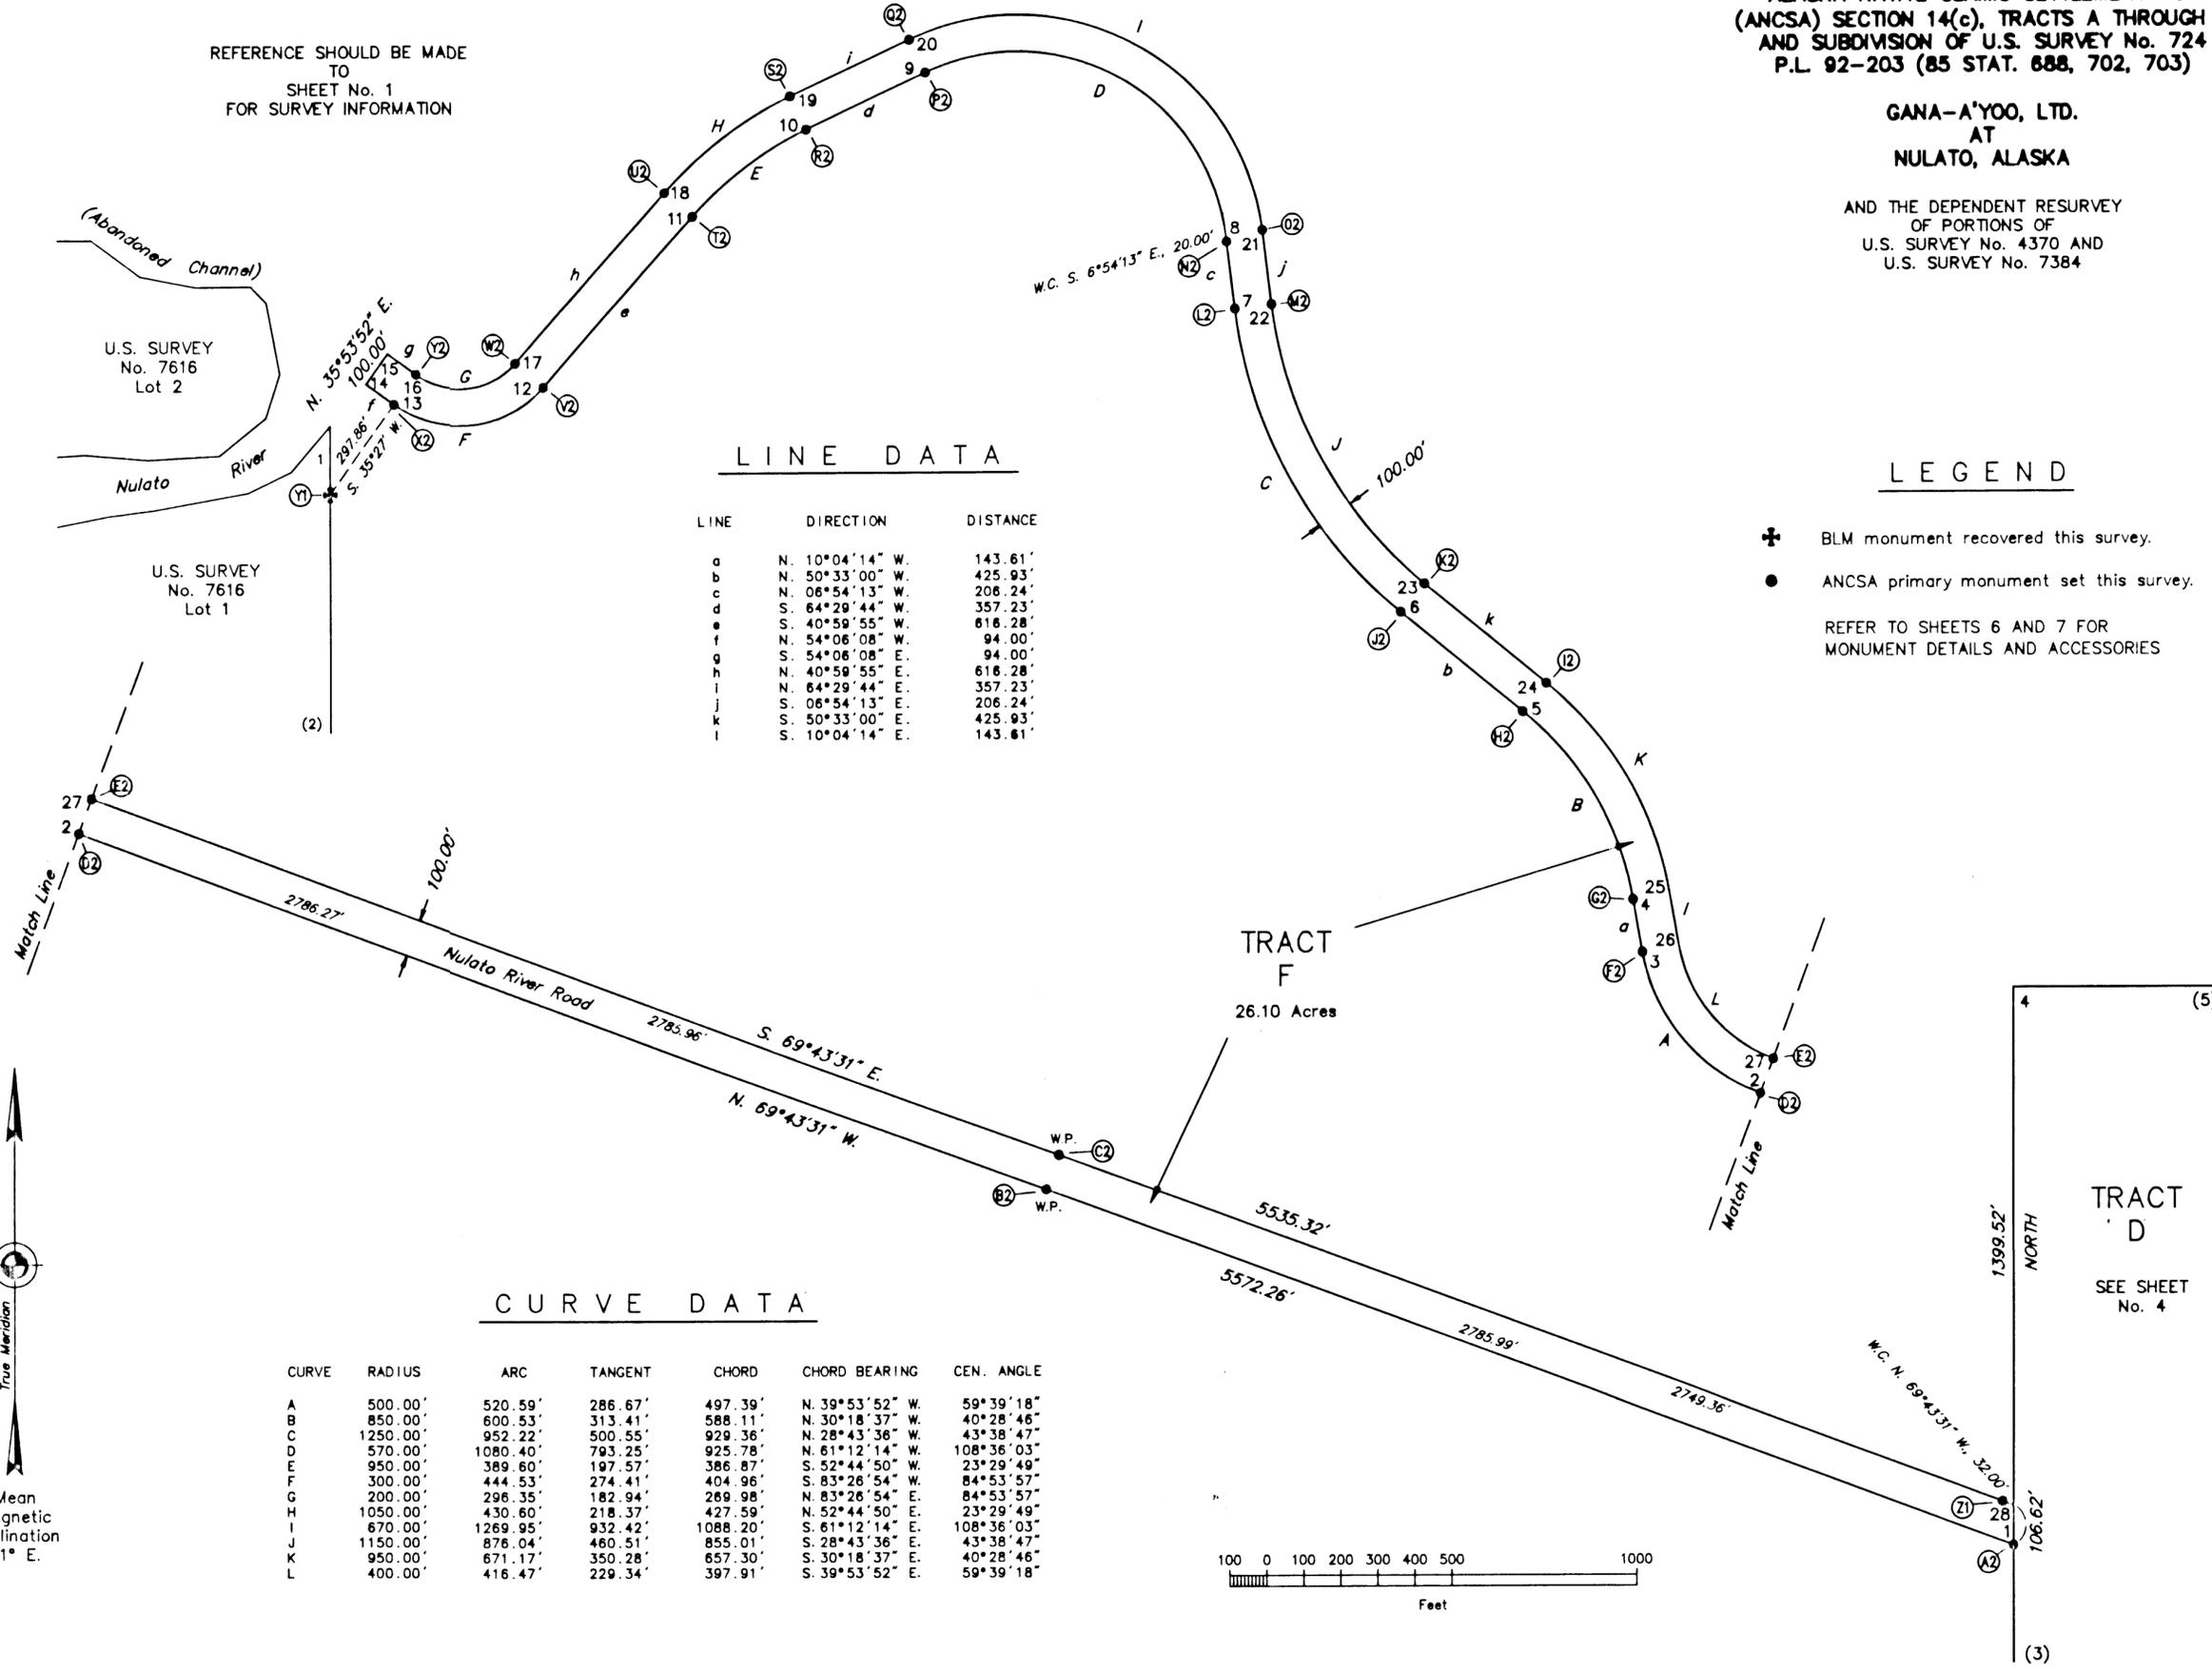


COPY

NULATO 98-2


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH F AND SUBDIVISION OF U.S. SURVEY No. 724 P.L. 92-203 (85 STAT. 688, 702, 703)

GANA-A'YOO, LTD. AT NULATO, ALASKA


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION



Recovered a rebar, 5/8 ins. diam., firmly set, projecting 11 ins. above ground, with 2 in. diam. alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 8 1/2 ins. diam., bears S. 15° W., 35.3 ft. dist., mkd. X BT.  
A spruce, 7 ins. diam., bears N. 53 3/4° W., 45.4 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 7 ins. diam., bears S. 81 3/4° E., 36.3 ft. dist., mkd. X BT.  
A spruce, 9 ins. diam., bears S. 29 1/4° W., 33.3 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 7 1/2 ins. diam., bears S. 34 1/2° E., 29.8 ft. dist., mkd. X BT.  
A spruce, 7 1/2 ins. diam., bears S. 64° W., 9.8 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 9 ins. diam., bears S. 24 3/4° E., 20.9 ft. dist., mkd. X BT.  
A spruce, 8 1/2 ins. diam., bears S. 70 1/2° W., 30.1 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron post, 2 1/2 ins. diam., flush with the ground, leaning SWly, with brass cap mkd. as shown, from which the original accessories  
A spruce, 10 ins. diam., bears N. 5° E., 43.8 ft. dist., mkd. with partially healed blaze.  
A spruce, 7 ins. diam., bears N. 86° W., 35.5 ft. dist., mkd. with partially healed blaze.




Recovered an iron post, 1 in. diam., firmly set, projecting 12 ins. above the ground, with brass cap mkd. as shown, from which the original accessories  
A pit, 12 x 18 x 6 ins. deep, bears S. 18 1/4° E., 6 ft. dist.  
A pit, 12 x 18 x 6 ins. deep, bears S. 71 1/2° W., 6 ft. dist.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with the ground, with alum. cap mkd. as shown, from which the original accessories  
A spruce, 6 ins. diam., bears S. 26° W., 21.1 ft. dist., mkd. with partially healed blaze.  
A spruce, 6 ins. diam., bears N. 29° W., 27.7 ft. dist., mkd. with partially healed blaze.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 9 ins. diam., bears S. 55 1/2° W., 38.2 ft. dist., mkd. X BT.  
A spruce, 9 ins. diam., bears N. 34 1/4° W., 31.5 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. as shown, from which the original accessories  
A spruce, 4 ins. diam., bears S. 63° W., 23.8 ft. dist., mkd. X BT.  
A spruce, 7 ins. diam., bears N. 75 1/2° W., (Rec. N. 69° W.) 17.2 ft. dist., mkd. BT.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above the ground, with brass cap mkd. as shown, from which the original accessories  
A spruce, 6 1/2 ins. diam., bears S. 23 3/4° W., 27.7 ft. dist., mkd. with fully healed blaze.  
A spruce, 4 1/2 ins. diam., bears N. 67° W., 56.1 ft. dist., mkd. with fully healed blaze.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 5 ins. diam., bears S. 7 1/2° W., 19.1 ft. dist., mkd. X BT.  
A spruce, 8 ins. diam., bears N. 74° W., 30.9 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 8 ins. diam., bears N. 30 3/4° E., 34.4 ft. dist., mkd. X BT.  
A spruce, 5 1/2 ins. diam., bears N. 49 1/4° W., 31.6 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original accessories  
A birch stump, 8 ins. diam., bears S. 53° E., 23 ft. dist., mkd. BT.  
A spruce, 7 ins. diam., bears N. 87° W., (Rec. S. 2° W.) 3.3 ft. dist., mkd. with fully healed blaze.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap mkd. as shown, from which the original accessories  
A spruce, 14 ins. diam., bears N. 5° E., 69.3 ft. dist., mkd. with partially healed blaze.  
A spruce, 9 1/2 ins. diam., bears S. 1° W. (Rec. S. 5° W.), 24.4 ft. dist., mkd. with fully healed blaze.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 8 1/2 ins. diam., bears S. 77 1/4° E., 22.0 ft. dist., mkd. X BT.  
A spruce, 9 1/2 ins. diam., bears S. 29 1/2° W., 23.5 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A birch, 5 1/2 ins. diam., bears S. 51 1/2° E., 19.8 ft. dist., mkd. X BT.  
A spruce, 10 ins. diam., bears N. 38 1/4° W., 78.8 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. as shown, from which the remaining original accessory  
A spruce stump, 8 ins. diam., bears N. 33 3/4° W., 15.2 ft. dist., mkd. BT.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 5 1/2 ins. diam., bears N. 38 1/2° E., 65.0 ft. dist., mkd. X BT.  
A spruce, 5 1/2 ins. diam., bears N. 53 1/4° W., 37.7 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 6 ins. diam., bears S. 31 3/4° W., 30.6 ft. dist., mkd. X BT.  
A spruce, 6 1/2 ins. diam., bears N. 40 1/2° W., 33.4 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A birch, 8 ins. diam., bears N. 39 1/2° E., 41.6 ft. dist., mkd. X BT.  
A birch, 6 ins. diam., bears N. 38 1/2° W., 19.7 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. as shown  
There is no remaining evidence of the original accessories.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 10 ins. diam., bears S. 20 1/2° W., 24.3 ft. dist., mkd. X BT.  
A spruce, 12 ins. diam., bears N. 48 1/4° W., 59.3 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 7 ins. diam., bears N. 32° E., 45.3 ft. dist., mkd. X BT.  
A spruce, 9 ins. diam., bears N. 52 1/2° W., 26.4 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.



Recovered an iron post, 2 1/2 ins. diam., firmly set, 7 ins. above the ground, with brass cap mkd. as shown



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with brass cap mkd. as shown, from which the original accessories  
A spruce, 3 1/2 ins. diam., bears S. 46° W., 7.3 ft. dist., mkd. X BT.  
A spruce stump, 3 1/2 ins. diam., bears N. 17° W. (Rec. N. 7° W.), 17.5 ft. dist., mkd. BT.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A spruce, 9 1/2 ins. diam., bears S. 58 1/2° E., 55.0 ft. dist., mkd. X BT.  
A spruce, 10 1/2 ins. diam., bears S. 34 1/2° W., 48.1 ft. dist., mkd. X BT.  
Deposit a magnet in a white plastic case at the base of the stainless steel post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH F AND SUBDIVISION OF U.S. SURVEY No. 724 P.L. 92-203 (85 STAT. 688, 702, 703)

GANNA-A'YOO, LTD. AT NULATO, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

Diagram B1: A circle containing a vertical line with 'GY3' above it and 'C4 TRB' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 7 1/2 ins. diam., bears S. 51° E., 40.3 ft. dist., mkd. X BT. A spruce, 9 ins. diam., bears S. 42° W., 27.7 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram I1: A circle containing a vertical line with 'GY3' above it and 'TRC C9' to its left, and 'TRB S4370' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 15 ins. diam., bears N. 45 3/4° E., 45.4 ft. dist., mkd. X BT. A spruce, 10 1/2 ins. diam., bears N. 47 3/4° W., 19.0 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram P1: A circle containing a vertical line with 'GY3 WC' above it and 'TRE C2' to its right, and 'L5 S724' to its left. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram C1: A circle containing a vertical line with 'GY3' above it and 'TRC C3' to its left, and 'TRC S4370' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram J1: A circle containing a vertical line with 'GY3' above it and 'TRD C2' to its left, and 'S4370 TRC' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram Q1: A circle containing a vertical line with 'GY3' above it and 'C3 TRE' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 4 ins. diam., bears S. 36 3/4° E., 74.4 ft. dist., mkd. X BT. A spruce, 4 ins. diam., bears S. 81 1/2° W., 71.5 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram W1: A circle containing a vertical line with 'GY3' above it and 'S724 L5' to its left, and 'C4 L6' to its right, and 'S724' below. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 7 ins. diam., bears S. 17 1/2° W., 24.3 ft. dist., mkd. X BT. A spruce, 10 ins. diam., bears N. 73° W., 39.6 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram D1: A circle containing a vertical line with 'GY3' above it and 'TRC C4' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 6 ins. diam., bears N. 53° E., 37.7 ft. dist., mkd. X BT. A spruce, 5 ins. diam., bears N. 17 1/4° W., 32.2 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram K1: A circle containing a vertical line with 'GY3' above it and 'TRD C3' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 4 ins. diam., bears N. 31° E., 58.7 ft. dist., mkd. X BT. A spruce, 4 1/2 ins. diam., bears N. 72 3/4° W., 8.9 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram R1: A circle containing a vertical line with 'GY3' above it and 'C4 TRE' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 4 ins. diam., bears N. 57 1/2° E., 49.2 ft. dist., mkd. X BT. A spruce, 5 1/2 ins. diam., bears N. 55° W., 55.5 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram X1: A circle containing a vertical line with 'GY3' above it and 'S724 L5' to its left, and 'C5 L6' to its right, and 'S724' below. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 8 ins. diam., bears N. 17 3/4° E., 43.9 ft. dist., mkd. X BT. A spruce, 8 1/2 ins. diam., bears N. 70 3/4° W., 88.5 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram E1: A circle containing a vertical line with 'GY3' above it and 'C5 TRC' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 5 1/2 ins. diam., bears S. 38 1/4° E., 24.7 ft. dist., mkd. X BT. A spruce, 5 ins. diam., bears S. 53° W., 37.5 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram L1: A circle containing a vertical line with 'GY3' above it and 'C4 TRD' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 4 1/2 ins. diam., bears N. 48 3/4° E., 47.2 ft. dist., mkd. X BT. A spruce, 7 ins. diam., bears S. 31° E., 30.1 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram S1: A circle containing a vertical line with 'GY3' above it and 'C5 TRE' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 4 ins. diam., bears N. 48° E., 60.8 ft. dist., mkd. X BT. A spruce, 4 ins. diam., bears S. 50 3/4° E., 45.7 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram Y1: A circle containing a vertical line with 'WC' above it and 'C1 L1' to its right, and 'S7818' below. Below the circle is '1988'. Text: Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with brass cap mkd. as shown, from which the original accessories A spruce, 6 1/2 ins. diam., bears S. 35° W., 36.3 ft. dist., mkd. with fully heeled blaze. A spruce, 12 ins. diam., bears S. 84 3/4° W., 51.5 ft. dist., mkd. X BT.

Diagram F1: A circle containing a vertical line with 'GY3' above it and 'C6 TRC' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 4 ins. diam., bears S. 19 1/2° W., 28.5 ft. dist., mkd. X BT. A spruce, 5 1/2 ins. diam., bears N. 81 1/2° W., 37.3 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram M1: A circle containing a vertical line with 'GY3' above it and 'C5 TRD' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 4 1/2 ins. diam., bears S. 70 1/2° W., 30.1 ft. dist., mkd. X BT. A spruce, 4 1/2 ins. diam., bears N. 0 1/2° W., 18.8 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram T1: A circle containing a vertical line with 'GY3 WC' above it and 'S4370 C8 TRC' to its right, and 'TRE L5 S724' to its left. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram Z1: A circle containing a vertical line with 'GY3 WC' above it and 'TRD C2B TRF' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram G1: A circle containing a vertical line with 'GY3' above it and 'C7 TRC' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 7 1/2 ins. diam., bears S. 28 1/2° E., 51.9 ft. dist., mkd. X BT. A spruce, 7 ins. diam., bears S. 87 1/2° W., 34.0 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram N1: A circle containing a vertical line with 'GY3' above it and 'C6 TRD' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 4 ins. diam., bears N. 33 1/4° E., 78.4 ft. dist., mkd. X BT. A spruce, 4 ins. diam., bears N. 47 3/4° W., 40.8 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram U1: A circle containing a vertical line with 'GY3 WC' above it and 'TRE C2 L6' to its right, and 'S724 L5 S724' to its left. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram A2: A circle containing a vertical line with 'GY3' above it and 'TRF C1 TRD' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram H1: A circle containing a vertical line with 'GY3' above it and 'C8 TRC' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 9 ins. diam., bears S. 40° W., 24.5 ft. dist., mkd. X BT. A spruce, 8 1/2 ins. diam., bears N. 55 3/4° W., 26.5 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram O1: A circle containing a vertical line with 'GY3' above it and 'C7 TRD' to its left, and 'S4370 TRC' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram V1: A circle containing a vertical line with 'GY3 WC' above it and 'C3 L5' to its left, and 'S724 L6 S724' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 9 ins. diam., bears S. 7 1/2° W., 32.1 ft. dist., mkd. X BT. A spruce, 9 1/2 ins. diam., bears N. 82 1/2° W., 20.3 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.

Diagram B2: A circle containing a vertical line with 'GY3 WP' above it and 'TRF' to its right. Below the circle is 'RLS 6945 1997'. Text: Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown. Deposit a magnet in a white plastic case at the base of the stainless steel post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH F  
AND SUBDIVISION OF U.S. SURVEY No. 724  
P.L. 92-203 (85 STAT. 688, 702, 703)

GANNA-A'YOO, LTD.  
AT  
NULATO, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Ⓜ

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

98-2

RECORDED & FILED 501

NULATO REC DIST

DATE 7-24 1998

TIME 2:26 P.M.

Revised by BLM

Address