

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
**NOME, ALASKA**

This plat, in 33 sheets, contains the entire survey record.

The history of surveys is referenced on sheet 2.

This survey was executed by Gary D. Kowal, Registered Alaska Land Surveyor No. LS-8856, for Sitnasuak Native Corporation, July 11, 2001 through October 8, 2003, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, Amended Special Instructions dated April 2, 2001, approved April 4, 2001, under Contract No. NACO10092, awarded June 26, 2001, and Notice to Proceed dated July 2, 2001.

Field Assistants were:

- Jason A. Madsen, Party Chief
- Walter K. Rice, Party Chief
- Gene L. Snell, Party Chief
- Ken Galley, Survey Technician
- Mike Walluk, Survey Technician
- John Ahmasuk, Survey Technician
- George Kost, Survey Technician

Area Surveyed: 1096.40 Acres.

The azimuth was obtained from Global Positioning System (GPS) observations and refers to the true meridian.

The geographic position of corner No. 1, Tract B, as determined from a tie to the witness corner to corner No. 1, Lot 1, U.S. Survey No. 8734, identical with the witness corner to corner No. 5, Lot 1, U.S. Survey No. 4403A, both meander corners, using the Global Positioning System and static relative positioning techniques, is:

Latitude: 64° 27' 12.01" North (NAD 27)  
Longitude: 165° 05' 51.65" West

The corner positions for this survey were determined using GPS Real-Time Kinematic techniques (RTK) and were verified using GPS Rapid Static methodology.

The mean magnetic declination was computed using the U.S. Geological Survey Geomag software program.

This survey is located within Townships 9 South, Ranges 33 and 34 West, Townships 10 South, Ranges 33 and 34 West, Townships 11 South, Ranges 31, 32, 33, 34, 35 and 36 West, and Townships 12 South, Ranges 31, 32 and 33 West, Kateel River Meridian, Alaska.

The land is mostly open, rolling tundra, with some steep areas and patches of alders and willows.

The soil is silty sand, gravel and rock.

UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Anchorage, Alaska

The survey represented by this plat, sheets 1 through 33, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

*John Smith* Feb. 8, 2005  
Date

Deputy State Director for Cadastral Survey, Alaska

**SHEET INDEX**


- SHEET 3 TRACTS J, FF AND 11  
LOT 1A MS2481  
TRAILS 1 AND 2
- SHEET 4 LOT 1A MS2270  
TRAILS 3, 4A, 4B, 8, 9, 10, 11 AND 12
- SHEET 5 TRACTS A, F, H, T AND NN  
TRAILS 5, 6 AND 7
- SHEET 6 TRACT N  
TRAILS 18, 19, 20, 21, 22, 24, 25, 26, 31, 31A AND 32
- SHEET 7 TRAILS 13A, 13B, 14, 15, 27, 28, 29, 30, 33 AND 34
- SHEET 8 ANVIL MTN ACCESS EASEMENT  
TRAILS 15A, 17, 35, 36 AND 37
- SHEET 9 TRAILS 38, 39, 40, 41A, 41B, 42, 43, 44A, 44B, 44C, 45, 46A, 46B, 47, 49, 50, 55, 56, 57 AND 58
- SHEET 10 TRACTS L AND U  
TRAILS 51, 52A, 52B, 52C AND 53
- SHEET 11 TRACTS B, V, AA AND CC  
LOTS 39A AND 39B S4107
- SHEET 12 TRACTS P, Q, R, S, W, Y, Z, EE AND GG
- SHEET 13 TRACT OO
- SHEET 14 TRACT D
- SHEET 15 TRACT E  
TRAILS 48A AND 48B
- SHEET 16 TRACT JJ
- SHEET 17 TRACT KK
- SHEET 18 LOTS 19A, 19B, 19C, 19D, 19E, 19F AND 19G S11683
- SHEET 19 TRACTS G, X AND LL
- SHEET 20 TRACT K
- SHEET 21 LOTS 54A, 54B, 55A, 55B, 59A, 59B, 61A AND 61B S4107
- SHEET 22 TRACT O  
LOT 1A S8734
- SHEET 23 LOTS 1A AND 1B MS2297
- SHEET 24 TRACTS I, BB, DD, HH AND PP
- SHEET 25 TRACT MM
- SHEETS 26 MONUMENT DESCRIPTIONS  
THROUGH 33



*Nome 2005-3*


I, Gary D. Kowal, Registered Alaska Land Surveyor No. LS-8856, HEREBY CERTIFY, upon honor, that, in pursuance of Amended Special Instructions dated April 2, 2001 and under Contract No. NACO10092, awarded June 26, 2001, I have executed the survey depicted on this plat in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, 1973, and in the specific manner described on this plat.

*Gary D. Kowal*  
3-8-04  
Date Registered Land Surveyor

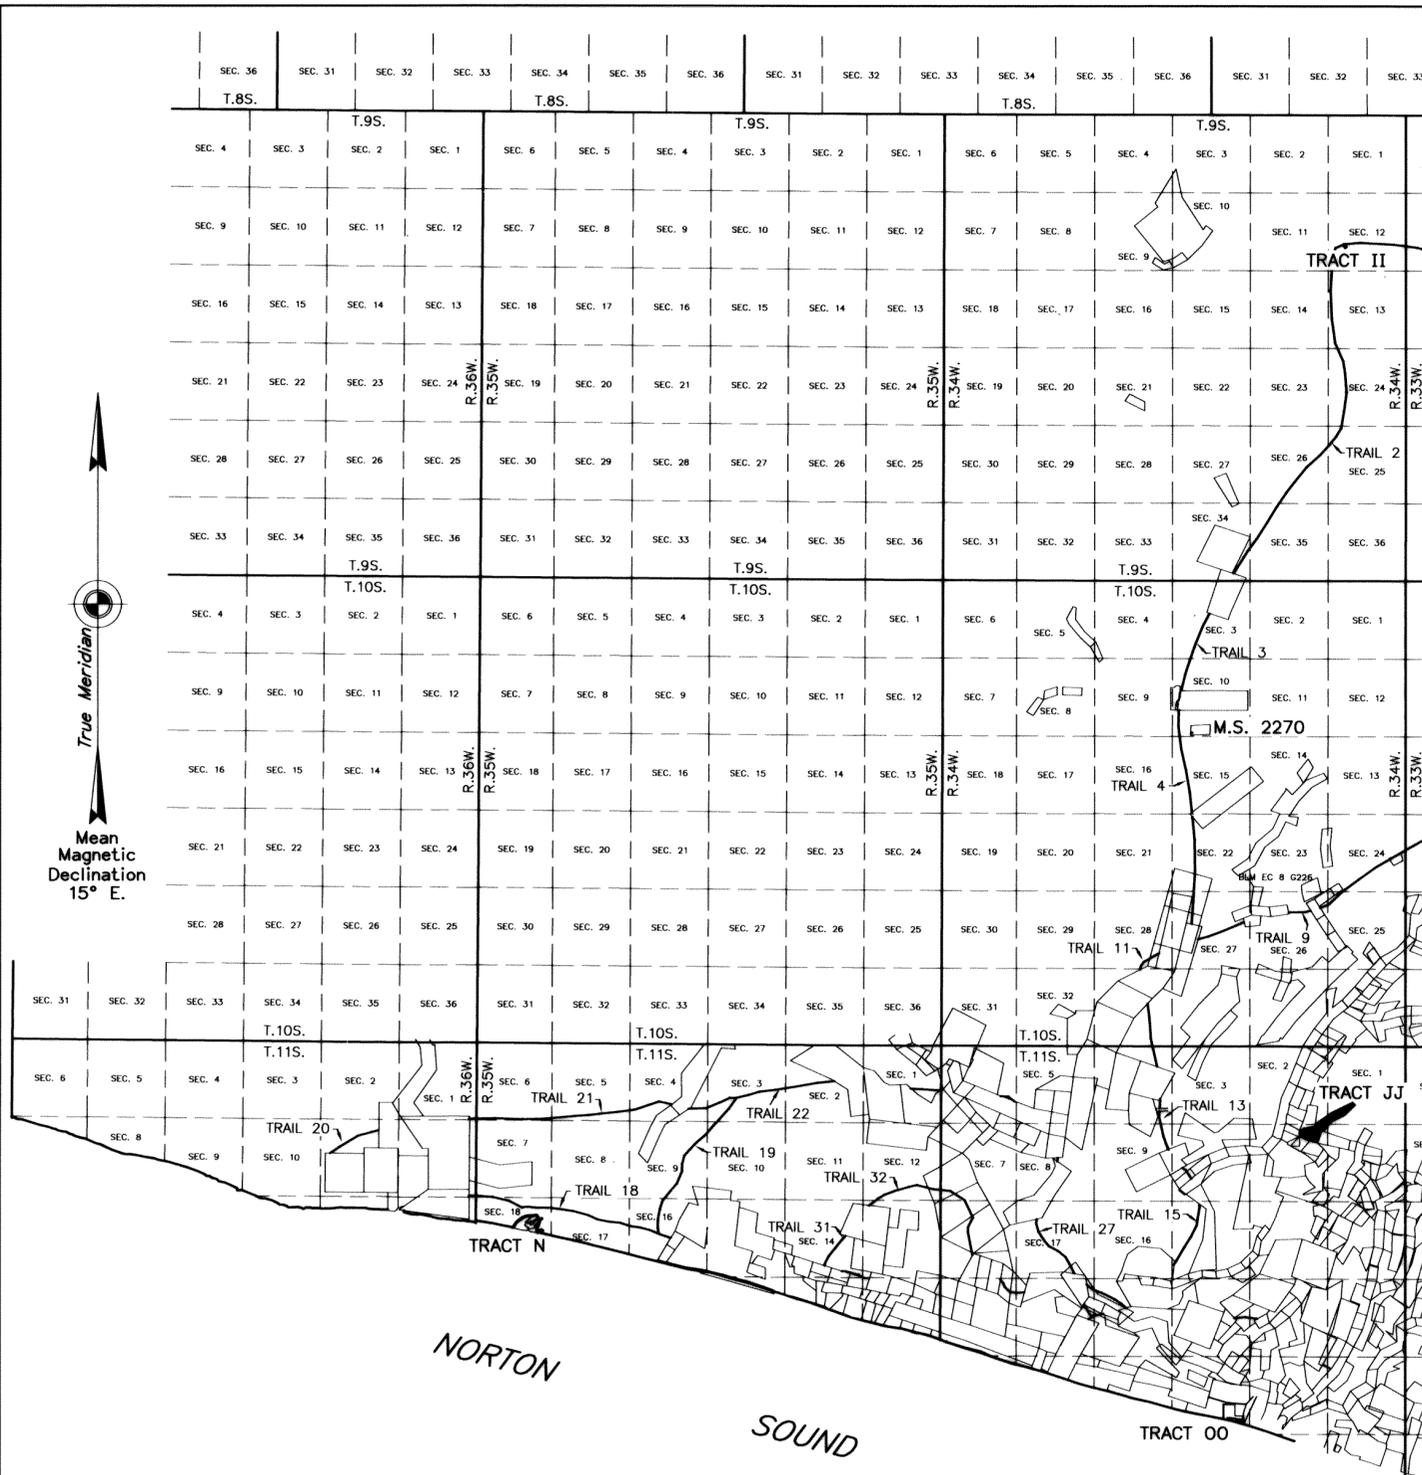

I hereby certify that Tracts A through PP, Lot 1A, Mineral Survey No. 2270, Lots 1A and 1B, Mineral Survey No. 2297, Lot 1A, Mineral Survey No. 2481, Lot 1A, U.S. Survey No. 8734, Lots 39A, 39B, 54A, 54B, 55A, 55B, 59A, 59B, 61A and 61B, U.S. Survey No. 4107, Lots 19A, 19B, 19C, 19D, 19E, 19F and 19G, U.S. Survey No. 11683, the Anvil Mountain Access Easement, and the various trails represented on this plat of survey, are on lands Interim Conveyed to Sitnasuak Native Corporation by Interim Conveyance Nos. 528, 558, 707, 992, 1685 and 1825 and/or Patent Nos. 50-82-0100, 50-82-0148 and 50-83-0275 issued by the United States of America; said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Sitnasuak Native Corporation Resolution Agreement No. 98-03, and the Sitnasuak Native Corporation ANCSA 14(c) Map of Boundaries accepted July 27, 1998.

*James S. Smith* 3/5/05  
Date  
*Robert L. Smith*  
President  
Sitnasuak Native Corporation





**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STAINLESS STEEL POST, 2 1/2 IN. DIAM., 28 IN. LONG, SET 24 TO 28 IN. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 IN. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.


**NOTE:**

TRAILS CONSIST OF A 25 FOOT WIDE RIGHT-OF-WAY, 12.5 FEET ON EACH SIDE OF THE PLATTED CENTERLINE. THE CENTERLINES OF THE TRAILS DEPICTED ON THIS PLAT HAVE NOT BEEN SURVEYED OR MONUMENTED. THE INFORMATIONAL CALLS TO THE CENTERLINE OF SAID TRAILS WERE DIGITIZED FROM THE MAP OF BOUNDARIES PROVIDED BY SITNASUAK NATIVE CORPORATION AND EXIST AS A PAPER PLAT ONLY. THE DEPICTION OF THESE TRAILS AS A PAPER PLAT IS BASED UPON AN AGREEMENT BETWEEN THE CITY OF NOME AND SITNASUAK NATIVE CORPORATION.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH PP, THE SUBDIVISION OF MINERAL SURVEY NOS. 2270, 2297 AND 2481, AND THE SUBDIVISION OF U.S. SURVEY NOS. 4107, 8734 AND 11683 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
NOME, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NOS. 1 AND 2 FOR SURVEY INFORMATION

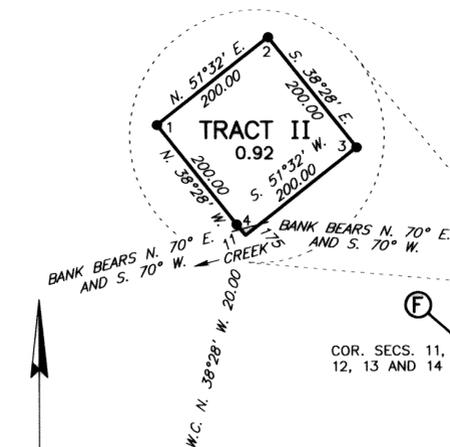


**ACCESSORY TABLE**

**TRACT II**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER PINK	N. 7° E. S. 83° E.	10.00 ft. 10.00 ft.
2	BLUE ORANGE	S. 7° W. N. 83° W.	10.00 ft. 10.00 ft.
3	SILVER ORANGE	N. 7° E. N. 83° W.	10.00 ft. 10.00 ft.
4	SILVER ORANGE	N. 7° E. N. 83° W.	10.00 ft. 10.00 ft.

**TRAIL 2**  
FROM AP-1, THE INTERSECTION WITH LINE 2-3, U.S. SURVEY NO. 6407 THENCE;

N. 2°54' W.	636.28 FT.	TO AP-2, THENCE;
N. 4°04' W.	927.07 FT.	TO AP-3, THENCE;
N. 5°03' W.	1368.03 FT.	TO AP-4, THENCE;
N. 14°52' W.	1111.02 FT.	TO AP-5, THENCE;
N. 27°56' W.	1446.43 FT.	TO AP-6, THENCE;
N. 26°45' W.	1635.91 FT.	TO AP-7, THENCE;
N. 5°42' E.	457.09 FT.	TO AP-8, THENCE;
N. 45°56' E.	513.52 FT.	TO AP-9, THENCE;
N. 45°52' E.	950.49 FT.	TO AP-10, THENCE;
N. 9°18' E.	706.35 FT.	TO AP-11, THENCE;
N. 0°27' E.	190.71 FT.	TO AP-12, THENCE;
N. 19°25' E.	2774.39 FT.	TO AP-13, THENCE;
N. 8°01' E.	911.23 FT.	TO AP-14, THENCE;
N. 11°29' E.	771.00 FT.	TO AP-15, THENCE;
N. 2°22' E.	1018.55 FT.	TO AP-16, THENCE;
N. 12°35' E.	924.71 FT.	TO AP-17, THENCE;
N. 9°05' E.	1341.21 FT.	TO AP-18, THENCE;
N. 1°18' E.	977.87 FT.	TO AP-19, THENCE;
N. 8°36' E.	568.31 FT.	TO AP-20, THENCE;
N. 8°02' E.	662.08 FT.	TO AP-21, THENCE;
N. 10°38' E.	1028.40 FT.	TO AP-22, THENCE;
N. 30°59' E.	644.09 FT.	TO AP-23, THENCE;
N. 11°32' E.	1187.37 FT.	TO AP-24, THENCE;
N. 2°42' E.	695.69 FT.	TO AP-25, THENCE;
N. 21°36' W.	547.23 FT.	TO AP-26, THENCE;
N. 78°31' W.	437.12 FT.	TO AP-27, THENCE;
N. 65°47' W.	299.33 FT.	TO AP-28, THENCE;
N. 68°27' W.	651.61 FT.	TO AP-29, THENCE;
N. 72°23' W.	303.83 FT.	TO AP-30, THENCE;
N. 49°01' W.	538.86 FT.	TO AP-31, THENCE;
N. 47°57' W.	282.48 FT.	TO AP-32, THENCE;
N. 28°45' W.	501.22 FT.	TO AP-33, THENCE;
N. 48°18' W.	568.77 FT.	TO AP-34, THENCE;
N. 47°51' W.	1369.03 FT.	TO AP-35, THENCE;
S. 38°34' W.	357.48 FT.	TO AP-36, THENCE;
S. 45°24' W.	671.96 FT.	TO AP-37, THENCE;
S. 51°32' W.	1194.30 FT.	TO AP-38, THENCE;
S. 69°09' W.	2159.31 FT.	TO AP-39, THENCE;
S. 72°39' W.	1665.57 FT.	TO AP-40, THENCE;
N. 72°44' W.	1198.96 FT.	TO AP-41, THENCE;
N. 82°43' W.	1622.32 FT.	TO AP-42, THENCE;
N. 87°03' W.	2254.54 FT.	TO AP-43, THENCE;
S. 85°33' W.	1120.43 FT.	TO AP-44, THENCE;
S. 68°50' W.	616.29 FT.	TO AP-45, THENCE;
S. 17°50' W.	811.92 FT.	TO AP-46, THENCE;
S. 5°18' W.	860.43 FT.	TO AP-47, THENCE;
S. 2°59' W.	1488.30 FT.	TO AP-48, THENCE;
S. 2°21' E.	1951.07 FT.	TO AP-49, THENCE;
S. 8°13' E.	1605.22 FT.	TO AP-50, THENCE;
S. 23°45' E.	1372.17 FT.	TO AP-51, THENCE;
S. 8°32' E.	860.91 FT.	TO AP-52, THENCE;
S. 4°25' E.	1270.20 FT.	TO AP-53, THENCE;
S. 7°49' W.	1286.71 FT.	TO AP-54, THENCE;
S. 9°11' W.	1186.99 FT.	TO AP-55, THENCE;
S. 31°07' W.	692.37 FT.	TO AP-56, THENCE;
S. 39°21' W.	680.54 FT.	TO AP-57, THENCE;
S. 42°30' W.	957.10 FT.	TO AP-58, THENCE;
S. 47°49' W.	1198.15 FT.	TO AP-59, THENCE;
S. 38°32' W.	1320.33 FT.	TO AP-60, THENCE;
S. 37°07' W.	961.21 FT.	TO AP-61, THENCE;
S. 34°01' W.	1086.15 FT.	TO AP-62, THENCE;
S. 31°42' W.	1285.97 FT.	TO AP-63, THENCE;
S. 32°14' W.	1317.13 FT.	TO AP-64, THENCE;
S. 35°58' W.	1079.29 FT.	TO AP-65, THENCE;
S. 31°55' W.	1745.13 FT.	TO AP-66, THE INTERSECTION WITH LINE 1-2, P.D.G.E. GROUP ON GOOD LUCK GULCH, M.S. 1852.

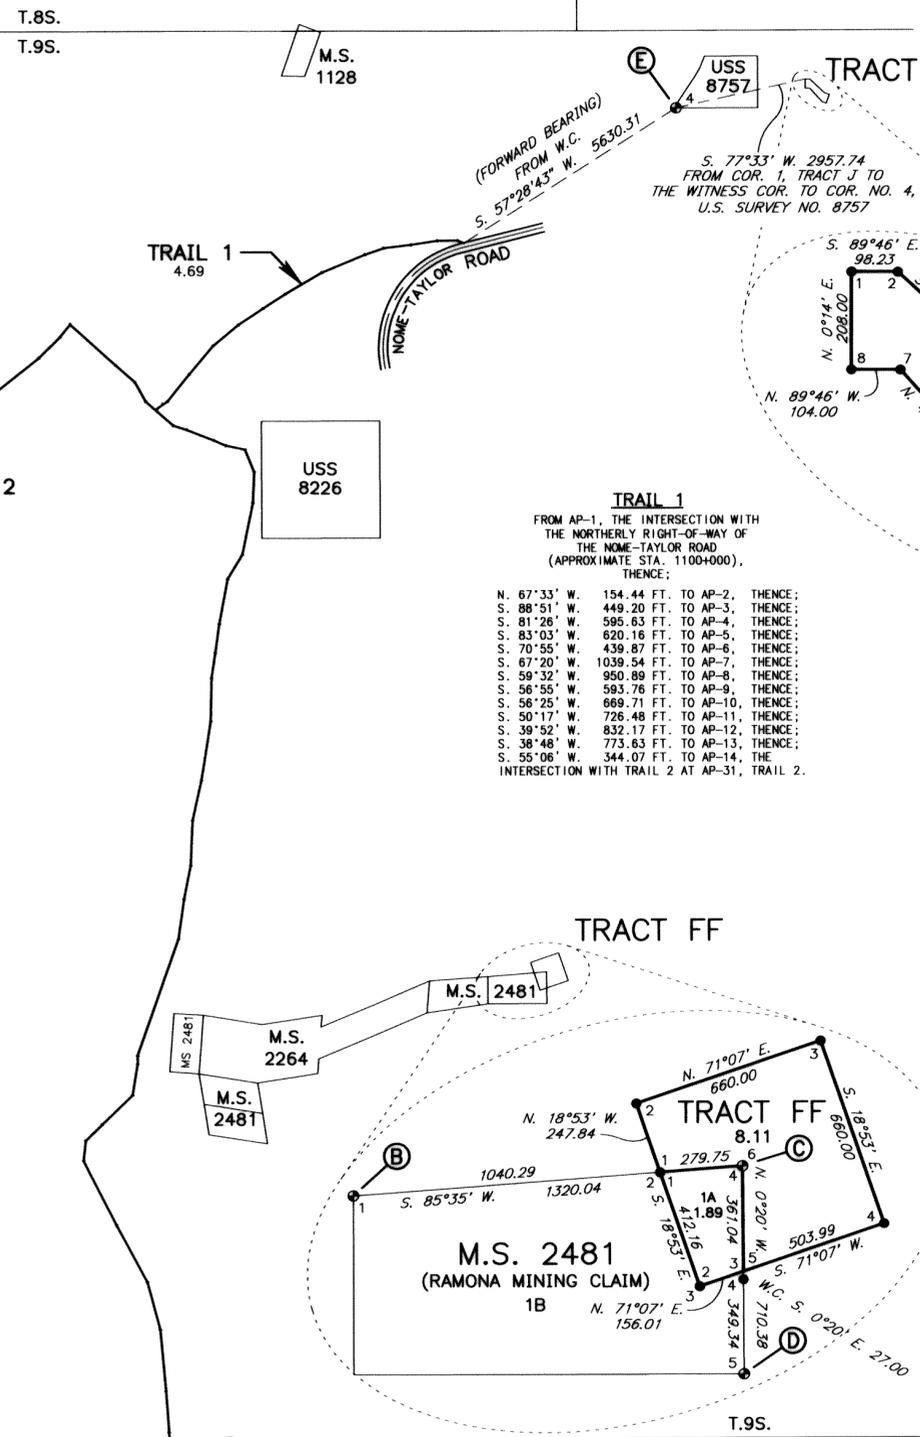

**TRAIL 1**  
FROM AP-1, THE INTERSECTION WITH THE NORTHERLY RIGHT-OF-WAY OF THE NOME-TAYLOR ROAD (APPROXIMATE STA. 1100+000), THENCE:

N. 67°33' W.	154.44 FT.	TO AP-2, THENCE;
S. 88°51' W.	449.20 FT.	TO AP-3, THENCE;
S. 81°26' W.	595.63 FT.	TO AP-4, THENCE;
S. 83°03' W.	620.16 FT.	TO AP-5, THENCE;
S. 70°55' W.	439.87 FT.	TO AP-6, THENCE;
S. 67°20' W.	1039.54 FT.	TO AP-7, THENCE;
S. 59°32' W.	950.89 FT.	TO AP-8, THENCE;
S. 56°55' W.	593.76 FT.	TO AP-9, THENCE;
S. 56°25' W.	669.71 FT.	TO AP-10, THENCE;
S. 50°17' W.	726.48 FT.	TO AP-11, THENCE;
S. 39°52' W.	832.17 FT.	TO AP-12, THENCE;
S. 38°48' W.	773.63 FT.	TO AP-13, THENCE;
S. 55°06' W.	344.07 FT.	TO AP-14, THE INTERSECTION WITH TRAIL 2 AT AP-31, TRAIL 2.

**ACCESSORY TABLE**

**TRACT J**


CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK BLUE	S. 45° E. S. 45° W.	10.00 ft. 10.00 ft.
2	BLUE ORANGE	S. 45° W. N. 45° W.	10.00 ft. 10.00 ft.
3	SILVER ORANGE	N. 2° E. N. 88° W.	10.00 ft. 10.00 ft.
4	PINK BLUE	S. 25° E. S. 65° W.	10.00 ft. 10.00 ft.
5	BLUE ORANGE	S. 65° W. N. 25° W.	10.00 ft. 10.00 ft.
6	SILVER PINK	N. 65° E. S. 25° E.	10.00 ft. 10.00 ft.
7	BLUE ORANGE	S. 45° W. N. 45° W.	10.00 ft. 10.00 ft.
8	SILVER ORANGE	N. 45° E. N. 45° W.	10.00 ft. 10.00 ft.

**TRACT FF**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK BLUE	S. 64° E. S. 26° W.	10.00 ft. 10.00 ft.
2	SILVER PINK	N. 26° E. S. 64° E.	10.00 ft. 10.00 ft.
3	BLUE ORANGE	S. 26° W. N. 64° W.	10.00 ft. 10.00 ft.
4	SILVER ORANGE	N. 26° E. N. 64° W.	10.00 ft. 10.00 ft.
5	PINK BLUE	S. 45° E. S. 45° W.	10.00 ft. 10.00 ft.

**M.S. 2481 LOT 1A**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
2	SILVER PINK	N. 26° E. S. 64° E.	10.00 ft. 10.00 ft.



*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1 AND 2  
FOR SURVEY INFORMATION

**ACCESSORY TABLE**  
**LOT 1A, M.S. 2270**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER	N. 51° E.	10.00 ft.
	ORANGE	N. 39° W.	10.00 ft.
2	PINK	S. 38° E.	10.00 ft.
	BLUE	S. 52° W.	10.00 ft.
3	PINK	S. 38° E.	10.00 ft.
	BLUE	S. 52° W.	9.00 ft.
4	SILVER	N. 52° E.	10.00 ft.
	ORANGE	N. 38° W.	10.00 ft.

**NOTE:**

TRAILS CONSIST OF A 25 FOOT WIDE RIGHT-OF-WAY, 12.5 FEET ON EACH SIDE OF THE PLATTED CENTERLINE. THE CENTERLINES OF THE TRAILS DEPICTED ON THIS PLAT HAVE NOT BEEN SURVEYED OR MONUMENTED. THE INFORMATIONAL CALLS TO THE CENTERLINE OF SAID TRAILS WERE DIGITIZED FROM THE MAP OF BOUNDARIES PROVIDED BY SITNASUAK NATIVE CORPORATION AND EXIST AS A PAPER PLAT ONLY. THE DEPICTION OF THESE TRAILS AS A PAPER PLAT IS BASED UPON AN AGREEMENT BETWEEN THE CITY OF NOME AND SITNASUAK NATIVE CORPORATION.

**TRAIL 8**  
FROM AP-1, THE INTERSECTION WITH LINE 2-3, LOT 2, U.S. SURVEY NO. 6408, THENCE;  
S. 77°35' W. 135.84 FT. TO AP-2, THENCE;  
S. 85°27' W. 1918.82 FT. TO AP-3, THENCE;  
S. 83°29' W. 996.55 FT. TO AP-4, THENCE;  
N. 85°18' W. 1079.02 FT. TO AP-5, THENCE;  
S. 77°43' W. 1095.07 FT. TO AP-6, THENCE;  
S. 56°36' W. 998.10 FT. TO AP-7, THENCE;  
S. 35°41' W. 868.41 FT. TO AP-8, THENCE;  
S. 1°32' W. 1118.97 FT. TO AP-9, THENCE;  
S. 27°04' E. 1533.81 FT. TO AP-10, THENCE;  
S. 28°35' E. 2120.97 FT. TO AP-11, THENCE;  
S. 26°46' E. 1460.80 FT. TO AP-12, THENCE;  
S. 14°40' E. 1611.18 FT. TO AP-13, THENCE;  
S. 19°13' W. 1349.21 FT. TO AP-14, THENCE;  
S. 37°28' W. 1334.71 FT. TO AP-15, THENCE;  
S. 62°53' W. 2011.63 FT. TO AP-16, THENCE;  
S. 60°24' W. 1312.43 FT. TO AP-17, THENCE;  
S. 80°09' W. 1315.73 FT. TO AP-18, THENCE;  
S. 60°03' W. 1007.23 FT. TO AP-19, THENCE;  
S. 59°33' W. 770.77 FT. TO AP-20, THENCE;  
S. 54°43' W. 1423.91 FT. TO AP-21, THENCE;  
S. 53°07' W. 1327.34 FT. TO AP-22, THENCE;  
S. 46°44' W. 1378.48 FT. TO AP-23, THENCE;  
S. 68°17' W. 655.21 FT. TO AP-24, THE INTERSECTION WITH LINE 3-4, NO. 1 ON SNOW CREEK PLACER CLAIM, M.S. 715.

**TRAIL 3**  
FROM AP-1, THE INTERSECTION WITH LINE 4-5, P.D.G.E. GROUP ON GOOD LUCK GULCH, M.S. 1852, THENCE;  
S. 28°56' W. 919.27 FT. TO AP-2, THENCE;  
S. 21°22' W. 1621.64 FT. TO AP-3, THENCE;  
S. 18°29' W. 1910.16 FT. TO AP-4, THENCE;  
S. 13°44' W. 1140.81 FT. TO AP-5, THE INTERSECTION WITH LINE 3-4, LOT 1, U.S. SURVEY NO. 8228.

**TRAIL 4A**  
FROM AP-1, THE INTERSECTION WITH LINE 1-2, LOT 1, U.S. SURVEY NO. 8228, THENCE;  
S. 0°59' W. 1125.92 FT. TO AP-2, THENCE;  
S. 7°20' E. 1500.14 FT. TO AP-3, THENCE;  
S. 12°43' E. 1477.94 FT. TO AP-4, THENCE;  
S. 9°43' E. 1530.25 FT. TO AP-5, THENCE;  
S. 6°07' E. 1419.84 FT. TO AP-6, THE INTERSECTION WITH LINE 2-3, M.S. 1835.

**TRAIL 4B**  
FROM AP-7, THE INTERSECTION WITH LINE 1-2, M.S. 1835, THENCE;  
S. 6°01' E. 1564.67 FT. TO AP-8, THENCE;  
S. 0°33' E. 2143.34 FT. TO AP-9, THENCE;  
S. 3°02' W. 2138.74 FT. TO AP-10, THENCE;  
S. 4°05' W. 1481.33 FT. TO AP-11, THE INTERSECTION WITH LINE 5-1, WASHINGTON ASSOCIATION PLACER, M.S. 1110.


**TRAIL 9**  
FROM AP-1, THE INTERSECTION WITH LINE 1-2, NO. 1 ON SNOW CREEK PLACER CLAIM, M.S. 715, THENCE;  
S. 75°58' W. 383.83 FT. TO AP-2, THENCE;  
S. 89°04' W. 1119.44 FT. TO AP-3, THE INTERSECTION WITH LINE 4-1, NO. 1 BELOW PLACER, M.S. 473.

**TRAIL 10**  
FROM AP-1, THE INTERSECTION WITH LINE 3-4, JOE BENCH PLACER, M.S. 473, THENCE;  
S. 68°42' W. 190.09 FT. TO AP-2, THENCE;  
S. 67°19' W. 1627.00 FT. TO AP-3, THENCE;  
S. 69°07' W. 795.86 FT. TO AP-4, THENCE;  
S. 74°21' W. 715.02 FT. TO AP-5, THE INTERSECTION WITH LINE 1-2, WASHINGTON ASSOCIATION PLACER, M.S. 1110.

**TRAIL 11**  
FROM AP-1, THE INTERSECTION WITH LINE 4-5, GREAT EASTERN ASSOCIATION PLACER, M.S. 1110, THENCE;  
S. 62°18' W. 106.48 FT. TO AP-2, THENCE;  
S. 60°20' W. 1071.25 FT. TO AP-3, THENCE;  
S. 35°31' W. 360.33 FT. TO AP-4, THENCE;  
S. 12°58' W. 254.05 FT. TO AP-5, THE INTERSECTION WITH LINE 1-2, BOSTON ASSOCIATION CLAIM NO. 2 PLACER, M.S. 1857.

**TRAIL 12**  
FROM AP-1, THE INTERSECTION WITH LINE 3-4, BOSTON ASSOCIATION NO. 1 PLACER, M.S. 1857, THENCE;  
S. 7°50' E. 932.94 FT. TO AP-2, THENCE;  
S. 4°00' E. 1504.39 FT. TO AP-3, THENCE;  
S. 13°06' E. 1466.45 FT. TO AP-4, THENCE;  
S. 13°14' E. 465.24 FT. TO AP-5, THE INTERSECTION WITH LINE 1-2, GOLDEN SQUARE PLACER, M.S. 1857.

- LEGEND**
- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
  - STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.



*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
**NOME, ALASKA**


REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1 AND 2  
FOR SURVEY INFORMATION

**ACCESSORY TABLE  
TRACT F**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK	S. 40° E.	10.00 ft.
	BLUE	S. 50° W.	10.00 ft.
2	SILVER	N. 50° E.	10.00 ft.
	ORANGE	N. 40° W.	10.00 ft.
3	SILVER	N. 43° E.	10.00 ft.
	PINK	S. 47° E.	10.00 ft.
4	SILVER	N. 43° E.	10.00 ft.
	PINK	S. 47° E.	10.00 ft.

**U.S. SURVEY NO. 5055**



CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
2	BLUE	S. 43° W.	10.00 ft.
	ORANGE	N. 47° W.	10.00 ft.

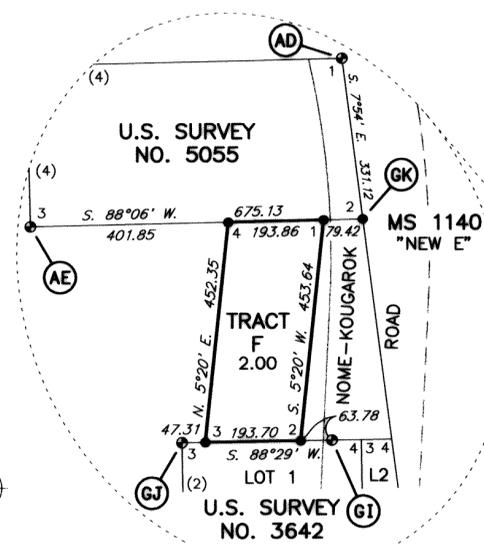

**NOTE**  
THE LOCATION OF THE NOME-KOUGAROK ROAD RIGHT-OF-WAY IN THIS AREA IS BASED UPON STATE OF ALASKA, DEPARTMENT OF TRANSPORTATION HIGHWAY RIGHT-OF-WAY MARKERS LOCATED AT STATION 451+40.58, 100 FT. LEFT AND STATION 690+00.48, 100 FT. LEFT. A THOROUGH SEARCH WAS MADE, BUT NO OTHER MARKERS OR CENTERLINE MONUMENTS WERE FOUND IN THE AREA OF TRACTS A, F, AND H.

**CURVE DATA  
TRACT H**

RADIUS: 2964.79  
LENGTH: 209.84  
DELTA: 4°03'19"  
LONG CHORD: S. 26°28' E. 209.80

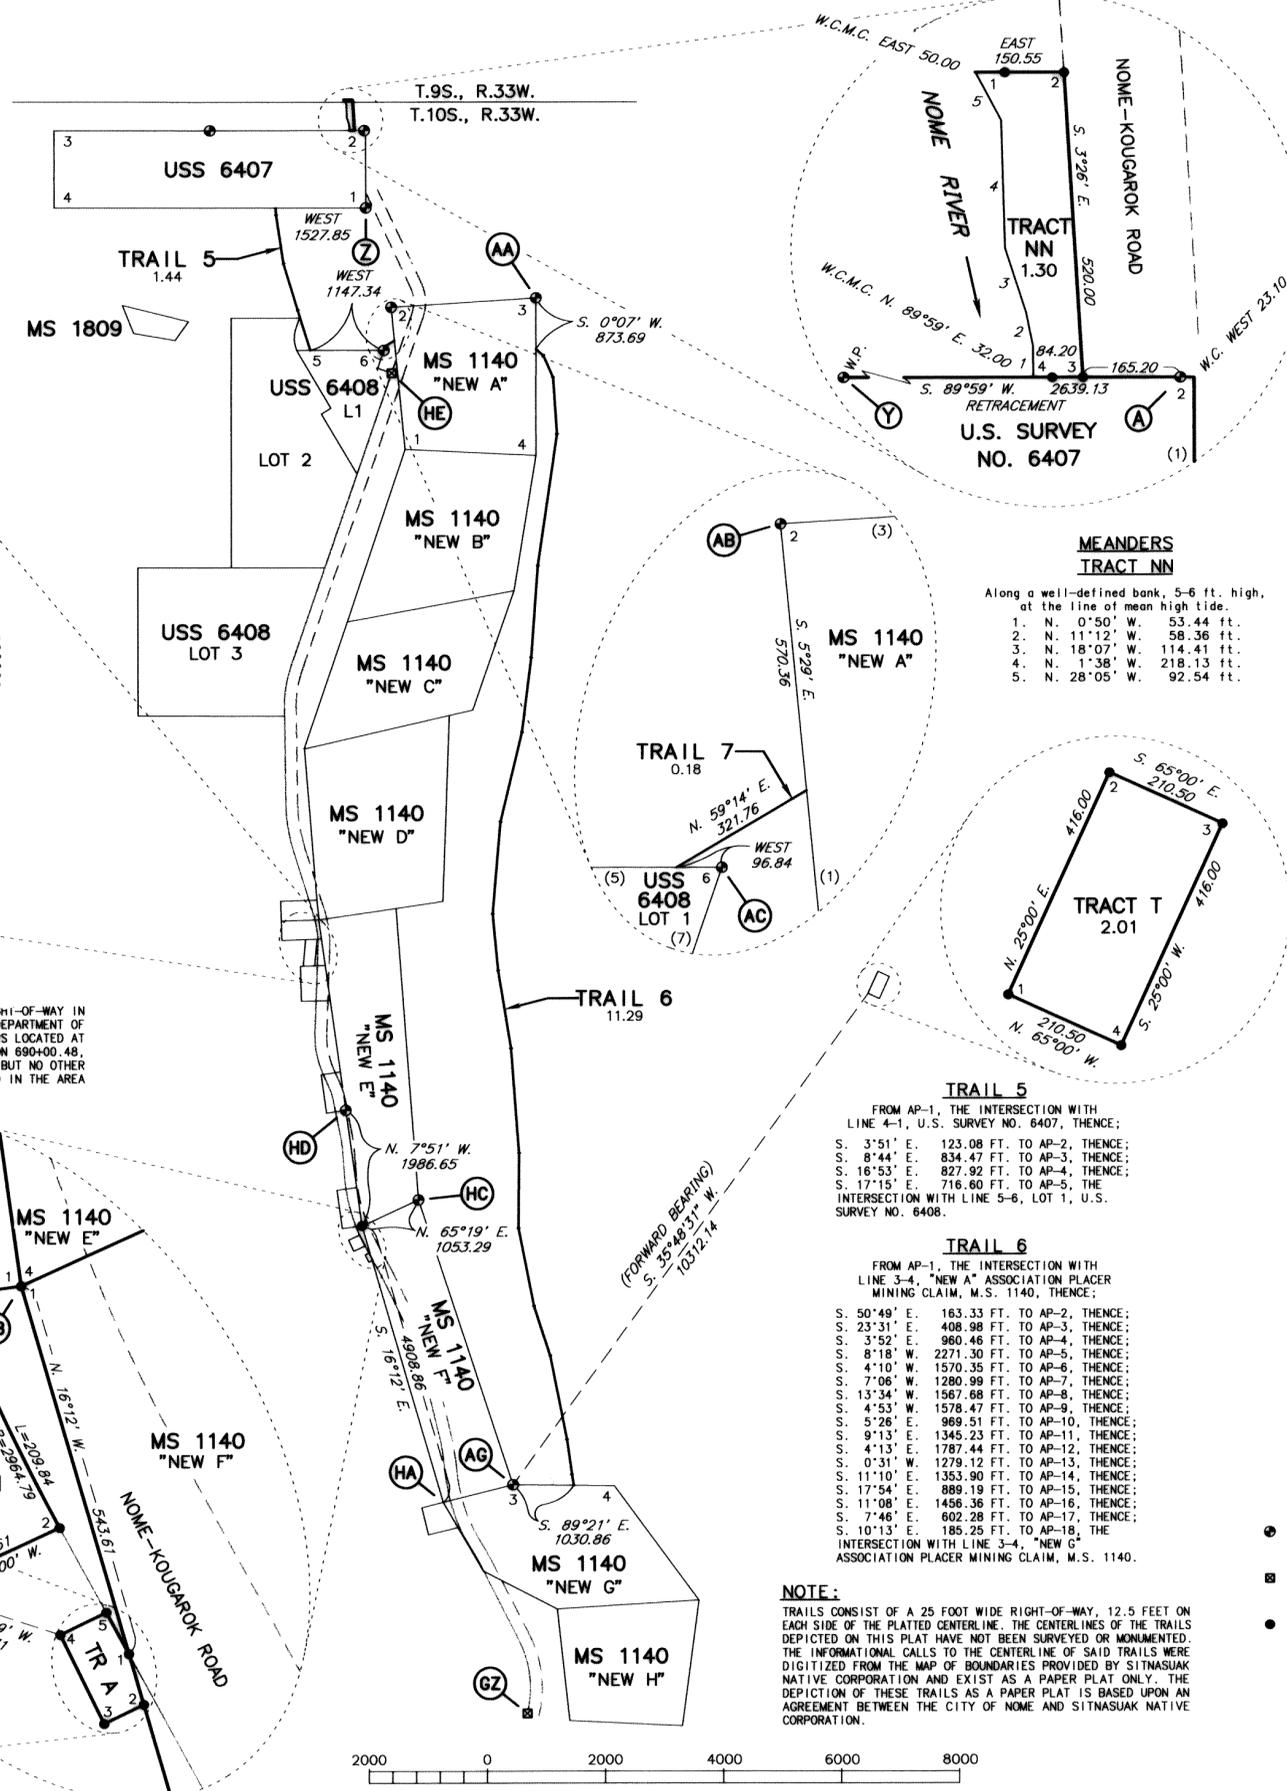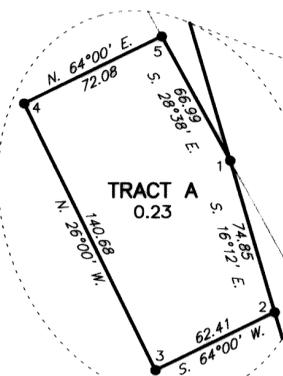

**MEANDERS  
TRACT NN**

Along a well-defined bank, 5-6 ft. high, at the line of mean high tide.  
1. N. 0°50' W. 53.44 ft.  
2. N. 11°12' W. 58.36 ft.  
3. N. 18°07' W. 114.41 ft.  
4. N. 1°38' W. 218.13 ft.  
5. N. 28°05' W. 92.54 ft.

**ACCESSORY TABLE  
TRACT A**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	BLUE	S. 45° W.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
2	BLUE	S. 45° W.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
3	SILVER	N. 45° E.	9.90 ft.
	PINK	S. 45° E.	9.90 ft.
4	SILVER	N. 19° E.	10.00 ft.
	PINK	S. 71° E.	10.00 ft.
5	BLUE	S. 45° W.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.

**TRACT H**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	BLUE	S. 45° W.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
2	BLUE	S. 45° W.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
3	SILVER	N. 20° E.	10.00 ft.
	ORANGE	N. 70° W.	10.00 ft.
4	SILVER	N. 45° E.	9.90 ft.
	PINK	S. 45° E.	9.90 ft.

**TRACT NN**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER	N. 45° E.	10.00 ft.
	PINK	S. 45° E.	10.00 ft.
2	BLUE	S. 45° W.	10.00 ft.
	ORANGE	N. 45° W.	10.00 ft.
3	BLUE	S. 45° W.	10.00 ft.
	ORANGE	N. 45° W.	10.00 ft.
4	SILVER	N. 45° E.	10.00 ft.
	PINK	S. 45° E.	10.00 ft.


**TRACT T**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER	N. 70° E.	10.00 ft.
	PINK	S. 20° E.	10.00 ft.
2	SILVER	N. 70° E.	10.00 ft.
	PINK	S. 20° E.	10.00 ft.
3	BLUE	S. 70° W.	10.00 ft.
	ORANGE	N. 20° W.	10.00 ft.
4	BLUE	S. 70° W.	10.00 ft.
	ORANGE	N. 20° W.	10.00 ft.

**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- DEPARTMENT OF TRANSPORTATION HIGHWAY RIGHT-OF-WAY MARKER RECOVERED THIS SURVEY.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SMC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.

**NOTE:**  
TRAILS CONSIST OF A 25 FOOT WIDE RIGHT-OF-WAY, 12.5 FEET ON EACH SIDE OF THE PLATTED CENTERLINE. THE CENTERLINES OF THE TRAILS DEPICTED ON THIS PLAT HAVE NOT BEEN SURVEYED OR MONUMENTED. THE INFORMATIONAL CALLS TO THE CENTERLINE OF SAID TRAILS WERE DIGITIZED FROM THE MAP OF BOUNDARIES PROVIDED BY SITNASUAK NATIVE CORPORATION AND EXIST AS A PAPER PLAT ONLY. THE DEPICTION OF THESE TRAILS AS A PAPER PLAT IS BASED UPON AN AGREEMENT BETWEEN THE CITY OF NOME AND SITNASUAK NATIVE CORPORATION.



*NOME 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
NOME, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1 AND 2  
FOR SURVEY INFORMATION

**TRAIL 18**  
FROM AP-1, THE INTERSECTION WITH LINE 3-4,  
NO. 2 PLACER MINING CLAIM ON GOLD BUG CREEK  
PLACER, M.S. 1319, THENCE;  
N. 71°41' W. 852.07 FT. TO AP-2, THENCE;  
N. 67°50' W. 608.35 FT. TO AP-3, THENCE;  
N. 74°56' W. 726.27 FT. TO AP-4, THENCE;  
N. 82°50' W. 653.13 FT. TO AP-5, THENCE;  
N. 72°05' W. 744.01 FT. TO AP-6, THENCE;  
N. 84°42' W. 812.06 FT. TO AP-7, THENCE;  
N. 79°26' W. 700.03 FT. TO AP-8, THENCE;  
N. 65°44' W. 703.07 FT. TO AP-9, THENCE;  
N. 75°20' W. 1063.46 FT. TO AP-10, THENCE;  
N. 81°41' W. 1120.93 FT. TO AP-11, THENCE;  
N. 85°09' W. 643.80 FT. TO AP-12, THENCE;  
N. 89°56' W. 781.92 FT. TO AP-13, THENCE;  
N. 84°17' W. 543.99 FT. TO AP-14, THENCE;  
S. 84°44' W. 424.50 FT. TO AP-15, THENCE;  
N. 63°50' W. 1002.73 FT. TO AP-16, THENCE;  
N. 76°47' W. 1146.12 FT. TO AP-17, THENCE;  
N. 86°37' W. 1037.60 FT. TO AP-18, THENCE;  
N. 89°20' W. 551.01 FT. TO AP-19, THE  
INTERSECTION WITH LINE 2-3, M.M.M.  
ASSOCIATION PLACER, M.S. 1102.

**TRAIL 19**  
FROM AP-1, IDENTICAL WITH AP-2, TRAIL 18,  
THENCE;  
N. 10°13' W. 422.84 FT. TO AP-2, THENCE;  
N. 0°54' E. 509.06 FT. TO AP-3, THENCE;  
N. 10°11' E. 727.80 FT. TO AP-4, THENCE;  
N. 17°04' E. 645.11 FT. TO AP-5, THENCE;  
N. 38°44' E. 684.58 FT. TO AP-6, THENCE;  
N. 39°50' E. 826.97 FT. TO AP-7, THENCE;  
N. 22°37' E. 890.35 FT. TO AP-8, THENCE;  
N. 0°13' E. 523.50 FT. TO AP-9, THENCE;  
N. 14°52' E. 582.84 FT. TO AP-10, THENCE;  
N. 41°04' E. 539.37 FT. TO AP-11, THENCE;  
N. 42°48' E. 592.03 FT. TO AP-12, THENCE;  
N. 48°42' E. 900.72 FT. TO AP-13, THENCE;  
N. 40°15' E. 840.67 FT. TO AP-14, THENCE;  
N. 41°34' E. 1536.23 FT. TO AP-15, THENCE;  
N. 35°28' E. 928.93 FT. TO AP-16,  
IDENTICAL WITH AP-5, TRAIL 22.

**TRAIL 20**  
FROM AP-1, THE INTERSECTION WITH LINE 4-1,  
LOT 3, U.S. SURVEY NO. 8723, THENCE;  
N. 54°48' E. 768.07 FT. TO AP-2, THENCE;  
N. 58°17' E. 1516.54 FT. TO AP-3, THENCE;  
N. 75°15' E. 946.97 FT. TO AP-4, THENCE;  
N. 74°37' E. 469.84 FT. TO AP-5, THE  
INTERSECTION WITH LINE 8-9, LOT 4, U.S.  
SURVEY NO. 8723.



**TRAIL 21**  
FROM AP-1, THE INTERSECTION WITH LINE 2-3,  
MAY ASSOCIATION PLACER, M.S. 1102, THENCE;  
N. 89°12' E. 543.96 FT. TO AP-2, THENCE;  
N. 88°27' E. 1196.87 FT. TO AP-3, THENCE;  
S. 88°30' E. 1851.83 FT. TO AP-4, THENCE;  
N. 88°21' E. 1564.56 FT. TO AP-5, THENCE;  
N. 84°21' E. 2015.15 FT. TO AP-6, THENCE;  
N. 85°33' E. 932.01 FT. TO AP-7, THENCE;  
N. 83°37' E. 1957.47 FT. TO AP-8, THENCE;  
N. 81°31' E. 1122.12 FT. TO AP-9, THENCE;  
N. 71°08' E. 1790.16 FT. TO AP-10, THENCE;  
S. 78°30' E. 898.72 FT. TO AP-11, THE  
INTERSECTION WITH LINE 5-6, O.K.  
ASSOCIATION PLACER, M.S. 1292.

**TRAIL 22**  
FROM AP-1, THE INTERSECTION WITH LINE 3-4,  
O.K. ASSOCIATION PLACER, M.S. 1292, THENCE;  
N. 88°26' E. 1174.41 FT. TO AP-2, THENCE;  
N. 66°59' E. 1004.87 FT. TO AP-3, THENCE;  
N. 64°01' E. 769.22 FT. TO AP-4, THENCE;  
N. 88°54' E. 487.96 FT. TO AP-5, THENCE;  
N. 78°28' E. 783.01 FT. TO AP-6, THENCE;  
N. 72°42' E. 762.90 FT. TO AP-7, THENCE;  
N. 82°09' E. 1154.23 FT. TO AP-8, THENCE;  
N. 80°37' E. 1050.45 FT. TO AP-9, THENCE;  
N. 84°30' E. 1140.33 FT. TO AP-10, THENCE;  
N. 84°30' E. 1140.33 FT. TO AP-11, THE  
INTERSECTION WITH LINE 4-5, JOHN HIGGINS  
GROUP PLACER, M.S. 1320.

**TRAIL 24**  
FROM AP-1, THE INTERSECTION WITH LINE 2-3,  
MEDFORD ASSOCIATION PLACER, M.S. 1320, THENCE;  
S. 87°11' E. 739.38 FT. TO AP-2, THENCE;  
S. 86°13' E. 1297.56 FT. TO AP-3, THE  
INTERSECTION WITH LINE 5-6, MEDFORD  
ASSOCIATION PLACER, M.S. 1320.

**TRAIL 25**  
FROM AP-1, THE INTERSECTION WITH LINE 1-2,  
AUGUSTUS CAESAR ASSOCIATION PLACER, M.S. 1314,  
THENCE;  
S. 88°54' E. 514.48 FT. TO AP-2, THENCE;  
S. 51°19' E. 550.53 FT. TO AP-3, THE  
INTERSECTION WITH LINE 1-2, AUGUSTUS CAESAR  
ASSOCIATION PLACER, M.S. 1314.

**TRAIL 26**  
FROM AP-1, THE INTERSECTION WITH LINE 3-4,  
DUCK BENCH, M.S. 1314, THENCE;  
S. 6°55' W. 259.50 FT. TO AP-2, THE  
INTERSECTION WITH LINE 7-8, BLARNEY STONE  
ASSOCIATION PLACER MINING CLAIM, M.S. 1879.

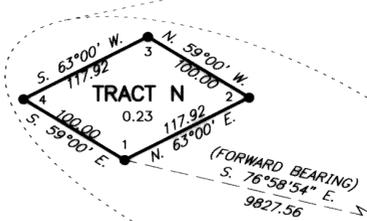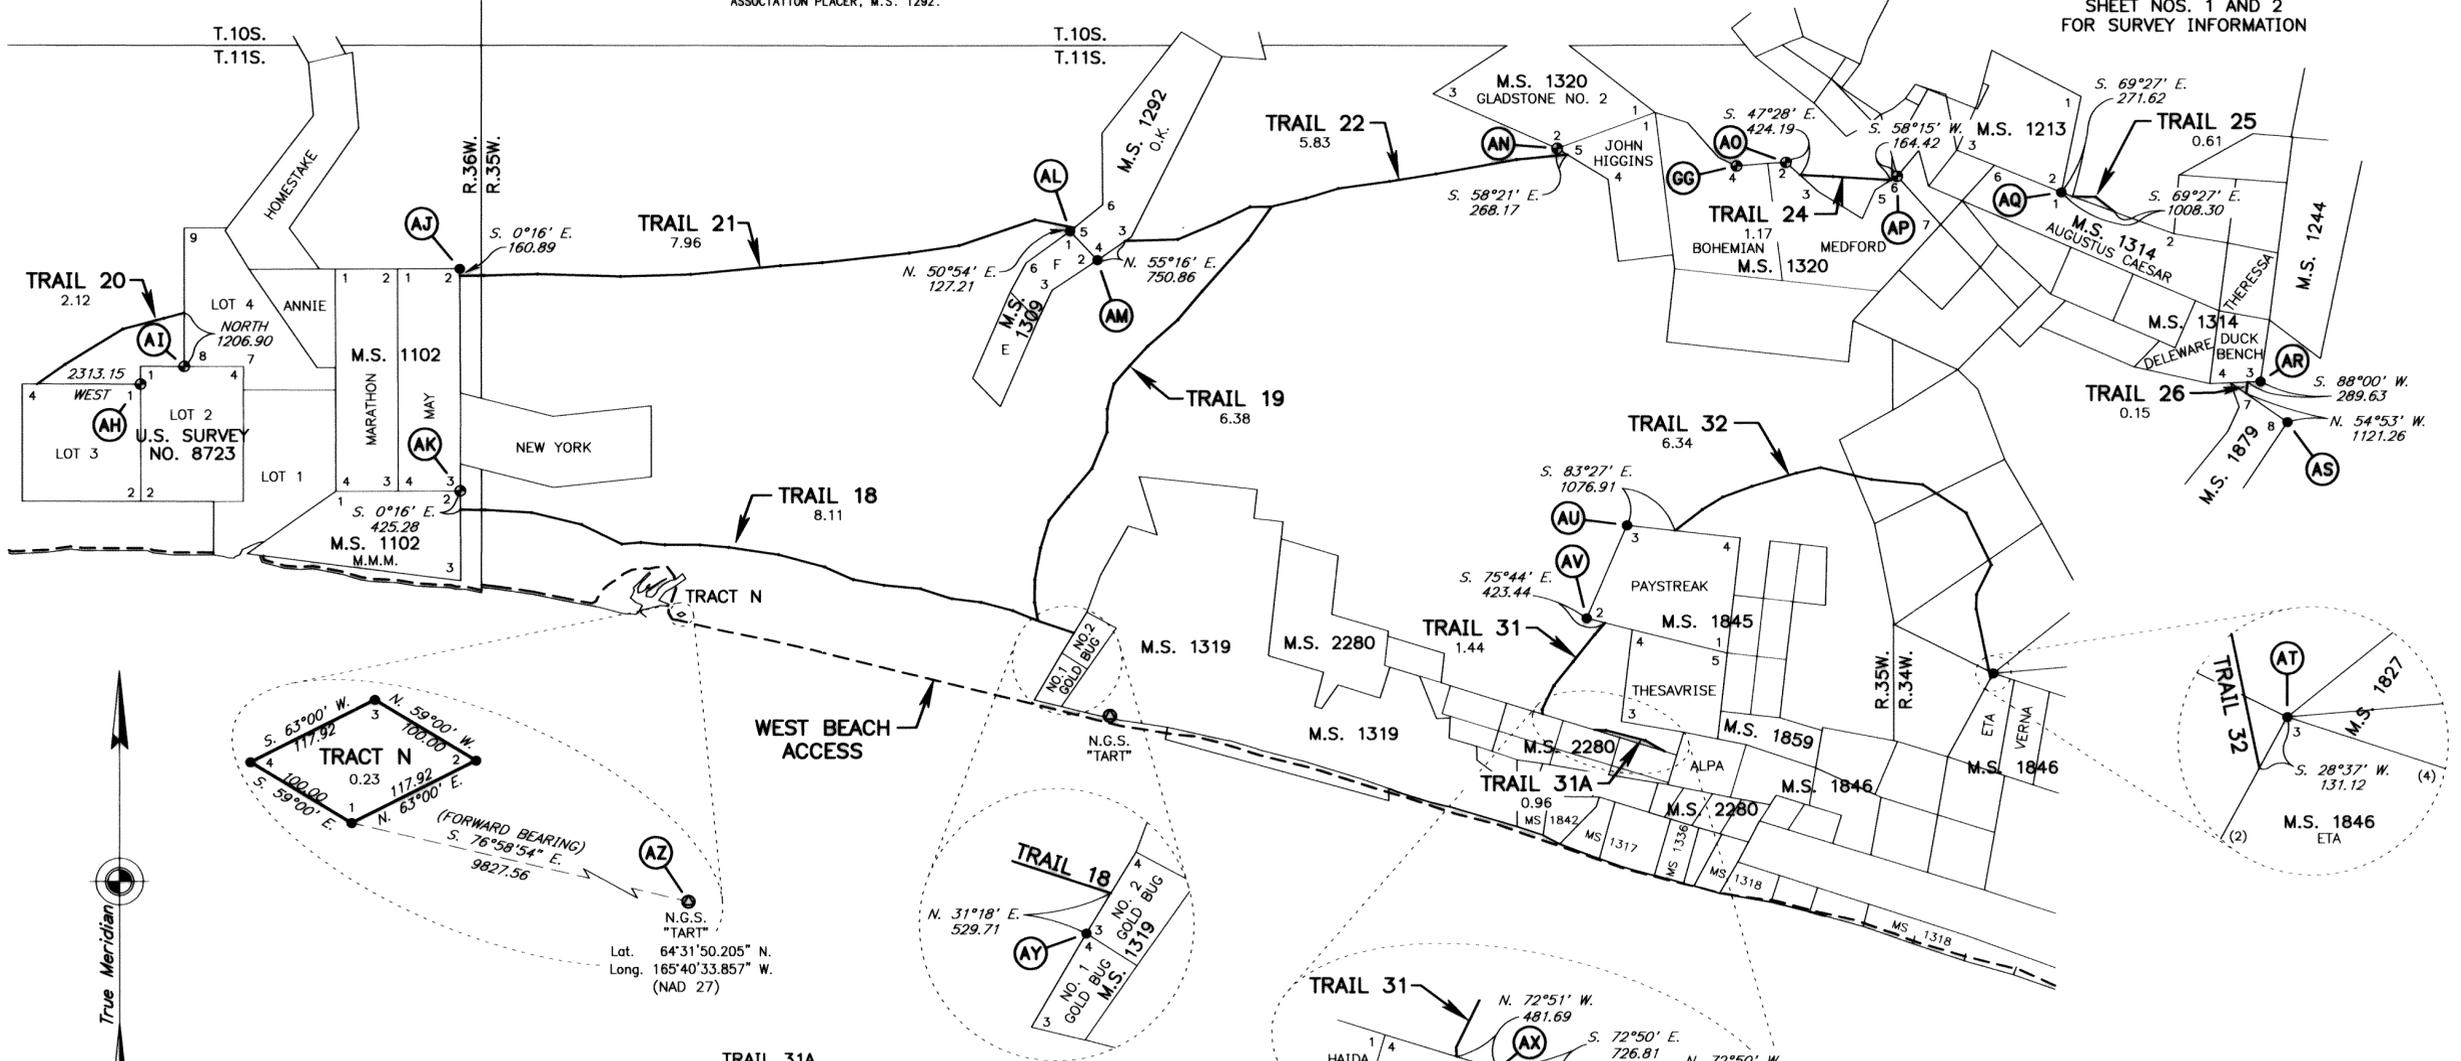

N.G.S. "TART"  
Lat. 64°31'50.205" N.  
Long. 165°40'33.857" W.  
(NAD 27)

**ACCESSORY TABLE**  
**TRACT N**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER	N. 18° E.	10.00 ft.
	ORANGE	N. 72° W.	10.00 ft.
2	BLUE	S. 18° W.	10.00 ft.
	ORANGE	N. 72° W.	10.00 ft.
3	BLUE	S. 18° W.	10.00 ft.
	ORANGE	N. 72° W.	10.00 ft.
4	SILVER	N. 18° E.	10.00 ft.
	PINK	S. 72° E.	10.00 ft.


**WEST BEACH ACCESS NOTE:**  
WEST BEACH ACCESS EASEMENT SHOWN FOR DEDICATION PURPOSES ONLY. A CORRIDOR, 60 FEET WIDE, ALONG AND PARALLEL TO THE LINE OF MEAN HIGH TIDE, SUBJECT TO VALID EXISTING RIGHTS, WHERE GRANTOR'S LAND IS RESTRICTED TO LESS THAN 60 FEET WIDE BETWEEN THE LINE OF MEAN HIGH TIDE AND THE NORTHERN BOUNDARY OF GRANTOR'S LAND. THE NORTHERN EXTENT OF THIS EASEMENT SHALL COINCIDE WITH THE NORTHERN BOUNDARY OF GRANTOR'S LAND. EASEMENT DEED RECORDED AT CAPE NOME RECORDING DISTRICT, BOOK 348, PAGE 429.

**TRAIL 31A**  
FROM AP-1, THE INTERSECTION WITH LINE 4-1,  
SANDPIPER, M.S. 2280, THENCE;  
N. 60°35' W. 499.89 FT. TO AP-2, THENCE;  
N. 75°14' W. 904.54 FT. TO AP-3, THENCE;  
N. 87°57' W. 280.95 FT. TO AP-4, THE  
INTERSECTION WITH LINE 4-1, KILLDEER,  
M.S. 2280.

**TRAIL 31**  
FROM AP-1, THE INTERSECTION WITH LINE 4-1,  
TLINGIT, M.S. 2280, THENCE;  
N. 3°14' W. 102.27 FT. TO AP-2, THENCE;  
N. 26°09' E. 594.42 FT. TO AP-3, THENCE;  
N. 38°48' E. 685.72 FT. TO AP-4, THENCE;  
N. 38°30' E. 778.72 FT. TO AP-5, THENCE;  
N. 40°45' E. 352.06 FT. TO AP-6, THE  
INTERSECTION WITH LINE 1-2, THE PAYSTREAK  
ASSOCIATION PLACER MINING CLAIM, M.S. 1845.

**TRAIL 32**  
FROM AP-1, THE INTERSECTION WITH LINE 3-4,  
THE PAYSTREAK ASSOCIATION PLACER MINING CLAIM,  
M.S. 1845, THENCE;  
N. 52°23' E. 774.20 FT. TO AP-2, THENCE;  
N. 58°13' E. 543.80 FT. TO AP-3, THENCE;  
N. 69°37' E. 685.50 FT. TO AP-4, THENCE;  
N. 73°29' E. 1047.02 FT. TO AP-5, THENCE;  
N. 77°25' E. 542.91 FT. TO AP-6, THENCE;  
S. 76°35' E. 1172.27 FT. TO AP-7, THENCE;  
S. 84°03' E. 1149.83 FT. TO AP-8, THENCE;  
S. 56°37' E. 1164.49 FT. TO AP-9, THENCE;  
S. 25°38' E. 1296.37 FT. TO AP-10, THENCE;  
S. 26°33' W. 750.15 FT. TO AP-11, THENCE;  
S. 1°32' W. 331.86 FT. TO AP-12, THENCE;  
S. 11°29' E. 1586.08 FT. TO AP-13, THE  
INTERSECTION WITH LINE 2-3, ETA ASSOCIATION  
PLACER, M.S. 1846.

**TRAILS NOTE:**  
TRAILS CONSIST OF A 25 FOOT WIDE RIGHT-OF-WAY, 12.5 FEET ON EACH SIDE OF THE PLATTED CENTERLINE. THE CENTERLINES OF THE TRAILS DEPICTED ON THIS PLAT HAVE NOT BEEN SURVEYED OR MONUMENTED. THE INFORMATIONAL CALLS TO THE CENTERLINE OF SAID TRAILS WERE DIGITIZED FROM THE MAP OF BOUNDARIES PROVIDED BY SITNASUAK NATIVE CORPORATION AND EXIST AS A PAPER PLAT ONLY. THE DEPICTION OF THESE TRAILS AS A PAPER PLAT IS BASED UPON AN AGREEMENT BETWEEN THE CITY OF NOME AND SITNASUAK NATIVE CORPORATION.



Name 2005-3  
**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- N.G.S. TRIANGULATION STATION MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.




ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1 AND 2  
FOR SURVEY INFORMATION

**NOTE:**

TRAILS CONSIST OF A 25 FOOT WIDE RIGHT-OF-WAY, 12.5 FEET ON EACH SIDE OF THE PLATTED CENTERLINE. THE CENTERLINES OF THE TRAILS DEPICTED ON THIS PLAT HAVE NOT BEEN SURVEYED OR MONUMENTED. THE INFORMATIONAL CALLS TO THE CENTERLINE OF SAID TRAILS WERE DIGITIZED FROM THE MAP OF BOUNDARIES PROVIDED BY SITNASUAK NATIVE CORPORATION AND EXIST AS A PAPER PLAT ONLY. THE DEPICTION OF THESE TRAILS AS A PAPER PLAT IS BASED UPON AN AGREEMENT BETWEEN THE CITY OF NOME AND SITNASUAK NATIVE CORPORATION.

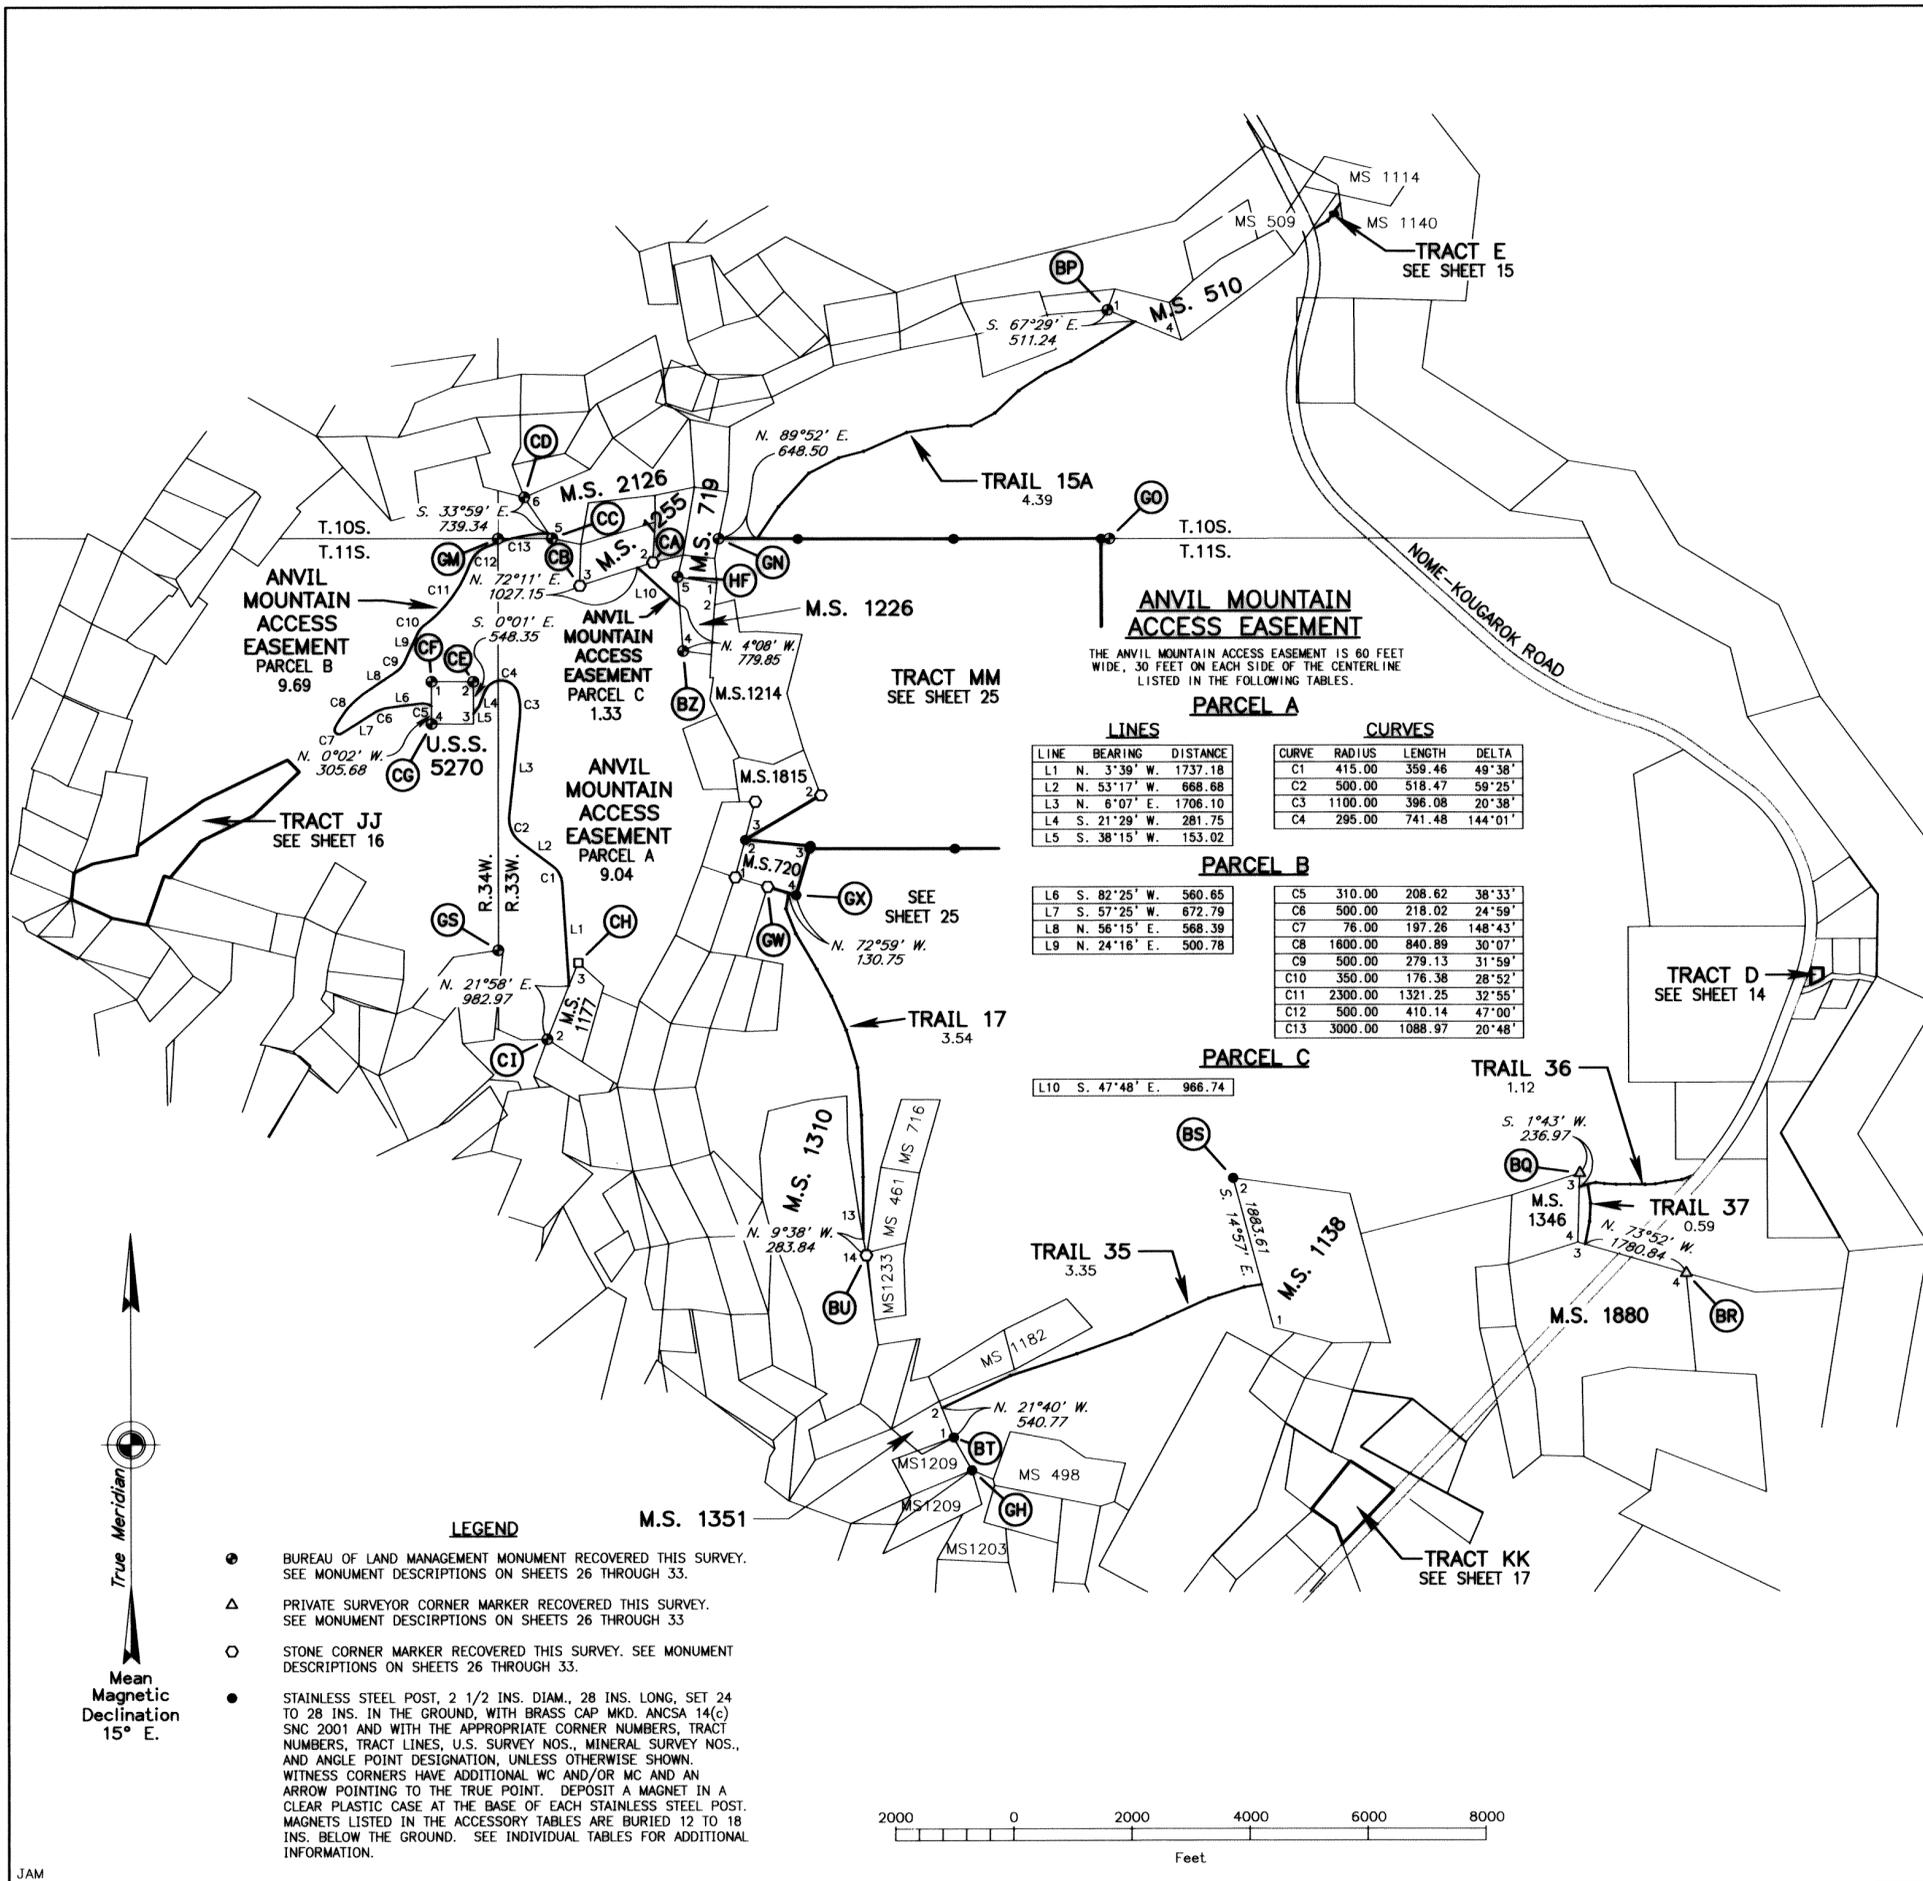

**ANVIL MOUNTAIN ACCESS EASEMENT**  
THE ANVIL MOUNTAIN ACCESS EASEMENT IS 60 FEET WIDE, 30 FEET ON EACH SIDE OF THE CENTERLINE LISTED IN THE FOLLOWING TABLES.

LINES			CURVES			
LINE	BEARING	DISTANCE	CURVE	RADIUS	LENGTH	DELTA
L1	N. 3°39' W.	1737.18	C1	415.00	359.46	49°38'
L2	N. 53°17' W.	668.68	C2	500.00	518.47	59°25'
L3	N. 6°07' E.	1706.10	C3	1100.00	396.08	20°38'
L4	S. 21°29' W.	281.75	C4	295.00	741.48	144°01'
L5	S. 38°15' W.	153.02				

PARCEL B			CURVES			
LINE	BEARING	DISTANCE	CURVE	RADIUS	LENGTH	DELTA
L6	S. 82°25' W.	560.85	C5	310.00	208.62	38°33'
L7	S. 57°25' W.	672.79	C6	500.00	218.02	24°59'
L8	N. 56°15' E.	968.39	C7	76.00	197.26	148°43'
L9	N. 24°16' E.	500.78	C8	1600.00	840.89	30°07'
			C9	500.00	279.13	31°59'
			C10	350.00	176.38	28°52'
			C11	2300.00	1321.25	32°55'
			C12	500.00	410.14	47°00'
			C13	3000.00	1088.97	20°48'

PARCEL C	
LINE	DISTANCE
L10	S. 47°48' E. 966.74

**TRAIL 15A**  
FROM AP-1, THE INTERSECTION WITH LINE 4-1, NO. 4 DEXTER CREEK, M.S. 510, THENCE;  
S. 57°00' W. 661.94 FT. TO AP-2, THENCE;  
S. 58°36' W. 621.82 FT. TO AP-3, THENCE;  
S. 65°18' W. 472.65 FT. TO AP-4, THENCE;  
S. 56°20' W. 549.12 FT. TO AP-5, THENCE;  
S. 46°53' W. 553.80 FT. TO AP-6, THENCE;  
S. 61°42' W. 459.41 FT. TO AP-7, THENCE;  
S. 89°28' W. 392.73 FT. TO AP-8, THENCE;  
S. 81°09' W. 704.39 FT. TO AP-9, THENCE;  
S. 66°12' W. 799.19 FT. TO AP-10, THENCE;  
S. 75°19' W. 436.16 FT. TO AP-11, THENCE;  
S. 62°38' W. 573.27 FT. TO AP-12, THENCE;  
S. 41°54' W. 769.22 FT. TO AP-13, THENCE;  
S. 33°50' W. 658.39 FT. TO AP-14, THE INTERSECTION WITH THE NORTH LINE OF TRACT MM, IDENTICAL WITH THE TOWNSHIP LINE COMMON TO SECS. 6 AND 31, TPS. 10 AND 11 S., RS. 33 W.


**TRAIL 17**  
FROM AP-1, THE INTERSECTION OF THE LINE FROM COR. NO. 4, NORTH STAR PLACER, M.S. 720 TO COR. NO. 3, NO. 6 ABOVE BENCH PLACER, M.S. 1876, THENCE;  
S. 10°08' W. 271.69 FT. TO AP-2, THENCE;  
S. 21°49' E. 457.76 FT. TO AP-3, THENCE;  
S. 30°44' E. 696.60 FT. TO AP-4, THENCE;  
S. 28°03' E. 518.11 FT. TO AP-5, THENCE;  
S. 23°20' E. 629.33 FT. TO AP-6, THENCE;  
S. 16°29' E. 865.03 FT. TO AP-7, THENCE;  
S. 4°43' E. 815.63 FT. TO AP-8, THENCE;  
S. 1°20' E. 1058.86 FT. TO AP-9, THENCE;  
S. 0°10' E. 1056.73 FT. TO AP-10, THE INTERSECTION WITH LINE 13-14, GREAT WESTERN GROUP CLAIM PLACER, M.S. 1310.

**TRAIL 35**  
FROM AP-1, THE INTERSECTION WITH LINE 1-2, LAURA BENCH CLAIM, M.S. 1351, THENCE;  
N. 64°53' E. 1283.24 FT. TO AP-2, THENCE;  
N. 71°47' E. 1190.13 FT. TO AP-3, THENCE;  
N. 70°09' E. 983.69 FT. TO AP-4, THENCE;  
N. 64°37' E. 676.01 FT. TO AP-5, THENCE;  
N. 65°39' E. 765.96 FT. TO AP-6, THENCE;  
N. 72°35' E. 632.16 FT. TO AP-7, THENCE;  
N. 81°21' E. 304.64 FT. TO AP-8, THE INTERSECTION WITH LINE 1-2, OWL ASSOCIATION PLACER CLAIM, M.S. 1138.

**TRAIL 36**  
FROM AP-1, THE INTERSECTION WITH LINE 3-4, M. COLLINS ON TRIPLE CREEK, M.S. 1346, THENCE;  
N. 72°12' E. 149.16 FT. TO AP-2, THENCE;  
N. 78°10' E. 139.55 FT. TO AP-3, THENCE;  
S. 82°15' E. 145.20 FT. TO AP-4, THENCE;  
S. 85°54' E. 197.28 FT. TO AP-5, THENCE;  
N. 89°47' E. 245.03 FT. TO AP-6, THENCE;  
S. 89°21' E. 248.75 FT. TO AP-7, THENCE;  
N. 87°23' E. 178.32 FT. TO AP-8, THENCE;  
N. 80°07' E. 176.98 FT. TO AP-9, THENCE;  
N. 81°14' E. 274.03 FT. TO AP-10, THENCE;  
N. 87°14' E. 203.88 FT. TO AP-11, THE INTERSECTION WITH THE WESTERLY RIGHT-OF-WAY LINE OF THE NOME-TAYLOR ROAD (APPROXIMATE STA. 252+18).

**TRAIL 37**  
FROM AP-1, IDENTICAL WITH AP-2, TRAIL 36, THENCE;  
S. 8°05' E. 329.77 FT. TO AP-2, THENCE;  
S. 3°01' W. 308.35 FT. TO AP-3, THENCE;  
S. 11°09' W. 400.51 FT. TO AP-4, THE INTERSECTION WITH LINE 3-4, EMPIRE ASSOCIATION PLACER MINING CLAIM, M.S. 1880.

- LEGEND**
- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
  - △ PRIVATE SURVEYOR CORNER MARKER RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
  - STONE CORNER MARKER RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
  - STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.



*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH PP, THE SUBDIVISION OF MINERAL SURVEY NOS. 2270, 2297 AND 2481, AND THE SUBDIVISION OF U.S. SURVEY NOS. 4107, 8734 AND 11683 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION AT NOME, ALASKA REFERENCE SHOULD BE MADE TO SHEET NOS. 1 AND 2 FOR SURVEY INFORMATION

NOTE:

TRAILS CONSIST OF A 25 FOOT WIDE RIGHT-OF-WAY, 12.5 FEET ON EACH SIDE OF THE PLATTED CENTERLINE. THE CENTERLINES OF THE TRAILS DEPICTED ON THIS PLAT HAVE NOT BEEN SURVEYED OR MONUMENTED. THE INFORMATIONAL CALLS TO THE CENTERLINE OF SAID TRAILS WERE DIGITIZED FROM THE MAP OF BOUNDARIES PROVIDED BY SITNASUAK NATIVE CORPORATION AND EXIST AS A PAPER PLAT ONLY. THE DEPICTION OF THESE TRAILS AS A PAPER PLAT IS BASED UPON AN AGREEMENT BETWEEN THE CITY OF NOME AND SITNASUAK NATIVE CORPORATION.

TRAIL 38

FROM AP-1, THE INTERSECTION WITH LINE 4-1, HIGHEST BID, M.S. 1220, THENCE; N. 60°00' E. 790.21 FT. TO AP-2, THENCE; N. 54°45' E. 757.47 FT. TO AP-3, THENCE; N. 41°58' E. 616.36 FT. TO AP-4, THE INTERSECTION WITH LINE 6-7, ALLIE BENCH ASSOCIATION PLACER MINING CLAIM, M.S. 1337.

TRAIL 39

FROM AP-1, THE INTERSECTION WITH LINE 5-6, ALLIE BENCH ASSOCIATION PLACER MINING CLAIM, M.S. 1337, THENCE; S. 24°11' W. 395.67 FT. TO AP-2, THENCE; S. 27°13' W. 608.52 FT. TO AP-3, IDENTICAL WITH AP-8, TRAIL 40.

TRAIL 40

FROM AP-1, THE INTERSECTION WITH LINE 4-1, HIGHEST BID, M.S. 1220, THENCE; S. 79°41' E. 515.47 FT. TO AP-2, THENCE; S. 84°13' E. 503.35 FT. TO AP-3, THENCE; S. 76°21' E. 452.42 FT. TO AP-4, THENCE; S. 72°09' E. 616.94 FT. TO AP-5, THENCE; S. 81°53' E. 112.70 FT. TO AP-6, THENCE; S. 71°39' E. 429.18 FT. TO AP-7, THENCE; N. 86°34' E. 376.64 FT. TO AP-8, THENCE; N. 88°23' E. 394.21 FT. TO AP-9, THENCE; N. 80°50' E. 440.69 FT. TO AP-10, THENCE; N. 73°02' E. 34.62 FT. TO AP-11, THE INTERSECTION WITH THE WESTERLY RIGHT-OF-WAY OF THE NOME-TAYLOR ROAD (APPROXIMATE STA. 81+81).

TRAIL 41A

FROM AP-1, THE INTERSECTION WITH LINE 2-3, NO. 4 ON OTTER CREEK PLACER, THENCE; N. 75°20' E. 74.60 FT. TO AP-2, THENCE; N. 68°43' E. 482.09 FT. TO AP-3, THENCE; N. 76°49' E. 1162.53 FT. TO AP-4, THENCE; N. 79°46' E. 716.22 FT. TO AP-5, THENCE; S. 62°34' E. 1108.26 FT. TO AP-6, THENCE; S. 37°36' E. 355.92 FT. TO AP-7, THENCE; S. 26°10' E. 1131.44 FT. TO AP-8, THENCE; S. 21°59' E. 733.36 FT. TO AP-9, THENCE; S. 1°31' W. 769.05 FT. TO AP-10, THENCE; S. 9°13' W. 493.32 FT. TO AP-11, THENCE; S. 14°18' W. 724.15 FT. TO AP-12, THENCE; S. 10°25' W. 273.19 FT. TO AP-13, THENCE; S. 5°27' W. 853.79 FT. TO AP-14, THENCE; S. 13°30' E. 722.38 FT. TO AP-15, THE INTERSECTION WITH THE RECORD MEANDERS OF THE RIGHT BANK OF THE NOME RIVER.

TRAIL 41B

FROM AP-1, THE INTERSECTION WITH LINE 1-2, LOT 7, U.S. SURVEY NO. 5270, THENCE; N. 55°49' W. 825.70 FT. TO AP-2, THENCE; N. 58°39' W. 770.46 FT. TO AP-3, THENCE; N. 54°49' W. 446.99 FT. TO AP-4, THENCE; N. 57°15' W. 260.89 FT. TO AP-5, THE INTERSECTION WITH THE RECORD MEANDERS OF THE LEFT BANK OF THE NOME RIVER.

TRAIL 42

FROM AP-1, THE INTERSECTION WITH LINE 4-5, LOT 7, U.S. SURVEY NO. 5270, THENCE; S. 64°19' E. 191.20 FT. TO AP-2, THENCE; S. 68°17' E. 370.72 FT. TO AP-3, THENCE; S. 68°06' E. 1047.39 FT. TO AP-4, THENCE; S. 80°25' E. 337.29 FT. TO AP-5, THENCE; S. 76°09' E. 640.06 FT. TO AP-6, THENCE; S. 83°04' E. 901.15 FT. TO AP-7, THENCE; S. 84°15' E. 816.20 FT. TO AP-8, THE INTERSECTION WITH LINE 4-5, MAINE NO. 2, M.S. 1131.

TRAIL 43

FROM AP-1, IDENTICAL WITH AP-2, TRAIL 42, THENCE; N. 59°19' E. 569.03 FT. TO AP-2, THENCE; N. 73°03' E. 1695.24 FT. TO AP-3, THENCE; N. 67°52' E. 695.34 FT. TO AP-4, THENCE; N. 68°16' E. 989.63 FT. TO AP-5, THENCE; N. 53°32' E. 946.02 FT. TO AP-6, THENCE; N. 46°29' E. 818.66 FT. TO AP-7, THENCE; N. 49°41' E. 583.51 FT. TO AP-8, THENCE; N. 54°48' E. 1375.66 FT. TO AP-9, THENCE; N. 63°09' E. 640.15 FT. TO AP-10, THENCE; N. 63°33' E. 427.89 FT. TO AP-11, THENCE; N. 67°07' E. 605.09 FT. TO AP-12, THENCE; N. 89°33' E. 351.71 FT. TO AP-13, THENCE; S. 15°44' E. 1172.67 FT. TO AP-14, THENCE; S. 7°07' W. 1466.04 FT. TO AP-15, THENCE; S. 10°44' W. 1251.42 FT. TO AP-16, THENCE; S. 8°58' W. 390.58 FT. TO AP-17, THE INTERSECTION WITH LINE 3-4, CONNECTICUT, M.S. 1131.

TRAIL 44A

FROM AP-1, THE INTERSECTION WITH LINE 4-5, ROBYN CLAIM, M.S. 2316, THENCE; S. 65°55' E. 595.22 FT. TO AP-2, THENCE; S. 67°57' E. 161.28 FT. TO AP-3, THE INTERSECTION WITH LINE 4-1, DONNA MARIA, M.S. 2328.

TRAIL 44B

FROM AP-1, THE INTERSECTION WITH LINE 1-2, DONNA MARIA, M.S. 2328, THENCE; S. 67°57' E. 128.33 FT. TO AP-2, THENCE; S. 70°44' E. 108.75 FT. TO AP-3, THE INTERSECTION WITH THE WESTERLY RIGHT-OF-WAY OF THE NOME-TAYLOR ROAD (APPROXIMATE STA. 4+97).

TRAIL 44C

FROM AP-1, THE INTERSECTION WITH THE EASTERLY RIGHT-OF-WAY OF THE NOME-TAYLOR ROAD (APPROXIMATE STA. 5+33), THENCE; S. 70°44' E. 19.95 FT. TO AP-2, THENCE; S. 67°08' E. 1105.96 FT. TO AP-3, THENCE; S. 72°01' E. 977.80 FT. TO AP-4, THE INTERSECTION WITH LINE 1-2, LOT 1, U.S. SURVEY NO. 3791.

TRAIL 45

FROM AP-1, THE INTERSECTION WITH THE SOUTHERLY RIGHT-OF-WAY OF THE NOME-COUNCIL ROAD (APPROXIMATE STA. 162+00), THENCE; S. 72°20' E. 169.96 FT. TO AP-2, THENCE; S. 78°58' E. 299.15 FT. TO AP-3, THENCE; S. 73°17' E. 276.06 FT. TO AP-4, THENCE; S. 67°24' E. 358.25 FT. TO AP-5, THENCE; S. 56°42' E. 107.22 FT. TO AP-6, THENCE; S. 75°08' E. 177.32 FT. TO AP-7, THE INTERSECTION WITH THE RECORD MEANDERS OF THE RIGHT BANK OF THE NOME RIVER.

TRAIL 46A

FROM AP-1, THE INTERSECTION WITH THE MEANDERS OF LOT 19, U.S. SURVEY NO. 11683 ALONG THE LEFT BANK OF THE NOME RIVER, THENCE; N. 71°49' W. 455.87 FT. TO AP-2, THE INTERSECTION WITH LINE 1-2, LOT 19, U.S. SURVEY NO. 11683.

TRAIL 46B



FROM AP-1, THE INTERSECTION WITH LINE 1-2, LOT 19, U.S. SURVEY NO. 11683, THENCE; S. 71°49' E. 848.10 FT. TO AP-2, THENCE; S. 74°46' E. 208.84 FT. TO AP-3, THE INTERSECTION WITH LINE 3-4, LOT 8, U.S. SURVEY NO. 11683.

TRAIL 47

FROM AP-1, THE INTERSECTION WITH THE NORTHERLY RIGHT-OF-WAY OF THE NOME-COUNCIL ROAD (APPROXIMATE STA. 107+36), THENCE; S. 74°46' E. 447.12 FT. TO AP-2, THENCE; S. 75°51' E. 2097.53 FT. TO AP-3, THENCE; S. 76°09' E. 1945.73 FT. TO AP-4, THE INTERSECTION WITH LINE 5-1, LOT 4, U.S. SURVEY NO. 5270.

TRAIL 49

FROM AP-1, THE INTERSECTION WITH LINE 1-2, HOMESTEAK BENCH PLACER, M.S. 1257, THENCE; N. 21°19' E. 1128.97 FT. TO AP-2, THENCE; N. 17°37' E. 1828.17 FT. TO AP-3, THENCE; N. 11°14' E. 797.31 FT. TO AP-4, THENCE; N. 4°14' E. 530.13 FT. TO AP-5, THENCE; N. 0°35' E. 207.61 FT. TO AP-6, THENCE; N. 2°26' W. 373.80 FT. TO AP-7, THENCE; N. 24°53' W. 435.35 FT. TO AP-8, THE INTERSECTION WITH LINE 2-3, YELLOWSTONE ASSOCIATION PLACER, M.S. 335.

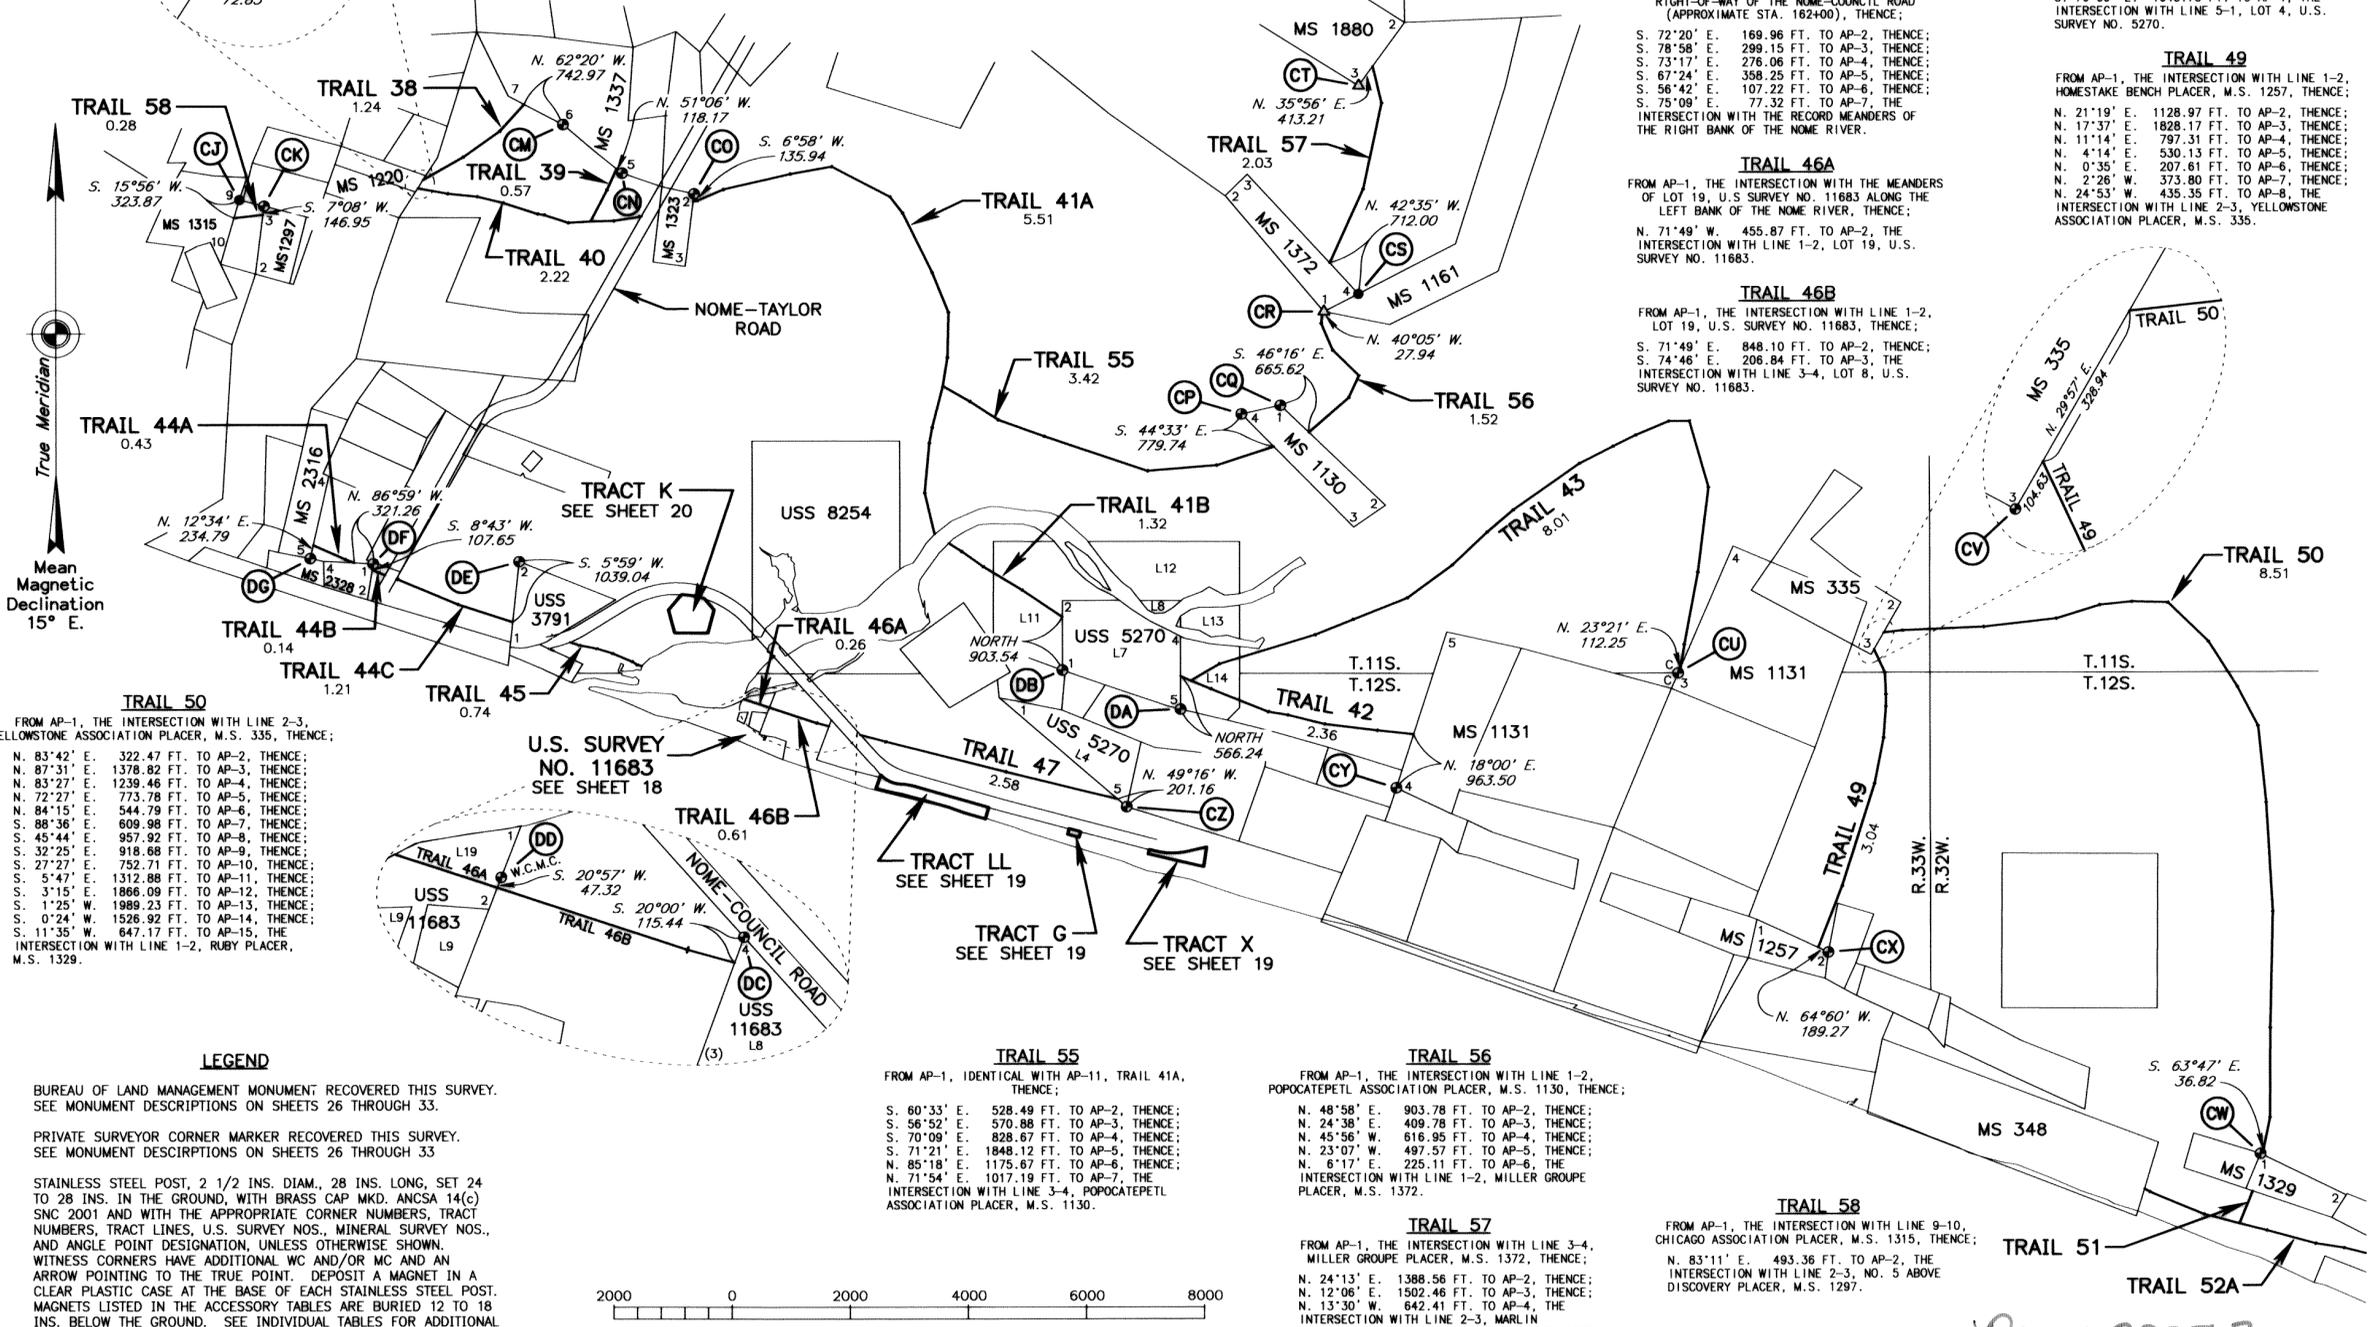


TRAIL 50 FROM AP-1, THE INTERSECTION WITH LINE 2-3, YELLOWSTONE ASSOCIATION PLACER, M.S. 335, THENCE; N. 83°42' E. 322.47 FT. TO AP-2, THENCE; N. 87°31' E. 1378.82 FT. TO AP-3, THENCE; N. 83°27' E. 1239.46 FT. TO AP-4, THENCE; N. 72°27' E. 773.78 FT. TO AP-5, THENCE; N. 84°15' E. 544.79 FT. TO AP-6, THENCE; S. 88°36' E. 609.98 FT. TO AP-7, THENCE; S. 45°44' E. 957.92 FT. TO AP-8, THENCE; S. 32°25' E. 918.66 FT. TO AP-9, THENCE; S. 27°27' E. 752.71 FT. TO AP-10, THENCE; S. 5°47' E. 1312.88 FT. TO AP-11, THENCE; S. 3°15' E. 1866.09 FT. TO AP-12, THENCE; S. 1°25' W. 1989.23 FT. TO AP-13, THENCE; S. 0°24' W. 1526.92 FT. TO AP-14, THENCE; S. 11°35' W. 647.17 FT. TO AP-15, THE INTERSECTION WITH LINE 1-2, RUBY PLACER, M.S. 1329.

TRAIL 55 FROM AP-1, IDENTICAL WITH AP-11, TRAIL 41A, THENCE; S. 60°33' E. 528.49 FT. TO AP-2, THENCE; S. 56°52' E. 570.88 FT. TO AP-3, THENCE; S. 70°09' E. 828.67 FT. TO AP-4, THENCE; S. 71°21' E. 1848.12 FT. TO AP-5, THENCE; N. 85°18' E. 1175.67 FT. TO AP-6, THENCE; N. 71°54' E. 1017.19 FT. TO AP-7, THE INTERSECTION WITH LINE 3-4, POPOCATEPETL ASSOCIATION PLACER, M.S. 1130.

TRAIL 56 FROM AP-1, THE INTERSECTION WITH LINE 1-2, POPOCATEPETL ASSOCIATION PLACER, M.S. 1130, THENCE; N. 48°58' E. 903.78 FT. TO AP-2, THENCE; N. 24°38' E. 409.78 FT. TO AP-3, THENCE; N. 45°56' W. 616.95 FT. TO AP-4, THENCE; N. 23°07' W. 497.57 FT. TO AP-5, THENCE; N. 6°17' E. 225.11 FT. TO AP-6, THE INTERSECTION WITH LINE 1-2, MILLER GROUPE PLACER, M.S. 1372.

TRAIL 57 FROM AP-1, THE INTERSECTION WITH LINE 3-4, MILLER GROUPE PLACER, M.S. 1372, THENCE; N. 24°13' E. 1388.56 FT. TO AP-2, THENCE; N. 12°06' E. 1502.46 FT. TO AP-3, THENCE; N. 13°30' W. 842.41 FT. TO AP-4, THE INTERSECTION WITH LINE 2-3, MARLIN ASSOCIATION PLACER MINING CLAIM, M.S. 1880.

LEGEND BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33. PRIVATE SURVEYOR CORNER MARKER RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33. STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.




Nome 2005-3

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1 AND 2  
FOR SURVEY INFORMATION

**NOTE:**  
TRAILS CONSIST OF A 25 FOOT WIDE RIGHT-OF-WAY, 12.5 FEET ON EACH SIDE OF THE PLATTED CENTERLINE. THE CENTERLINES OF THE TRAILS DEPICTED ON THIS PLAT HAVE NOT BEEN SURVEYED OR MONUMENTED. THE INFORMATIONAL CALLS TO THE CENTERLINE OF SAID TRAILS WERE DIGITIZED FROM THE MAP OF BOUNDARIES PROVIDED BY SITNASUAK NATIVE CORPORATION AND EXIST AS A PAPER PLAT ONLY. THE DEPICTION OF THESE TRAILS AS A PAPER PLAT IS BASED UPON AN AGREEMENT BETWEEN THE CITY OF NOME AND SITNASUAK NATIVE CORPORATION.

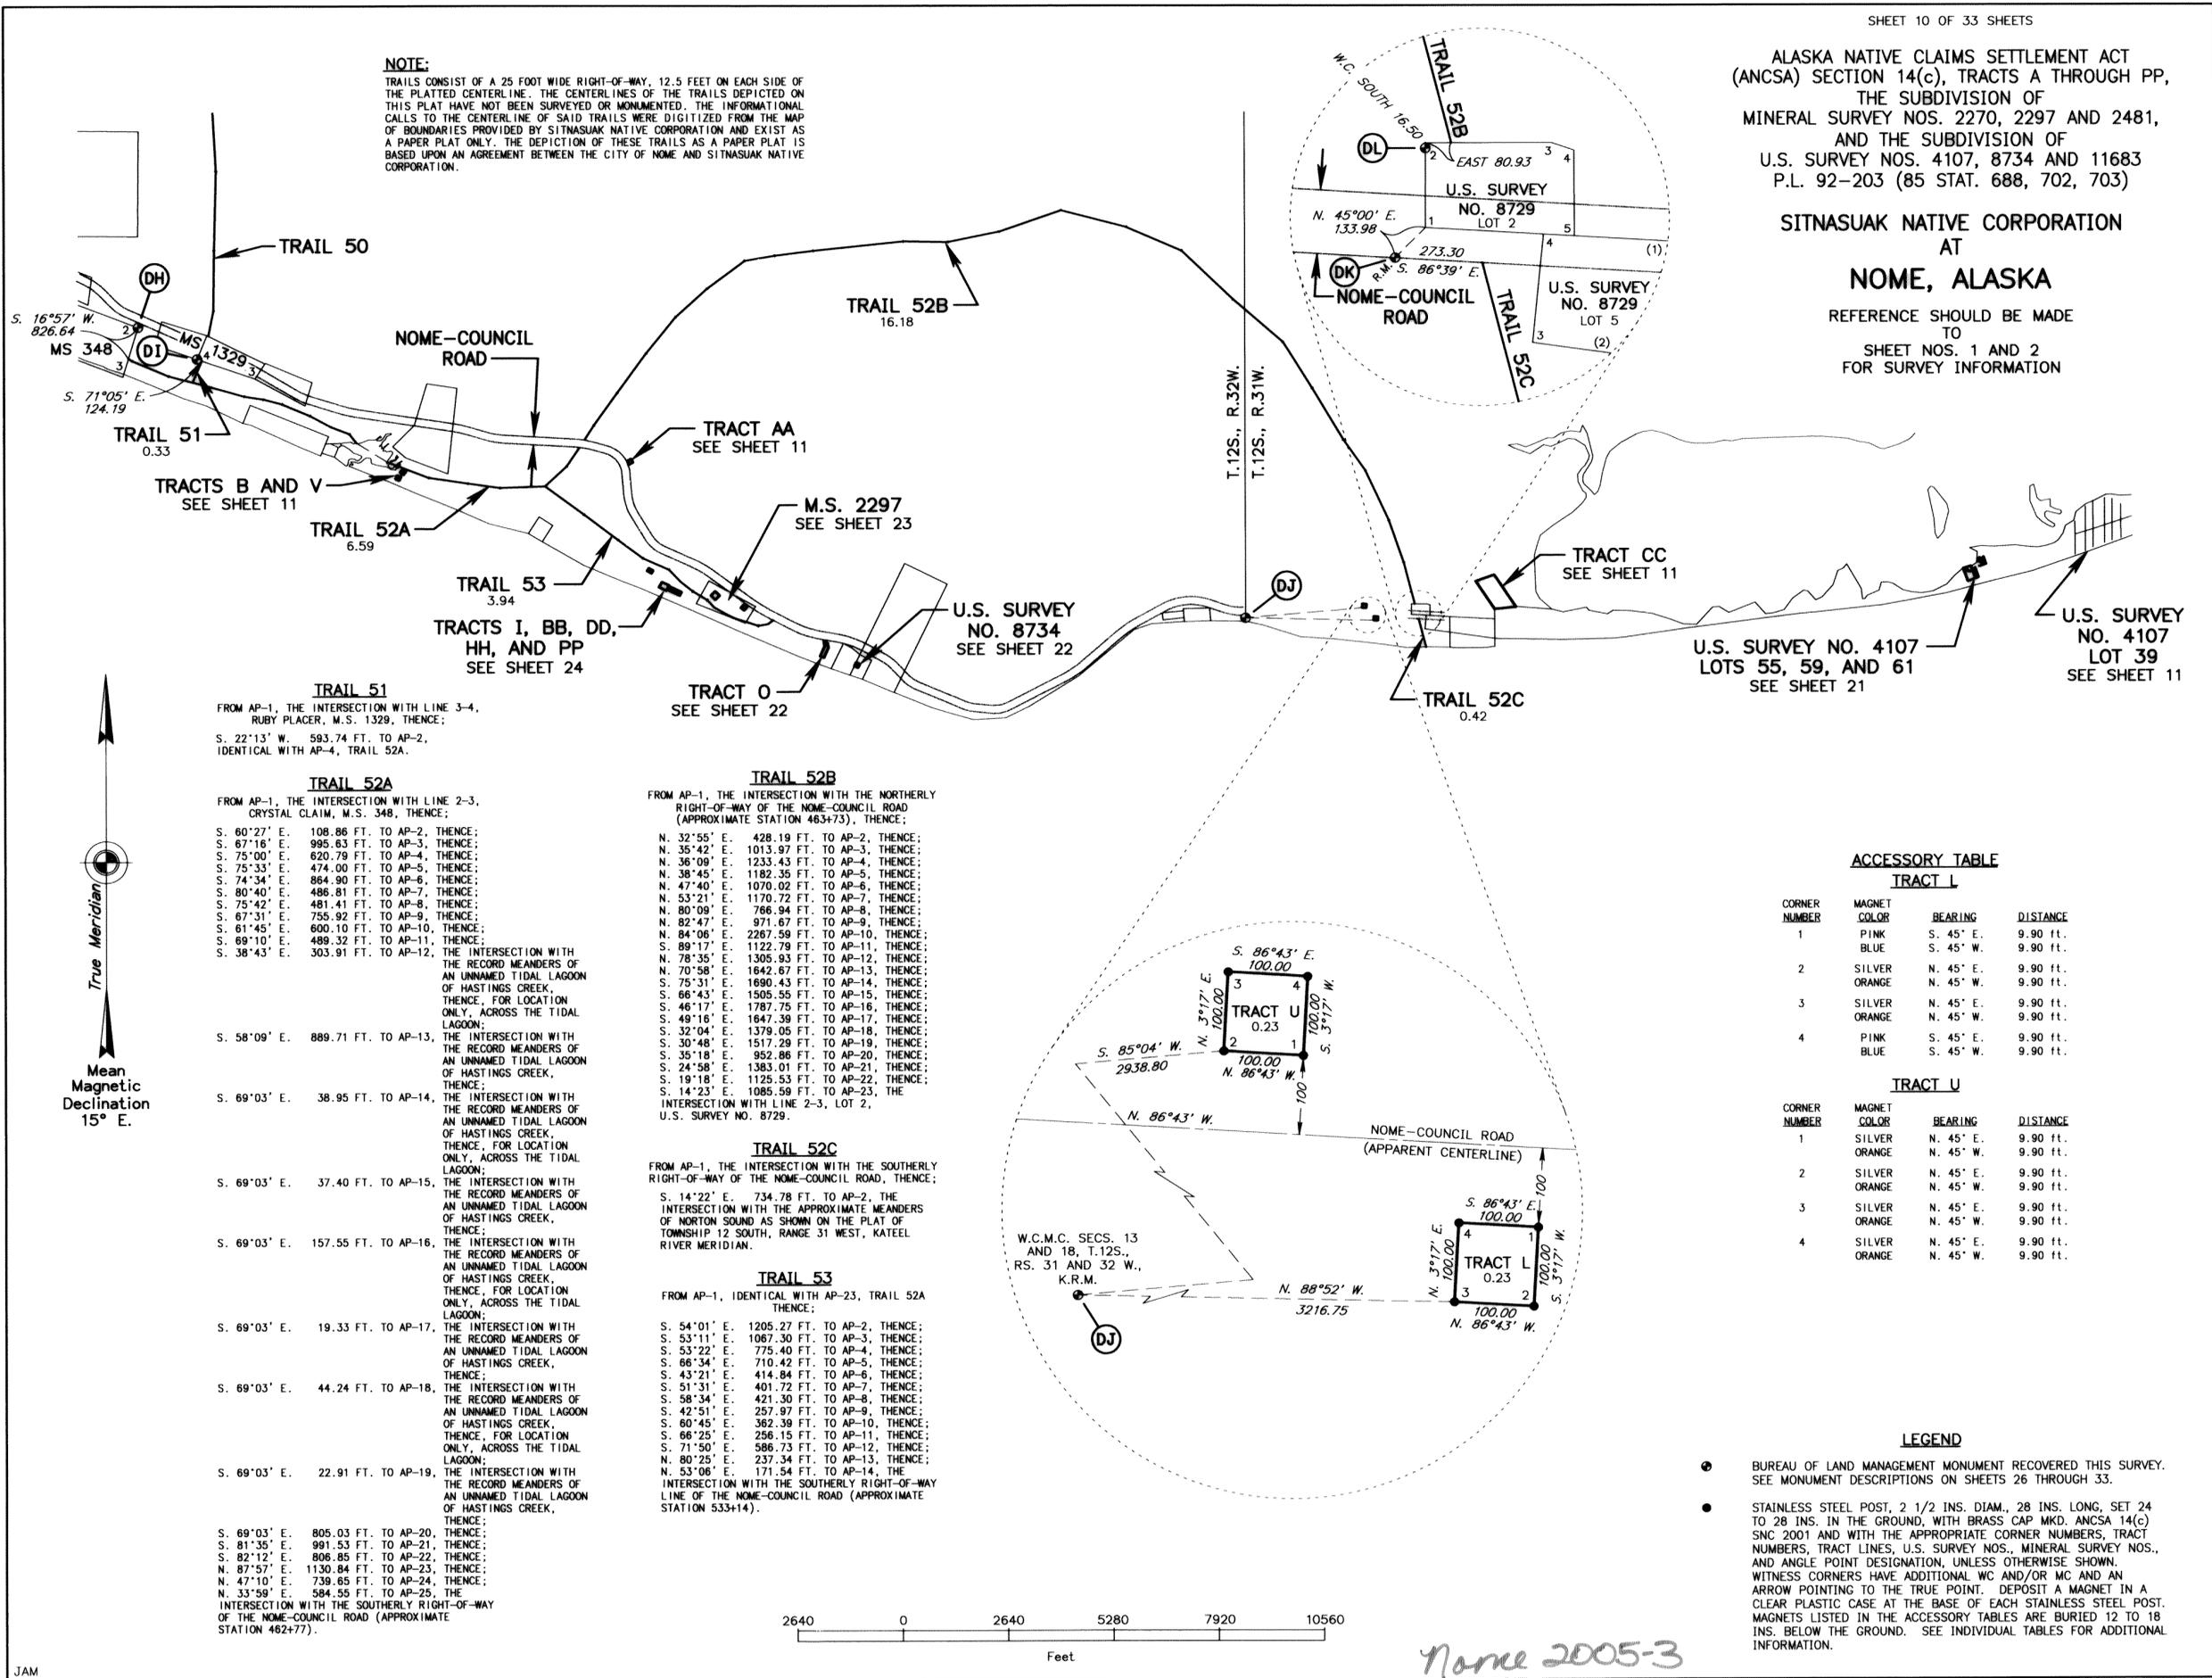

**TRAIL 51**  
FROM AP-1, THE INTERSECTION WITH LINE 3-4, RUBY PLACER, M.S. 1329, THENCE:  
S. 22°13' W. 593.74 FT. TO AP-2,  
IDENTICAL WITH AP-4, TRAIL 52A.

**TRAIL 52A**  
FROM AP-1, THE INTERSECTION WITH LINE 2-3, CRYSTAL CLAIM, M.S. 348, THENCE:  
S. 60°27' E. 108.86 FT. TO AP-2, THENCE;  
S. 67°16' E. 995.63 FT. TO AP-3, THENCE;  
S. 75°00' E. 620.79 FT. TO AP-4, THENCE;  
S. 75°33' E. 474.00 FT. TO AP-5, THENCE;  
S. 74°34' E. 864.90 FT. TO AP-6, THENCE;  
S. 80°40' E. 486.81 FT. TO AP-7, THENCE;  
S. 75°42' E. 481.41 FT. TO AP-8, THENCE;  
S. 67°31' E. 755.92 FT. TO AP-9, THENCE;  
S. 61°45' E. 600.10 FT. TO AP-10, THENCE;  
S. 69°10' E. 489.32 FT. TO AP-11, THENCE;  
S. 38°43' E. 303.91 FT. TO AP-12,

THE INTERSECTION WITH THE RECORD MEANDERS OF AN UNNAMED TIDAL LAGOON OF HASTINGS CREEK, THENCE, FOR LOCATION ONLY, ACROSS THE TIDAL LAGOON;

S. 58°09' E. 889.71 FT. TO AP-13, THE INTERSECTION WITH THE RECORD MEANDERS OF AN UNNAMED TIDAL LAGOON OF HASTINGS CREEK, THENCE, FOR LOCATION ONLY, ACROSS THE TIDAL LAGOON;

S. 69°03' E. 38.95 FT. TO AP-14, THE INTERSECTION WITH THE RECORD MEANDERS OF AN UNNAMED TIDAL LAGOON OF HASTINGS CREEK, THENCE, FOR LOCATION ONLY, ACROSS THE TIDAL LAGOON;

S. 69°03' E. 37.40 FT. TO AP-15, THE INTERSECTION WITH THE RECORD MEANDERS OF AN UNNAMED TIDAL LAGOON OF HASTINGS CREEK, THENCE;

S. 69°03' E. 157.55 FT. TO AP-16, THE INTERSECTION WITH THE RECORD MEANDERS OF AN UNNAMED TIDAL LAGOON OF HASTINGS CREEK, THENCE, FOR LOCATION ONLY, ACROSS THE TIDAL LAGOON;

S. 69°03' E. 19.33 FT. TO AP-17, THE INTERSECTION WITH THE RECORD MEANDERS OF AN UNNAMED TIDAL LAGOON OF HASTINGS CREEK, THENCE;

S. 69°03' E. 44.24 FT. TO AP-18, THE INTERSECTION WITH THE RECORD MEANDERS OF AN UNNAMED TIDAL LAGOON OF HASTINGS CREEK, THENCE, FOR LOCATION ONLY, ACROSS THE TIDAL LAGOON;

S. 69°03' E. 22.91 FT. TO AP-19, THE INTERSECTION WITH THE RECORD MEANDERS OF AN UNNAMED TIDAL LAGOON OF HASTINGS CREEK, THENCE;

S. 69°03' E. 805.03 FT. TO AP-20, THENCE;  
S. 81°35' E. 991.53 FT. TO AP-21, THENCE;  
S. 82°12' E. 806.85 FT. TO AP-22, THENCE;  
N. 87°57' E. 1130.84 FT. TO AP-23, THENCE;  
N. 47°10' E. 739.65 FT. TO AP-24, THENCE;  
N. 33°59' E. 584.55 FT. TO AP-25, THE INTERSECTION WITH THE SOUTHERLY RIGHT-OF-WAY OF THE NOME-COUNCIL ROAD (APPROXIMATE STATION 462+77).

**TRAIL 52B**  
FROM AP-1, THE INTERSECTION WITH THE NORTHERLY RIGHT-OF-WAY OF THE NOME-COUNCIL ROAD (APPROXIMATE STATION 463+73), THENCE:  
N. 32°55' E. 428.19 FT. TO AP-2, THENCE;  
N. 35°42' E. 1013.97 FT. TO AP-3, THENCE;  
N. 36°09' E. 1233.43 FT. TO AP-4, THENCE;  
N. 38°45' E. 1182.35 FT. TO AP-5, THENCE;  
N. 47°40' E. 1070.02 FT. TO AP-6, THENCE;  
N. 53°21' E. 1170.72 FT. TO AP-7, THENCE;  
N. 80°09' E. 766.94 FT. TO AP-8, THENCE;  
N. 82°47' E. 971.67 FT. TO AP-9, THENCE;  
N. 84°06' E. 2267.59 FT. TO AP-10, THENCE;  
S. 89°17' E. 1122.79 FT. TO AP-11, THENCE;  
N. 78°35' E. 1305.93 FT. TO AP-12, THENCE;  
N. 70°58' E. 1642.67 FT. TO AP-13, THENCE;  
S. 75°31' E. 1690.43 FT. TO AP-14, THENCE;  
S. 66°43' E. 1505.55 FT. TO AP-15, THENCE;  
S. 46°17' E. 1787.75 FT. TO AP-16, THENCE;  
S. 49°16' E. 1647.39 FT. TO AP-17, THENCE;  
S. 32°04' E. 1379.05 FT. TO AP-18, THENCE;  
S. 30°48' E. 1517.29 FT. TO AP-19, THENCE;  
S. 35°18' E. 952.86 FT. TO AP-20, THENCE;  
S. 24°58' E. 1383.01 FT. TO AP-21, THENCE;  
S. 19°18' E. 1125.53 FT. TO AP-22, THENCE;  
S. 14°23' E. 1085.59 FT. TO AP-23, THE INTERSECTION WITH LINE 2-3, LOT 2, U.S. SURVEY NO. 8729.

**TRAIL 52C**  
FROM AP-1, THE INTERSECTION WITH THE SOUTHERLY RIGHT-OF-WAY OF THE NOME-COUNCIL ROAD, THENCE;  
S. 14°22' E. 734.78 FT. TO AP-2, THE INTERSECTION WITH THE APPROXIMATE MEANDERS OF NORTON SOUND AS SHOWN ON THE PLAT OF TOWNSHIP 12 SOUTH, RANGE 31 WEST, KATEEL RIVER MERIDIAN.

**TRAIL 53**  
FROM AP-1, IDENTICAL WITH AP-23, TRAIL 52A THENCE:  
S. 54°01' E. 1205.27 FT. TO AP-2, THENCE;  
S. 53°11' E. 1067.30 FT. TO AP-3, THENCE;  
S. 53°22' E. 775.40 FT. TO AP-4, THENCE;  
S. 66°34' E. 710.42 FT. TO AP-5, THENCE;  
S. 43°21' E. 414.84 FT. TO AP-6, THENCE;  
S. 51°31' E. 401.72 FT. TO AP-7, THENCE;  
S. 58°34' E. 421.30 FT. TO AP-8, THENCE;  
S. 42°51' E. 257.97 FT. TO AP-9, THENCE;  
S. 60°45' E. 362.39 FT. TO AP-10, THENCE;  
S. 66°25' E. 256.15 FT. TO AP-11, THENCE;  
S. 71°50' E. 586.73 FT. TO AP-12, THENCE;  
N. 80°25' E. 237.34 FT. TO AP-13, THENCE;  
N. 53°06' E. 171.54 FT. TO AP-14, THE INTERSECTION WITH THE SOUTHERLY RIGHT-OF-WAY LINE OF THE NOME-COUNCIL ROAD (APPROXIMATE STATION 533+14).

**ACCESSORY TABLE**  
**TRACT L**


CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK	S. 45° E.	9.90 ft.
	BLUE	S. 45° W.	9.90 ft.
2	SILVER	N. 45° E.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
3	SILVER	N. 45° E.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
4	PINK	S. 45° E.	9.90 ft.
	BLUE	S. 45° W.	9.90 ft.

**TRACT U**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER	N. 45° E.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
2	SILVER	N. 45° E.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
3	SILVER	N. 45° E.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
4	SILVER	N. 45° E.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.

**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.







*Name 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
NOME, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1 AND 2  
FOR SURVEY INFORMATION

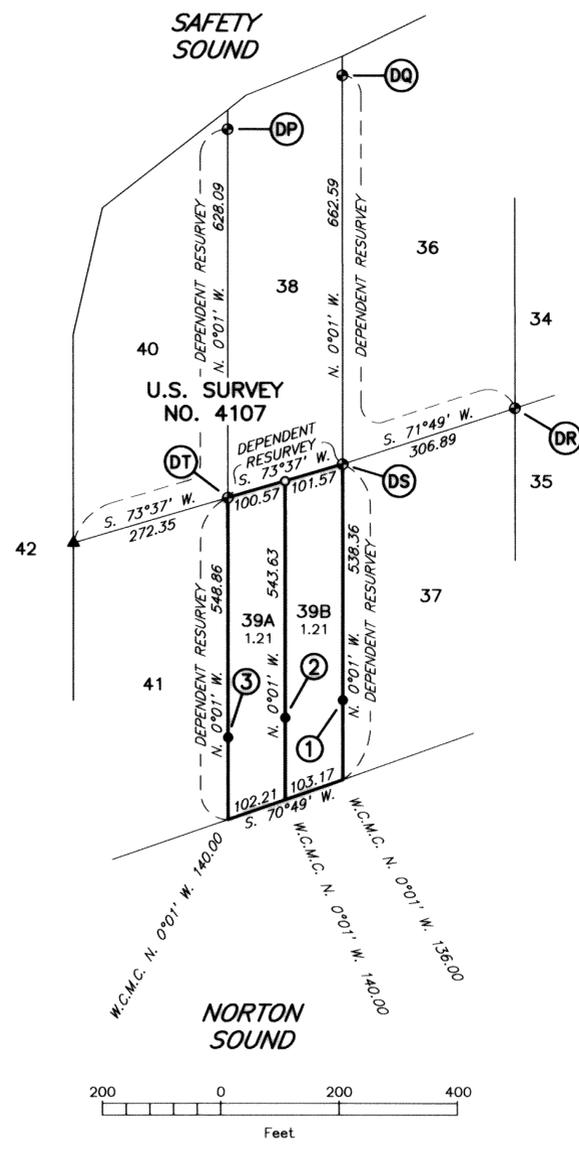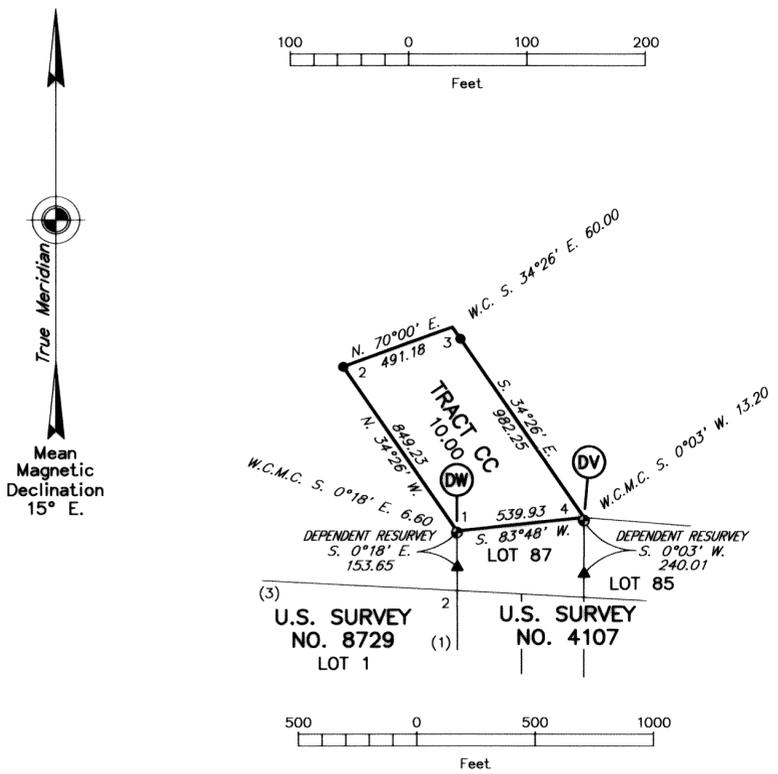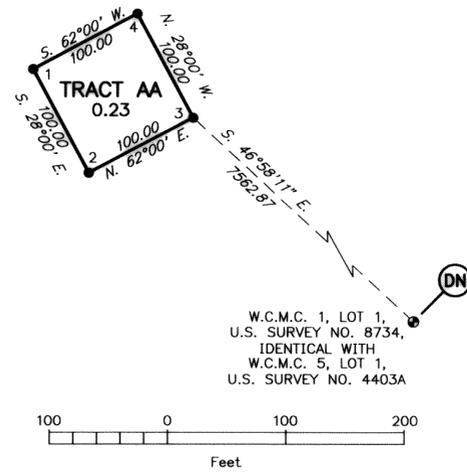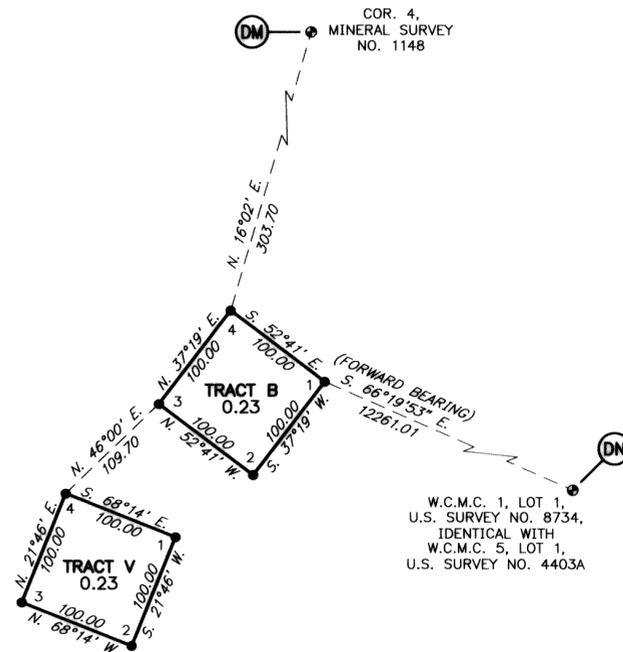

**ACCESSORY TABLE**  
**TRACT AA**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER	N. 17° E.	10.00 ft.
	PINK	S. 73° E.	10.00 ft.
2	SILVER	N. 17° E.	10.00 ft.
	PINK	S. 73° E.	10.00 ft.
3	BLUE	S. 17° W.	10.00 ft.
	ORANGE	N. 73° W.	10.00 ft.
4	BLUE	S. 17° W.	10.00 ft.
	ORANGE	N. 73° W.	10.00 ft.

**TRACT B**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK	S. 7 3/4° E.	10.00 ft.
	BLUE	S. 82 1/4° W.	10.00 ft.
2	SILVER	N. 82 1/4° E.	10.00 ft.
	ORANGE	N. 7 3/4° W.	10.00 ft.
3	SILVER	N. 82 1/4° E.	10.00 ft.
	PINK	S. 7 3/4° E.	10.00 ft.
4	PINK	S. 7 3/4° E.	10.00 ft.
	BLUE	S. 82 1/4° W.	10.00 ft.

**TRACT V**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	BLUE	S. 67° W.	10.00 ft.
	ORANGE	N. 23° W.	10.00 ft.
2	SILVER	N. 67° E.	10.00 ft.
	ORANGE	N. 23° W.	10.00 ft.
3	SILVER	N. 67° E.	10.00 ft.
	ORANGE	N. 23° W.	10.00 ft.
4	SILVER	N. 66 3/4° E.	10.00 ft.
	PINK	S. 23 1/4° E.	10.00 ft.

**TRACT CC**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
2	PINK	S. 60° E.	10.00 ft.
	BLUE	S. 30° W.	10.00 ft.
3	PINK	S. 80° E.	10.00 ft.
	BLUE	S. 10° W.	10.00 ft.

**LOTS 39A AND 39B, U.S. SURVEY NO. 4107**

CORNER	MAGNET COLOR	BEARING	DISTANCE
①	SILVER	N. 45° E.	10.00 ft.
	ORANGE	N. 45° W.	10.00 ft.
②	SILVER	N. 45° E.	10.00 ft.
	ORANGE	N. 45° W.	10.00 ft.
③	SILVER	N. 45° E.	10.00 ft.
	ORANGE	N. 45° W.	10.00 ft.

**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- ▲ RECOVERED 1" DIAM. BLM IRON PIPE.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.
- SECONDARY MONUMENT

*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1 AND 2  
FOR SURVEY INFORMATION

**ACCESSORY TABLE  
TRACT Z**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
3	SILVER PINK	N. 45° E. S. 45° E.	10.00 ft. 10.00 ft.
4	BLUE ORANGE	S. 45° W. N. 45° W.	10.00 ft. 10.00 ft.

**TRACT EE**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	BLUE ORANGE	S. 45° W. N. 45° W.	10.00 ft. 10.00 ft.
2	SILVER PINK	N. 45° E. S. 45° E.	10.00 ft. 10.00 ft.

**ACCESSORY TABLE  
TRACT Q**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	BLUE ORANGE	S. 42° W. N. 48° W.	10.00 ft. 10.00 ft.
2	SILVER PINK	N. 48° E. S. 42° E.	10.00 ft. 10.00 ft.
3	SILVER ORANGE	N. 48° E. N. 42° W.	10.00 ft. 10.00 ft.
4	BLUE ORANGE	S. 48° W. N. 42° W.	10.00 ft. 10.00 ft.

**TRACT P**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK BLUE	S. 60° E. S. 30° W.	10.00 ft. 10.00 ft.
2	PINK BLUE	S. 60° E. S. 30° W.	10.00 ft. 10.00 ft.
3	SILVER ORANGE	N. 30° E. N. 60° W.	10.00 ft. 10.00 ft.
4	SILVER ORANGE	N. 30° E. N. 60° W.	10.00 ft. 10.00 ft.

**ACCESSORY TABLE  
TRACT GG**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER ORANGE	N. 45° E. N. 45° W.	10.00 ft. 10.00 ft.
2	SILVER PINK	N. 45° E. S. 45° E.	10.00 ft. 10.00 ft.
3	PINK BLUE	S. 45° E. S. 45° W.	10.00 ft. 10.00 ft.
4	BLUE ORANGE	S. 45° W. N. 45° W.	10.00 ft. 10.00 ft.

**TRACT S**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER ORANGE	N. 45° E. N. 45° W.	10.00 ft. 10.00 ft.
2	PINK BLUE	S. 45° E. S. 45° W.	10.00 ft. 10.00 ft.
3	PINK BLUE	S. 45° E. S. 45° W.	10.00 ft. 10.00 ft.
4	BLUE ORANGE	S. 45° W. N. 45° W.	10.00 ft. 10.00 ft.
5	SILVER PINK	N. 45° E. S. 45° E.	10.00 ft. 10.00 ft.

**ACCESSORY TABLE  
TRACT W**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	BLUE ORANGE	S. 11° W. N. 79° W.	10.00 ft. 10.00 ft.
2	SILVER PINK	N. 11° E. S. 79° E.	10.00 ft. 10.00 ft.
3	SILVER PINK	N. 11° E. S. 79° E.	10.00 ft. 10.00 ft.
4	BLUE ORANGE	S. 11° W. N. 79° W.	10.00 ft. 10.00 ft.

**ACCESSORY TABLE  
TRACT R**



CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	BLUE ORANGE	S. 0°11' W. N. 89°49' W.	10.00 ft. 10.00 ft.
2	SILVER ORANGE	N. 0°11' E. N. 89°49' W.	10.00 ft. 10.00 ft.
3	PINK BLUE	S. 89°49' E. S. 0°11' W.	10.00 ft. 10.00 ft.
4	PINK BLUE	S. 89°49' E. S. 0°11' W.	10.00 ft. 10.00 ft.

**ACCESSORY TABLE  
TRACT Y**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK BLUE	S. 45° E. S. 45° W.	10.00 ft. 10.00 ft.
2	SILVER ORANGE	N. 45° E. N. 45° W.	10.00 ft. 10.00 ft.
3	SILVER ORANGE	N. 45° E. N. 45° W.	10.00 ft. 10.00 ft.
4	SILVER PINK	N. 75° E. S. 15° E.	10.00 ft. 10.00 ft.



**VICINITY DIAGRAM  
SCALE: 1" = 1 MILE**

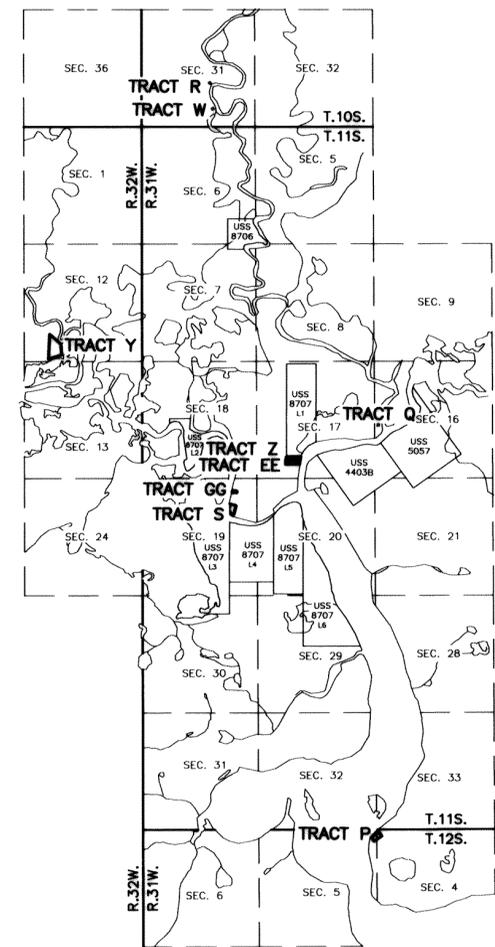


*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
 THE SUBDIVISION OF  
 MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
 AND THE SUBDIVISION OF  
 U.S. SURVEY NOS. 4107, 8734 AND 11683  
 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
 AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
 TO  
 SHEET NOS. 1 AND 2  
 FOR SURVEY INFORMATION

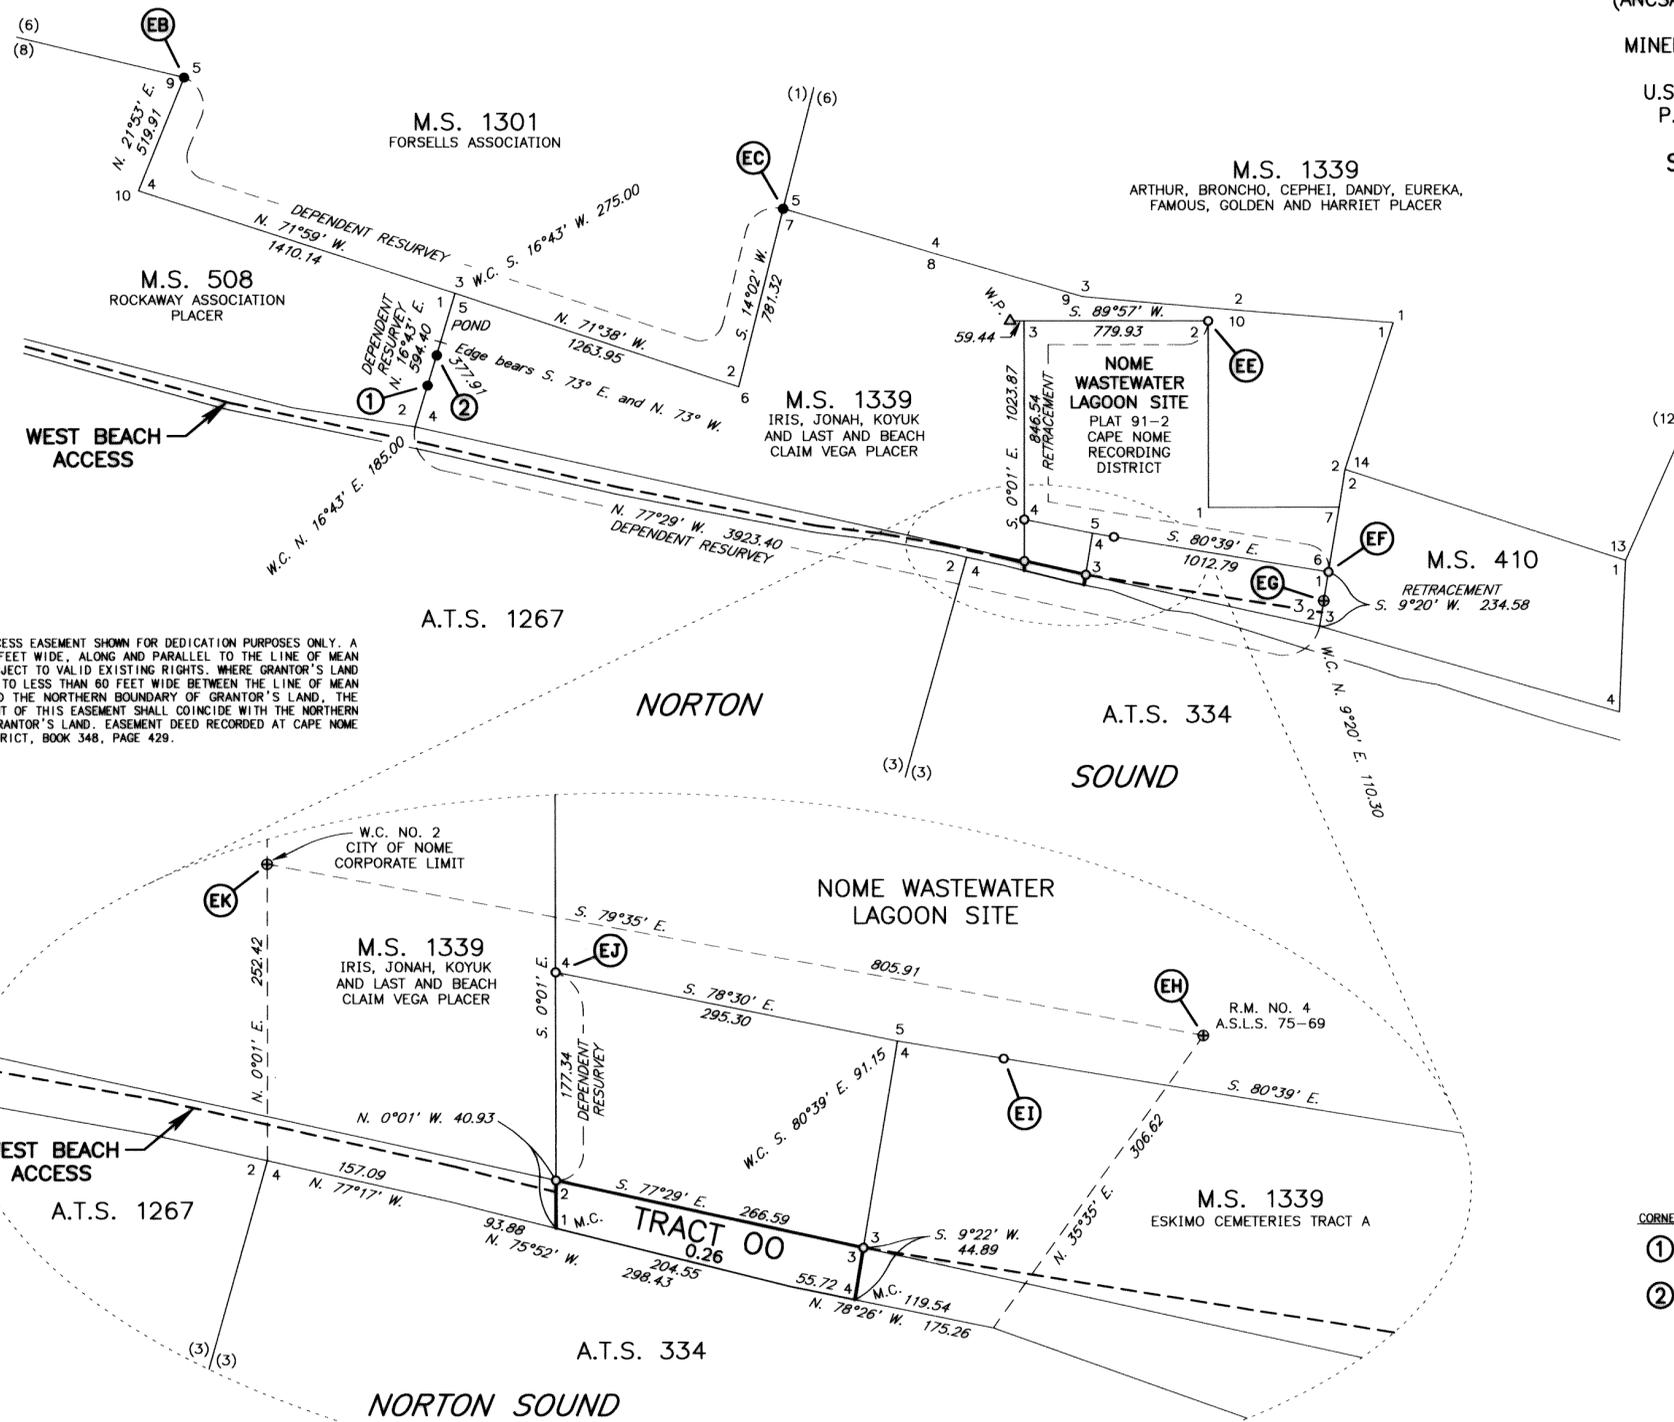


**NOTE:**  
 WEST BEACH ACCESS EASEMENT SHOWN FOR DEDICATION PURPOSES ONLY. A CORRIDOR, 60 FEET WIDE, ALONG AND PARALLEL TO THE LINE OF MEAN HIGH TIDE, SUBJECT TO VALID EXISTING RIGHTS. WHERE GRANTOR'S LAND IS RESTRICTED TO LESS THAN 60 FEET WIDE BETWEEN THE LINE OF MEAN HIGH TIDE AND THE NORTHERN BOUNDARY OF GRANTOR'S LAND, THE NORTHERN EXTENT OF THIS EASEMENT SHALL COINCIDE WITH THE NORTHERN BOUNDARY OF GRANTOR'S LAND. EASEMENT DEED RECORDED AT CAPE NOME RECORDING DISTRICT, BOOK 348, PAGE 429.



**ACCESSORY TABLE**

CORNER	MAGNET COLOR	BEARING	DISTANCE
①	SILVER	N. 45° E.	10.00 ft.
	ORANGE	N. 45° W.	10.00 ft.
②	PINK	S. 45° E.	10.00 ft.
	BLUE	S. 45° W.	10.00 ft.

- LEGEND**
- ⊕ PRIMARY MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
  - △ YELLOW PLASTIC CAP ON 5/8" REBAR RECOVERED THIS SURVEY.
  - STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.
  - SECONDARY MONUMENT.





*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
 THE SUBDIVISION OF  
 MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
 AND THE SUBDIVISION OF  
 U.S. SURVEY NOS. 4107, 8734 AND 11683  
 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
 AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
 TO  
 SHEET NOS. 1 AND 2  
 FOR SURVEY INFORMATION

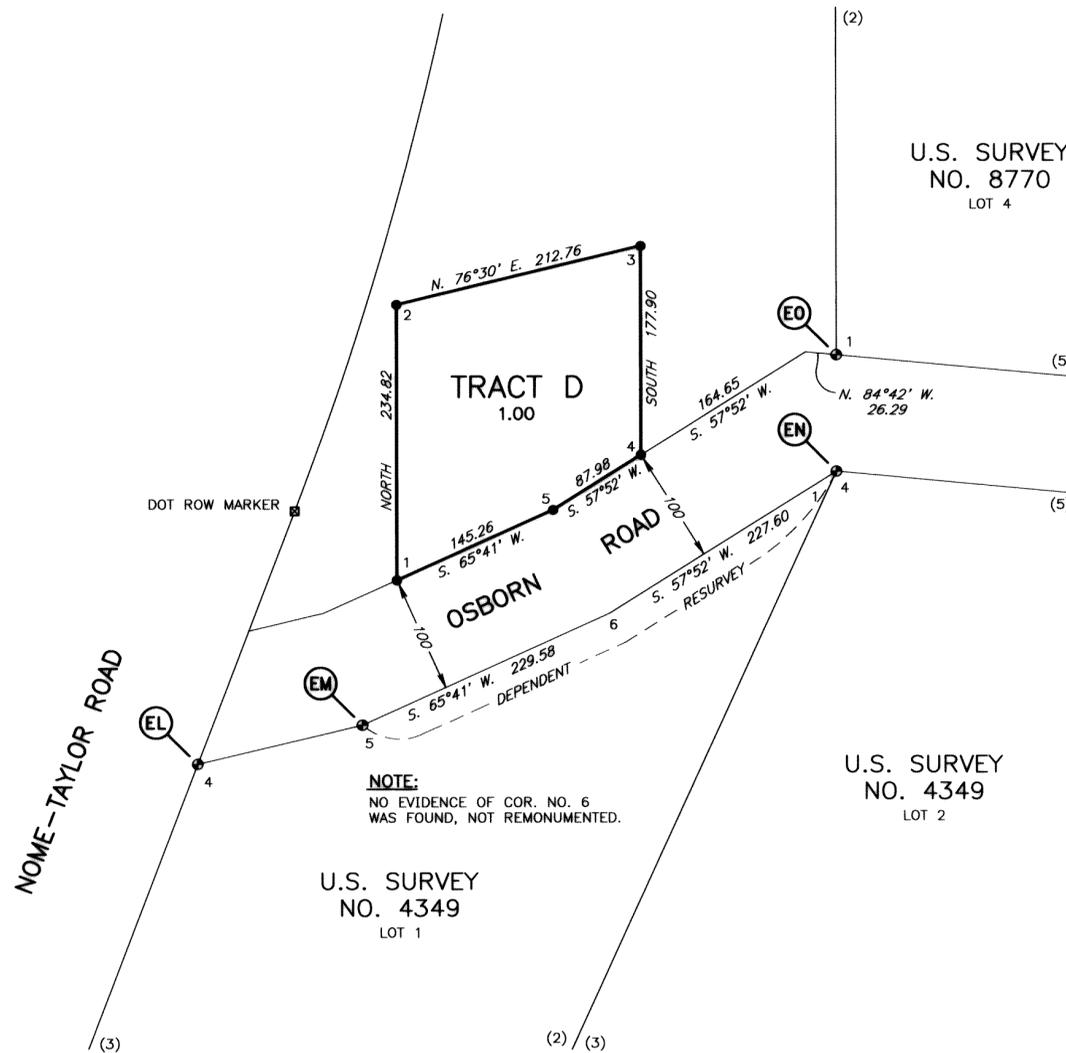

**ACCESSORY TABLE**  
**TRACT D**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER	N. 45° E.	10.00 ft.
	ORANGE	N. 45° W.	10.00 ft.
2	PINK	S. 45° E.	10.00 ft.
	BLUE	S. 45° W.	10.00 ft.
3	PINK	S. 45° E.	10.00 ft.
	BLUE	S. 45° W.	10.00 ft.
4	SILVER	N. 45° E.	10.00 ft.
	ORANGE	N. 45° W.	10.00 ft.
5	SILVER	N. 24° E.	10.00 ft.
	ORANGE	N. 66° W.	10.00 ft.

**NOTE:**  
 NO EVIDENCE OF COR. NO. 6  
 WAS FOUND, NOT REMONUMENTED.

**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- DEPARTMENT OF TRANSPORTATION HIGHWAY RIGHT-OF-WAY MARKER RECOVERED THIS SURVEY.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.

*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
 THE SUBDIVISION OF  
 MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
 AND THE SUBDIVISION OF  
 U.S. SURVEY NOS. 4107, 8734 AND 11683  
 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
 AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
 TO  
 SHEET NOS. 1 AND 2  
 FOR SURVEY INFORMATION

**NOTE:**

TRAILS CONSIST OF A 25 FOOT WIDE RIGHT-OF-WAY, 12.5 FEET ON EACH SIDE OF THE PLATTED CENTERLINE. THE CENTERLINES OF THE TRAILS DEPICTED ON THIS PLAT HAVE NOT BEEN SURVEYED OR MONUMENTED. THE INFORMATIONAL CALLS TO THE CENTERLINE OF SAID TRAILS WERE DIGITIZED FROM THE MAP OF BOUNDARIES PROVIDED BY SITNASUAK NATIVE CORPORATION AND EXIST AS A PAPER PLAT ONLY. THE DEPICTION OF THESE TRAILS AS A PAPER PLAT IS BASED UPON AN AGREEMENT BETWEEN THE CITY OF NOME AND SITNASUAK NATIVE CORPORATION.

**TRAIL 48A**

FROM AP-1, THE INTERSECTION WITH LINE 1-2,  
 NEW H ASSOCIATION PLACER MINING CLAIM,  
 M.S. 1140, THENCE:  
 S. 35°36' W. 185.05 FT. TO AP-2, THE  
 INTERSECTION WITH LINE 3-4, TRACT E.

**TRAIL 48B**


FROM AP-1, THE INTERSECTION WITH LINE 2-3,  
 TRACT E, THENCE:  
 S. 35°36' W. 108.93 FT. TO AP-2, THENCE;  
 S. 59°47' W. 261.37 FT. TO AP-3, THE  
 INTERSECTION WITH THE EASTERLY RIGHT-OF-WAY  
 OF THE NOME-TAYLOR ROAD (APPROXIMATE  
 STATION 461+95).

**ACCESSORY TABLE  
 TRACT E**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER	N. 26 3/4° E.	10.00 ft.
	ORANGE	N. 63 1/4° W.	10.00 ft.
2	SILVER	N. 26 3/4° E.	10.00 ft.
	ORANGE	N. 63 1/4° W.	10.00 ft.
3	PINK	S. 63 1/4° E.	10.00 ft.
	BLUE	S. 26 3/4° W.	10.00 ft.
4	PINK	S. 63 1/4° E.	10.00 ft.
	BLUE	S. 26 3/4° W.	10.00 ft.

**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- △ PRIVATE SURVEY MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.

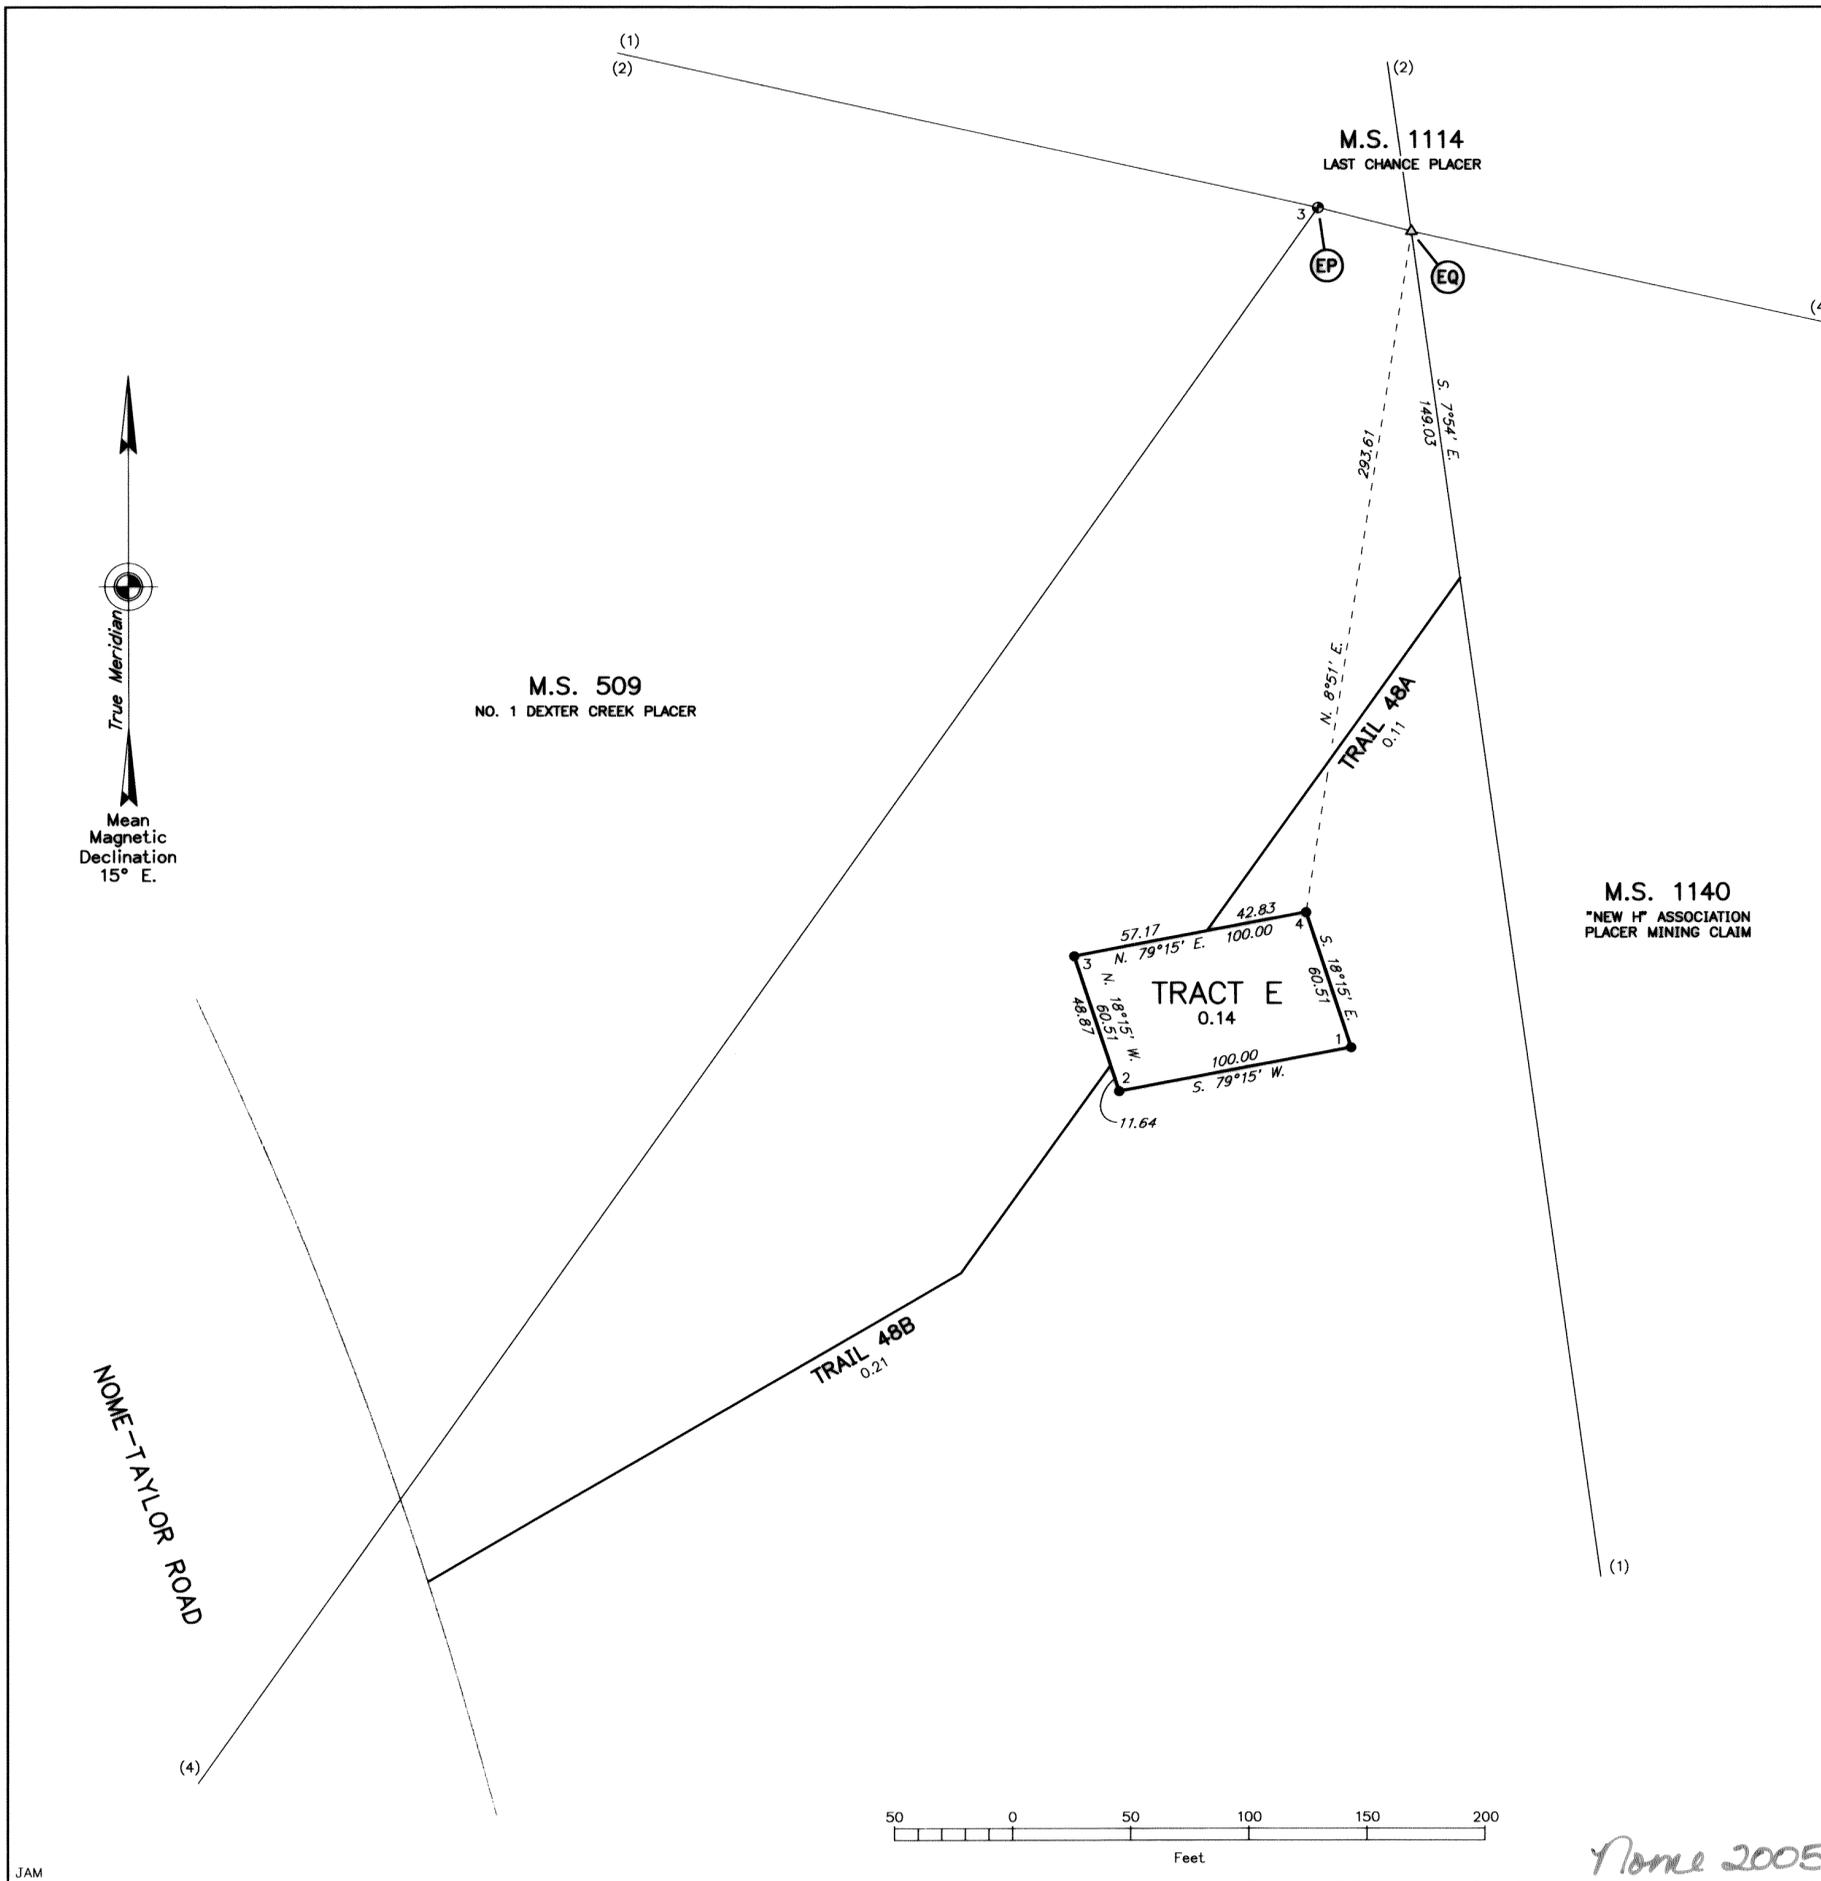

*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1 AND 2  
FOR SURVEY INFORMATION


**ACCESSORY TABLE**  
**TRACT JJ**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK	S. 37° E.	10.00 ft.
	BLUE	S. 53° W.	10.00 ft.
2	BLUE	S. 10° W.	10.00 ft.
	ORANGE	N. 80° W.	10.00 ft.
3	BLUE	S. 19° W.	10.00 ft.
	ORANGE	N. 71° W.	10.00 ft.
4	BLUE	S. 1° W.	10.00 ft.
	ORANGE	N. 89° W.	10.00 ft.
5	SILVER	N. 1° E.	10.00 ft.
	PINK	S. 89° E.	10.00 ft.
6	SILVER	N. 19° E.	10.00 ft.
	PINK	S. 71° E.	10.00 ft.
7	BLUE	S. 63° W.	10.00 ft.
	ORANGE	N. 27° W.	10.00 ft.
8	SILVER	N. 63° E.	10.00 ft.
	PINK	S. 27° E.	10.00 ft.

**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STONE CORNER MARKER RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.


*NOME 2005-3*

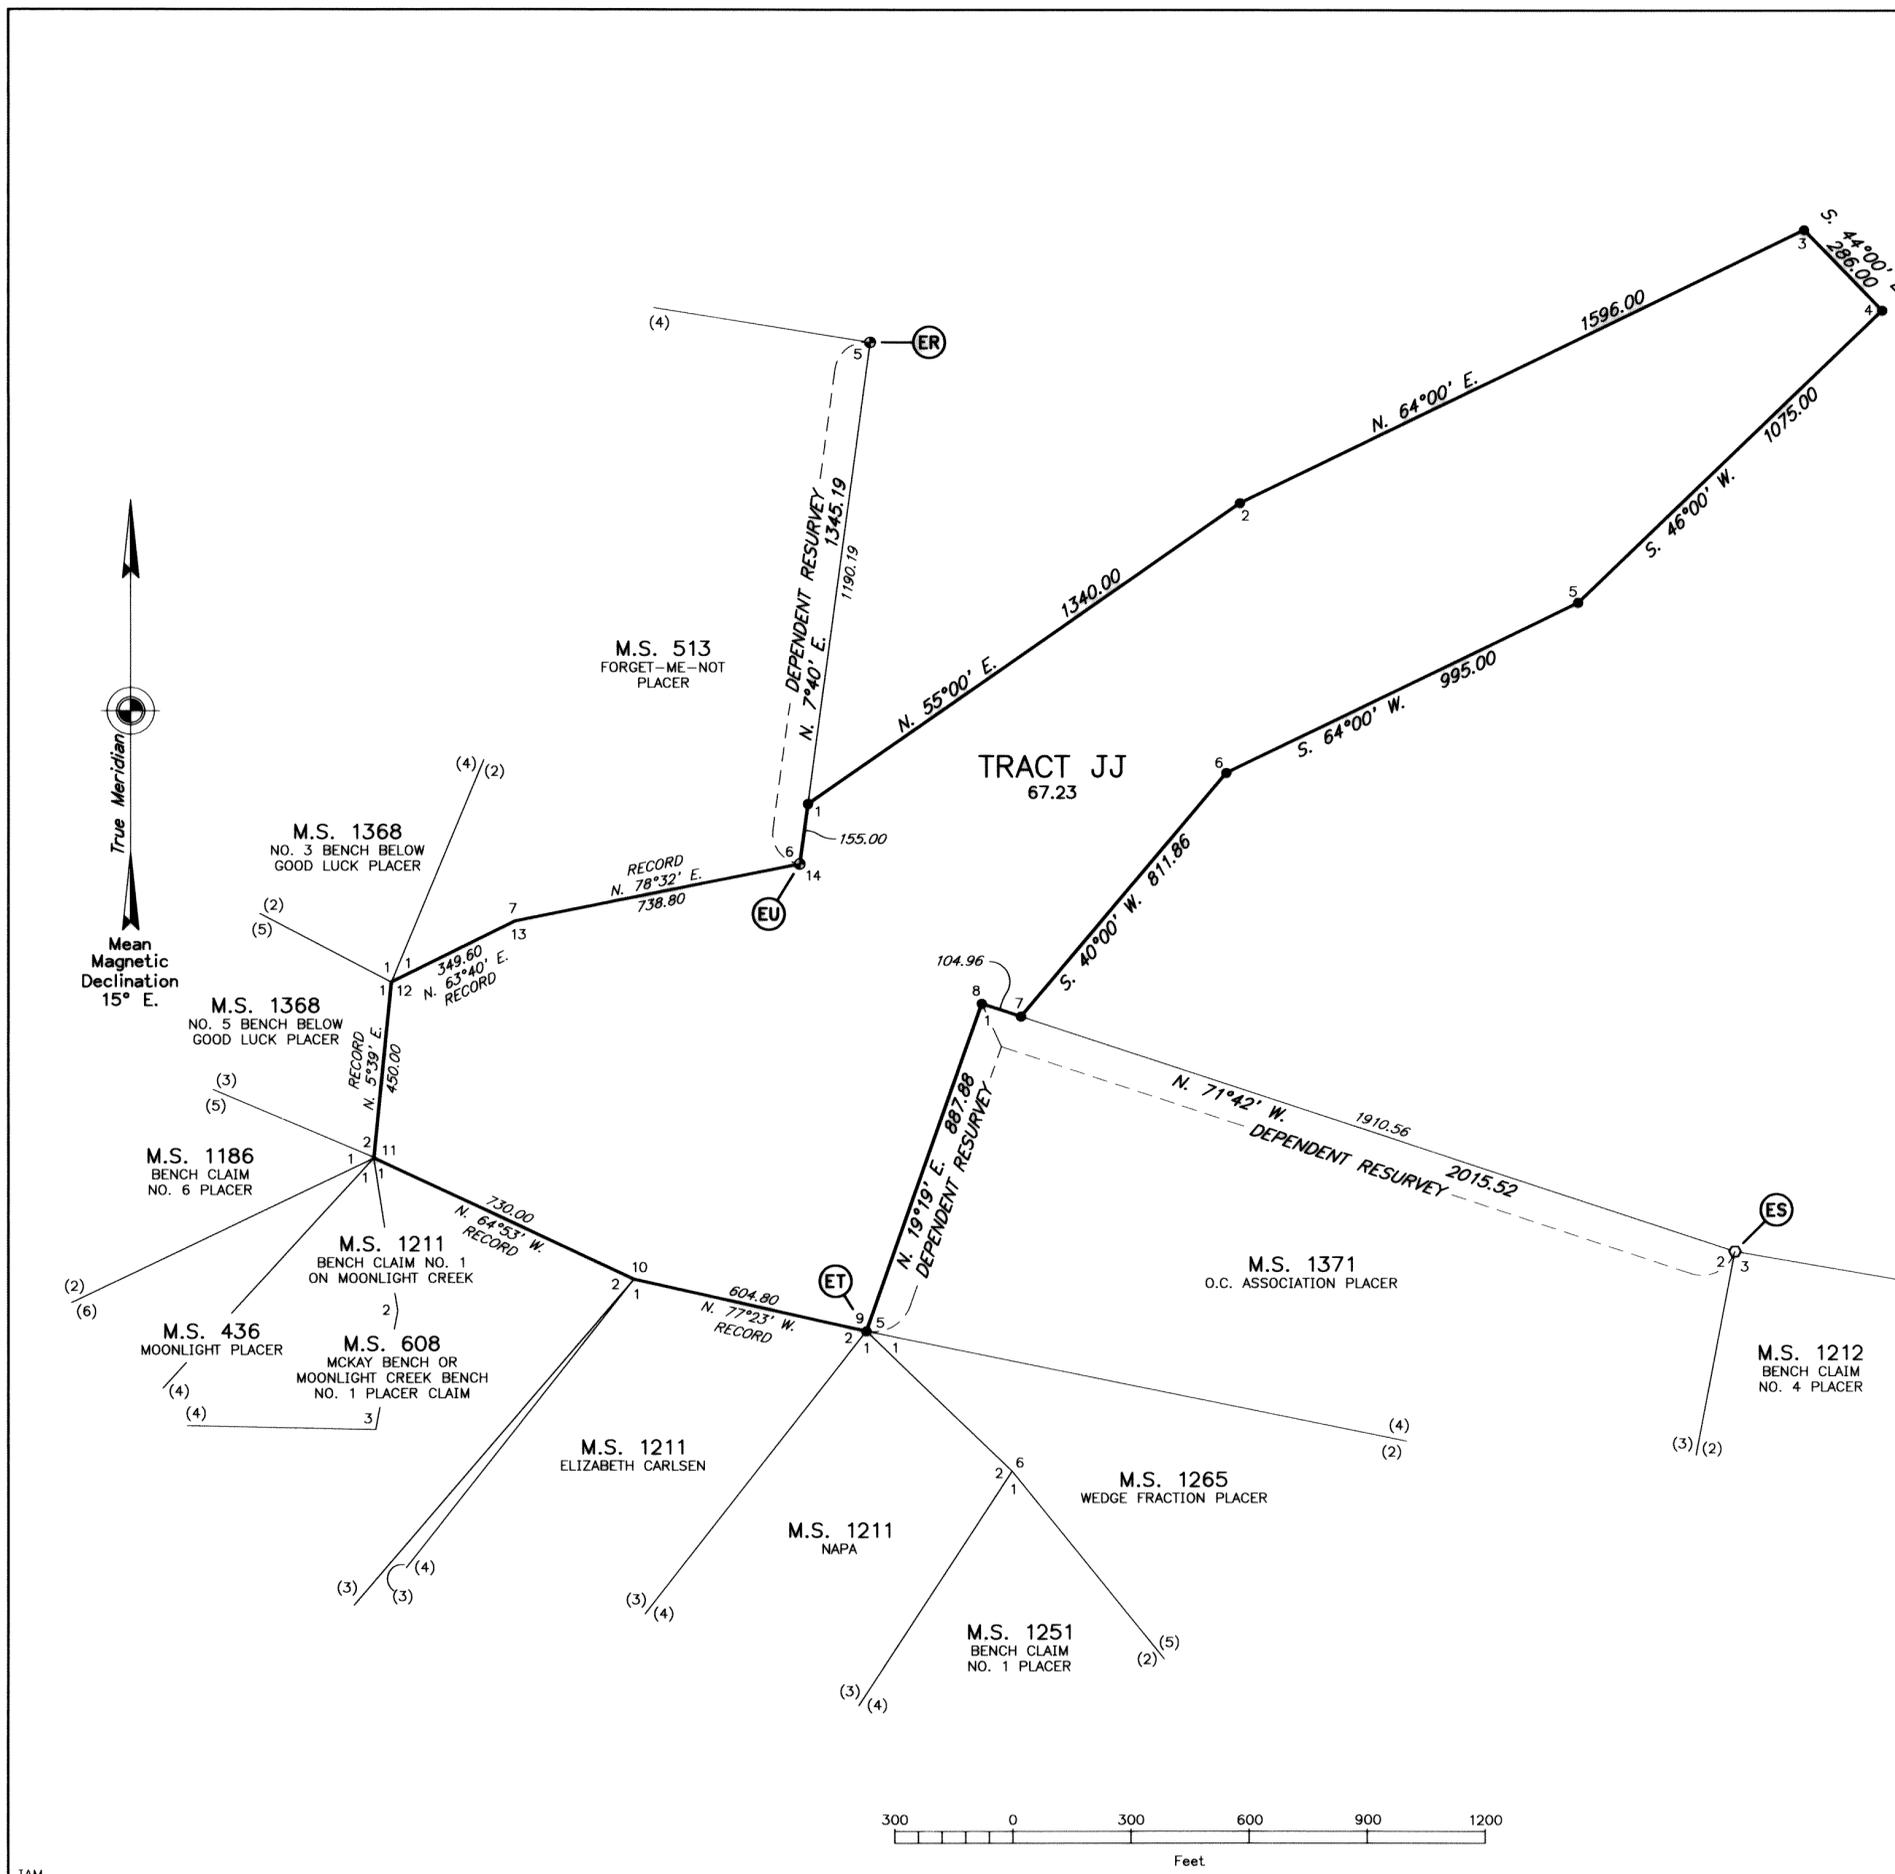

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
 THE SUBDIVISION OF  
 MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
 AND THE SUBDIVISION OF  
 U.S. SURVEY NOS. 4107, 8734 AND 11683  
 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
 AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
 TO  
 SHEET NOS. 1 AND 2  
 FOR SURVEY INFORMATION

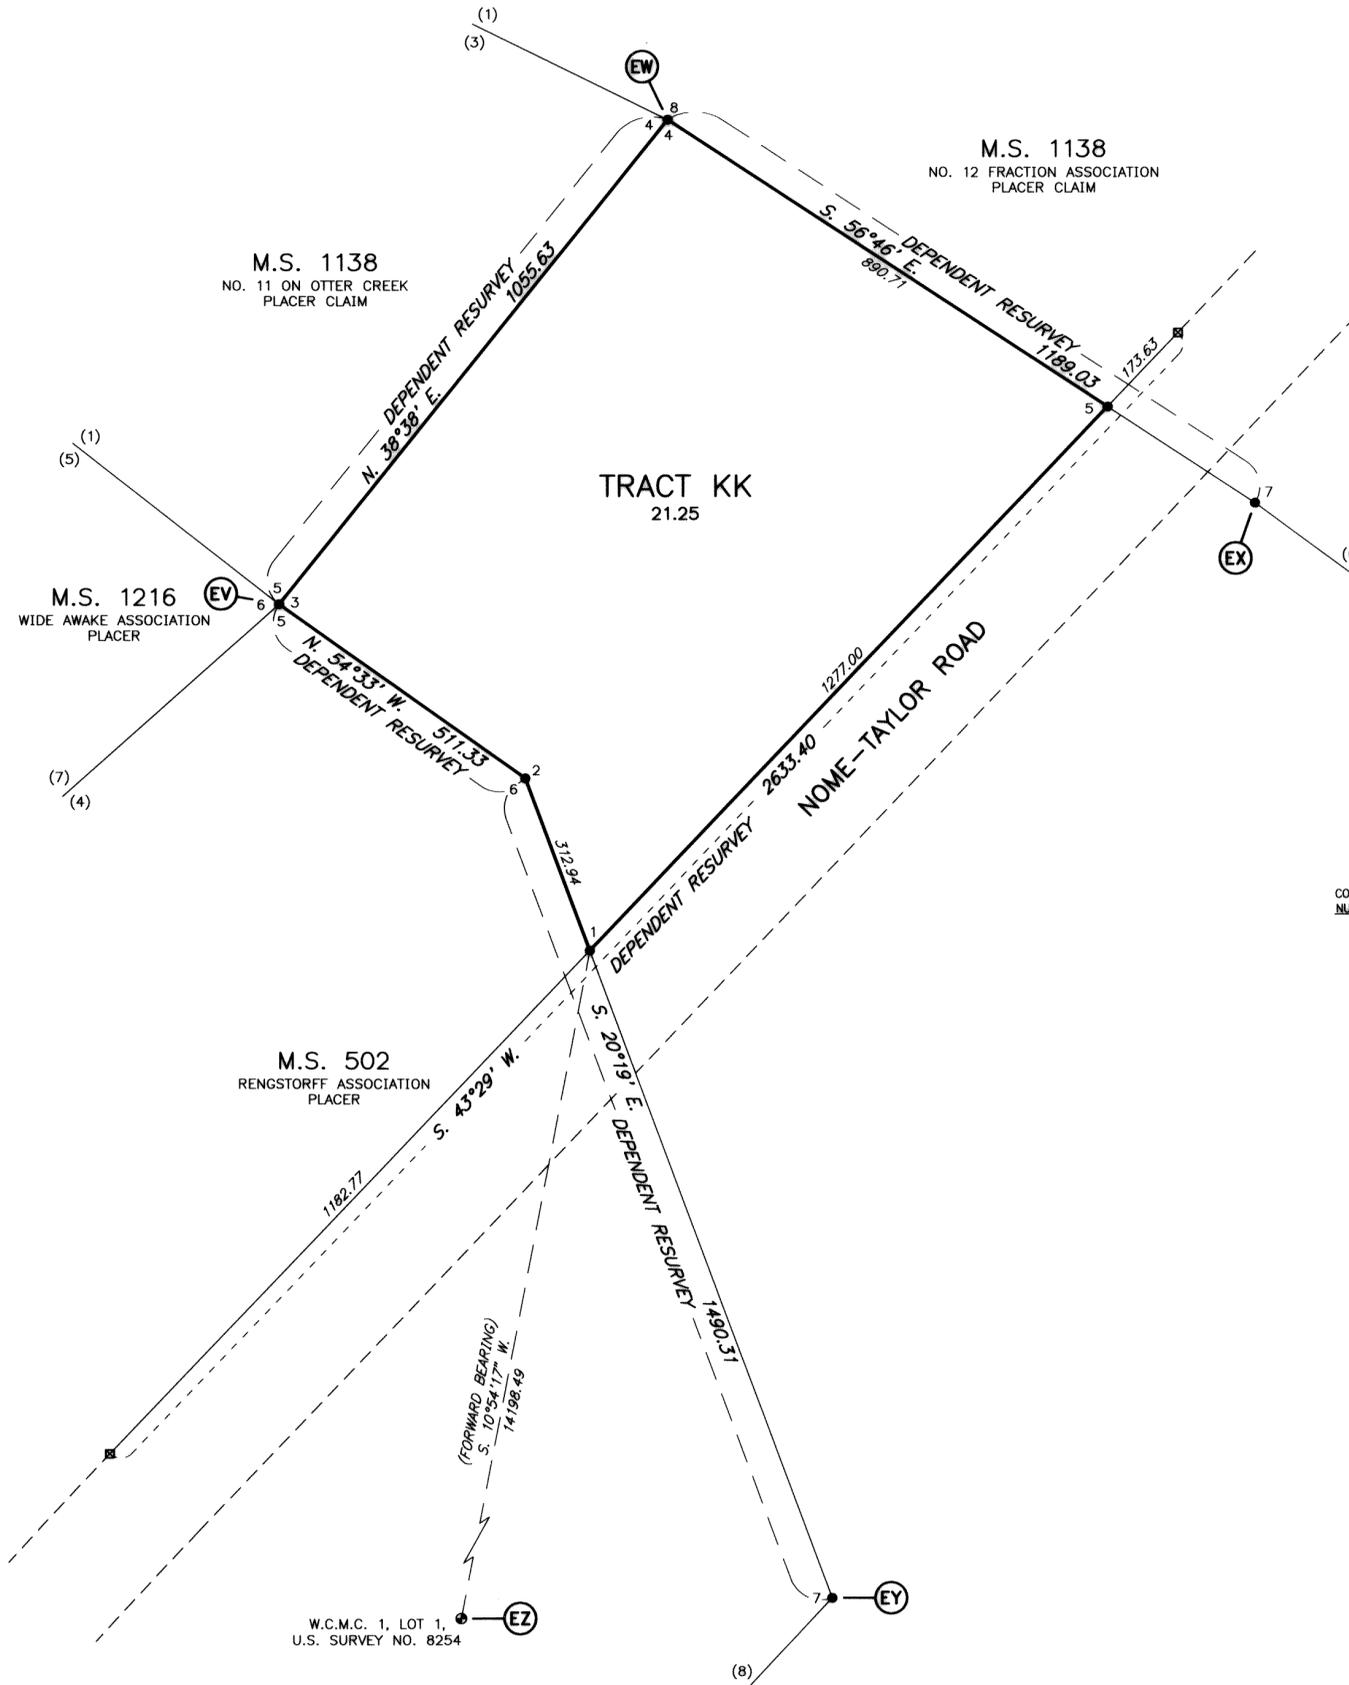

**ACCESSORY TABLE**  
**TRACT KK**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER	N. 25° E.	10.00 ft.
	ORANGE	N. 65° W.	10.00 ft.
2	PINK	S. 65° E.	10.00 ft.
	BLUE	S. 25° W.	10.00 ft.
5	BLUE	S. 78° W.	10.00 ft.
	ORANGE	N. 12° W.	10.00 ft.

**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- DEPARTMENT OF TRANSPORTATION HIGHWAY RIGHT-OF-WAY MARKER RECOVERED THIS SURVEY.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.

*Nome 2005-3*



ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1 AND 2  
FOR SURVEY INFORMATION

**MEANDERS**

- TRACT LL**  
Along a gently-sloping beach,  
at the line of mean high tide.
1. S. 76°06' E. 247.44 FT.
  2. S. 78°52' E. 207.86 FT.
  3. S. 74°44' E. 401.22 FT.
  4. S. 74°21' E. 409.82 FT.
  5. S. 69°54' E. 275.19 FT.
  6. S. 73°29' E. 385.59 FT.

**ACCESSORY TABLE**  
**TRACT G**


CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK	S. 31 3/4' E.	10.00 ft.
	BLUE	S. 59 3/4' W.	10.00 ft.
2	SILVER	N. 59 3/4' E.	10.00 ft.
	ORANGE	N. 31 3/4' W.	10.00 ft.
3	SILVER	N. 59 3/4' E.	10.00 ft.
	ORANGE	N. 31 3/4' W.	10.00 ft.
4	PINK	S. 31 3/4' E.	10.00 ft.
	BLUE	S. 59 3/4' W.	10.00 ft.

**TRACT X**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK	S. 37' E.	10.00 ft.
	BLUE	S. 53' W.	10.00 ft.
2	SILVER	N. 57' E.	10.00 ft.
	ORANGE	N. 37' W.	10.00 ft.
3	SILVER	N. 57' E.	10.00 ft.
	ORANGE	N. 37' W.	10.00 ft.
4	PINK	S. 32' E.	10.00 ft.
	BLUE	S. 58' W.	10.00 ft.
5	PINK	S. 30 1/4' E.	10.00 ft.
	BLUE	S. 59 3/4' W.	10.00 ft.
6	PINK	S. 58 1/4' E.	10.00 ft.
	BLUE	S. 31 3/4' W.	10.00 ft.


**TRACT LL**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER	N. 61' E.	10.00 ft.
	ORANGE	N. 29' W.	10.00 ft.
2	PINK	S. 29' E.	10.00 ft.
	BLUE	S. 61' W.	10.00 ft.
3	PINK	S. 29' E.	10.00 ft.
	BLUE	S. 61' W.	10.00 ft.
4	PINK	S. 36' E.	10.00 ft.
	BLUE	S. 54' W.	10.00 ft.

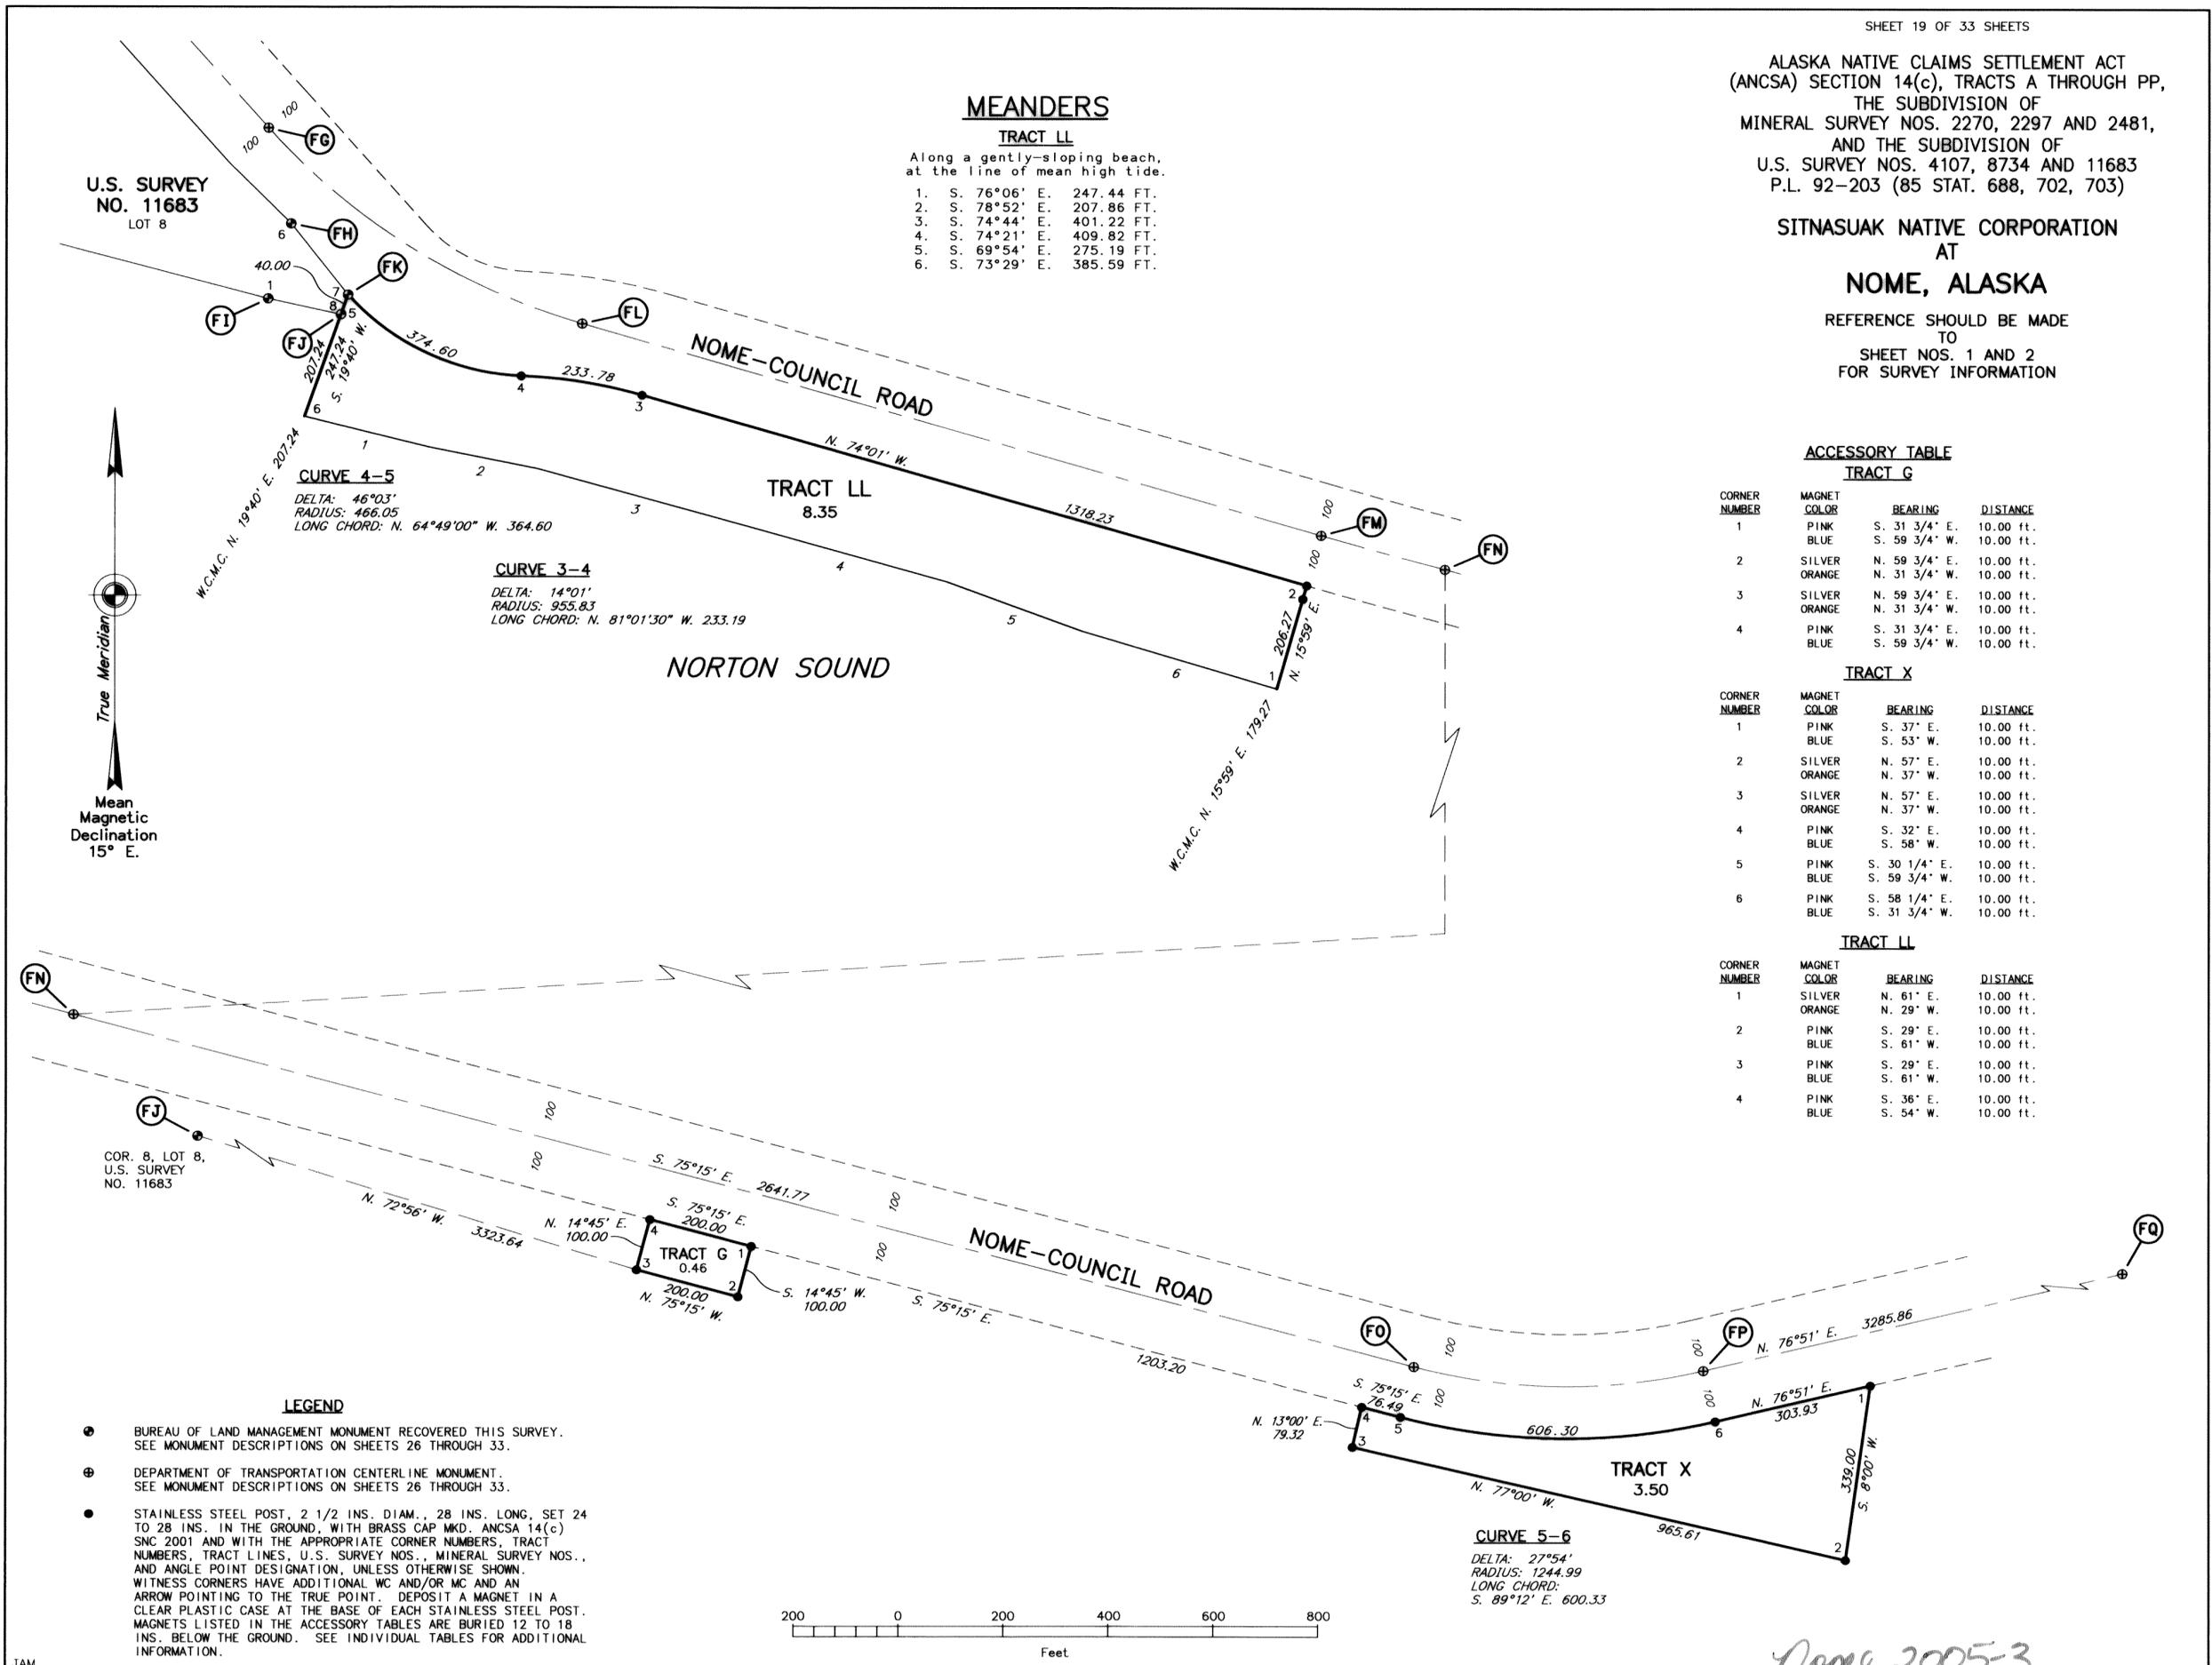

**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- ⊕ DEPARTMENT OF TRANSPORTATION CENTERLINE MONUMENT. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.




*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
 THE SUBDIVISION OF  
 MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
 AND THE SUBDIVISION OF  
 U.S. SURVEY NOS. 4107, 8734 AND 11683  
 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
 AT  
**NOME, ALASKA**


REFERENCE SHOULD BE MADE  
 TO  
 SHEET NOS. 1 AND 2  
 FOR SURVEY INFORMATION

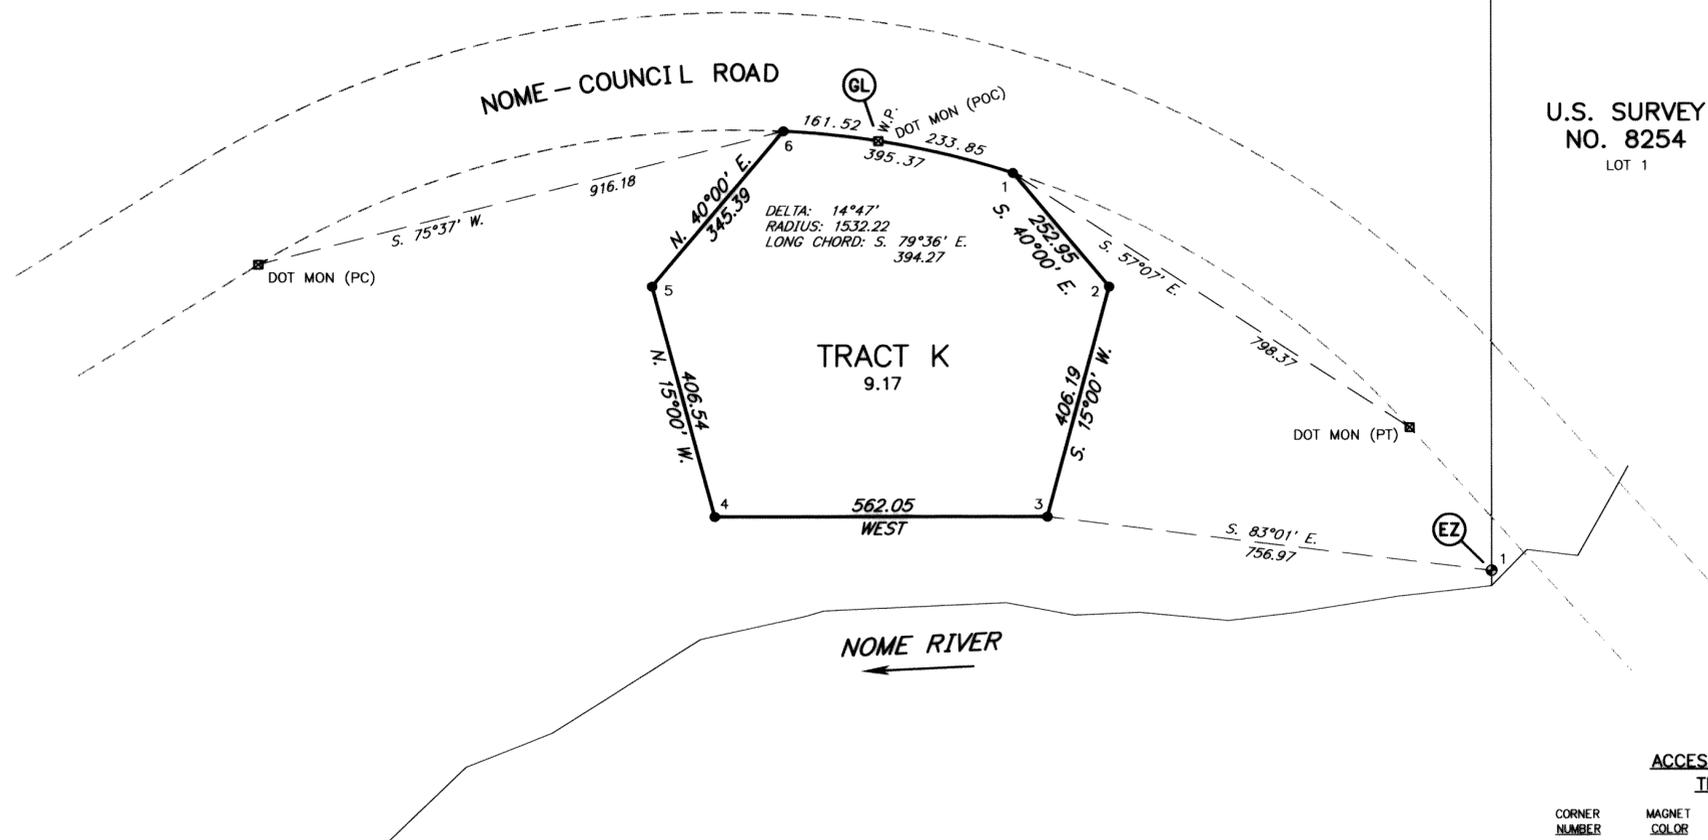

U.S. SURVEY  
 NO. 8254  
 LOT 1

**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.
- DEPARTMENT OF TRANSPORTATION HIGHWAY RIGHT-OF-WAY MARKER RECOVERED THIS SURVEY.



**ACCESSORY TABLE**  
**TRACT K**


CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK	S. 45° E.	10.00 ft.
	BLUE	S. 45° W.	10.00 ft.
2	SILVER	N. 5° E.	10.00 ft.
	ORANGE	N. 85° W.	10.00 ft.
3	SILVER	N. 60° E.	10.00 ft.
	ORANGE	N. 30° W.	10.00 ft.
4	SILVER	N. 30° E.	10.00 ft.
	ORANGE	N. 60° W.	10.00 ft.
5	SILVER	N. 85° E.	10.00 ft.
	ORANGE	N. 5° W.	10.00 ft.
6	PINK	S. 45° E.	10.00 ft.
	BLUE	S. 45° W.	10.00 ft.

*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
 THE SUBDIVISION OF  
 MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
 AND THE SUBDIVISION OF  
 U.S. SURVEY NOS. 4107, 8734 AND 11683  
 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
 AT  
 NOME, ALASKA

REFERENCE SHOULD BE MADE  
 TO  
 SHEET NOS. 1 AND 2  
 FOR SURVEY INFORMATION

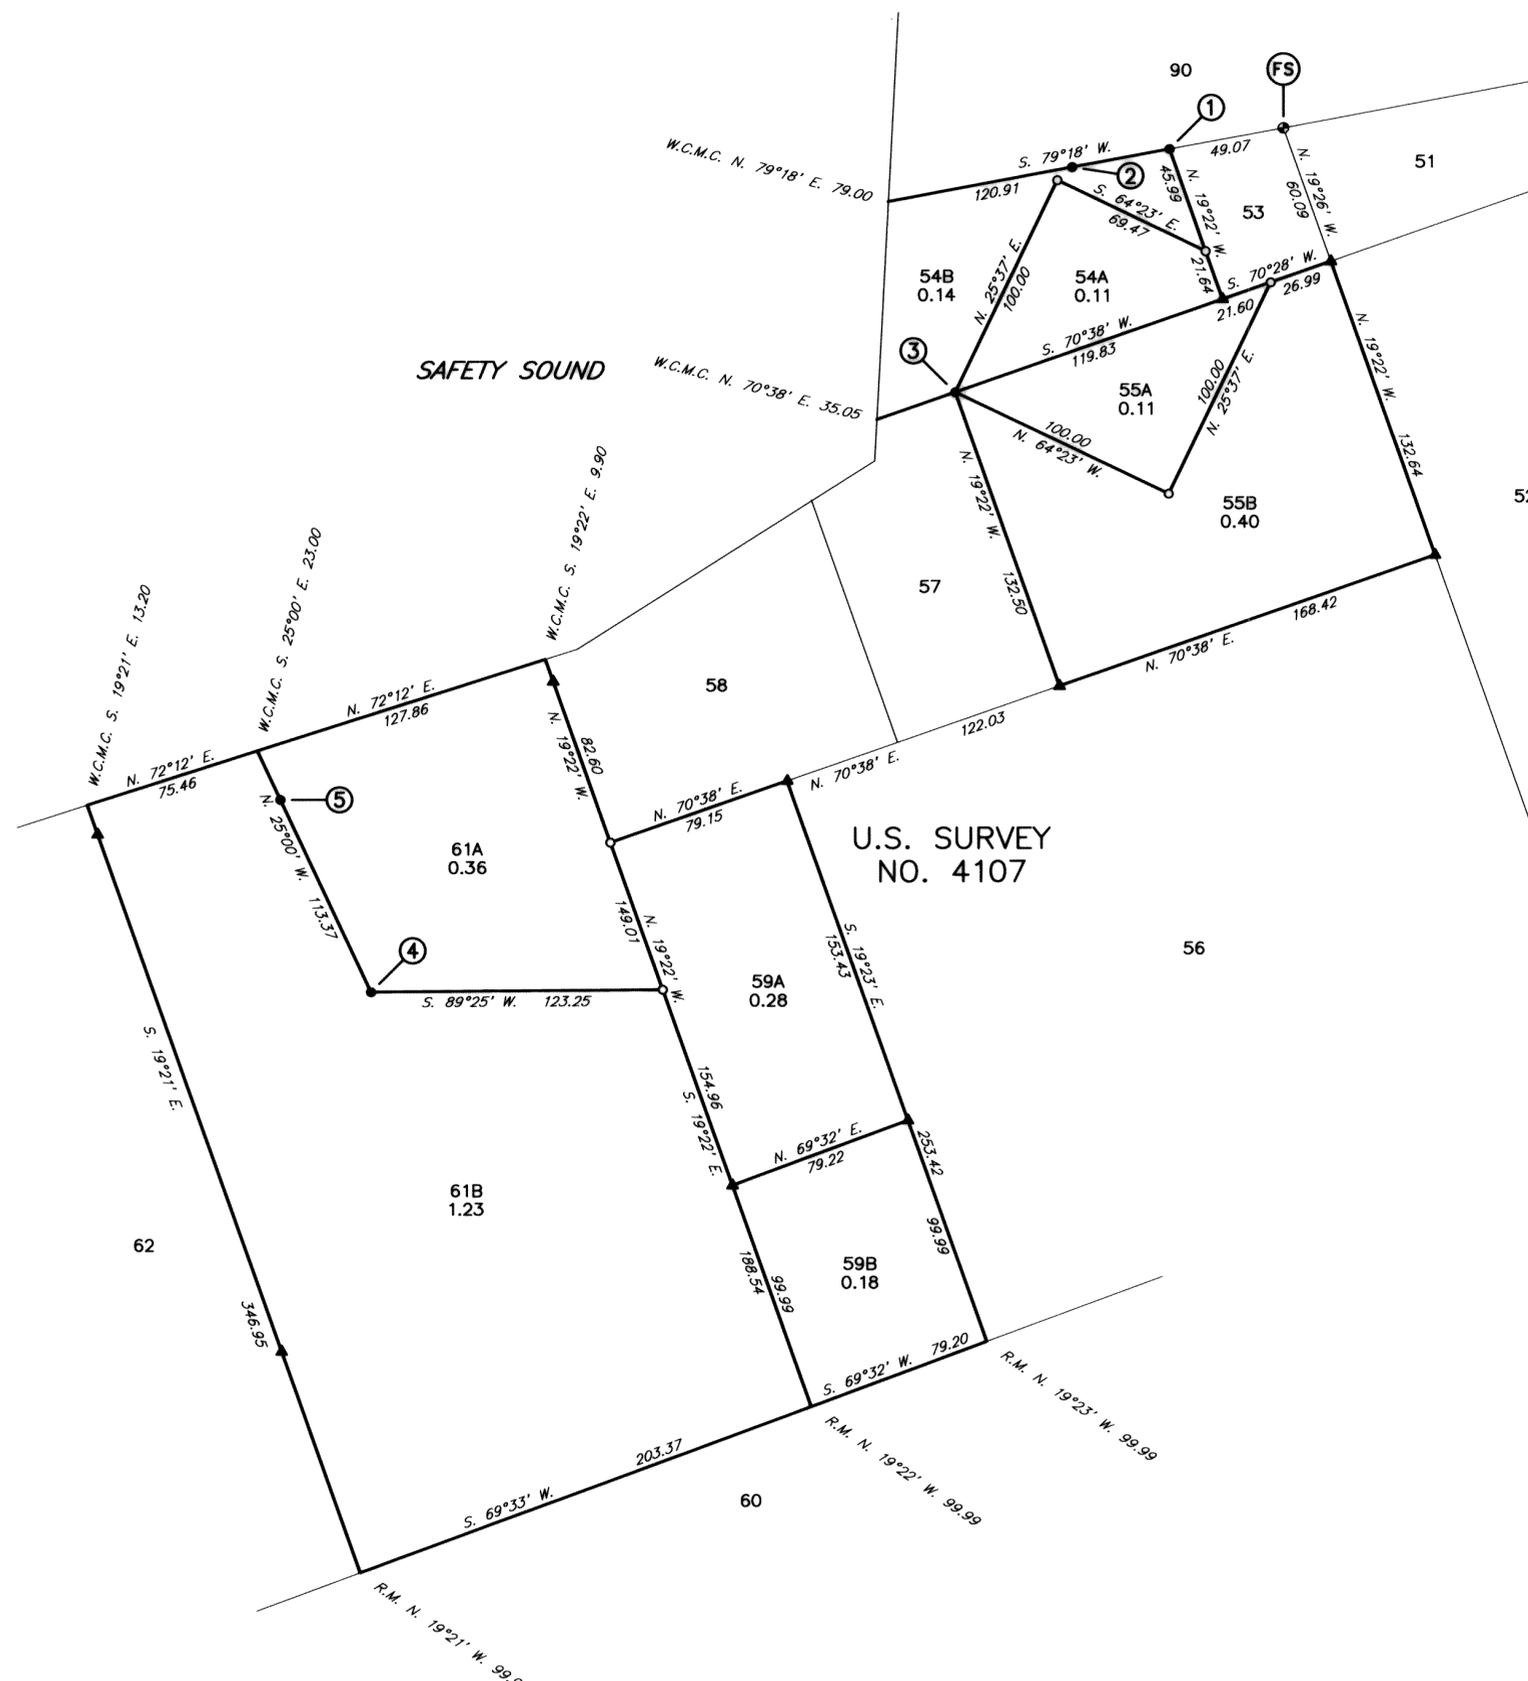


ACCESSORY TABLE

CORNER	MAGNET COLOR	BEARING	DISTANCE
①	PINK	S. 64° E.	10.00 ft.
	BLUE	S. 26° W.	10.00 ft.
②	SILVER	N. 34° E.	10.00 ft.
	PINK	S. 56° E.	10.00 ft.
③	PINK	S. 80° E.	10.00 ft.
	BLUE	S. 10° W.	10.00 ft.
④	SILVER	N. 20° E.	10.00 ft.
	ORANGE	N. 70° W.	10.00 ft.
⑤	PINK	S. 70° E.	10.00 ft.
	BLUE	S. 20° W.	10.00 ft.

LEGEND

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.
- SECONDARY MONUMENT
- ▲ RECOVERED 1 IN. DIAM. BLM IRON PIPE.



*Nome 2005-3*



ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
 THE SUBDIVISION OF  
 MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
 AND THE SUBDIVISION OF  
 U.S. SURVEY NOS. 4107, 8734 AND 11683  
 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
 AT  
**NOME, ALASKA**


REFERENCE SHOULD BE MADE  
 TO  
 SHEET NOS. 1 AND 2  
 FOR SURVEY INFORMATION

**ACCESSORY TABLE  
 LOT 1A**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK BLUE	S. 15° E. S. 75° W.	10.00 ft. 10.00 ft.
2	PINK BLUE	S. 15° E. S. 75° W.	10.00 ft. 10.00 ft.
3	SILVER ORANGE	N. 75° E. N. 15° W.	10.00 ft. 10.00 ft.
4	SILVER ORANGE	N. 75° E. N. 15° W.	10.00 ft. 10.00 ft.


**ACCESSORY TABLE  
 LOT 1B**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER PINK	N. 85° E. S. 5° E.	10.00 ft. 10.00 ft.
2	BLUE ORANGE	S. 85° W. N. 5° W.	10.00 ft. 10.00 ft.
3	BLUE ORANGE	S. 85° W. N. 5° W.	10.00 ft. 10.00 ft.
4	SILVER PINK	N. 85° E. S. 5° E.	10.00 ft. 10.00 ft.

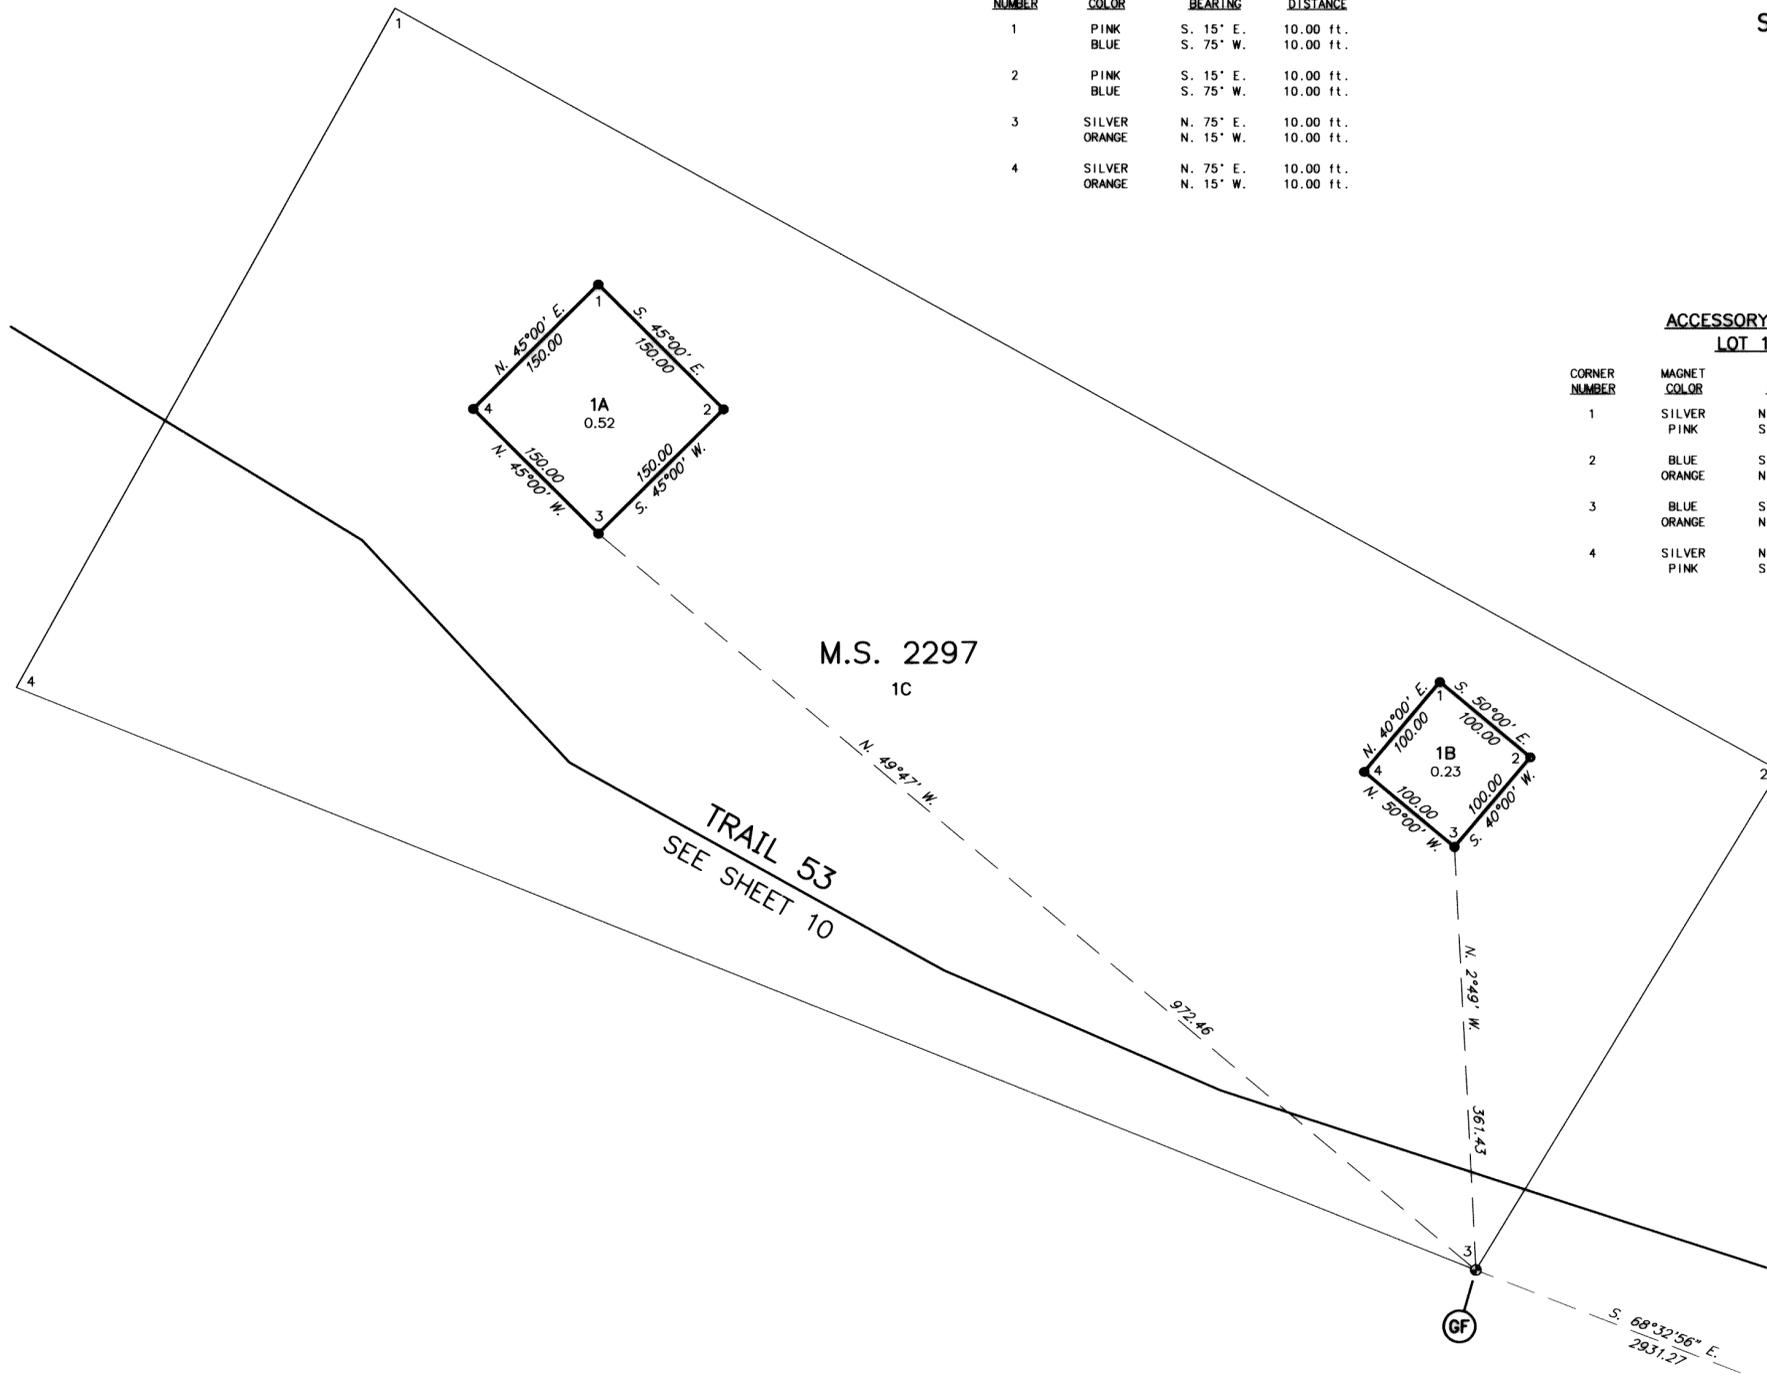

**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.




*NOME 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1 AND 2  
FOR SURVEY INFORMATION

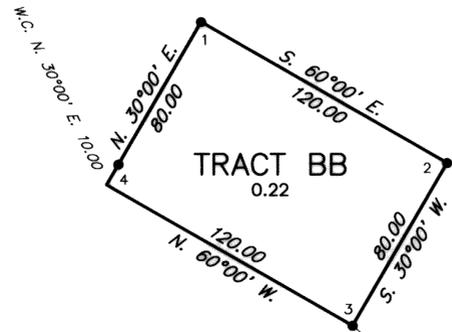

**ACCESSORY TABLE  
TRACT I**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER PINK	N. 70° E. S. 20° E.	10.00 ft. 10.00 ft.
2	BLUE ORANGE	S. 70° W. N. 20° W.	10.00 ft. 10.00 ft.
3	SILVER ORANGE	N. 74° E. N. 16° W.	10.00 ft. 10.00 ft.
4	SILVER ORANGE	N. 74° E. N. 16° W.	10.00 ft. 10.00 ft.

**ACCESSORY TABLE  
TRACT DD**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	PINK BLUE	S. 16° E. S. 74° W.	10.00 ft. 10.00 ft.
2	PINK BLUE	S. 16° E. S. 74° W.	10.00 ft. 10.00 ft.
3	SILVER ORANGE	N. 74° E. N. 16° W.	10.00 ft. 10.00 ft.
4	SILVER ORANGE	N. 74° E. N. 16° W.	10.00 ft. 10.00 ft.

**ACCESSORY TABLE  
TRACT BB**



CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER PINK	N. 75° E. S. 15° E.	10.00 ft. 10.00 ft.
2	PINK BLUE	S. 15° E. S. 75° W.	10.00 ft. 10.00 ft.
3	SILVER ORANGE	N. 15° E. N. 75° W.	10.00 ft. 10.00 ft.
4	SILVER ORANGE	N. 75° E. N. 15° W.	10.00 ft. 10.00 ft.

**ACCESSORY TABLE  
TRACT HH**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	SILVER PINK	N. 70° E. S. 20° E.	10.00 ft. 10.00 ft.
4	SILVER ORANGE	N. 74° E. N. 16° W.	10.00 ft. 10.00 ft.


**ACCESSORY TABLE  
TRACT PP**

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
1	BLUE ORANGE	S. 70° W. N. 20° W.	10.00 ft. 10.00 ft.
2	SILVER PINK	N. 70° E. S. 20° E.	10.00 ft. 10.00 ft.
3	SILVER ORANGE	N. 74° E. N. 16° W.	10.00 ft. 10.00 ft.
4	SILVER ORANGE	N. 74° E. N. 16° W.	10.00 ft. 10.00 ft.

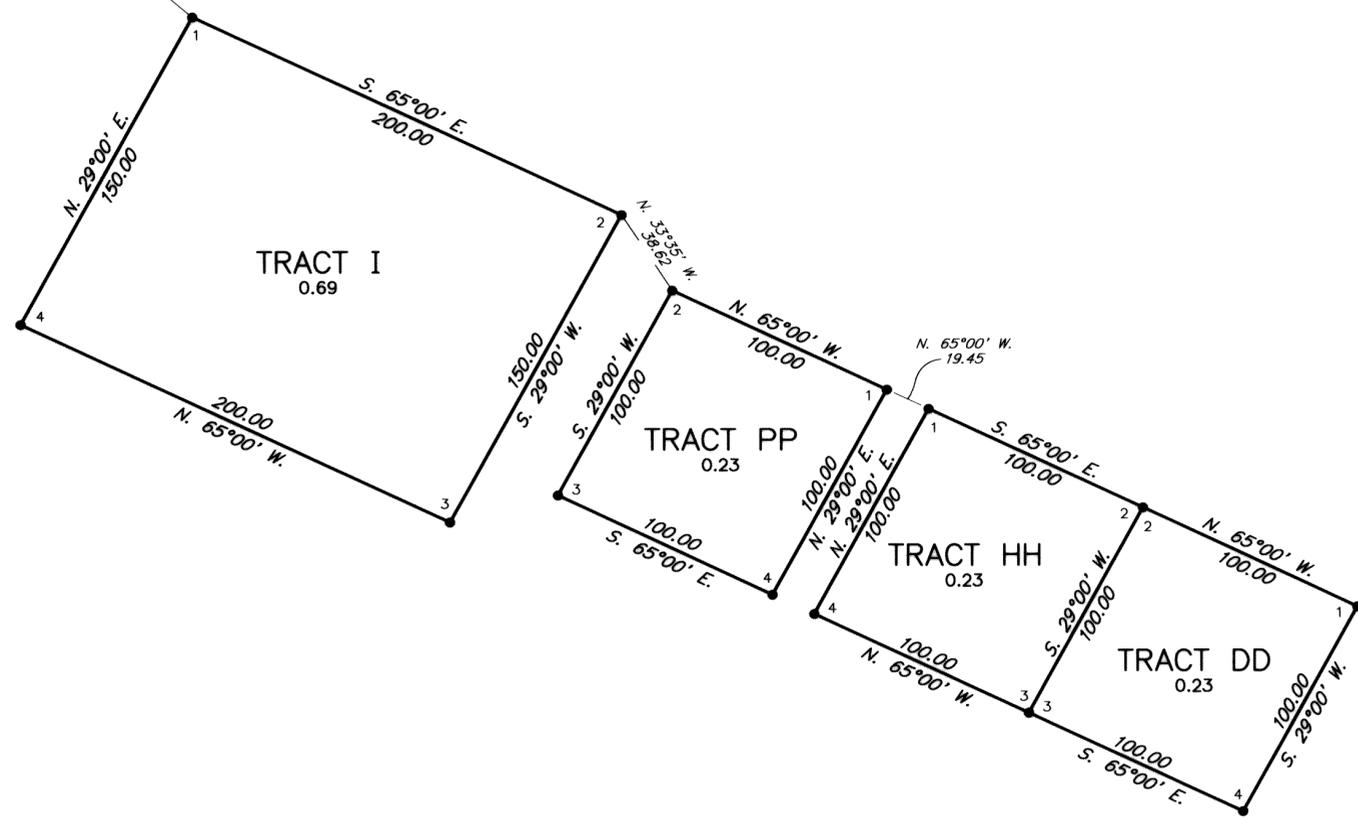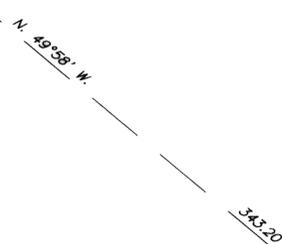

**LEGEND**

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.




W.C.M.C. 1, LOT 1,  
U.S. SURVEY NO. 8734,  
IDENTICAL WITH  
W.C.M.C. 5, LOT 1,  
U.S. SURVEY NO. 4403A

*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
THE SUBDIVISION OF  
MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
AND THE SUBDIVISION OF  
U.S. SURVEY NOS. 4107, 8734 AND 11683  
P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
AT  
NOME, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET NOS. 1 AND 2  
FOR SURVEY INFORMATION

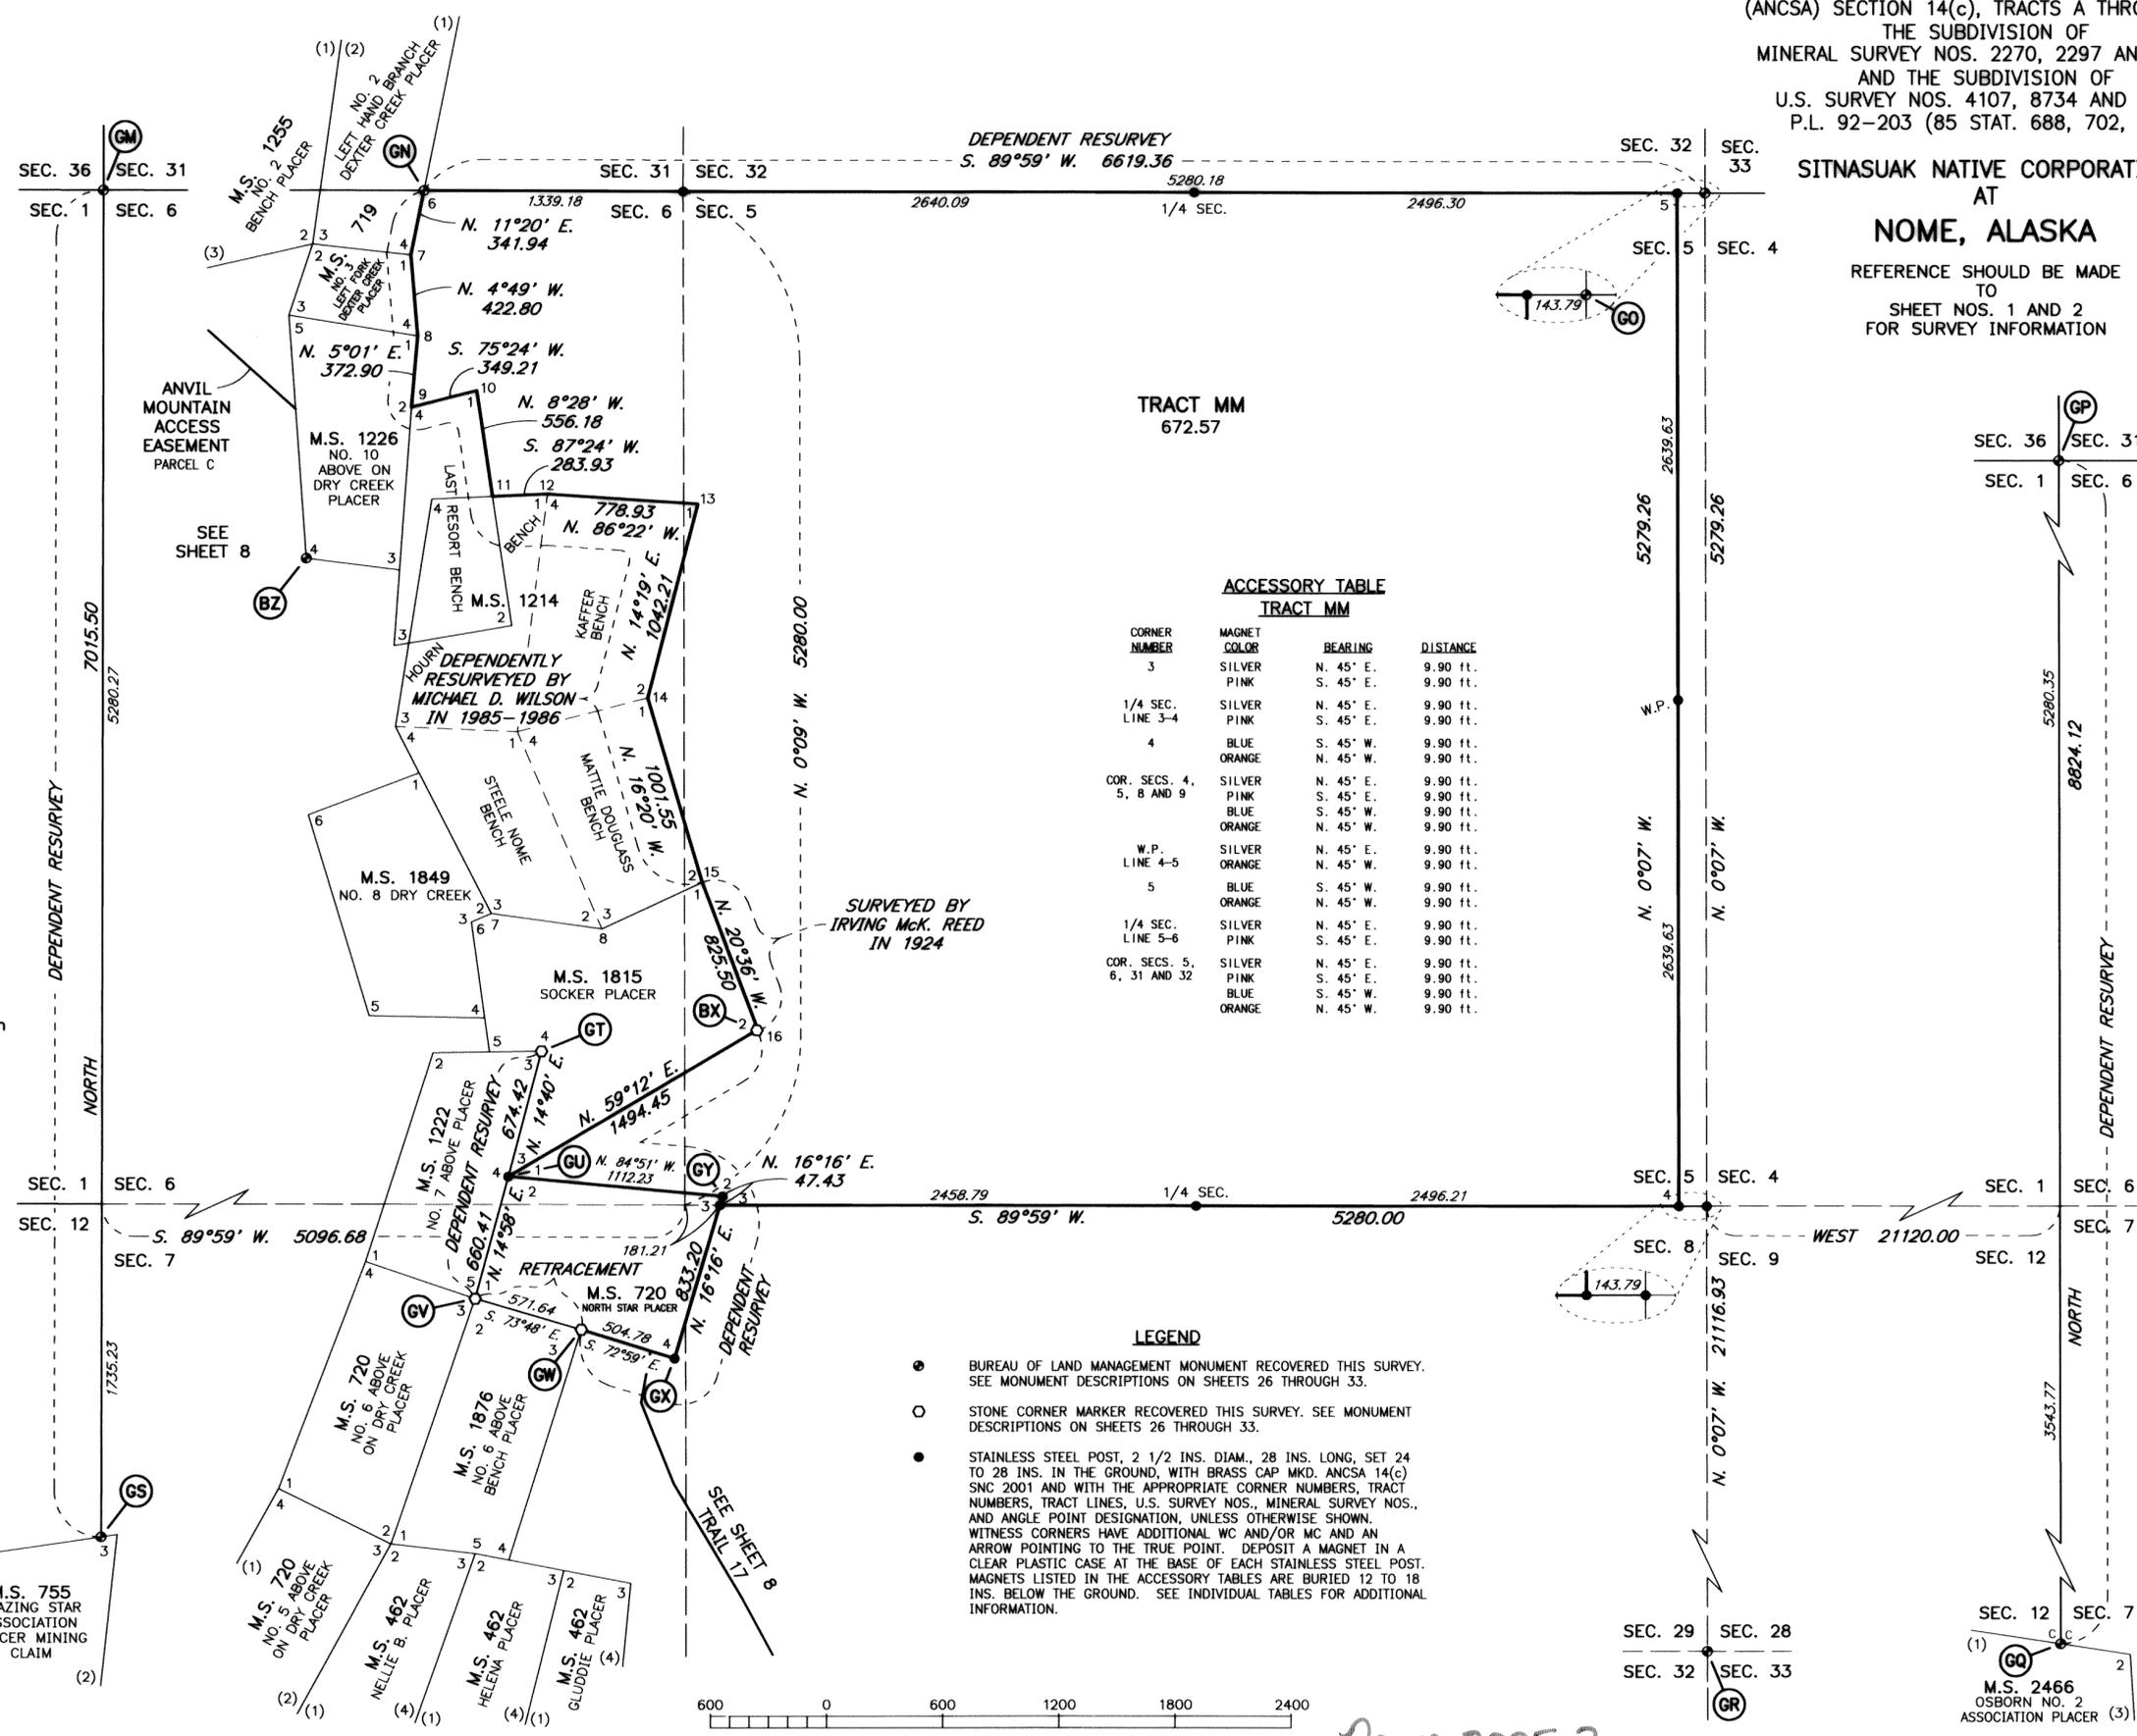


TRACT MM  
672.57

ACCESSORY TABLE  
TRACT MM

CORNER NUMBER	MAGNET COLOR	BEARING	DISTANCE
3	SILVER	N. 45° E.	9.90 ft.
	PINK	S. 45° E.	9.90 ft.
1/4 SEC. LINE 3-4	SILVER	N. 45° E.	9.90 ft.
	PINK	S. 45° E.	9.90 ft.
4	BLUE	S. 45° W.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
COR. SECS. 4, 5, 8 AND 9	SILVER	N. 45° E.	9.90 ft.
	PINK	S. 45° E.	9.90 ft.
	BLUE	S. 45° W.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
W.P. LINE 4-5	SILVER	N. 45° E.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
5	BLUE	S. 45° W.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.
1/4 SEC. LINE 5-6	SILVER	N. 45° E.	9.90 ft.
	PINK	S. 45° E.	9.90 ft.
COR. SECS. 5, 6, 31 AND 32	SILVER	N. 45° E.	9.90 ft.
	PINK	S. 45° E.	9.90 ft.
	BLUE	S. 45° W.	9.90 ft.
	ORANGE	N. 45° W.	9.90 ft.

LEGEND

- BUREAU OF LAND MANAGEMENT MONUMENT RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STONE CORNER MARKER RECOVERED THIS SURVEY. SEE MONUMENT DESCRIPTIONS ON SHEETS 26 THROUGH 33.
- STAINLESS STEEL POST, 2 1/2 INS. DIAM., 28 INS. LONG, SET 24 TO 28 INS. IN THE GROUND, WITH BRASS CAP MKD. ANCSA 14(c) SNC 2001 AND WITH THE APPROPRIATE CORNER NUMBERS, TRACT NUMBERS, TRACT LINES, U.S. SURVEY NOS., MINERAL SURVEY NOS., AND ANGLE POINT DESIGNATION, UNLESS OTHERWISE SHOWN. WITNESS CORNERS HAVE ADDITIONAL WC AND/OR MC AND AN ARROW POINTING TO THE TRUE POINT. DEPOSIT A MAGNET IN A CLEAR PLASTIC CASE AT THE BASE OF EACH STAINLESS STEEL POST. MAGNETS LISTED IN THE ACCESSORY TABLES ARE BURIED 12 TO 18 INS. BELOW THE GROUND. SEE INDIVIDUAL TABLES FOR ADDITIONAL INFORMATION.




Name 2005-3


ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
 THE SUBDIVISION OF  
 MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
 AND THE SUBDIVISION OF  
 U.S. SURVEY NOS. 4107, 8734 AND 11683  
 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
 AT  
 NOME, ALASKA


REFERENCE SHOULD BE MADE  
 TO  
 SHEET NOS. 1 AND 2  
 FOR SURVEY INFORMATION



Recovered an alum. rod, 3/4 in. diam., firmly set, flush with ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above ground, with supportive rock collar, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., top portion missing, no mks. visible, hewn end still in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
 A magnet in a metallic silver plastic case, bears N. 59° E., 10 ft. dist., buried 12 ins. below the ground.  
 A magnet in a fluorescent orange plastic case, bears N. 31° W., 10 ft. dist., buried 12 ins. below the ground.


Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 11 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. 1857 on one side, and 2GS on another, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
 A magnet in a fluorescent blue plastic case, bears S. 74° W., 10 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent orange plastic case, bears N. 16° W., 10 ft. dist., buried 12 ins. below the ground.  
 Deposit a magnet in a clear plastic case at the base of the stainless steel post.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered a copperweld monument, firmly set, projecting 12 ins. above ground, mkd. as shown.  
 Accessories not searched for.




Recovered stone, 4 ins. x 7 ins., firmly set, projecting 5 ins. above ground, mkd. 3-473 JB on the northeast face, with an X near the top center. Alongside stone, recovered wood post, 2 ins. x 4 ins., projecting 36 ins. above ground, mkd. 'NOMI'. Post was split along one edge, leaving only partial letters as shown. Held original stone as corner position and left wood post as found, from which  
 A magnet in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 12 ins. below the ground.  
 Deposit a magnet in a clear plastic case alongside the stone.




Recovered an iron post, 2 1/2 ins. diam., loosely set and leaning, projecting 17 ins. above ground, with brass cap mkd. as shown. Straightened and firmed monument to insure perpetuation of position.  
 Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. NW1/4 M1, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
 A magnet in a metallic silver plastic case, bears N. 60° E., 10 ft. dist., buried 12 ins. below the ground.


A magnet in a fluorescent orange plastic case, bears N. 30° W., 10 ft. dist., buried 12 ins. below the ground.  
 Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown.  
 Accessories not searched for.



Recovered an alum. rod, 3/4 in. diam., firmly set, projecting 10 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.



Recovered an alum. rod, 3/4 in. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.

*Nome 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH PP, THE SUBDIVISION OF MINERAL SURVEY NOS. 2270, 2297 AND 2481, AND THE SUBDIVISION OF U.S. SURVEY NOS. 4107, 8734 AND 11683 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION AT NOME, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NOS. 1 AND 2 FOR SURVEY INFORMATION

Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. MS1828 on one side, 3/N on another, and N.W.-3-1846-E on another, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 12 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.

Recovered wood post, 4 ins. x 4 ins., fair condition, projecting 24 ins. above ground, mkd. 3C1845 on one side, B4 on another, and N3 on another. Replace wood post with a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a metallic silver plastic case, bears N. 52° E., 10 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent pink plastic case, bears S. 38° E., 10 ft. dist., buried 12 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.

Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, no visible mks., bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which


A magnet in a metallic silver plastic case, bears N. 68° E., 10 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent pink plastic case, bears S. 22° E., 10 ft. dist., buried 12 ins. below the ground.


Deposit a magnet in a clear plastic case at the base of the stainless steel post.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.


Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown. Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown. Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown. Accessories not searched for.




Recovered an iron post, 2 1/2 ins. diam., firmly set, 18 ins. below ground, with brass cap mks. not readable. Accessories not searched for.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown. Accessories not searched for.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown. Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown. Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown. Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown. Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, no mks. evident, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
A magnet in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown. Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. 1309 on one side, and S1292 OK on another, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
A magnet in a metallic silver plastic case, bears N. 5° E., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent pink plastic case, bears S. 85° E., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. 2/1309, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
A magnet in a metallic silver plastic case, bears N. 10° E., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent pink plastic case, bears S. 80° E., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown. Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown. Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown. Accessories not searched for.







Recovered wood post, 4 ins. x 4 ins., poor condition, mkd. 1'14. Replace wood post with a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
A magnet in a metallic silver plastic case, bears N. 58° E., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent orange plastic case, bears N. 32° W., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.



Recovered wood post, 4 ins. x 4 ins., fair condition, projecting 30 ins. above ground, mkd. SW LUCK on one side, and 3D1314 on another. Replace wood post with a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
A magnet in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.



Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. U3 on one side, and S1819 on another, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
A magnet in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Nome 2005-3


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH PP, THE SUBDIVISION OF MINERAL SURVEY NOS. 2270, 2297 AND 2481, AND THE SUBDIVISION OF U.S. SURVEY NOS. 4107, 8734 AND 11683 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION AT NOME, ALASKA


REFERENCE SHOULD BE MADE TO SHEET NOS. 1 AND 2 FOR SURVEY INFORMATION




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with alum. cap mkd. as shown.  
Accessories not searched for.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown.  
Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, with alum. cap mkd. as shown.  
Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. S1319 on one side, NO.2CB on another, and NO.1CB on another, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
A magnet in a metallic silver plastic case, bears N. 78° E., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent pink plastic case, bears S. 12° E., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered stone, 8 ins. x 10 ins., firmly set, buried 6 ins. below ground, mkd. 14-740. Held center of stone as corner position, from which  
A magnet in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case alongside the stone.




Recovered an alum. rod, 3/4 in. diam., firmly set, projecting 60 ins. above ground, with alum. cap mkd. as shown.  
Accessories not searched for.




Recovered a steel rod, 3/4 in. diam., firmly set, projecting 14 ins. above ground, with brass cap mkd. as shown.  
Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown.  
Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 11 ins. above ground, with alum. cap mkd. as shown.  
Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., poor condition, mkd. 1857 on one side, 3CS on another, and GOLDEN on another. Replace wood post with a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
A magnet in a metallic silver plastic case, bears N. 59° E., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent orange plastic case, bears N. 31° W., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown.  
Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. E 4-1846S on one side, 2 18- on another, and 3-1 on another, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
A magnet in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown.  
Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown.  
Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., badly decomposed, no mks. visible, hewn end still in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, wood post buried alongside, from which  
A magnet in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.



Recovered wood post, 4 ins. x 4 ins., poor condition, mkd. 5 1118GG on one side, and 6 1858 on another. Replace wood post with a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which  
A magnet in a metallic silver plastic case, bears N. 13° E., 10 ft. dist., buried 12 ins. below the ground.  
A magnet in a fluorescent orange plastic case, bears N. 77° W., 10 ft. dist., buried 12 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown.  
Accessories not searched for.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.  
Accessories not searched for.

*Name 2005-3*

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
 THE SUBDIVISION OF  
 MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
 AND THE SUBDIVISION OF  
 U.S. SURVEY NOS. 4107, 8734 AND 11683  
 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
 AT  
**NOME, ALASKA**

REFERENCE SHOULD BE MADE  
 TO  
 SHEET NOS. 1 AND 2  
 FOR SURVEY INFORMATION

Recovered wood post, 4 ins. x 2 1/2 ins., broken in two pieces, top portion lying on ground, mkd. 1372 M, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 12 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.

Recovered a rebar, 5/8 in. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.













Accessories not searched for.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.



Recovered wood post, 4 ins. x 4 ins., poor condition, mkd. 1220HB on one side, and 1220B on another. Replace wood post with a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a metallic silver plastic case, bears N. 64° E., 10 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent orange plastic case, bears N. 26° W., 10 ft. dist., buried 12 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown.

Accessories not searched for.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown.

Accessories not searched for.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.

Recovered a rebar, 5/8 in. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.

Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. as shown.

Accessories not searched for.

Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.

Accessories not searched for.

Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as shown.

Accessories not searched for.

Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. 171, bottom portion still buried in ground at original position.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with alum. cap mks. not visible.

Accessories not searched for.

Recovered wood post, 4 ins. x 4 ins., poor condition, mkd. 2-1356 on one side, and 9-1315 on another. Replace wood post with a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which







A magnet in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 12 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown.

Accessories not searched for.



Recovered stone, 5 ins. x 14 ins., firmly set, projecting 7 ins. above ground, mkd. 1336 2B on the east side and 1310 GW on the west side, with an X at the top. Held original stone as corner position, from which

A magnet in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 12 ins. below the ground.

Deposit a magnet in a clear plastic case alongside the stone.

Not used.

Not used.

Recovered stone, 3 ins. x 12 ins., firmly set, projecting 9 ins. above ground, mkd. 215S S on the northerly side, with an X at the top. Held original stone as corner position.

Not used.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.

Recovered stone, 3 ins. x 14 ins., firmly set, projecting 7 ins. above ground, mkd. 2-3 1255-6 on one side, with an X at the top. Held original stone as corner position.







Recovered stone, 2 1/2 ins. x 9 ins., firmly set, projecting 11 ins. above ground, mkd. 3 255 on one side, with an X at the top. Held original stone as corner position.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.

Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.




*Nome 2005-3*


ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
 THE SUBDIVISION OF  
 MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
 AND THE SUBDIVISION OF  
 U.S. SURVEY NOS. 4107, 8734 AND 11683  
 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
 AT  
 NOME, ALASKA


REFERENCE SHOULD BE MADE  
 TO  
 SHEET NOS. 1 AND 2  
 FOR SURVEY INFORMATION




Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered a rebar, 5/8 in. diam., firmly set, projecting 24 ins. above ground, with alum. cap badly damaged, with mks. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Not used.  
 Recovered a copperweld monument, firmly set, 1 in. below ground, mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered a copperweld monument, firmly set, projecting 12 ins. above ground, mkd. as shown.  
 Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered a copperweld monument, firmly set, projecting 6 ins. above ground, mkd. as shown.  
 Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered a copperweld monument, firmly set, projecting 6 ins. above ground, mkd. as shown.  
 Accessories not searched for.




Recovered a copperweld monument, firmly set, projecting 10 ins. above ground, mkd. as shown.  
 Accessories not searched for.



Recovered a copperweld monument, firmly set, projecting 12 ins. above ground, mkd. as shown.  
 Accessories not searched for.



Not used.  
 Recovered an iron pipe, 1 in. diam., badly rusted and bent over at ground level. Replaced iron pipe with a rebar, 5/8" diam., 30 ins. long, 30 ins. in the ground, with alum. cap mkd. as shown.  
 Accessories not searched for.



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, this witness cor. now also serves as the witness cor. to cor. No. 1, Tract CC, Sitnasuak Native Corporation 14(c), from which the new accessories  
 A magnet in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below the ground.  
 A magnet in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below the ground.



Not used.  
 Not used.  
 Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH PP, THE SUBDIVISION OF MINERAL SURVEY NOS. 2270, 2297 AND 2481, AND THE SUBDIVISION OF U.S. SURVEY NOS. 4107, 8734 AND 11683 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION AT NOME, ALASKA

REFERENCE SHOULD BE MADE TO SHEET NOS. 1 AND 2 FOR SURVEY INFORMATION

Recovered wood post, 4 ins. x 6 ins., broken in two pieces, top portion lying on ground, mkd. 1216 502 NW, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a metallic silver plastic case, bears N. 84° E., 10 ft. dist., buried 18 ins. below the ground.

A magnet in a fluorescent orange plastic case, bears N. 6° W., 10 ft. dist., buried 18 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.

Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. 4 S1138, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a fluorescent pink plastic case, bears S. 6° E., 10 ft. dist., buried 18 ins. below the ground.

A magnet in a fluorescent blue plastic case, bears S. 84° W., 10 ft. dist., buried 18 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.

Recovered wood post, 3 ins. x 4 ins., broken in two pieces, top portion lying on ground, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, wood post buried alongside, from which

A magnet in a metallic silver plastic case, bears N. 78° E., 10 ft. dist., buried 18 ins. below the ground.

A magnet in a fluorescent pink plastic case, bears S. 12° E., 10 ft. dist., buried 18 ins. below the ground.


Deposit a magnet in a clear plastic case at the base of the stainless steel post.

Recovered wood post, 4 ins. x 6 ins., broken in two pieces, top portion lying on ground, mks. not readable, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a metallic silver plastic case, bears N. 25° E., 10 ft. dist., buried 18 ins. below the ground.


A magnet in a fluorescent orange plastic case, bears N. 65° W., 10 ft. dist., buried 18 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.

Accessories not searched for.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, in 3 ft. diam. rock collar, with alum. cap mkd. as shown.

Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. 9-508-R on one side, and 5 13 on another, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a fluorescent blue plastic case, bears S. 67° W., 10 ft. dist., buried 12 ins. below the ground.


A magnet in a fluorescent orange plastic case, bears N. 23° W., 10 ft. dist., buried 12 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered a rebar, 5/8 in. diam., firmly set, projecting 10 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, in 2 ft. diam. rock collar, with alum. cap mkd. as shown.

Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. 7 1339 on one side, and Harriet on another, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a metallic silver plastic case, bears N. 60° E., 10 ft. dist., buried 12 ins. below the ground.


A magnet in a fluorescent pink plastic case, bears S. 30° E., 10 ft. dist., buried 12 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered a rebar, 5/8 in. diam., firmly set, projecting 5 ins. above ground, with alum. cap mkd. as shown.


Accessories not searched for.



Recovered a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown.




Not used.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.




Recovered a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown, from which

A 6 X 6 inch concrete highway right-of-way marker, projecting 27 ins. above ground, bears N. 20°57' E., 230.75 ft. dist.




Recovered stone, 7 ins. x 18 ins., firmly set, projecting 7 ins. above ground, mkd. B H on one side and -121-3 on another, with an X at the top. Held original stone as corner position.




Recovered a rebar, 5/8 in. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.

Accessories not searched for.



Recovered an iron post, concrete filled, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, no cap.

Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., poor condition, projecting 24 ins. above ground, mkd. 1371. Replace wood post with a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a metallic silver plastic case, bears N. 64° E., 10 ft. dist., buried 18 ins. below the ground.


A magnet in a fluorescent orange plastic case, bears N. 26° W., 10 ft. dist., buried 18 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown.

Accessories not searched for.



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.

Accessories not searched for.




Recovered a brass tablet, set flush in the top of a pyramid shaped stone which projects 30 ins. above ground. The stone is mkd. 6-513 on the west side, brass tablet mkd. as shown.

Accessories not searched for.


ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c), TRACTS A THROUGH PP,  
 THE SUBDIVISION OF  
 MINERAL SURVEY NOS. 2270, 2297 AND 2481,  
 AND THE SUBDIVISION OF  
 U.S. SURVEY NOS. 4107, 8734 AND 11683  
 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION  
 AT  
**NOME, ALASKA**


REFERENCE SHOULD BE MADE  
 TO  
 SHEET NOS. 1 AND 2  
 FOR SURVEY INFORMATION




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered a brass capped monument, 2 1/2 ins. diam. cap, firmly set, recessed 4 ins. below road surface in a 6 ins. diam. monument case, mks. not readable.  
 Accessories not searched for.




Recovered a brass capped monument, 2 1/2 ins. diam. cap, firmly set, recessed 20 ins. below road surface in a 6 ins. diam. monument case, mks. not readable.  
 Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered a brass capped monument, 2 1/2 ins. diam. cap, firmly set, recessed 14 ins. below road surface in a 6 ins. diam. monument case, mks. not readable.  
 Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered a brass capped monument, 2 1/2 ins. diam. cap, firmly set, recessed 9 ins. below road surface in a 6 ins. diam. monument case, mks. not readable.  
 Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered a brass capped monument, 2 1/2 ins. diam. cap, firmly set, recessed 11 ins. below road surface in a 6 ins. diam. monument case, mks. not readable.  
 Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Not used.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered a brass capped monument, 2 1/2 ins. diam. cap, firmly set, recessed 16 ins. below road surface in a 6 ins. diam. monument case, mks. not readable.  
 Accessories not searched for.




Recovered a copperweld monument, firmly set, flush with ground mkd. as shown.  
 Accessories not searched for.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.




Recovered a brass capped monument, 2 1/2 ins. diam. cap, firmly set, recessed 18 ins. below road surface in a 6 ins. diam. monument case, mks. not readable.  
 Accessories not searched for.



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown.  
 Accessories not searched for.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown.  
 Accessories not searched for.




Recovered wood post, 4 ins. x 4 ins., badly weathered, projecting 24 ins. above ground, no mks. evident. Replace wood post with a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a metallic silver plastic case, bears N. 70° E., 10 ft. dist., buried 12 ins. below the ground.

A magnet in a fluorescent orange plastic case, bears N. 20° W., 10 ft. dist., buried 12 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered wood post, 4 ins. x 4 ins., broken in two pieces, top portion lying on ground, mkd. 8 1209 on one side, M on another, and MS1203 on another, bottom portion still buried in ground at original position. At center of bottom portion, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, wood post left alongside, from which

A magnet in a metallic silver plastic case, bears N. 16° E., 10 ft. dist., buried 12 ins. below the ground.


A magnet in a fluorescent orange plastic case, bears N. 74° W., 10 ft. dist., buried 12 ins. below the ground.

Deposit a magnet in a clear plastic case at the base of the stainless steel post.



Recovered a copperweld monument, firmly set, projecting 6 ins. above ground, mkd. as shown.

Accessories not searched for.



Recovered a copperweld monument, firmly set, projecting 4 ins. above ground, mkd. as shown.


Accessories not searched for.

*Name 2005-3*


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH PP, THE SUBDIVISION OF MINERAL SURVEY NOS. 2270, 2297 AND 2481, AND THE SUBDIVISION OF U.S. SURVEY NOS. 4107, 8734 AND 11683 P.L. 92-203 (85 STAT. 688, 702, 703)

SITNASUAK NATIVE CORPORATION AT NOME, ALASKA


REFERENCE SHOULD BE MADE TO SHEET NOS. 1 AND 2 FOR SURVEY INFORMATION



Cor. No. 2, U.S. Survey No. 5055. No evidence of original corner. Corner position was re-established by bearing-bearing intersection.  
At the corner point  
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 2 ins. below the ground, with brass cap mkd. as shown, from which  
A magnet in a fluorescent blue plastic case, bears S. 43° W., 10 ft. dist., buried 18 ins. below the ground.  
A magnet in a fluorescent orange plastic case, bears N. 47° W., 10 ft. dist., buried 18 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., leaning to the west, projecting 9 ins. above ground, straightened and firmed to now project 6 ins. above ground, with brass cap mkd. as shown.  
Accessories not searched for.




Cor. No. 3, M.S. 720, North Star Placer. No evidence of original corner. Corner position was re-established by grant boundary adjustment from cor. No. 2, M.S. 720, N.S.P., identical with cor. No. 4, M.S. 1222, identical with cor. No. 3, M.S. 1815, identical with cor. No. 1, Tract MM, Ancsa 14(c), (through cor. Nos. 3 and 4, M.S. 720, N.S.P.) to cor. No. 1, M.S. 720, N.S.P., identical with cor. No. 3, M.S. 720, No. 6 A.O.D.P.C., identical with cor. No. 5, M.S. 1222, identical with cor. No. 2, M.S. 1876.

At the corner point  
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which  
A magnet in a fluorescent blue plastic case, bears S. 45° W., 9.90 ft. dist., buried 18 ins. below the ground.  
A magnet in a fluorescent orange plastic case, bears N. 45° W., 9.90 ft. dist., buried 18 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered a 6 X 6 inch concrete highway right-of-way marker, with tack in top center, projecting 18 ins. above ground, now designated as a witness point on the curve between cor. No. 6 and cor. No. 1, Tract K, Sitnasuak Native Corporation 14(C).



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown.  
Accessories not searched for.  
A fence post bears North, 1 lk. dist.



Recovered a 6 X 6 inch concrete highway right-of-way marker, projecting 24 ins. above ground, located on the westerly side of the Nome-Kougarok Road, at Station 451+40.58, 100 ft. left, according to the State of Alaska, Department of Highways, Right-of-Way Project S-0141(7), recorded in the Nome Recording District as Plat No. 85-9.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with the top of a mound of stone, 1 ft. high, 2 1/2 ft. diam., with alum. cap mkd. as shown.  
Accessories not searched for.




Recovered stone, 12 ins. x 12 ins., firmly set, projecting 6 ins. above ground, mkd. 4 1815 DAL 3 1222 on one side, with an X at the top. Held original stone as corner position.




Cor. No. 2, M.S. 720, North Star Placer. No evidence of original corner. Corner position was re-established by broken boundary method between recovered cors. Nos. 3 and 5, M.S. 1222, No. 7 Above Placer.  
At the corner point  
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A magnet in a fluorescent pink plastic case, bears S. 45° E., 9.90 ft. dist., buried 18 ins. below the ground.  
A magnet in a fluorescent blue plastic case, bears S. 45° W., 9.90 ft. dist., buried 18 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with the top of a mound of stone, 8 ins. high, 2 ft. diam., with alum. cap mkd. as shown.  
Accessories not searched for.



Cor. No. 2, M.S. 720, North Star Placer. No evidence of original corner. Corner position was re-established by broken boundary method between recovered cors. Nos. 3 and 5, M.S. 1222, No. 7 Above Placer.  
At the corner point  
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A magnet in a fluorescent pink plastic case, bears S. 45° E., 9.90 ft. dist., buried 18 ins. below the ground.  
A magnet in a fluorescent blue plastic case, bears S. 45° W., 9.90 ft. dist., buried 18 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Cor. No. 4, New F Association Placer, M.S. 1140, identical with cor. No. 2, New G Association Placer, M.S. 1140, identical with cor. No. 1, U.S. Survey No. 5056. Original monument not found, not remonumented. Corner position was re-established by distance-distance intersection, from which the original reference monuments set in 1972  
An iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. RM1 C1 C4 S5056 NGAPMC MS1140G 50 FT 1972, bears S. 32°57' E., 50.00 ft. dist.  
An iron post, 2 1/2 ins. diam., firmly set, projecting 9 ins. above ground, with brass cap mkd. RM2 50 FT S5056 1972, bears S. 75°27' W., 50.00 ft. dist.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above a mound of stone, 1 ft. high, 3 ft. diam., with alum. cap mkd. as shown.  
Accessories not searched for.




Recovered stone, 14 ins. x 16 ins., firmly set, projecting 6 ins. above ground, mkd. 746 1 1876 2 6B 5-1222 on one side. Held center of original stone as corner position.




Cor. No. 4, New E Association Placer, M.S. 1140, identical with cor. No. 1, New F Association Placer, M.S. 1140, identical with cor. No. 1, Lot 1, U.S. Survey No. 3646. Original monument not found. Corner position was re-established by grant boundary adjustment between cor. No. 1, U.S. Survey No. 3645 and cor. No. 2, U.S. Survey No. 3646, utilizing information contained in the record of U.S. Survey No. 5055, from which  
A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. SNC RM1 NEW E C4 MS 1140 C1 L1 S3646 C1 NEW F 2003, bears S. 30°00' W., 140.00 ft. dist.  
A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. SNC RM2 NEW E C4 MS 1140 C1 L1 S3646 C1 NEW F 2003, bears N. 60°00' W., 180.00 ft. dist.




Recovered an iron post, 2 1/2 ins. diam., leaning badly to the west, projecting 9 ins. above ground, straightened and firmed to now project 6 ins. above ground, with brass cap mkd. as shown.  
Accessories not searched for.



Cor. No. 4, M.S. 720, North Star Placer. No evidence of original corner. Corner position was re-established by grant boundary adjustment from cor. No. 2, M.S. 720, N.S.P., identical with cor. No. 4, M.S. 1222, identical with cor. No. 3, M.S. 1815, identical with cor. No. 1, Tract MM, Ancsa 14(c), (through cor. Nos. 3 and 4, M.S. 720, N.S.P.) to cor. No. 1, M.S. 720, N.S.P., identical with cor. No. 3, M.S. 720, No. 6 A.O.D.P.C., identical with cor. No. 5, M.S. 1222, identical with cor. No. 2, M.S. 1876.  
At the corner point  
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which  
A magnet in a metallic silver plastic case, bears N. 45° E., 9.90 ft. dist., buried 18 ins. below the ground.  
A magnet in a fluorescent orange plastic case, bears N. 45° W., 9.90 ft. dist., buried 18 ins. below the ground.  
Deposit a magnet in a clear plastic case at the base of the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown.  
Accessories not searched for.  
A fence post bears North, 1 lk. dist.



Recovered an iron post, 2 1/2 ins. diam., leaning to the southeast, straightened and firmed to now project 6 ins. above ground, with brass cap mkd. as shown.  
Accessories not searched for.



Recovered a 6 X 6 inch concrete highway right-of-way marker, leaning slightly to the southeast, projecting 12 ins. above ground, located on the westerly side of the Nome-Kougarok Road, at Station 690+00.48, 100 ft. left, according to the State of Alaska, Department of Highways, Right-of-Way Project S-0141(7), recorded in the Nome Recording District as Plat No. 85-9.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 1 in. above the ground, with alum. cap mkd. as shown.  
Accessories not searched for.

2005-3  
Nome REC DIST 1800 cc  
DATE 2/16/05  
TIME 10:32 AM  
Requested By USA/BJM  
Address

Nome 2005-3



# United States Department of the Interior

BUREAU OF LAND MANAGEMENT  
ALASKA STATE OFFICE  
222 W. 7<sup>th</sup> Avenue, #13  
ANCHORAGE, ALASKA 99513-7599



9600 (927)  
ANCSA 14(c)  
NOME

February 8, 2005

FAIRBANKS RECORDER'S OFFICE  
ATTN: CAPE NOME RECORDING DISTRICT  
1648 South Cushman Street, #201  
Fairbanks, Alaska 99701-6206

Dear District Recorder:

The Alaska Native Claims Settlement Act (ANCSA) Section 14(c) plat for Nome, Tracts A through PP and the subdivision of Mineral Survey Nos. 2270, 2297 and 2481 and the subdivision of U.S. Survey Nos. 4107, 8734 and 11683, consisting of thirty-three (33) original sheets, transmitted to you by this letter of compliance, portrays a Cadastral Survey conducted to fulfill statutory requirements mandated by ANCSA, pursuant to Public Law 92-203 (Stat. 688, 702, 703), and satisfies the federal guidelines and requirements proclaimed for ANCSA 14(c) Surveys.

The plat represents surveyed parcels of land selected for ANCSA 14(c) reconveyances situated on portions of surface estate lands transferred from the United States of America by Interim Conveyance Nos. 528, 558, 707, 992, 1685 and 1825 and Patent Nos. 50-82-0100, 50-82-0148 and 50-83-0275, all to Sitnasuak Native Corporation.

ANCSA 14(c) Surveys have been authorized as federally mandated surveys, under the provisions of Section 13 of ANCSA, 43 U.S.C. Stat. 1612. The authority to execute all federal land surveys in Alaska is delegated by the Secretary of the Interior to the Director, Bureau of Land Management (BLM) and subsequently redelegated to the Deputy State Director for Cadastral Survey and Geomatics, Alaska State Office. Accordingly, BLM requests that this plat be filed with the CAPE NOME RECORDING DISTRICT to comply with the federal platting regulations and the agreements set forth between the Bureau of Land Management and the State Recording Authority.

Sincerely,

John A. Sroufe  
Deputy State Director  
for Cadastral Survey, Alaska