


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A-F
P.L. 92-203 (85 STAT. 688, 702, 703)
OCEANSIDE CORPORATION
AT
PERRYVILLE, ALASKA
AND
THE RETRACTMENT OF A PORTION OF
U.S. SURVEY No. 4993

This plat contains the entire survey record.
U.S. Survey No. 4993 was surveyed by Mason W. Thayer, Supervisory Cadastral Surveyor, in 1969.
The exterior boundaries of Township 48 South, Ranges 63 and 64 West, and Township 49 South, Range 64 West, Seward Meridian, Alaska, were surveyed by Stanley E. King, Cadastral Surveyor, in 1980.
Oceanside Estates Subdivision, Plat No. 89-8, and Brooks Access Road and Pump Station, Plat No. 89-7, Aleutian Islands Recording District, State of Alaska, were surveyed by Gregory W. Maxwell, Registered Alaska Land Surveyor No. 6934, in 1989.
This survey was executed by Kristine S. Staffeldt, Cadastral Surveyor, July 17, through September 3, 1991, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973; Special Instructions approved May 30, 1991; Amended Special Instructions approved July 12, 1991; the Perryville ANCSA 14(c) Map of Boundaries approved August 1, 1991; and Assignment Instructions dated June 3, 1991.

Field assistants were:
Steven J. Green, Student Trainee (LS)
Scott P. Peronto, Student Trainee (LS)
Area: 1036.48 Acres.
The azimuth was obtained from the retracement of line 3-4 of U.S. Survey No. 4993, and refers to the true meridian.
The geographic position of corner No. 19, Tract A, identical with corner No. 1, U.S. Survey No. 4993, both meander corners, as determined by a tie to Bureau of Land Management station "EC 10731 1980", is:
Latitude: 55° 54' 36.39" North NAD 27
Longitude: 159° 09' 03.29" West
The mean magnetic declination was obtained from U.S. Geological Survey quadrangle map "STEPOVAK BAY (D-4)," Alaska, 1963, with minor revisions in 1983.
This survey is situated on the south coast of the Alaska Peninsula at the village of Perryville, Alaska.
The land is low and rolling near the ocean, covered with grass and patches of thick alder, with the outer surveyed boundaries in steep mountains surrounding the village.
The soil is a sandy loam mixed with coarse volcanic gravel.
The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska
The survey represented by this plat, sheets 1 - 9, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.
For the Director
Russell P. Christ 4 March 1993
Date
Deputy State Director for Cadastral Survey, Alaska


TRACT E
SEE SHEET 9

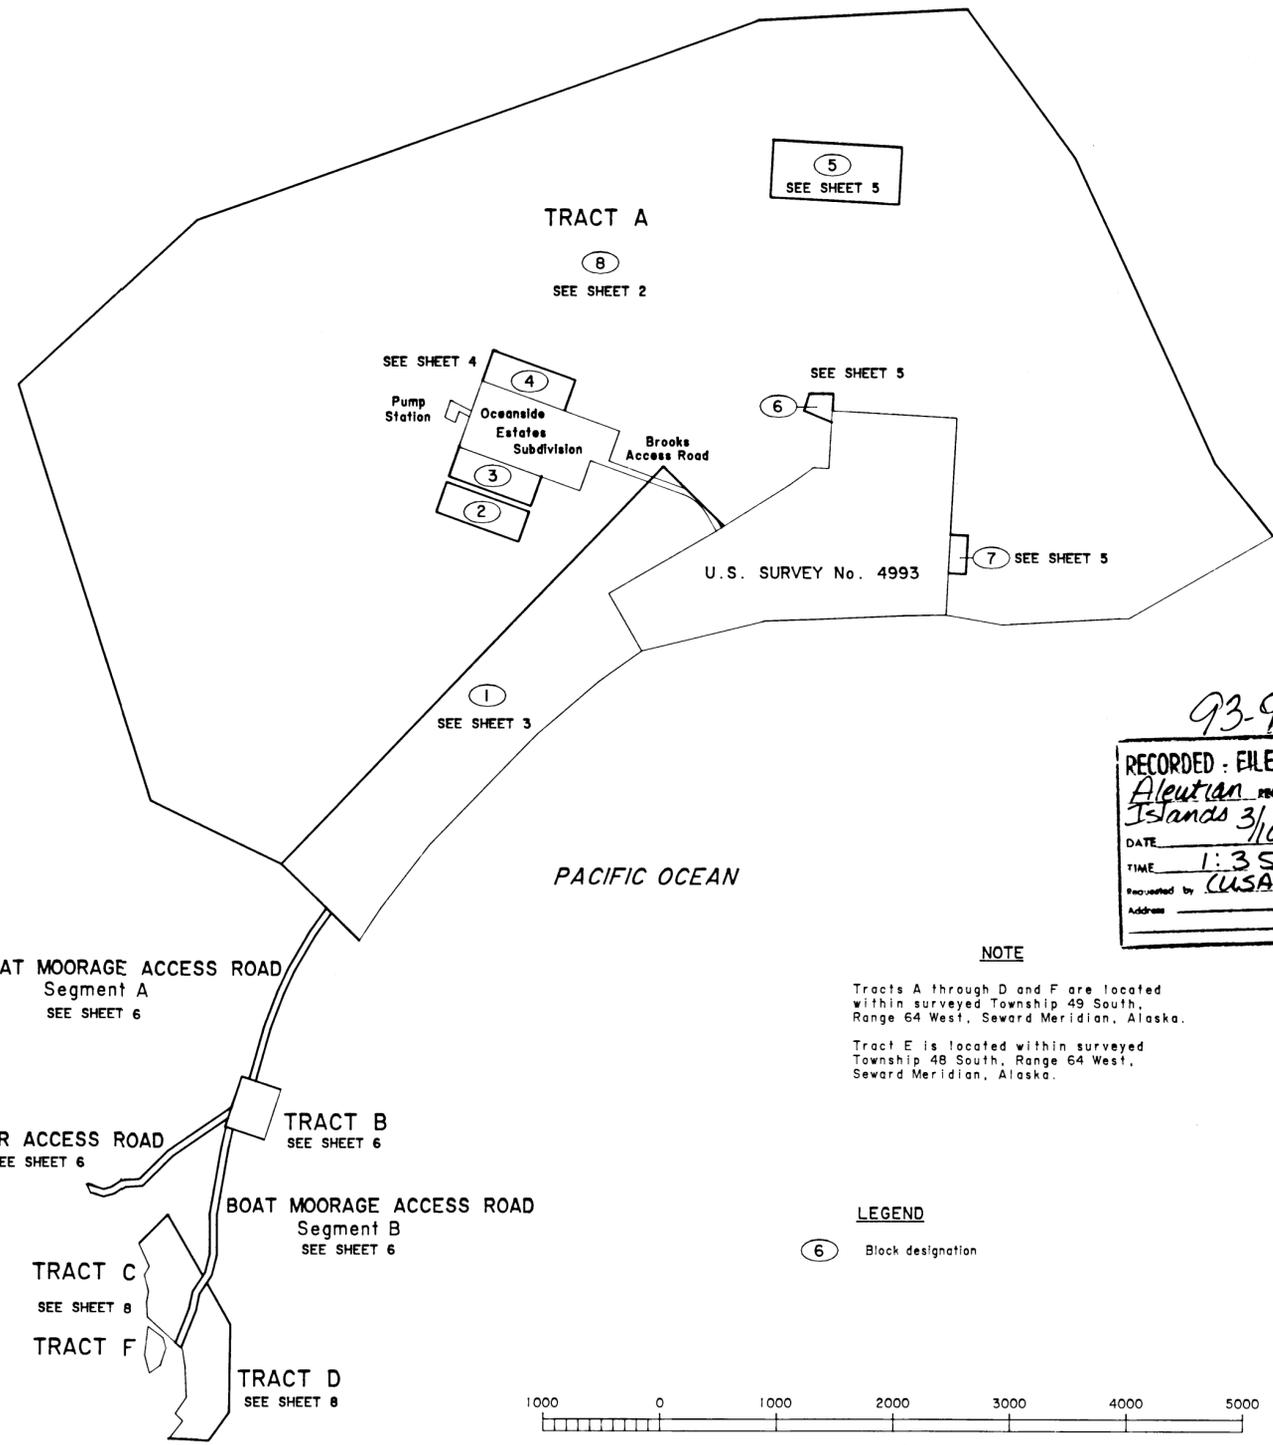

93-9
RECORDED: FILED 60-
Aleutian REC DIST.
Islands 3/10 19 93
DATE
TIME 1:35 P
Recorded by (USA/BLM)
Address

NOTE
Tracts A through D and F are located within surveyed Township 49 South, Range 64 West, Seward Meridian, Alaska.
Tract E is located within surveyed Township 48 South, Range 64 West, Seward Meridian, Alaska.

LEGEND
⑥ Block designation





I, Kristine S. Staffeldt, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 - 9, in conformity with the Special Instructions approved May 30, 1991; and Amended Special Instructions approved July 12, 1991; the principles of survey described in the Manual of Surveying Instructions, 1973; and in the specific manner described on this plat.
December 3, 1992
Date
Kristine S. Staffeldt
Cadastral Surveyor


I hereby certify that the Tracts A through F represented on this plat of survey are on lands Interim Conveyed to Oceanside Corporation by Interim Conveyance No. 080 issued by the United States of America; said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by the Oceanside Corporation Resolution No. 90-1, and the Perryville ANCSA 14(c) Map of Boundaries approved August 1, 1991.
Feb. 24, 1993
Date
Ruford Larea
President, Oceanside Corporation

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS A-F
 P.L. 92-203 (85 STAT. 688, 702, 703)
 OCEANSIDE CORPORATION
 AT
 PERRYVILLE, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

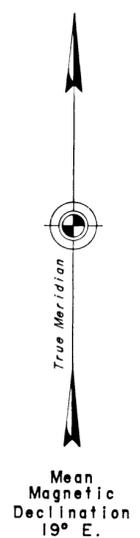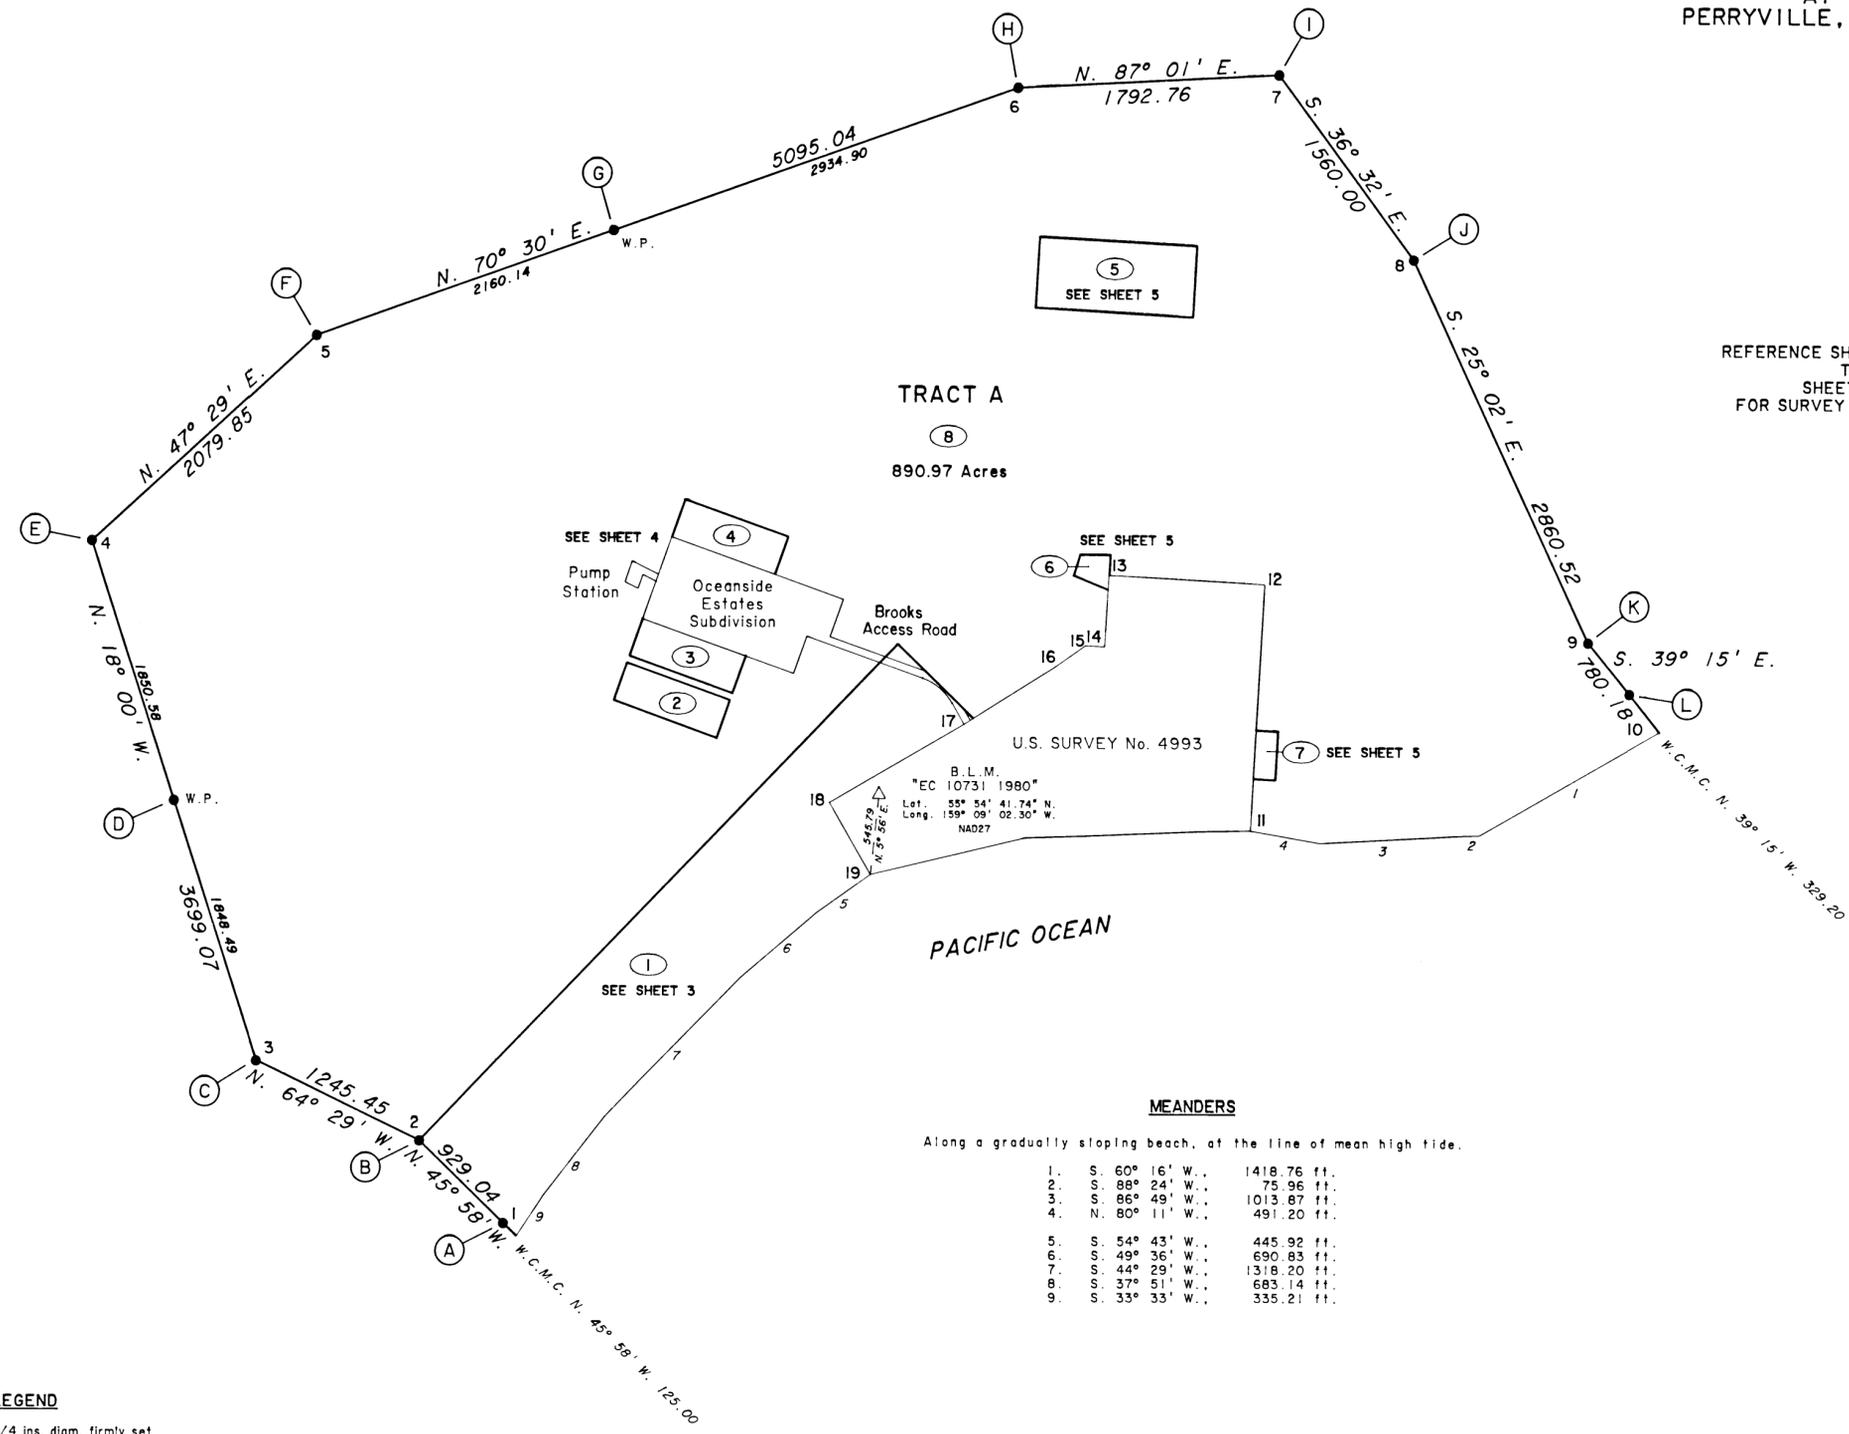

- LEGEND**
- △ Found alum. rod, 3/4 ins. diam. firmly set, projecting 6 ins. above the ground, with alum. cap mkd. EC 10731 1980.
 - Set primary ANCSA 14(c) stainless steel post, more particularly described on Sheet No. 7.
 - ⑥ Block designation



MEANDERS
 Along a gradually sloping beach, at the line of mean high tide.

1.	S. 60° 16' W.,	1418.76 ft.
2.	S. 88° 24' W.,	75.96 ft.
3.	S. 86° 49' W.,	1013.87 ft.
4.	N. 80° 11' W.,	491.20 ft.
5.	S. 54° 43' W.,	445.92 ft.
6.	S. 49° 36' W.,	690.83 ft.
7.	S. 44° 29' W.,	1318.20 ft.
8.	S. 37° 51' W.,	683.14 ft.
9.	S. 33° 33' W.,	335.21 ft.


93-9

RECORDED - FILED 60
 Aleutian REC. DIST.
 Islands 3/10 93
 DATE 1:35 P
 Recorded by (USA/Blm)
 Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS A-F
 P.L. 92-203 (85 STAT. 688, 702, 703)
 OCEANSIDE CORPORATION
 AT
 PERRYVILLE, ALASKA

TRACT A
 SEE SHEET 2

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

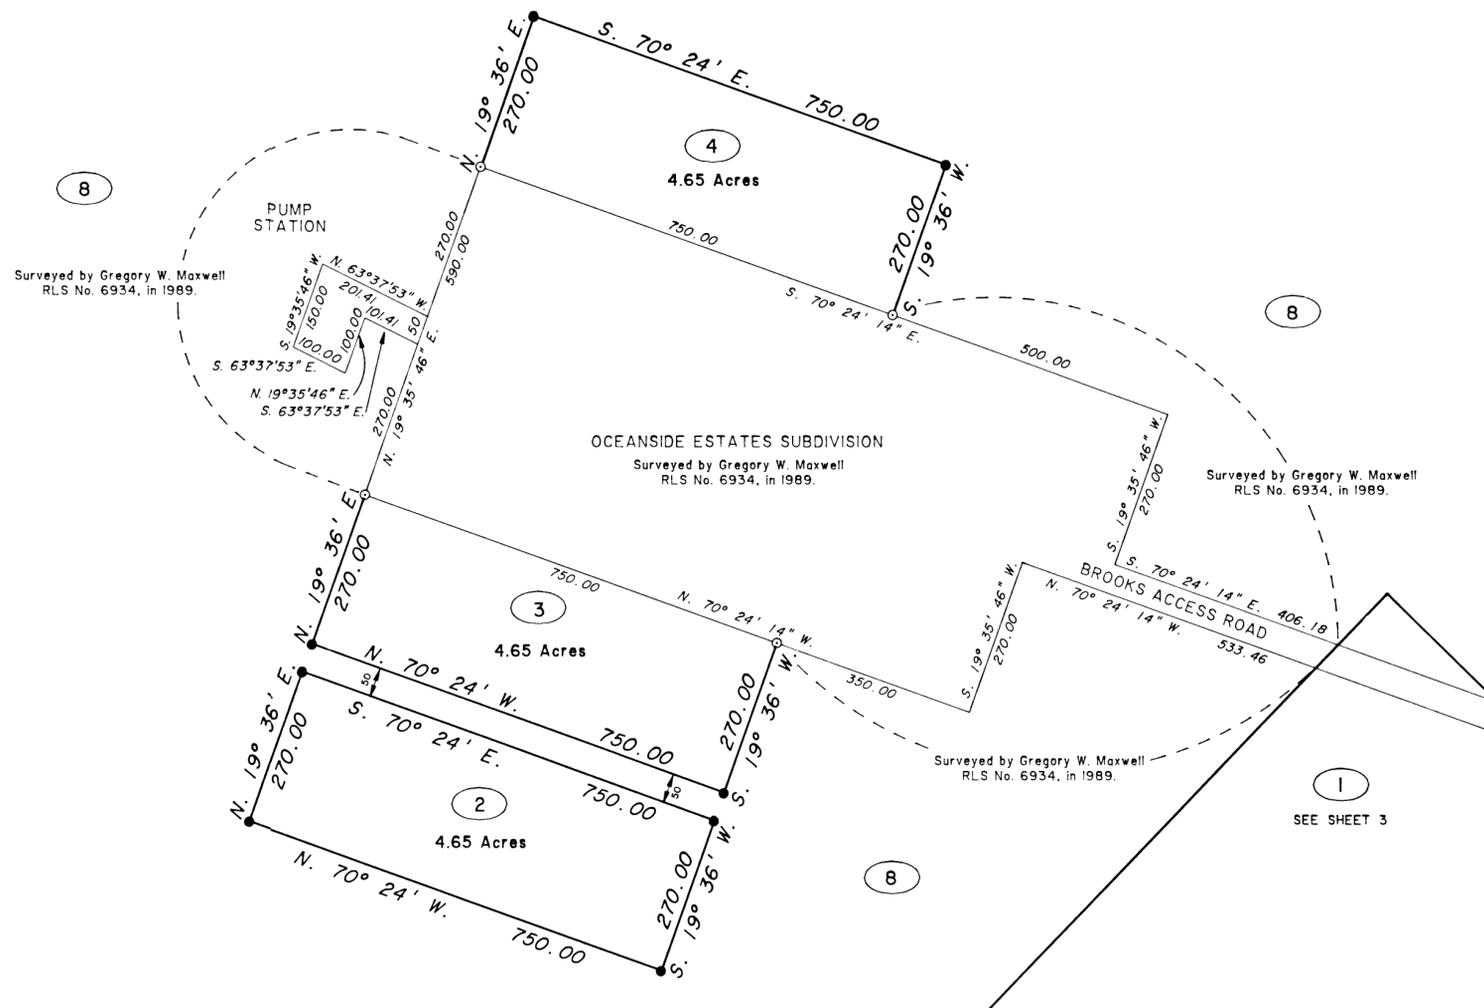

LEGEND


- Set primary ANCSA 14(c) stainless steel post.
- Found rebar, 5/8 in. diam., with alum. cap. set by Gregory W. Maxwell, Registered Land Surveyor No. 6934, in 1989.
- ⑥ Block designation

93-9



RECORDED - FILED 60-	
Aleutian REC. DIST.	
Islands 3/10 93	
DATE	19 93
TIME	1:35 P.M.
Recorded by	(USA/BLM)
Address	

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS A-F
 P.L. 92-203 (85 STAT. 688, 702, 703)
 OCEANSIDE CORPORATION
 AT
 PERRYVILLE, ALASKA

TRACT A
 SEE SHEET 2

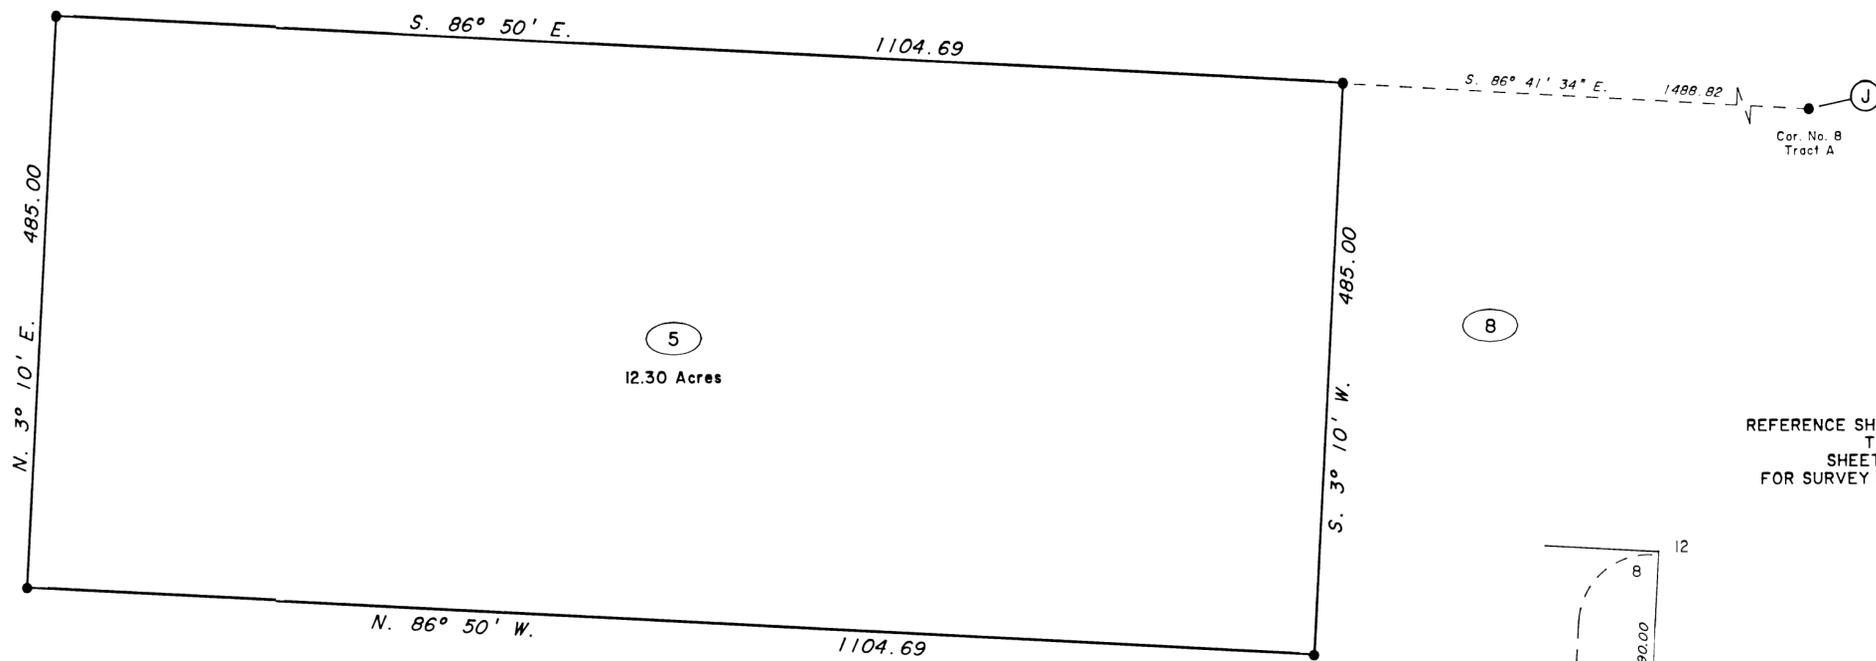



REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

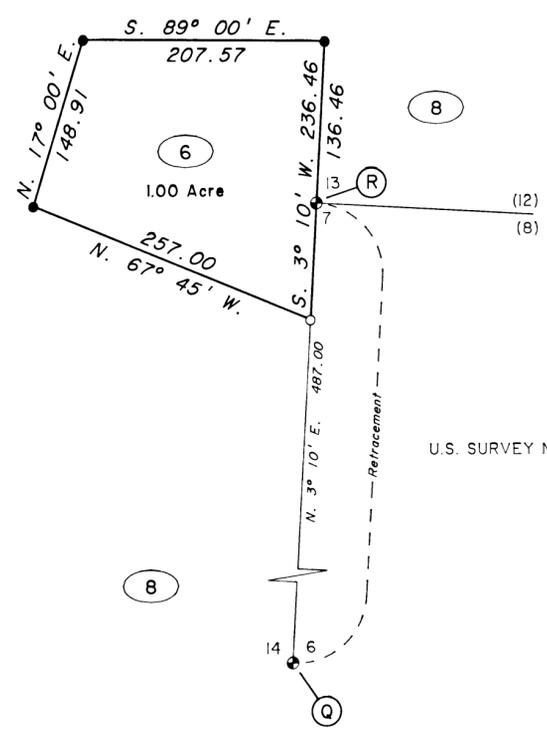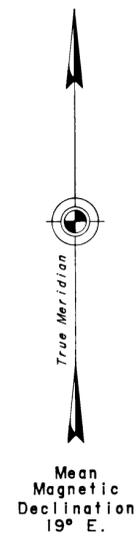

U.S. SURVEY No. 4993

U.S. SURVEY No. 4993

- LEGEND**
- Found iron post, set by Mason W. Thayer, Supervisory Cadastral Surveyor, in 1969, more particularly described on Sheet No. 7.
 - Found rebar, 5/8 in. diam., with alum. cap. set by Mason W. Thayer, Supervisory Cadastral Surveyor, in 1969.
 - Set primary ANCSA 14(c) stainless steel post. Monuments designated as J, more particularly described on Sheet No. 7.
 - Set secondary ANCSA 14(c) iron rebar, 30 ins. long, 3/4 ins. diam., with alum. cap.
 - 6 Block designation

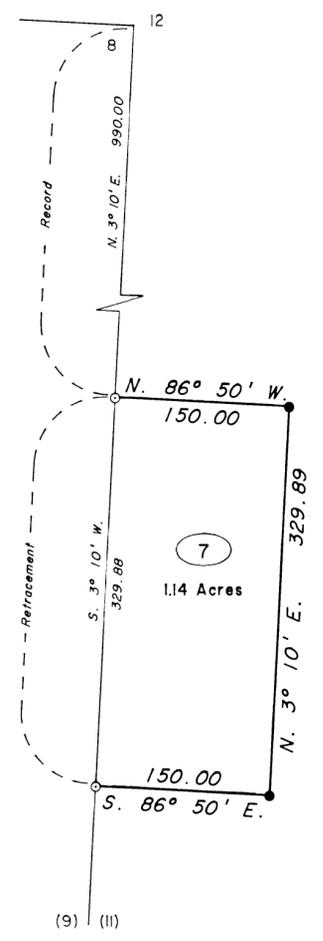

939

RECORDED - FILED	60
Aleutian REC DIST	
Islands 3/10	93
DATE	10 19 93
TIME	1:35 P
Surveyed by	(USA/BLM)
Address	

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A-F
P.L. 92-203 (85 STAT. 688, 702, 703)
OCEANSIDE CORPORATION
AT
PERRYVILLE, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

BOAT MOORAGE ACCESS ROAD Segment A



From a point on line 1-2 Tract A, along the easterly right of way

- | | | |
|--------------------|------------|--|
| 1. S. 35° 27' W., | 233.97 ft. | |
| 2. S. 30° 16' W., | 355.46 ft. | |
| 3. S. 25° 06' W., | 212.65 ft. | |
| 4. S. 21° 12' W., | 311.73 ft. | |
| 5. S. 15° 55' W., | 465.40 ft. | |
| 6. N. 71° 42' W., | 60.05 ft. | To a point on line 1-2 Tract B,
thence along the westerly
right of way |
| 7. N. 15° 55' E., | 465.67 ft. | |
| 8. N. 21° 12' E., | 316.54 ft. | |
| 9. N. 25° 06' E., | 217.40 ft. | |
| 10. N. 30° 16' E., | 360.88 ft. | |
| 11. N. 35° 27' E., | 245.75 ft. | To a point on line 1-2 Tract A |
| 12. S. 45° 58' E., | 60.68 ft. | |

RIVER ACCESS ROAD

From a point on line 2-3 Tract B, along the southerly right of way


- | | | |
|--------------------|------------|--|
| 29. S. 55° 46' W., | 573.98 ft. | |
| 30. S. 45° 54' W., | 362.23 ft. | |
| 31. S. 86° 09' W., | 146.83 ft. | |
| 32. S. 56° 45' W., | 115.47 ft. | |
| 33. S. 74° 53' W., | 94.23 ft. | |
| 34. N. 72° 22' W., | 102.79 ft. | At end of course, intersect the
left bank of an unnamed river,
thence along said bank, at
the line of mean high tide. |
| 35. N. 25° 02' W., | 81.63 ft. | At end of course, intersect the
northerly right of way,
thence along the northerly
right of way |
| 36. S. 72° 22' E., | 140.53 ft. | |
| 37. N. 74° 53' E., | 66.97 ft. | |
| 38. N. 56° 45' E., | 121.64 ft. | |
| 39. N. 86° 09' E., | 140.59 ft. | |
| 40. N. 45° 54' E., | 345.43 ft. | |
| 41. N. 55° 46' E., | 657.42 ft. | |
| 42. S. 18° 18' W., | 98.61 ft. | To a point on line 2-3 Tract B |

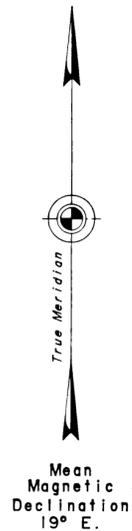

BOAT MOORAGE ACCESS ROAD Segment A
60 Ft. R.O.W.
2.19 Acres

RIVER ACCESS ROAD
60 Ft. R.O.W.
1.97 Acres


BOAT MOORAGE ACCESS ROAD Segment B
60 Ft. R.O.W.
2.63 Acres

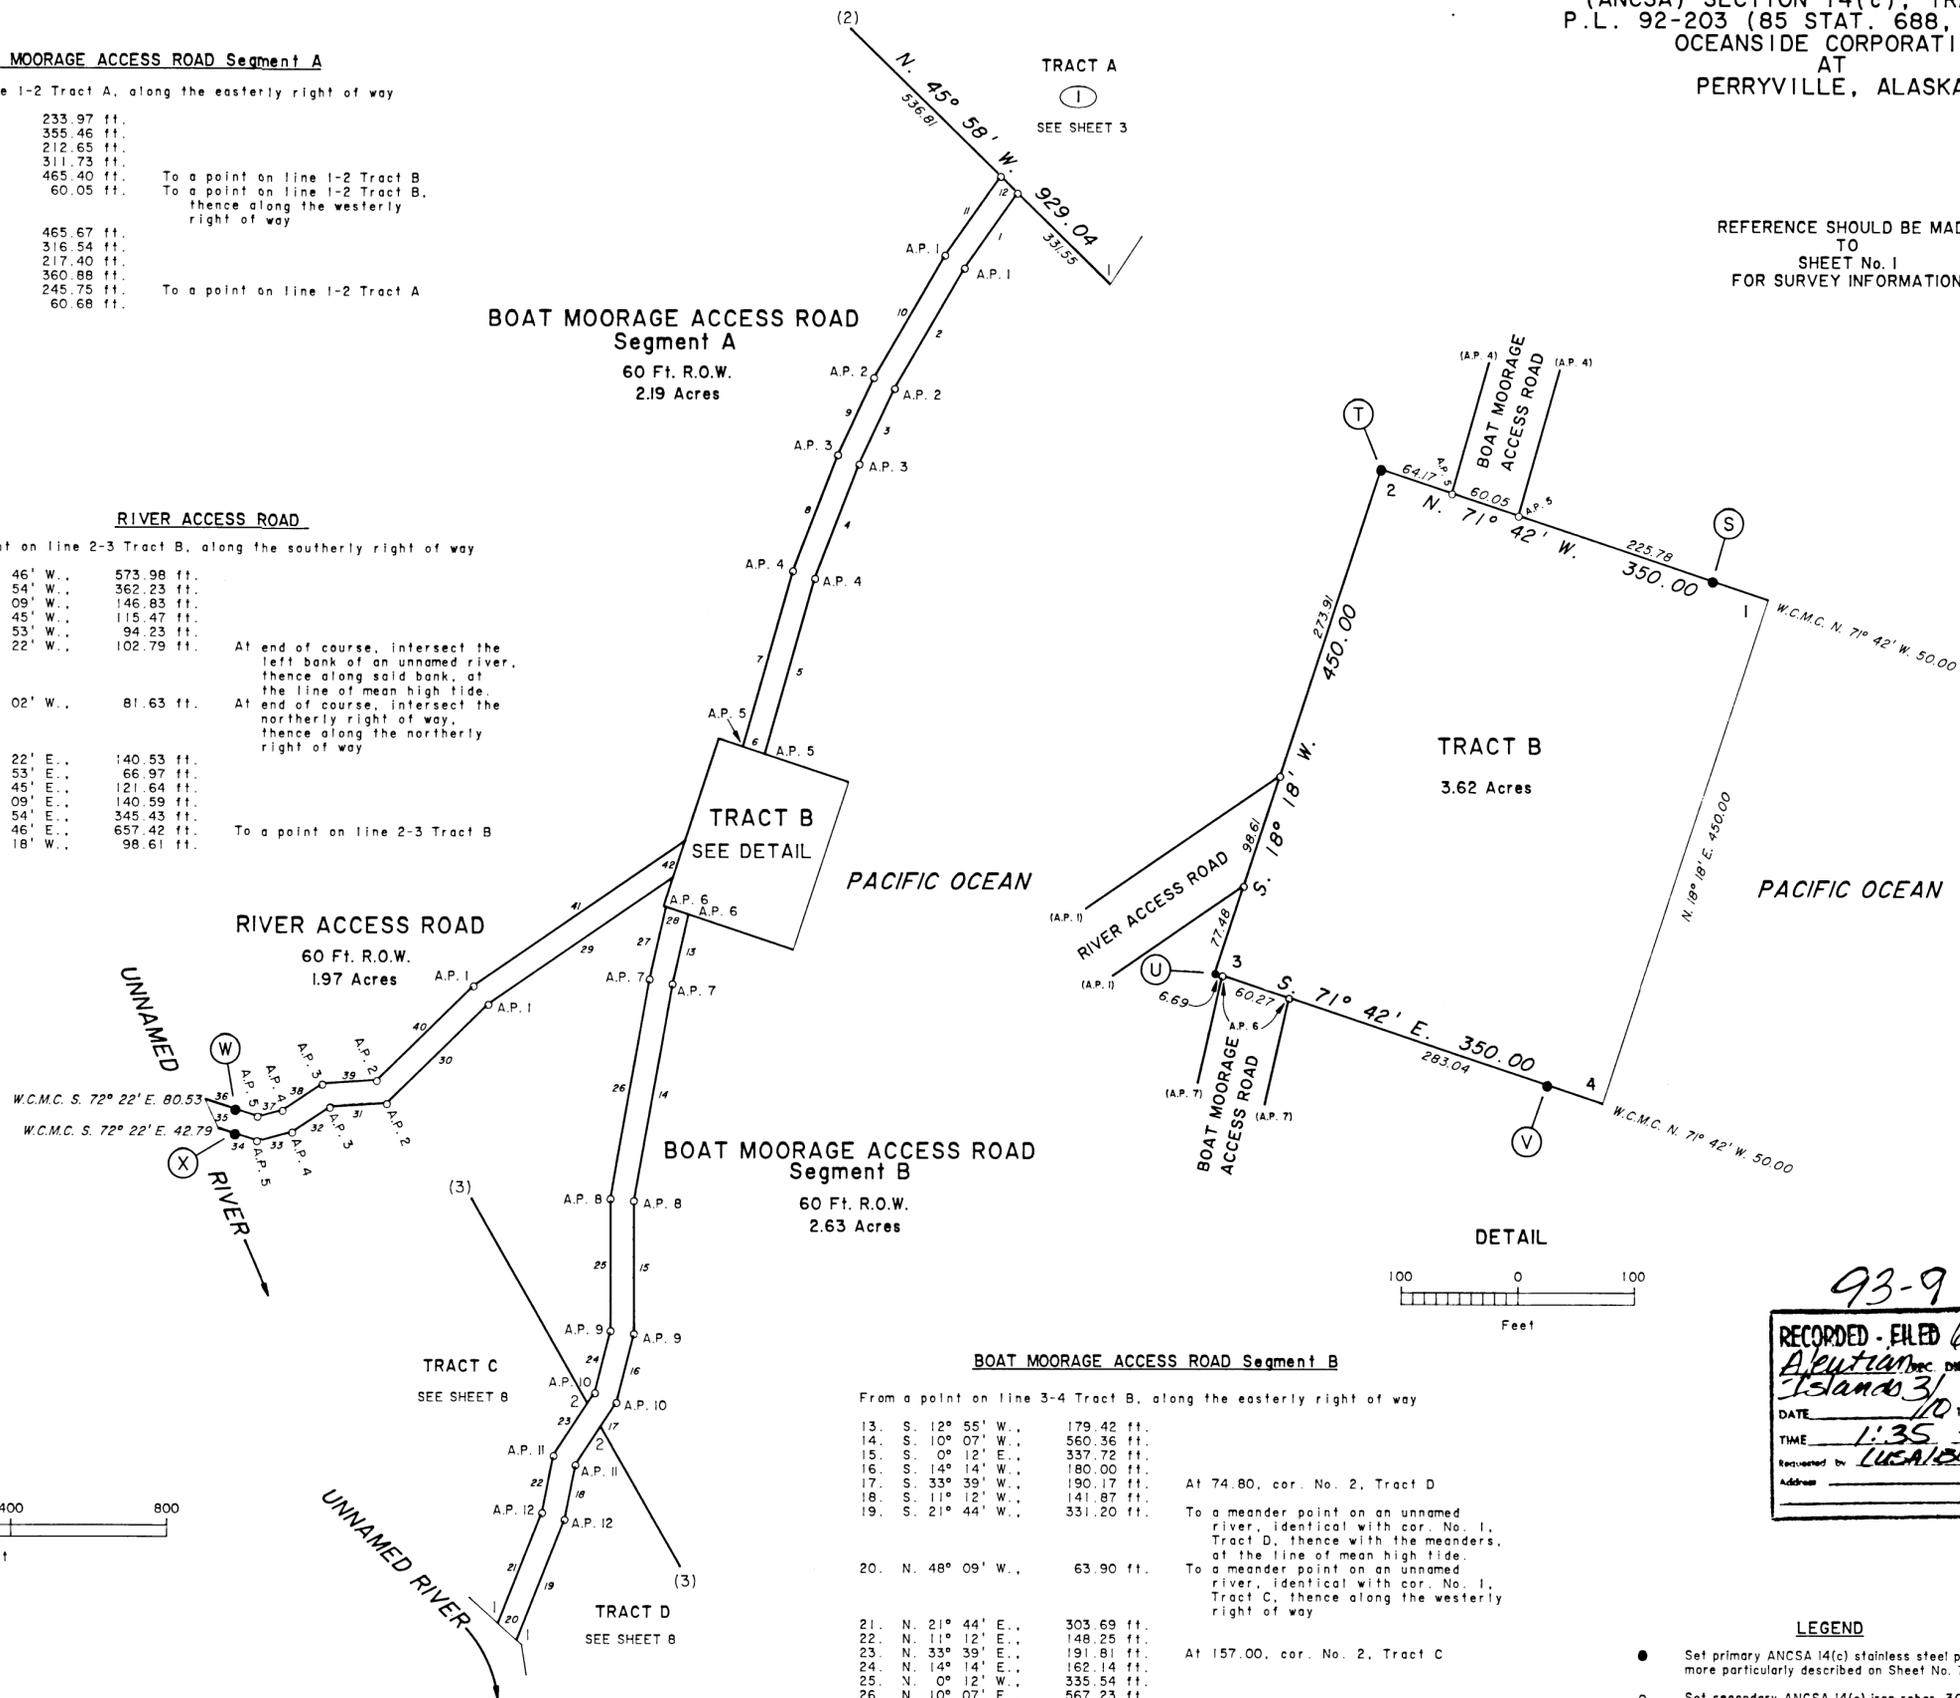

BOAT MOORAGE ACCESS ROAD Segment B

From a point on line 3-4 Tract B, along the easterly right of way

- | | | |
|--------------------|------------|---|
| 13. S. 12° 55' W., | 179.42 ft. | |
| 14. S. 10° 07' W., | 560.36 ft. | |
| 15. S. 0° 12' E., | 337.72 ft. | |
| 16. S. 14° 14' W., | 180.00 ft. | |
| 17. S. 33° 39' W., | 190.17 ft. | At 74.80, cor. No. 2, Tract D |
| 18. S. 11° 12' W., | 141.87 ft. | To a meander point on an unnamed
river, identical with cor. No. 1,
Tract D, thence with the meanders,
at the line of mean high tide. |
| 19. S. 21° 44' W., | 331.20 ft. | To a meander point on an unnamed
river, identical with cor. No. 1,
Tract C, thence along the westerly
right of way |
| 20. N. 48° 09' W., | 63.90 ft. | |
| 21. N. 21° 44' E., | 303.69 ft. | |
| 22. N. 11° 12' E., | 148.25 ft. | |
| 23. N. 33° 39' E., | 191.81 ft. | |
| 24. N. 14° 14' E., | 162.14 ft. | At 157.00, cor. No. 2, Tract C |
| 25. N. 0° 12' W., | 335.54 ft. | |
| 26. N. 10° 07' E., | 567.23 ft. | |
| 27. N. 12° 55' E., | 186.54 ft. | To a point on line 3-4 Tract B |
| 28. S. 71° 42' E., | 60.27 ft. | |

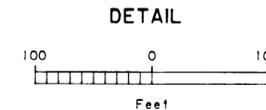

93-9
RECORDED - FILED 60-
Aleutian DIST.
Islands 3/10/93
DATE 1:35 P.M.
Requested by (USA/BLM)
Address

LEGEND

- Set primary ANCSA 14(c) stainless steel post, more particularly described on Sheet No. 7.
- Set secondary ANCSA 14(c) iron rebar, 30 ins. long, 3/4 ins. diam., with alum. cap.
- ⑥ Block designation


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A-F P.L. 92-203 (85 STAT. 688, 702, 703) OCEANSIDE CORPORATION AT PERRYVILLE, ALASKA

TYPICAL CAP MARKING


For monuments set this survey, unless otherwise shown; no accessories taken

RECORDED - FILED 60 Aleutian Islands REC DIST DATE 1:35 P M 93 Received by (USA/Bum) Address


REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A blue DEEP-1 magnet bears S. 60° W., 5 ft. dist., 12 ins. below ground. An orange DEEP-1 magnet bears N. 30° W., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located on level ground in grass.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which A silver DEEP-1 magnet bears N. 45° E., 4 ft. dist., 12 ins. below ground. A pink DEEP-1 magnet bears S. 45° E., 4 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located on marshy area in grass.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as shown, from which the remnant of a pit bears SW on line, 3 ft. dist.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which A pink DEEP-1 magnet bears S. 60° E., 5 ft. dist., 12 ins. below ground. A blue DEEP-1 magnet bears S. 30° W., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located on flat tundra and widely scattered alder.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which A blue DEEP-1 magnet bears S. 45° W., 5 ft. dist., 12 ins. below ground. An orange DEEP-1 magnet bears N. 45° W., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located on level ground in dense willow.




Found an iron post, 2 1/2 ins. diam., firmly set, 5 1/2 ft. below surface of the ground, with brass cap mkd. C2 S4993 1969.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which A silver DEEP-1 magnet bears N. 45° E., 5 ft. dist., 12 ins. below ground. An orange DEEP-1 magnet bears N. 45° W., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located on top of a SE facing rock cliff in dense alder.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A pink DEEP-1 magnet bears S. 45° E., 5 ft. dist., 12 ins. below ground. A blue DEEP-1 magnet bears S. 45° W., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located on level ground in dense alder.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 1 ft. below ground, with brass cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A pink DEEP-1 magnet bears S. 45° E., 4 ft. dist., 12 ins. below ground. A blue DEEP-1 magnet bears S. 45° W., 4 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located on S slope in dense alder.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which A silver DEEP-1 magnet bears N. 45° E., 5 ft. dist., 12 ins. below ground. A pink DEEP-1 magnet bears N. 45° W., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located on SE slope in dense willows.




Found an iron post, 2 1/2 ins. diam., firmly set, 12 ins. below surface of the ground, with brass cap mkd. as shown. There is no remaining evidence of the original accessories.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A silver DEEP-1 magnet bears N. 20° E., 5 ft. dist., 12 ins. below ground. A pink DEEP-1 magnet bears S. 70° E., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located on SE slope among willows near the top of a hill.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a rock collar, 2 ft. diam., with brass cap mkd. as shown, from which A silver DEEP-1 magnet bears N. 45° E., 5 ft. dist., 12 ins. below ground. An orange DEEP-1 magnet bears N. 45° W., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located at bottom of S slope at edge of marsh, among willow.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with brass cap mkd. as shown, from which the remnants of pits bears NE and SW on line, 3 ft. dist.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which A blue DEEP-1 magnet bears S. 20° W., 4 ft. dist., 12 ins. below ground. An orange DEEP-1 magnet bears N. 70° W., 4 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located on S slope among willows.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which A silver DEEP-1 magnet bears N. 60° E., 5 ft. dist., 12 ins. below ground. An orange DEEP-1 magnet bears N. 30° W., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument is located on a N slope in dense alder.




Found an iron post, 2 1/2 ins. diam., firmly set and leaning, projecting 2 ins. above the ground, with brass cap mkd. as shown. There is no remaining evidence of the original accessories. Reset the original iron post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A silver DEEP-1 magnet bears N. 45° E., 5 ft. dist., 12 ins. below ground. A pink DEEP-1 magnet bears S. 45° E., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument located on level ground, among willow and alder.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which A blue DEEP-1 magnet bears S. 45° W., 5 ft. dist., 12 ins. below ground. An orange DEEP-1 magnet bears N. 45° W., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument located on level ground, in tall grass.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A pink DEEP-1 magnet bears S. 45° E., 5 ft. dist., 12 ins. below ground. A blue DEEP-1 magnet bears S. 45° W., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument located on level ground, in tall grass.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which A silver DEEP-1 magnet bears N. 45° E., 5 ft. dist., 12 ins. below ground. A pink DEEP-1 magnet bears S. 45° E., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument located on level ground, in tall grass.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which A blue DEEP-1 magnet bears S. 45° W., 5 ft. dist., 12 ins. below ground. An orange DEEP-1 magnet bears N. 45° W., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument located on level ground, in tall grass.





Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A silver DEEP-1 magnet bears N. 45° E., 5 ft. dist., 12 ins. below ground. A pink DEEP-1 magnet bears S. 45° E., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument located on level ground, among willow and alder.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which A silver DEEP-1 magnet bears N. 45° E., 5 ft. dist., 12 ins. below ground. A pink DEEP-1 magnet bears S. 45° E., 5 ft. dist., 12 ins. below ground. Bury a clear DEEP-1 magnet at the base of the stainless steel post. Monument located on level ground, in alder.

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A-F
P.L. 92-203 (85 STAT. 688, 702, 703)
OCEANSIDE CORPORATION
AT
PERRYVILLE, ALASKA

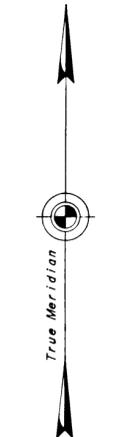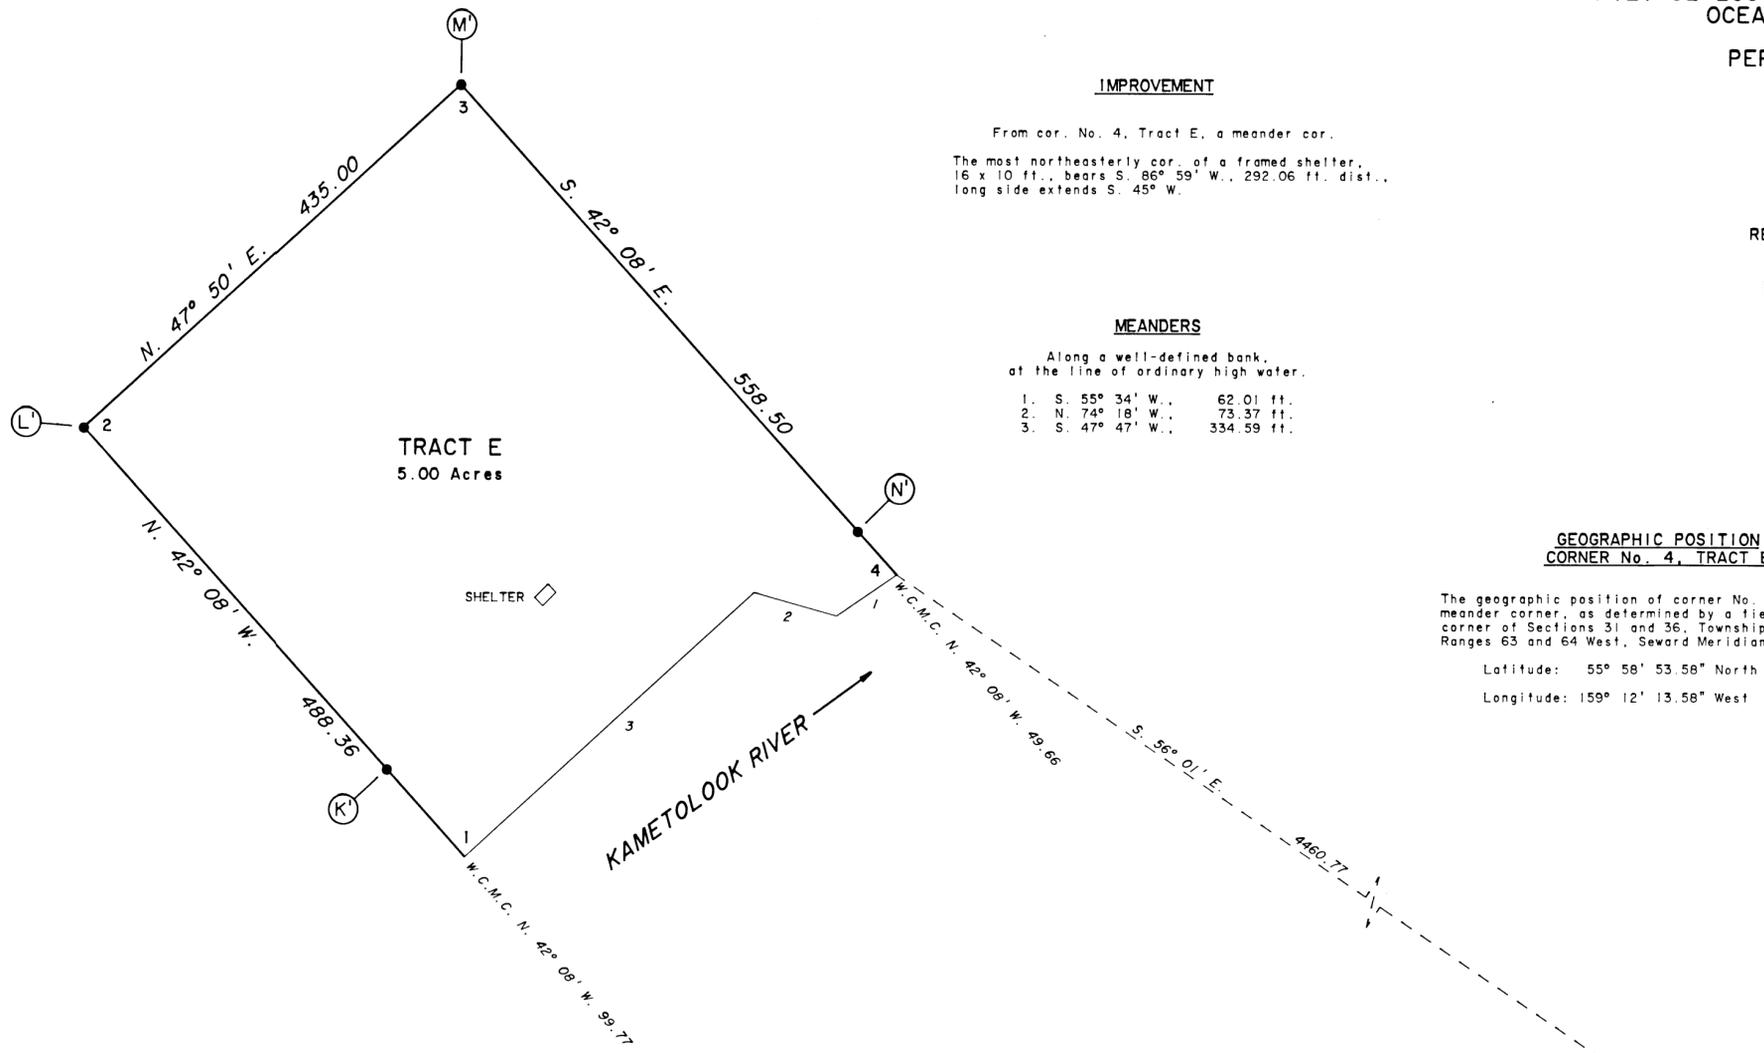

Mean
Magnetic
Declination
19° E.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A silver DEEP-1 magnet bears N. 30° E., 5 ft. dist., 12 ins. below ground.

An orange DEEP-1 magnet bears N. 60° W., 5 ft. dist., 12 ins. below ground.

Bury a clear DEEP-1 magnet at the base of the iron post.

Monument located on SE slope in tall grass and scattered alder.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A pink DEEP-1 magnet bears S. 60° E., 5 ft. dist., 12 ins. below ground.

A blue DEEP-1 magnet bears S. 30° W., 5 ft. dist., 12 ins. below ground.

Bury a clear DEEP-1 magnet at the base of the iron post.

Monument located on level ground in tall grass and scattered alder.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which

A pink DEEP-1 magnet bears S. 60° E., 5 ft. dist., 12 ins. below ground.

A blue DEEP-1 magnet bears S. 30° W., 5 ft. dist., 12 ins. below ground.

Bury a clear DEEP-1 magnet at the base of the iron post.

Monument located on SE slope in tall grass and scattered alder.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A silver DEEP-1 magnet bears N. 30° E., 5 ft. dist., 12 ins. below ground.

An orange DEEP-1 magnet bears N. 60° W., 5 ft. dist., 12 ins. below ground.

Bury a clear DEEP-1 magnet at the base of the iron post.


Monument located on level ground among alder.



Found an alum rod, 3/4 ins. diam., firmly set, projecting 12 ins. above the ground, with rack collar, 2 ft. diam., 8 ins. high, with alum. cap mkd. as shown, from which

An alum. rod, 3/4 ins. diam., firmly set, projecting 15 ins. above ground, bears N., 6 ft. dist., with an orange triangular marker on top.

Monument located on level ground among boulders and sparse vegetation.



93-9
RECORDED - FILED 60
Aleutian REC DIST.
Islands 3/10 93
DATE
TIME 1:35 P.M.
Represented by (USA/BLM)
Address