

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH E  
P.L. 92-203 (85 STAT. 688, 702, 703)  
DINEEGA CORPORATION  
AT  
RUBY, ALASKA  
AND THE DEPENDENT RESURVEY OF A  
PORTION OF U.S. SURVEY No. 7842

This plat contains the entire survey record.

The history of surveys is listed on Sheet No. 3.

This survey was executed by Eric Stahlke, Registered Alaska Land Surveyor No. LS-6945, for Tanana Chiefs Conference, Inc., August 1, 1996 through August 15, 1996, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated September 11, 1995 and approved February 8, 1996, Amended Special Instructions dated July 30, 1996, approved July 31, 1996, the Dineega Corp. ANCSA 14(c) Map of Boundaries accepted March 1, 1995, and Contract No. 1422-N660-C96-3043, dated August 1, 1996.

Field assistants were:

Joseph D. Gailey, Land Surveyor  
Shawn Huffman, Survey Technician  
Don Honea, Jr., Survey Technician

Area: 468.74 Acres.

The azimuth for Tracts A, B, C and D was obtained from the Global Positioning System, using static relative positioning techniques and refers to the true meridian. The azimuth for Tract E was obtained from the record of U.S. Survey No. 7842 and verified by direct observation of the sun, using the hour angle method.

The geographic position of cor. No. 17, Tract A, as determined from the Global Positioning System, is:

Latitude: 64°43'23.17" North NAD 27  
Longitude: 155°29'06.08" West

The magnetic declination was observed during the execution of this survey.

The land is rolling hills, with vegetation consisting of spruce, birch, alder, and willow with low shrubs and grasses. The soil consists of sand and sandy loam.



UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Anchorage, Alaska

The survey represented by this plat, sheets 1-5 having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

*Must C. Parnes* 13 Jan, 1998  
(ACTING) Date


Deputy State Director for Cadastral Survey, Alaska

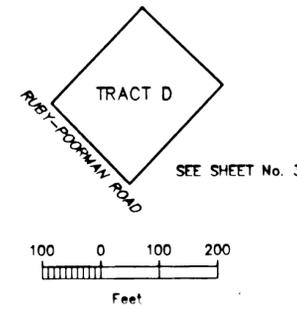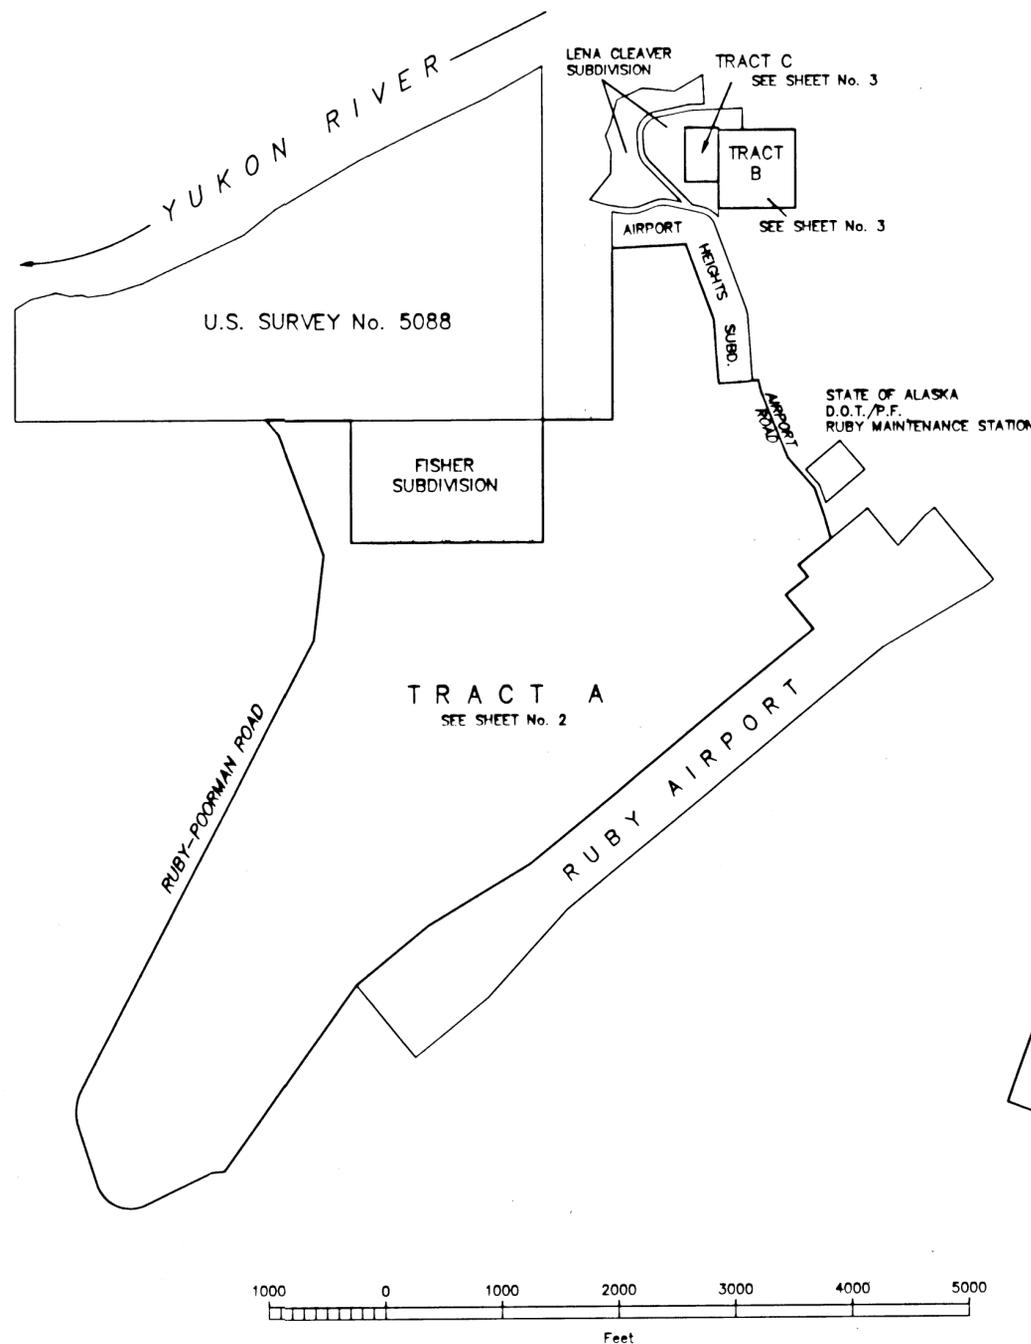

Tracts A, B and C are located at Ruby, Alaska, within Township 9 South, Range 17 East, Kateel River Meridian, Alaska.

Tract D is located approximately 10 miles south of the village of Ruby, Alaska, within Township 10 South, Range 17 East, Kateel River Meridian, Alaska.

Tract E is located approximately 4 miles northeasterly of the village of Ruby, Alaska, within Township 8 South, Range 17 East, Kateel River Meridian, Alaska.

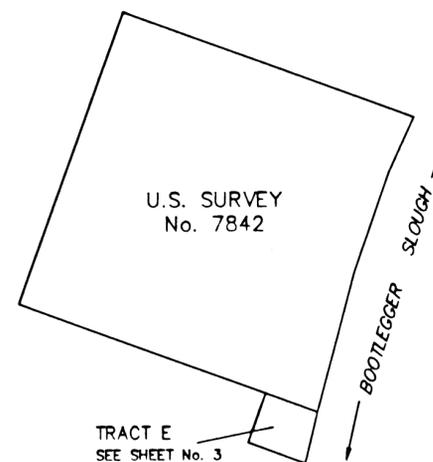

I, ERIC STAHLKE, Registered Alaska Land Surveyor No. LS-6945, for Tanana Chiefs Conference, Inc., HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-5, in conformity with the Special Instructions approved February 6, 1996, Amended Special Instructions approved July 31, 1996, Contract No. 1422-N660-C96-3043, awarded August 1, 1996, the principles of survey described in the Manual of Instructions for the Survey of Public Lands of the United States, 1973, and in the specific manner described on this plat.



I hereby certify that Tracts A through E represented on this plat of survey are on lands Interim Conveyed to Dineega Corporation by Interim Conveyance No. 660 issued by the United States of America; said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Dineega Corporation Board Resolution No. 95-01 and the Dineega Corporation ANCSA 14(c) Map of Boundaries approved March 1, 1995.

12-30-97  
Date

*Rob M. Siles*  
President, Dineega Corporation

1-23-97  
Date

*Eric Stahlke*  
Registered Land Surveyor

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH E P.L. 92-203 (85 STAT. 688, 702, 703) DINEGA CORPORATION AT RUBY, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

LEGEND

- ⊕ BLM monument recovered this survey.
- ⊕ State of Alaska D.O.T./P.F. monument, recovered this survey.
- 5/8 in. rebar and alum. cap recovered this survey.
- ANCSA primary monument set this survey.
- ANCSA secondary monument set this survey.

REFER TO SHEETS 4 AND 5 FOR MONUMENT DETAILS AND ACCESSORIES




Typical cap marking for primary monument set this survey.



Typical cap marking for reference monument set this survey.

U.S. SURVEY No. 5088

Surveyed by Warren P. Latvata, Supervisory Cadastral Surveyor and Ralph W. Wilson, Cadastral Surveyor, in 1971

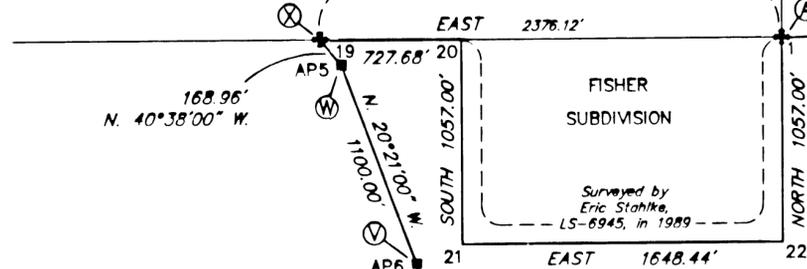


TRACT A  
449.75 Acres




Surveyed by Douglas A. Graether, LS-7835, in 1994

Drainage bears N. 80° E. and S. 80° W.  
Dkt. Road, 8 ft. wide, bears S. 80° E. and N. 80° W.


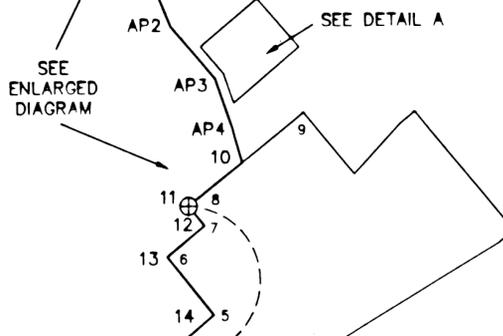


SEE ENLARGED DIAGRAM

STATE OF ALASKA D.O.T./P.F. RUBY MAINTENANCE STATION Surveyed by H. Lee Saylor, LS-4922, in 1983

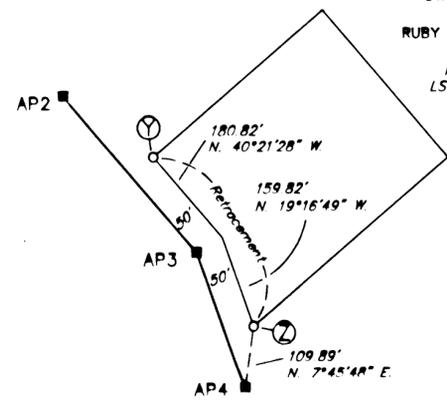


DETAIL A



Δ = 45°30'00"  
R = 400.00'  
L = 317.65'

Δ = 97°40'00"  
R = 300.00'  
L = 511.38'

Ruby-Poorman Road, 20 ft. wide, bears N 85° E



ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH E P.L. 92-203 (85 STAT. 688, 702, 703) DINEEGA CORPORATION AT RUBY, ALASKA

AND THE DEPENDENT RESURVEY OF A PORTION OF U.S. SURVEY No. 7842

U.S. Survey No. 5088 was surveyed by Warren P. Latvala, Supervisory Cadastral Surveyor and Ralph W. Wilson, Cadastral Surveyor, in 1971

U.S. Survey No. 7842 was surveyed by Patrick S. Twohy, Cadastral Surveyor, in 1984.

The exterior boundaries and a portion of the sub-divisional lines of Township 10 South, Range 17 East, Kateel River Meridian, Alaska, were surveyed by C.A. Herschback for International Technology Ltd., in 1977.

The Ruby School Site was surveyed by Floyd A. Ohlsen, Registered Alaska Land Surveyor No. 3187, in 1977.

The boundary survey of the State of Alaska, Department of Transportation and Public Facilities, Ruby Maintenance Station, Modified Quitclaim Deed, book 10, pages 722 through 727, Nulato Recording District, was surveyed by H. Lee Saylor, Registered Alaska Land Surveyor No. 4922, in 1983.

Lena Cleaver Subdivision, Plat No. 85-2, Nulato Recording District, was surveyed by Kenneth J. Ludy, Registered Alaska Land Surveyor No. 4802, in 1985.

Fisher Subdivision, Plat No. 89-1, Nulato Recording District, was surveyed by Eric Stahlke, Registered Alaska Land Surveyor No. 6945, in 1989.

The Ruby Airport, Plat No. 94-2RS, Nulato Recording District, was surveyed by H. Lee Saylor, Registered Alaska Land Surveyor No. 4922, in 1993.



The boundary survey of a 21 acre parcel of land located in sections 15 and 22, Township 10 South, Range 17 East, Kateel River Meridian, deeded from Dineega Corporation to Albert and Dolly Yrjana February 11, 1994, was surveyed by Arthur J. Saarlaos, Registered Alaska Land Surveyor No. 2238, in 1993. The survey has not been recorded as of this date.

Airport Heights Subdivision was surveyed by Douglas A. Graether, Registered Alaska Land Surveyor No. 7835, in 1994.

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

LEGEND

- + BLM monument recovered this survey.
o Aluminum post monument recovered this survey.
● ANCSA primary monument set this survey.
REFER TO SHEET 5 FOR MONUMENT DETAILS AND ACCESSORIES


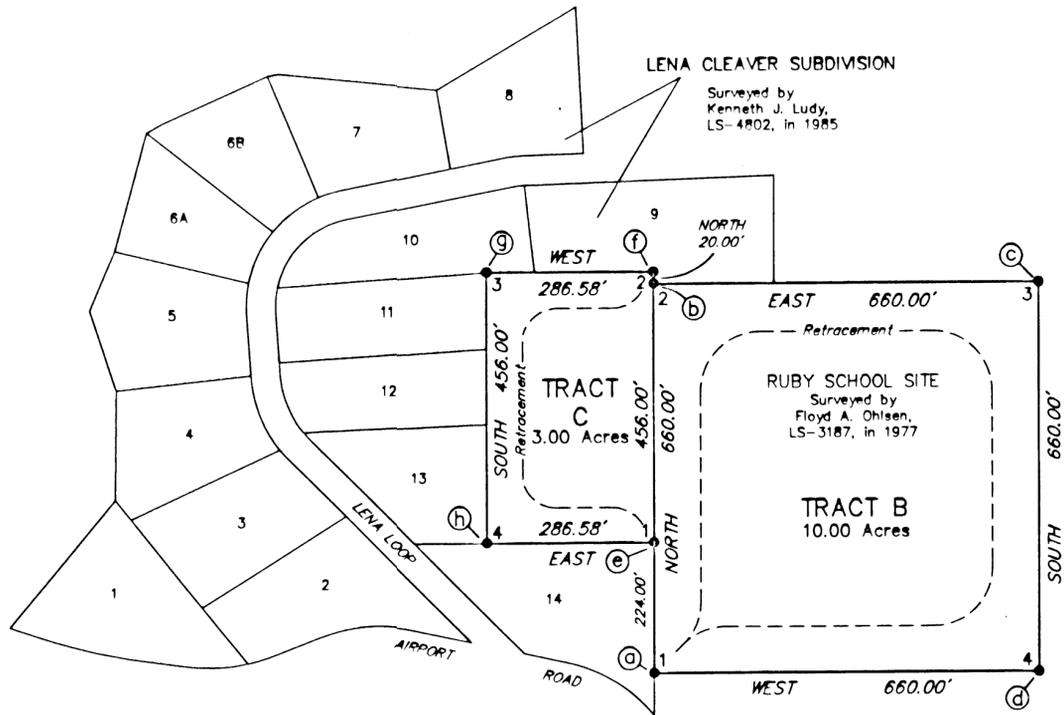


MEANDERS TRACT E

Along a well defined sloping bank, 15 ft. high, at the line of ordinary high water.

- 1. N. 13°55'43" E. 442.48'

U.S. SURVEY No. 7842

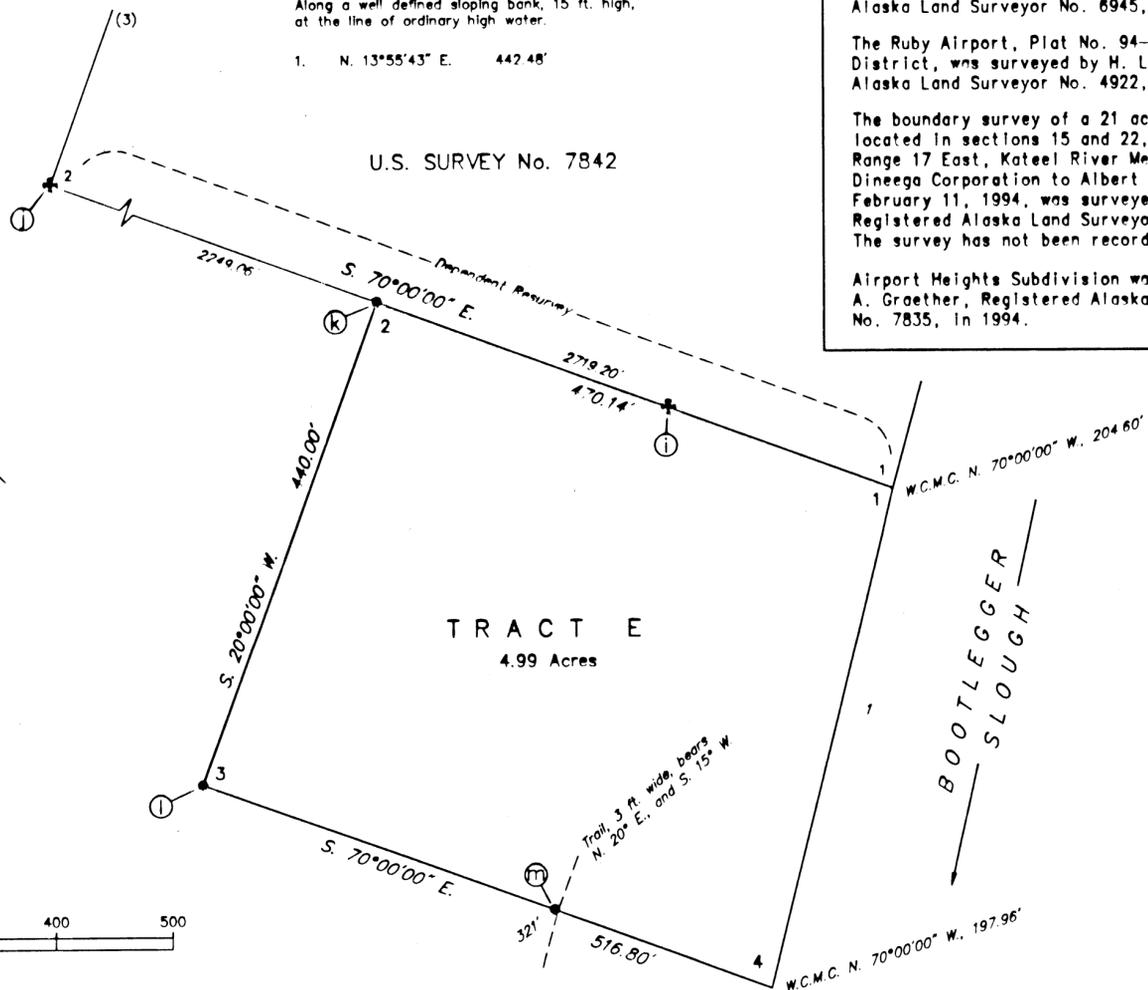

Mean Magnetic Declination 19 1/2° E.


COR. COMMON TO SECTIONS 4, 5, 8 AND 9, T. 10 S., R. 17 E., K.R.M., AK

APPARENT CENTERLINE RUBY-POOPMAN ROAD

Surveyed by Arthur J. Saarlaos, LS-2238, in 1993


ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c), TRACTS A THROUGH E  
P.L. 92-203 (85 STAT. 688, 702, 703)  
DINEGA CORPORATION  
AT  
RUBY, ALASKA

REFERENCE SHOULD BE MADE  
TO  
SHEET No. 1  
FOR SURVEY INFORMATION



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, leaning southwesterly, reset to vertical, with brass cap mkd. as shown.


There is no remaining evidence of the original accessories.




Set a rebar, 30 ins. long, 5/8 ins. diam., 40 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 59° W., 50.66 ft. dist., with brass cap mkd. DC RM1 50.66 FT. AP2 TRA 1996, with an arrow pointing towards the cor.

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 59° E., 50.66 ft. dist., with brass cap mkd. DC RM2 50.66 FT. AP2 TRA 1996, with an arrow pointing towards the cor.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 54 3/4° E., 79.1 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 37 1/4° W., 78.2 ft. dist., mkd. X BT.


Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a rebar, 30 ins. long, 5/8 ins. diam., 40 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 60 1/4° W., 50.86 ft. dist., with brass cap mkd. DC RM1 50.86 FT. AP3 TRA 1996, with an arrow pointing towards the cor.


Cor. No. 5, State of Alaska, D.O.T./P.F. Ruby Maintenance Station, monumented with an iron bar, 5/8 ins. diam., 18 ins. below ground, bears N. 80° E., 50.89 ft. dist., with alum. cap mkd. RUBY MS COR5 4922-S 1983.



Set a rebar, 30 ins. long, 5/8 ins. diam., 42 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 5° W., 100.00 ft. dist., with brass cap mkd. DC RM1 100.00 FT C18 TRA 1996, with an arrow pointing towards the cor.


A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 5° E., 100.00 ft. dist., with brass cap mkd. DC RM2 100.00 FT C18 TRA 1996, with an arrow pointing towards the cor.




Set a rebar, 30 ins. long, 5/8 ins. diam., 30 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 62 1/4° E., 100.00 ft. dist., with brass cap mkd. DC RM1 100.00 FT PC8 TRA 1996, with an arrow pointing towards the cor.

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 62 1/4° E., 100.00 ft. dist., with brass cap mkd. DC RM2 100.00 FT PC8 TRA 1996, with an arrow pointing towards the cor.




Recovered a rebar, 5/8 ins. diam., firmly set, projecting 3 ins. above ground, with 2 in. diam. alum. cap mkd. as shown.



Set a rebar, 30 ins. long, 5/8 ins. diam., 38 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 72 1/2° W., 50.02 ft. dist., with brass cap mkd. DC RM1 50.02 FT. AP4 TRA 1996, with an arrow pointing towards the cor.


A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 72 1/2° E., 50.02 ft. dist., with brass cap mkd. DC RM2 50.02 FT. AP4 TRA 1996, with an arrow pointing towards the cor.



Set a rebar, 30 ins. long, 5/8 ins. diam., 36 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 15 1/4° W., 101.63 ft. dist., with brass cap mkd. DC RM1 101.63 FT AP12 TRA 1996, with an arrow pointing towards the cor.


A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 15 1/4° E., 101.63 ft. dist., with brass cap mkd. DC RM2 101.63 FT AP12 TRA 1996, with an arrow pointing towards the cor.



Set a rebar, 30 ins. long, 5/8 ins. diam., 37 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 62 1/4° E., 100.00 ft. dist., with brass cap mkd. DC RM1 100.00 FT WP TRA 1996, with an arrow pointing towards the cor.

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 62 1/4° E., 100.00 ft. dist., with brass cap mkd. DC RM2 100.00 FT WP TRA 1996, with an arrow pointing towards the cor.




Recovered a rebar, 5/8 ins. diam., firmly set, projecting 3 ins. above ground, with 2 in. diam. alum. cap mkd. as shown.



Set a rebar, 30 ins. long, 5/8 ins. diam., 37 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 50 3/4° W., 54.43 ft. dist., with brass cap mkd. DC RM1 54.43 FT. C10 TRA 1996, with an arrow pointing towards the cor.


A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 50 3/4° E., 54.43 ft. dist., with brass cap mkd. DC RM2 54.43 FT. C10 TRA 1996, with an arrow pointing towards the cor.



Set a rebar, 30 ins. long, 5/8 ins. diam., 38 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 25 1/2° W., 100.00 ft. dist., with brass cap mkd. DC RM1 100.00 FT PT11 TRA 1996, with an arrow pointing towards the cor.


A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 25 1/2° E., 100.00 ft. dist., with brass cap mkd. DC RM2 100.00 FT PT11 TRA 1996, with an arrow pointing towards the cor.



Set a rebar, 30 ins. long, 5/8 ins. diam., 36 ins. in the ground, with alum. cap mkd. as shown, from which


A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 73° E., 101.72 ft. dist., with brass cap mkd. DC RM1 101.72 FT AP7 TRA 1996, with an arrow pointing towards the cor.

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 73° W., 101.72 ft. dist., with brass cap mkd. DC RM2 101.72 FT AP7 TRA 1996, with an arrow pointing towards the cor.




Set a rebar, 30 ins. long, 5/8 ins. diam., 37 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 82° E., 50.00 ft. dist., with brass cap mkd. DC RM1 50.00 FT. C9 TRA 1996, with an arrow pointing towards the cor.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.



Set a rebar, 30 ins. long, 5/8 ins. diam., 36 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 72 1/4° E., 100.00 ft. dist., with brass cap mkd. DC RM1 100.00 FT PC10 TRA 1996, with an arrow pointing towards the cor.


A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 72 1/4° W., 100.00 ft. dist., with brass cap mkd. DC RM2 100.00 FT PC10 TRA 1996, with an arrow pointing towards the cor.



Set a rebar, 30 ins. long, 5/8 ins. diam., 38 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 83° E., 102.81 ft. dist., with brass cap mkd. DC RM1 102.81 FT AP6 TRA 1996, with an arrow pointing towards the cor.


A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 83° W., 102.81 ft. dist., with brass cap mkd. DC RM2 102.81 FT AP6 TRA 1996, with an arrow pointing towards the cor.




Set a rebar, 30 ins. long, 5/8 ins. diam., 37 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 88 1/4° W., 50.00 ft. dist., with brass cap mkd. DC RM1 50.00 FT. PT1 TRA 1996, with an arrow pointing towards the cor.

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 88 1/4° E., 50.00 ft. dist., with brass cap mkd. DC RM2 50.00 FT. PT1 TRA 1996, with an arrow pointing towards the cor.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown.



Set a rebar, 30 ins. long, 5/8 ins. diam., 38 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 72 1/4° E., 100.00 ft. dist., with brass cap mkd. DC RM1 100.00 FT PT9 TRA 1996, with an arrow pointing towards the cor.

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 72 1/4° W., 100.00 ft. dist., with brass cap mkd. DC RM2 100.00 FT PT9 TRA 1996, with an arrow pointing towards the cor.




Set a rebar, 30 ins. long, 5/8 ins. diam., 37 ins. in the ground, with alum. cap mkd. as shown, from which

A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears N. 59 1/2° E., 110.00 ft. dist., with brass cap mkd. DC RM1 110.00 FT AP5 TRA 1996, with an arrow pointing towards the cor.


A reference monument, a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, bears S. 59 1/2° W., 101.59 ft. dist., with brass cap mkd. DC RM2 101.59 FT AP5 TRA 1996, with an arrow pointing towards the cor.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH E P.L. 92-203 (85 STAT. 688, 702, 703) DINEEGA CORPORATION AT RUBY, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION




Recovered an iron post, 2 1/2 ins. diam., firmly set, buried 27 ins. below the road surface, with brass cap mkd. as shown. No original accessories were established for this cor.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 16 ins. above ground, leaning southeasterly, with brass cap mkd. RUBY SCHOOL SITE SE COR 3187-S 1977. At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 5 ins. diam., bears S. 10 3/4° W., 16.3 ft. dist., mkd. X BT. A spruce, 5 ins. diam., bears N. 60 3/4° W., 21.9 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base, and bury original monument inverted alongside the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown, from which the original accessories A spruce, 4 ins. diam., bears N. 32° E., 33.5 ft. dist., (record 33.7 ft.) mkd. S7842 C2 BT. A spruce, 5 ins. diam., bears N. 82 1/2° W., 24.7 ft. dist., (record 25.1 ft.) mkd. X BT.




Recovered a rebar, 5/8 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.




Recovered an iron rod, 3/4 ins. diam., firmly set, projecting 7 ins. above ground, bent northwesterly, with threaded nut on top. At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 36 ins. in the ground, with brass cap mkd. as shown, from which A power pole, with underground power drop, bears N. 4 1/2° E., 130.1 ft. dist. An aspen, 5 ins. diam., bears N. 81 1/4° W., 51.7 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base, and bury original iron rod inside the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 6 ins. diam., bears S. 5 1/4° E., 66.5 ft. dist., mkd. X BT. A spruce, 10 ins. diam., bears N. 89 3/4° W., 71.7 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 36 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 7 ins. diam., bears N. 10° E., 142.2 ft. dist., mkd. X BT. A spruce, 5 ins. diam., bears S. 80 3/4° E., 217.0 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered a rebar, 5/8 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown.




Recovered a rebar, 3/4 ins. diam., firmly set, projecting 1 in. above ground. At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A birch, 6 ins. diam., bears S. 33 1/4° W., 65.4 ft. dist., mkd. X BT. A birch, 5 ins. diam., bears N. 49 1/2° W., 16.8 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base, and bury original rebar alongside the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 5 ins. diam., bears N. 56 3/4° E., 53.8 ft. dist., mkd. X BT. A spruce, 5 ins. diam., bears N. 41 3/4° W., 41.9 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 7 ins. diam., bears S. 6 1/2° W., 48.3 ft. dist., mkd. X BT. A spruce, 7 ins. diam., bears N. 77 1/4° W., 51.5 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. RUBY SCHOOL SITE SW COR 3187-S 1977. At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 5 ins. diam., bears N. 36° E., 54.7 ft. dist., mkd. X BT. A spruce, 5 ins. diam., bears S. 59 1/4° E., 20.5 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base, and bury original monument inverted alongside the stainless steel post.




Recovered an iron rod, 3/4 ins. diam., firmly set, projecting 2 in. above ground. At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A birch, 5 ins. diam., bears S. 51° E., 30.1 ft. dist., mkd. X BT. An aspen, 4 ins. diam., bears S. 33 1/4° W., 55.5 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base, and bury original iron rod inside the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 12 ins. diam., bears S. 57 3/4° E., 76.0 ft. dist., mkd. X BT. A spruce, 8 ins. diam., bears N. 33 1/2° W., 76.2 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 6 ins. diam., bears N. 15 1/2° E., 23.4 ft. dist., mkd. X BT. A spruce, 6 ins. diam., bears N. 81 1/2° W., 32.6 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. RUBY SCHOOL SITE NW COR 3187-S 1977. At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which An aspen, 6 ins. diam., bears N. 45 3/4° E., 49.2 ft. dist., mkd. X BT. A birch, 7 ins. diam., bears S. 43 3/4° E., 18.5 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base, and bury original monument inverted alongside the stainless steel post.




Recovered an iron rod, 3/4 ins. diam., firmly set, projecting 2 in. above ground. At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A birch, 7 ins. diam., bears N. 17 1/4° E., 26.7 ft. dist., mkd. X BT. An aspen, 4 ins. diam., bears S. 64 3/4° E., 56.4 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base, and bury original iron rod inside the stainless steel post.




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with alum. cap mkd. as shown.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 34 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 14 ins. diam., bears N. 11 1/4° E., 143.4 ft. dist., mkd. X BT. A spruce, 5 ins. diam., bears N. 80° W., 194.2 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base of the stainless steel post.




Recovered an iron post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. RUBY SCHOOL SITE NE COR 3187-S 1977. At the cor. point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A spruce, 8 ins. diam., bears S. 80° E., 49.9 ft. dist., mkd. X BT. A birch, 4 ins. diam., bears S. 44° W., 47.9 ft. dist., mkd. X BT. Deposit a magnet in a white plastic case at the base, and bury original monument inverted alongside the stainless steel post.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown, from which the original accessories A birch, 4 ins. diam., bears S. 82 1/4° W., 9.5 ft. dist., (record 9.2 ft.) mkd. X BT. A birch, 6 ins. diam., bears N. 33 1/2° W., 10.0 ft. dist., (record 9.9 ft.) mkd. X BT.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with alum. cap mkd. as shown.



Recovered an alum. rod, 5/8 ins. diam., firmly set, projecting 24 ins. above ground, with alum. cap mkd. as shown, from which the original accessories A spruce, 4 ins. diam., bears N. 3° E., 28.1 ft. dist., (record 28.4 ft.) mkd. X BT. A spruce, 4 ins. diam., bears S. 43° E., 30.9 ft. dist., (record 31.0 ft.) mkd. X BT. A spruce, 4 ins. diam., bears S. 10° W., 43.2 ft. dist., (record 44.2 ft.) mkd. X BT. A spruce, 4 ins. diam., bears N. 57° W., 48.0 ft. dist., (record 48.2 ft.) mkd. X BT.

Handwritten notes: 98-1, RECORDED, BLM, Nulato, DATE 1-20-98, TIME 3:03 P.M., Requested by BLM, Address