

INDEX

SHEET 2 LOTS 1 THROUGH 3
 SHEET 3 LOTS 4 THROUGH 8
 SHEET 4 LOTS 9 THROUGH 11
 SHEET 5 LOTS 12 THROUGH 14
 SHEET 6 LOTS 15 THROUGH 17
 SHEET 7 LOTS 18 THROUGH 20
 SHEET 8 LOTS 21 THROUGH 23
 SHEET 9 LOTS 24 THROUGH 26
 SHEET 10 LOT 27
 SHEET 11 LOTS 28 THROUGH 30

GEOGRAPHIC LOCATION

Lots 1 through 25 are situated along the southern shore of Kvichak Bay between the village of South Naknek, Alaska, and Johnson Hill Creek.
 Lot 26 is situated along the northerly edge of a gravel road approximately 2 miles southwesterly of the village of South Naknek, Alaska.
 Lot 27 is situated approximately 2 miles northeasterly of the village of South Naknek, Alaska.
 Lot 28 is situated on the right bank of Smelt Creek, approximately 6 miles southwesterly of the village of King Salmon, Alaska.
 Lot 29 is situated on the right bank of Big Creek, approximately 4 1/2 miles southeasterly of the village of King Salmon, Alaska.
 Lot 30 is situated on the left bank of the Naknek River, approximately 5 1/2 miles southeasterly of the village of King Salmon, Alaska.


LOCATION TABLE

LOT #	SEWARD MERIDIAN, ALASKA TOWNSHIP(S)	RANGE(S)
1 - 5	18 SOUTH	48 WEST
6 & 7	17 AND 18 SOUTH	48 WEST
8 - 19	17 SOUTH	48 WEST
20 - 26	17 SOUTH	47 WEST
27	17 SOUTH	46 WEST
28	18 SOUTH	45 WEST
29 & 30	18 SOUTH	44 WEST

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(C) LOTS 1 THROUGH 30 P.L. 92-203 (85 STAT. 688, 702, 703) ALASKA PENINSULA CORPORATION AT SOUTH NAKNEK, ALASKA AND THE RETRACEMENT OF PORTIONS OF U.S. SURVEY NO. 10434 AND U.S. SURVEY NO. 1573

This plat contains the entire survey record.
 A portion of the west boundary and a portion of the subdivisional lines of Township 17 South, Range 47 West, Seward Meridian, Alaska, were surveyed by C. Norman Brown, Cadastral Surveyor, in 1972.
 A portion of the subdivisional lines of Township 17 South, Range 48 West, Seward Meridian, Alaska, was surveyed by C. Norman Brown, Cadastral Surveyor, in 1972.
 The dependent resurvey of a portion of the subdivisional lines and the survey of the remainder of the east boundary, the south boundary, and the meanders of Township 17 South, Range 48 West, Seward Meridian, Alaska, were surveyed by Douglas G. Minton and Tommy A. Noble, Cadastral Surveyors, in 1978.
 The south boundary and the remainder of the east boundary of Township 17 South, Range 46 West, Seward Meridian, Alaska, were surveyed by Douglas G. Minton and Tommy A. Noble, Cadastral Surveyors, in 1978 through 1986.
 The Eleventh Guide Meridian West, through Township 18 South, between Ranges 44 and 45 West, Seward Meridian, Alaska, was surveyed by Douglas G. Minton and Tommy A. Noble, Cadastral Surveyors, in 1978.
 U.S. Survey No. 1573 was surveyed by Charles S. Hubbell, Deputy Surveyor, in 1925.
 U.S. Survey No. 7410 was surveyed by Patrick S. Twohy, Cadastral Surveyor, in 1983.
 U.S. Survey No. 8043 was surveyed by Christopher R. Russell, Cadastral Surveyor, in 1986.
 U.S. Survey No. 8496 was surveyed by Brian C. Anderson, Cadastral Surveyor, in 1986.
 U.S. Survey No. 10434 was surveyed by Michael O. Harmening, Cadastral Surveyor, in 1991.
 This survey was executed by Michael O. Harmening, Cadastral Surveyor, June 11 through July 4, 1991, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated June 27, 1990, approved June 27, 1990, supplemental memorandum dated July 3, 1990, the South Naknek ANCSA 14(c) map of boundaries, approved June 4, 1987; and Assignment Instructions dated May 14, 1991.

REFERENCE DIAGRAM

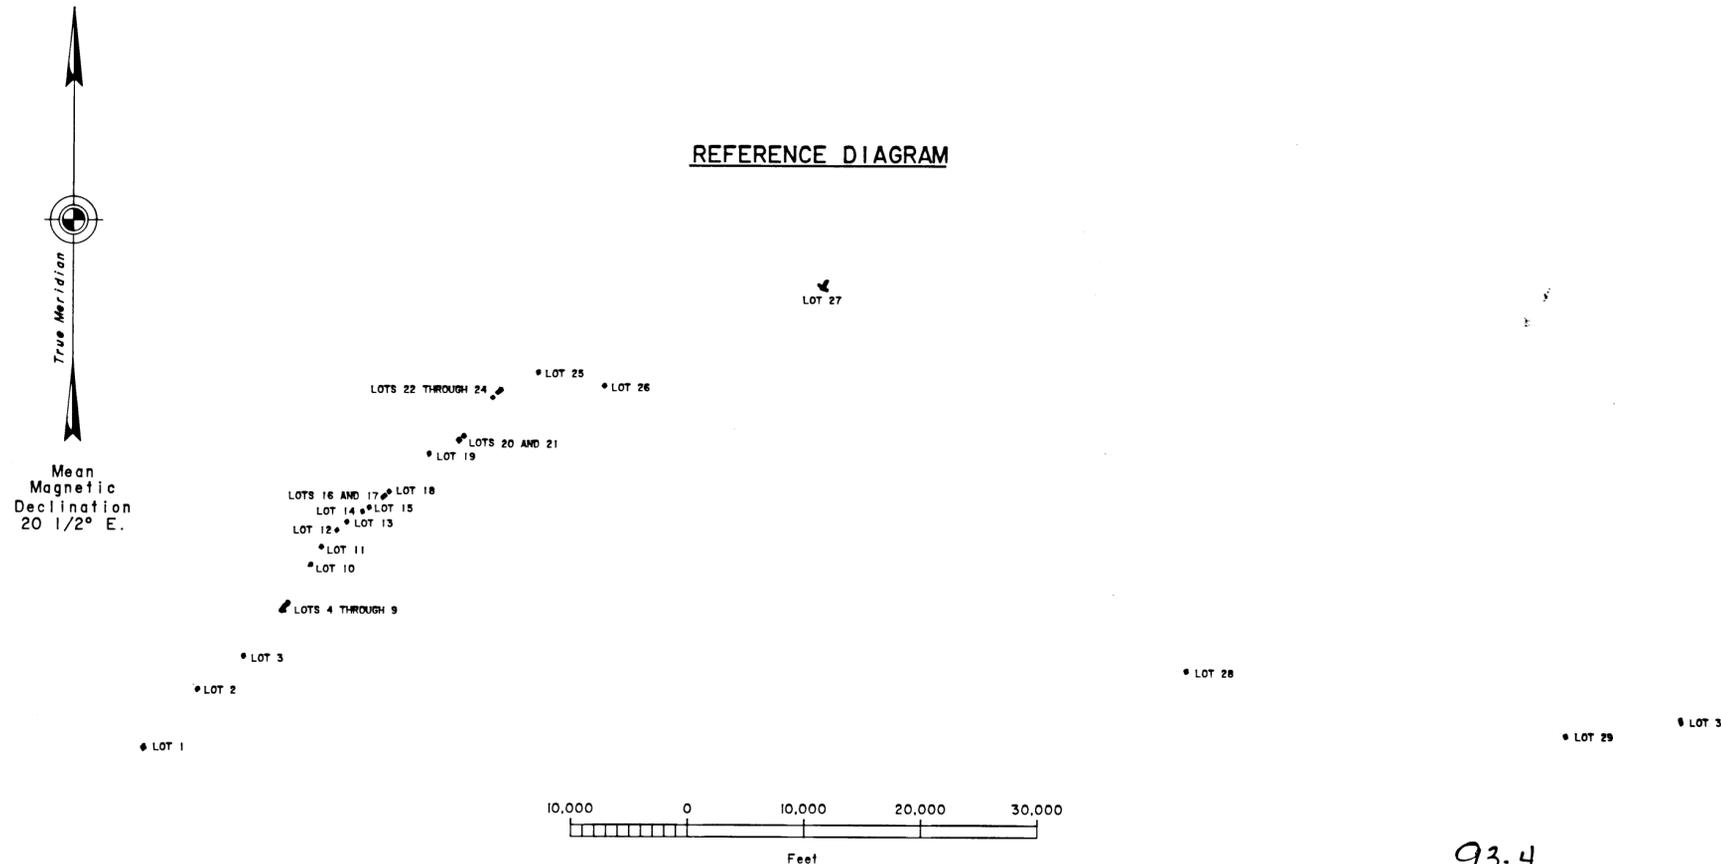

Mean Magnetic Declination 20 1/2° E.

93.4
 RECORDED - FILED 70
 KVICHAK REC DIST
 DATE 5/12 1993
 TIME 8:30 A.M.
 Surveyed by (USA/BLM)
 Address

I, Michael O. Harmening, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 - 11, in conformity with the Special Instructions approved June 27, 1990, supplemental memorandum dated July 3, 1990, the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.

MARCH 31, 1993 Date
 Michael O. Harmening
 Cadastral Surveyor

I hereby certify that Lots 1 through 30 represented on this plat of survey are on lands Interim Conveyed to the Alaska Peninsula Corporation, by Interim Conveyance No. 263 issued by the United States of America; said lots also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Alaska Peninsula Corporation, Resolution Agreement Nos. 85-3 and 86-12, and the South Naknek ANCSA 14(c) Map of Boundaries approved June 4, 1987.

4-24-93 Date
 Ralph Angerson Sr.
 President, Alaska Peninsula Corporation

Field assistants were:
 Paul L. Moss, Land Surveyor
 Douglas N. Haywood, Student Trainee (LS)
 David M. Klein, Student Trainee (LS)
 Area: 37.13 Acres.
 The azimuth for Lots 1 through 26, 28 and 29 was obtained from direct observations of the sun, using the hour angle method. The azimuth for Lot 27 was obtained from the retracement of line 3-4, U.S. Survey No. 1573. The azimuth for Lot 30 was obtained from line 3-4, U.S. Survey No. 7410. All azimuths refer to the true meridian.
 The geographic position of corner No. 2, ANCSA 14(c) Lot 19, as determined by the record of U.S. Survey No. 10434, is:
 Latitude: 58° 41' 19.21" North
 Longitude: 157° 07' 21.61" West NAD 27
 The mean magnetic declination was obtained from U.S. Geological Survey quadrangle maps "NAKNEK (C-2)," Alaska, 1952 edition, with minor revisions in 1973, "NAKNEK (C-3)," Alaska, 1952 edition, with minor revisions in 1971, and "NAKNEK (C-4)," Alaska, 1952 edition, with minor revisions in 1982.
 The land is generally level, covered with native grasses, alder, and willow.
 The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT Anchorage, Alaska


The survey represented by this plat, sheets 1-11, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director
 George P. Orin
 Deputy State Director for Cadastral Survey, Alaska
 3 May 1993 Date

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(C) LOTS 1 THROUGH 30
P.L. 92-203 (85 STAT. 688, 702, 703)
ALASKA PENINSULA CORPORATION
AT
SOUTH NAKNEK, ALASKA

REFERENCE SHOULD BE MADE
TO SHEET 1 FOR SURVEY INFORMATION

COR. No. 2, LOT 4
SEE SHEET 3




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.


True point falls on or near a vertical bank, not suitable for a permanent monument.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.


Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Raise a mound of stone, 2 1/2 ft. base, 1 1/2 ft. high, SE of cor.


Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SW of iron post, 3 and 6 ft. dist.



Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Raise a mound of stone, 3 ft. base, 2 ft. high, NW of cor.


Bury a clear DEEP-1 magnet at the base of the iron post.

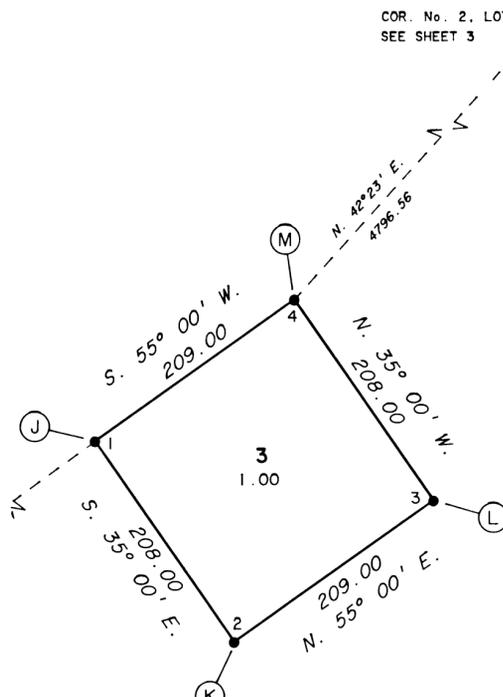

Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., NE and SE of iron post, 3 ft. dist.


Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.


Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.


Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SE and SW of iron post, 3 ft. dist.


Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., NE and SE of iron post, 3 ft. dist.


Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.


Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown


Raise a mound of stone, 3 ft. base, 2 ft. high, SE of cor.

Bury a clear DEEP-1 magnet at the base of the iron post.

MEANDERS

LOT 1
Along a well-defined cut bank, 2 to 4 ft. high, at the line of mean high tide.

1. N. 46°40' W., 57.27 ft.
2. N. 49°09' W., 112.65 ft.
3. N. 39°15' W., 67.56 ft.
4. N. 19°18' E., 72.90 ft.



Mean Magnetic Declination
20 1/2° E.



93-4



RECORDED - FILED 70-
KVICIAK REC. DIST.

DATE 5/12 1993
TIME 8:30 A.M.
Witnessed by (USA/BLM)
Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(C) LOTS 1 THROUGH 30
P.L. 92-203 (85 STAT. 688, 702, 703)
ALASKA PENINSULA CORPORATION
AT
SOUTH NAKNEK, ALASKA


REFERENCE SHOULD BE MADE
TO SHEET 1 FOR SURVEY INFORMATION

SEE SHEET 5
COR. No. 2, LOT 12

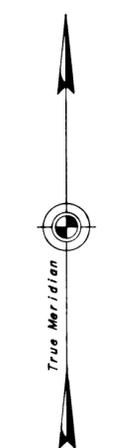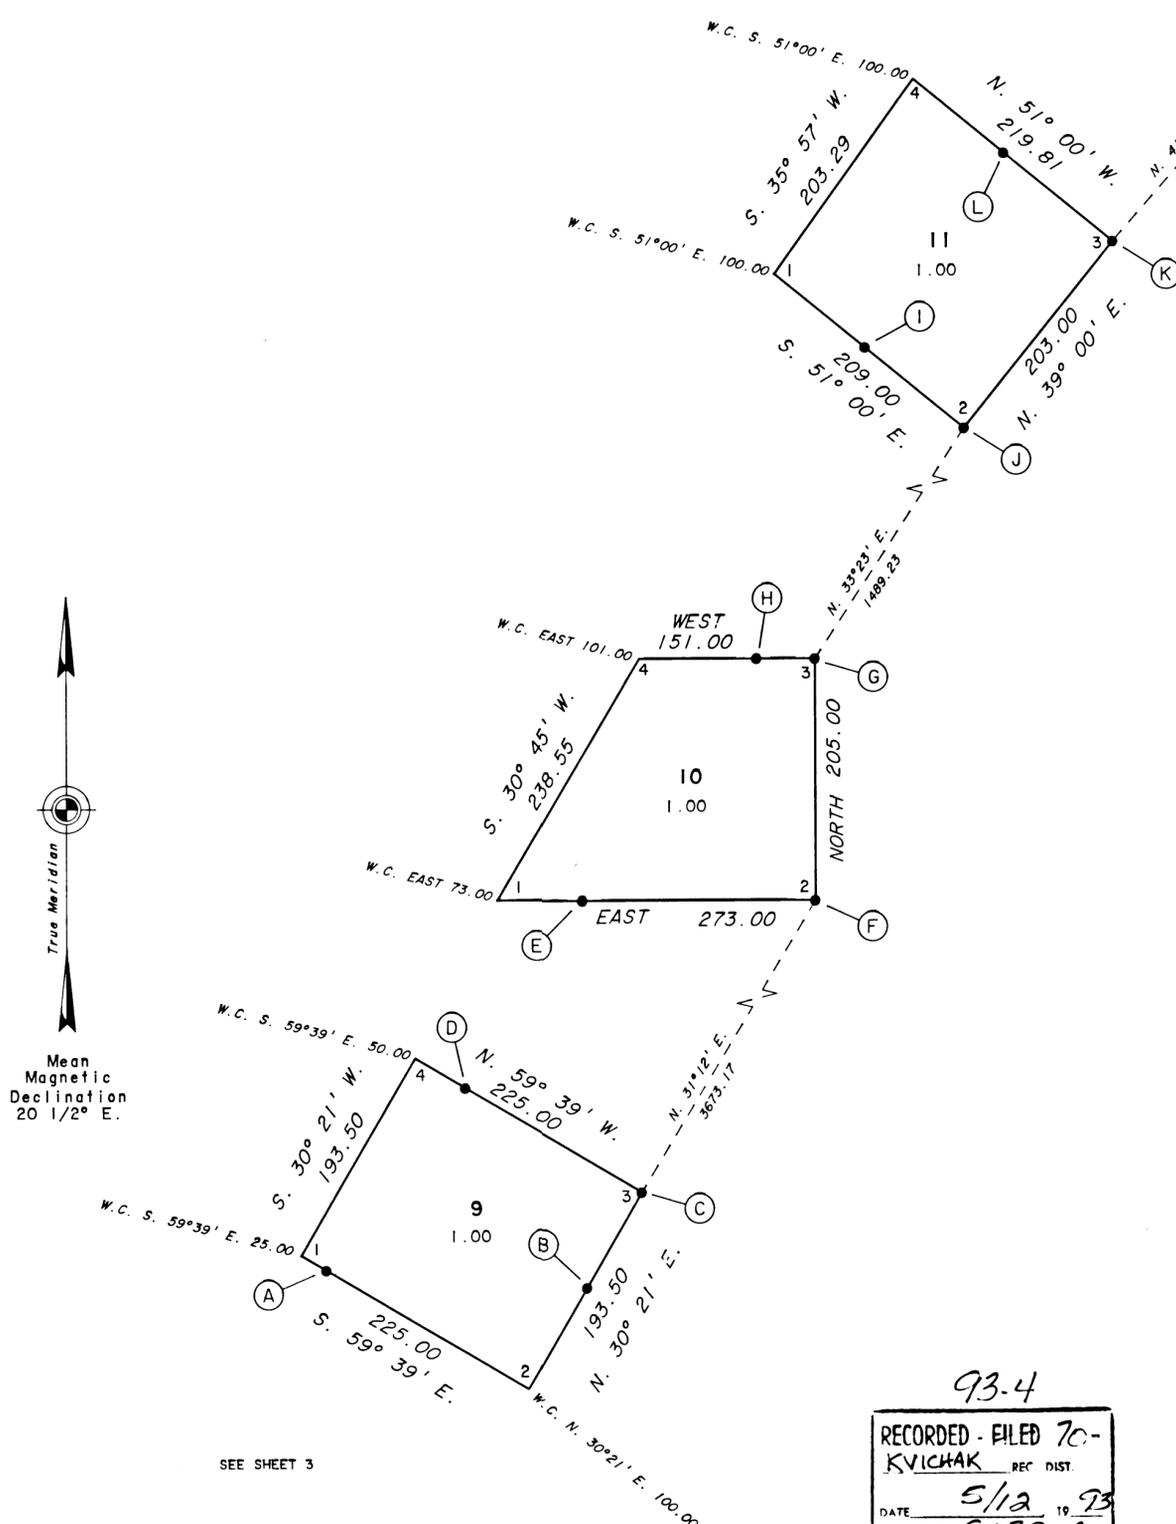

Mean
Magnetic
Declination
20 1/2° E.


SEE SHEET 3



93-4

RECORDED - FILED 70-
KVICHAK REC DIST.

DATE 5/12 19 93
TIME 8:30 A M
Transmitted by (USA/BLM)
Address




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

The SE cor. of a framed plywood cabin, 20 X 24 ft., bears N. 72 3/4° E., 56.1 ft. dist., long side extends N. 45° E.

Bury a clear DEEP-1 magnet at the base of the iron post.

True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., NE of iron post, 3 and 6 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.


True point falls on or near a vertical bank, not suitable for a permanent monument.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.

True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., E of iron post, 3 and 6 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.


True point falls on or near a vertical bank, not suitable for a permanent monument.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., N and W of iron post, 3 ft. dist.


Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., S and W of iron post, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., E of iron post, 3 and 6 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.

True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.


True point falls on or near a vertical bank, not suitable for a permanent monument.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.


Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.





Bury a clear DEEP-1 magnet at the base of the iron post.

True point falls on or near a vertical bank, not suitable for a permanent monument.


ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(C) LOTS 1 THROUGH 30
 P.L. 92-203 (85 STAT. 688, 702, 703)
 ALASKA PENINSULA CORPORATION
 AT
SOUTH NAKNEK, ALASKA

REFERENCE SHOULD BE MADE
 TO SHEET 1 FOR SURVEY INFORMATION


SEE SHEET 6
 COR. No. 2, LOT 15

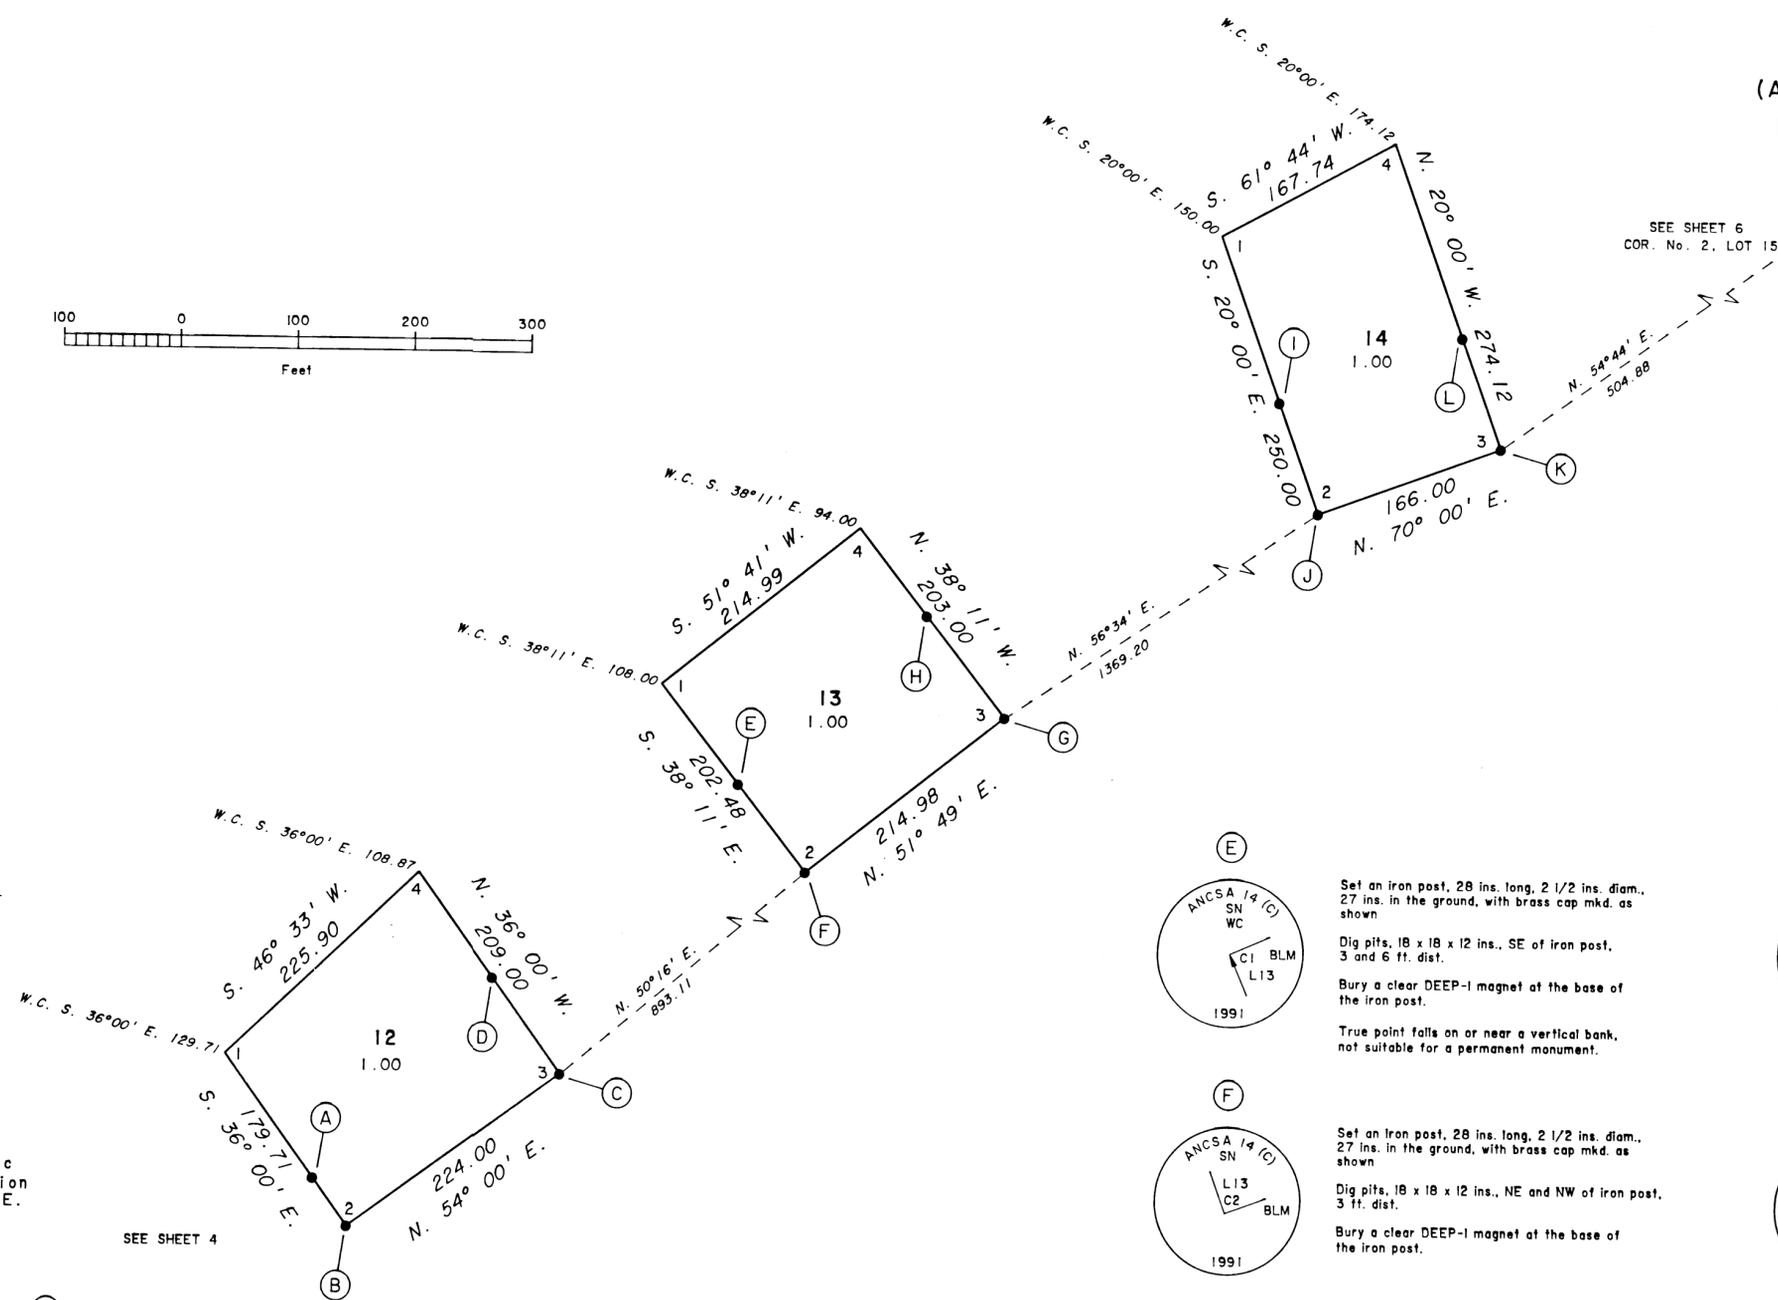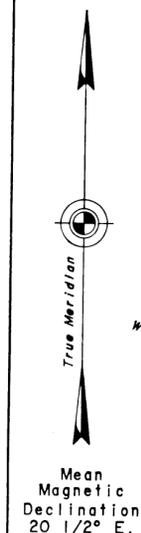


Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SW and NW on line, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.

93-4

RECORDED - FILED 70-
 KVICWAK REC. DIST.
 DATE 5/12 1993
 TIME 5:30 A.M.
 Registered by (L.S.A./B.M.)
 Address



ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(C) LOTS 1 THROUGH 30
 P.L. 92-203 (85 STAT. 688, 702, 703)
 ALASKA PENINSULA CORPORATION
 AT
 SOUTH NAKNEK, ALASKA

REFERENCE SHOULD BE MADE
 TO SHEET 1 FOR SURVEY INFORMATION

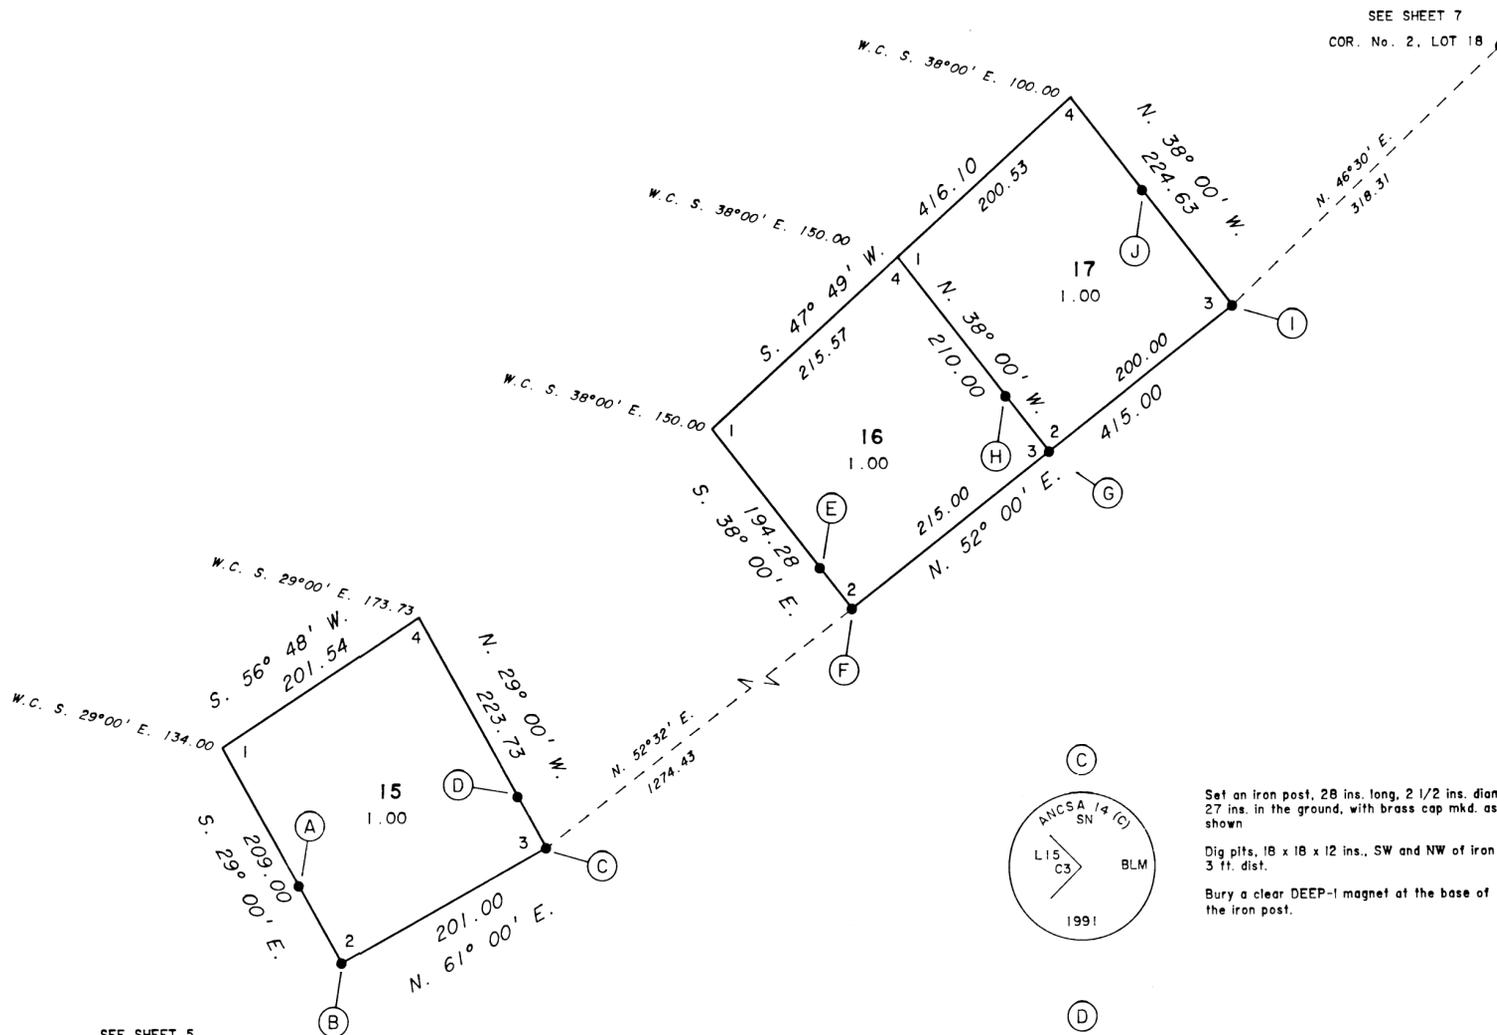


True Meridian
 Mean
 Magnetic
 Declination
 20 1/2° E.


SEE SHEET 5




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.

93-4
 RECORDED - FILED 70-
 KVICHAK REF. DIST.
 DATE 5/12 1993
 TIME 8:30 A.M.
 Transmitted by (USA, BLM)
 Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(C) LOTS 1 THROUGH 30
 P.L. 92-203 (85 STAT. 688, 702, 703)
 ALASKA PENINSULA CORPORATION
 AT
 SOUTH NAKNEK, ALASKA

REFERENCE SHOULD BE MADE
 TO SHEET 1 FOR SURVEY INFORMATION


COR. No. 2, LOT 21
 SEE SHEET 8

U.S. SURVEY
 No. 10434
 LOT 1

93.4

RECORDED - FILED 70-
 KVICHAK REC. DIST.

DATE 5/12 1993
 TIME 8:30 A.M.
 Witnessed by (C.S.A./B.M.)
 Address




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.


True point falls on or near a vertical bank, not suitable for a permanent monument.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.


Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown

Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.

Bury a clear DEEP-1 magnet at the base of the iron post.





True point falls on or near a vertical bank, not suitable for a permanent monument.

MEANDERS


LOT 19
 Along the upper edge of a gravel beach, as surveyed by C. Norman Brown, in 1972, at the line of mean high tide.

- S. 78°29' W., 21.14 ft.
- S. 61°15' W., 174.86 ft.


WITNESS COR. TO THE MEANDER COR. OF SECS. 24 AND 25, TP. 17 S., R. 48 W., S.M.

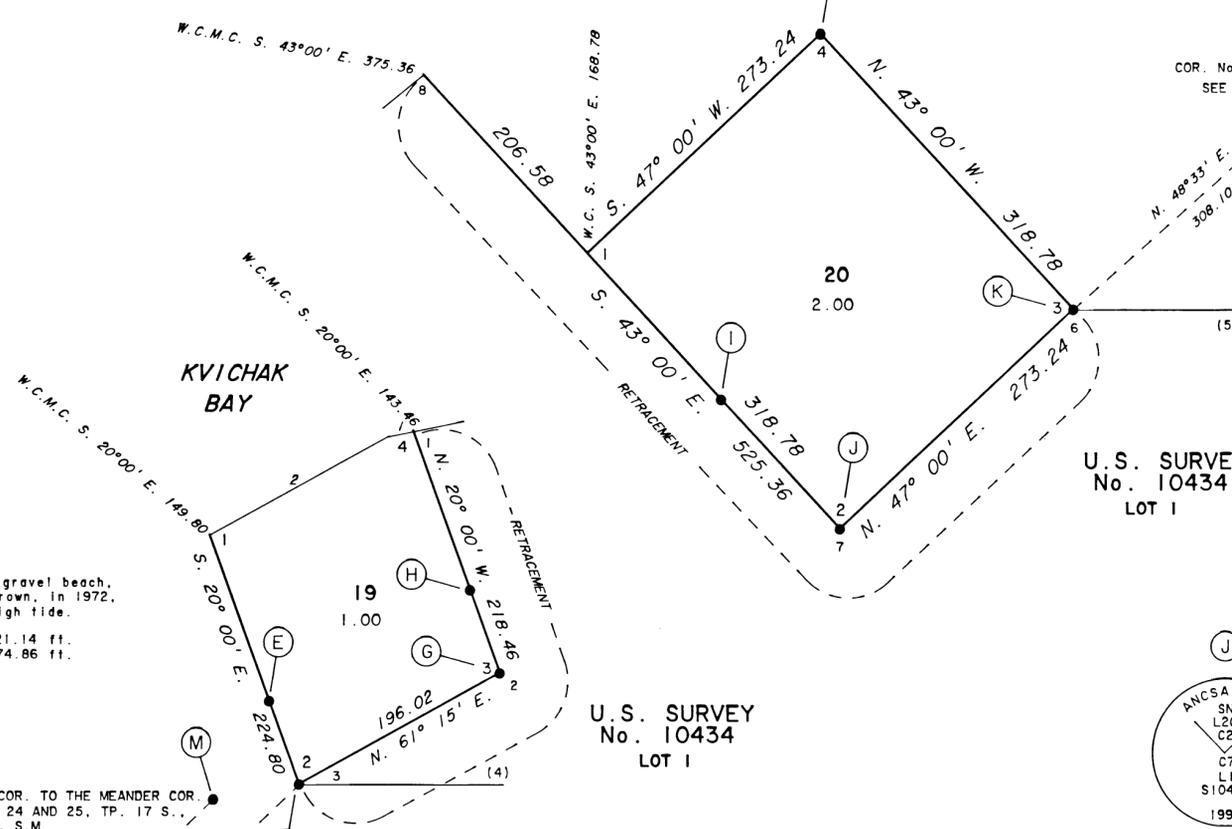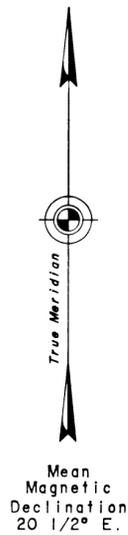


Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. C7 L1 S10434 1991.
 The original pits, 18 x 18 x 12 ins., 3 ft. NE and NW of cor.
 Add marks to read as shown.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, flush with the ground, with brass cap mkd. C2 L1 S10434 1991.
 The original pits, 18 x 18 x 12 ins., 3 ft. SW and NW of cor.
 Add marks to read as shown.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. C6 L1 S10434 1991.
 The original pits, 18 x 18 x 12 ins., 3 ft. E and SW of cor.
 Add marks to read as shown.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. WC MC C1 L1 S10434 1991.
 No original accessories.
 Add marks to read as shown.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, encircled by a rock collar, 2 ft. diam., with brass cap mkd. as shown
 Raise a mound of stone, 3 ft. base, 1 1/2 ft. high, 3 ft. SE of cor.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Recovered a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. WC MC C8 L1 S10434 1991.
 The original pits, 18 x 18 x 12 ins., 3 ft. and 6 ft. SE of cor.
 Add marks to read as shown.




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as shown
 No original accessories.

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(C) LOTS 1 THROUGH 30
 P.L. 92-203 (85 STAT. 688, 702, 703)
 ALASKA PENINSULA CORPORATION
 AT
 SOUTH NAKNEK, ALASKA


REFERENCE SHOULD BE MADE
 TO SHEET 1 FOR SURVEY INFORMATION




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.







Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NW of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NW of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls in a deep pool of water, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.

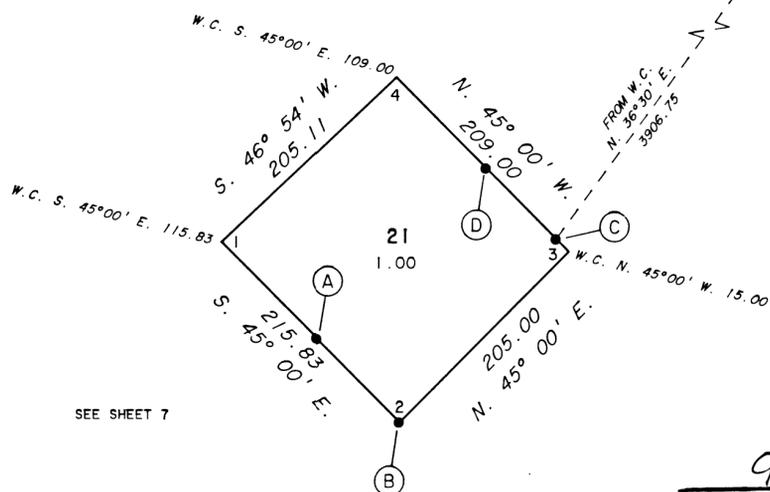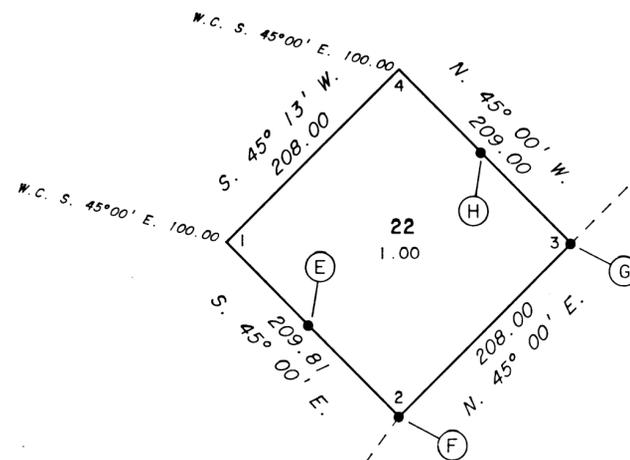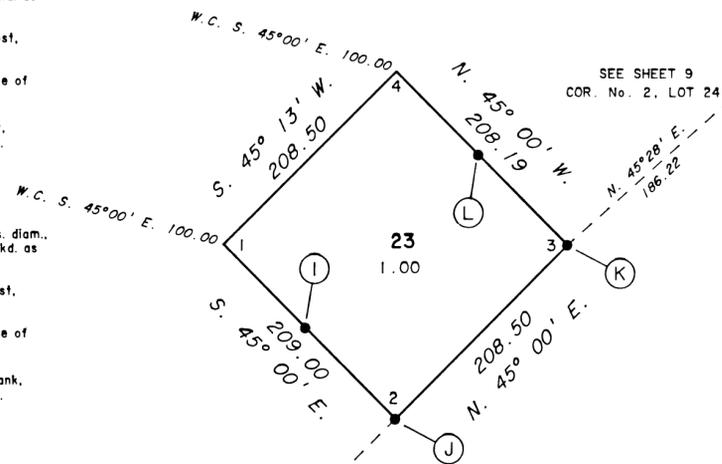


Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 8 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.

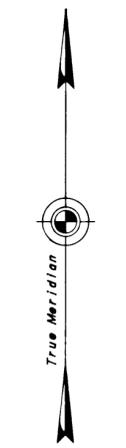

Mean Magnetic Declination 20 1/2° E.


SEE SHEET 7



93-4
 RECORDED - FILED 70-
 KVICHAK REC DIST
 DATE 5/12 19 93
 TIME 8:30 A.M.
 Returned by (USA/BM)
 Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(C) LOTS 1 THROUGH 30
 P.L. 92-203 (85 STAT. 688, 702, 703)
 ALASKA PENINSULA CORPORATION
 AT
 SOUTH NAKNEK, ALASKA

REFERENCE SHOULD BE MADE
 TO SHEET 1 FOR SURVEY INFORMATION

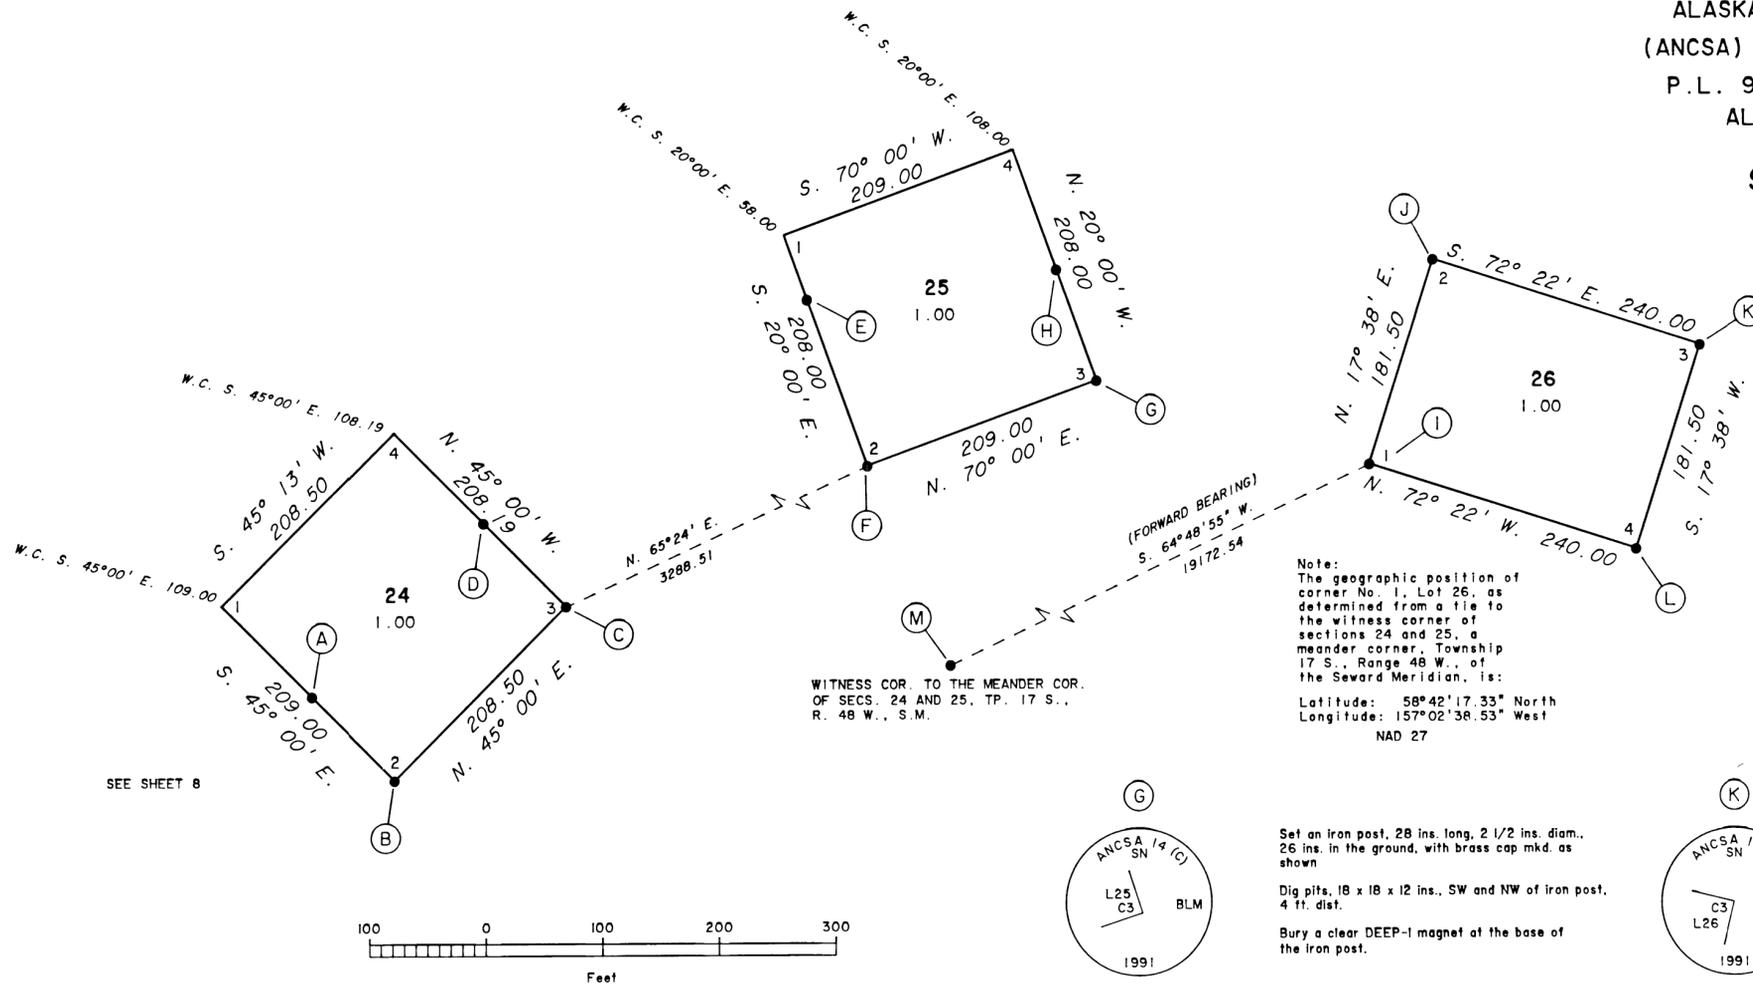


True Meridian
 Mean Magnetic Declination 20 1/2° E.

SEE SHEET 8


WITNESS COR. TO THE MEANDER COR.
 OF SECS. 24 AND 25, TP. 17 S.,
 R. 48 W., S.M.

(FORWARD BEARING)
 S. 64°48'55" W.
 19172.54


Note:
 The geographic position of
 corner No. 1, Lot 26, as
 determined from a tie to
 the witness corner of
 sections 24 and 25, a
 meander corner, Township
 17 S., Range 48 W., of
 the Seward Meridian, is:
 Latitude: 58°42'17.33" North
 Longitude: 157°02'38.53" West
 NAD 27




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SW and NW of iron post, 4 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE of iron post, 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.
 True point falls on or near a vertical bank, not suitable for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NE and SE of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SE and SW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., SW and NW on line, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown
 Dig pits, 18 x 18 x 12 ins., NE and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of the iron post.



Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with brass cap mkd. as shown
 No original accessories.

93-4
 RECORDED - FILED 70-
 KVICMAK REC DIST
 DATE 5/12 1993
 TIME 8:30 A.M.
 Witnessed by (USA, BLM)
 Address

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(C) LOTS 1 THROUGH 30
 P.L. 92-203 (85 STAT. 688, 702, 703)
 ALASKA PENINSULA CORPORATION
 AT
 SOUTH NAKNEK, ALASKA

REFERENCE SHOULD BE MADE
 TO SHEET 1 FOR SURVEY INFORMATION


Note:
 The geographic position of corner No. 1, Lot 27, as
 determined from a tie to corner No. 1, U.S. Survey
 No. 8043, identical with corner No. 4, U.S. Survey
 No. 1573, is:
 Latitude: 58°43'45.03" North
 Longitude: 156°56'38.58" West
 NAD 27

U.S. SURVEY
 No. 8043


U.S. SURVEY
 No. 1573

RETRACEMENT


1318.67
 696.67




Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 27 ins. in the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., SW and W. of iron post,
 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 27 ins. in the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., NW of iron post,
 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.
 True point falls in a marsh, not suitable
 for a permanent monument.




Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 27 ins. in the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., SE and SW of iron post,
 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.





Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 26 ins. in the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., SW of iron post,
 3 and 6 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.



Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 27 ins. in the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., NE and NW of iron post,
 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 flush with the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., NE and SE of iron post,
 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.

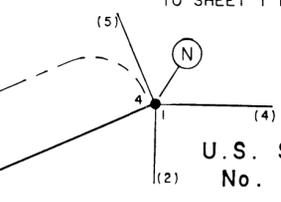


Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 26 ins. in the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., NE and SE of iron post,
 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 27 ins. in the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., NE and NW of iron post,
 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 27 ins. in the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., SE and SW of iron post,
 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 27 ins. in the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., NE and SE of iron post,
 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 26 ins. in the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., NE of iron post,
 6 ft. dist. and NW of iron post, 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.




Set an iron post, 28 ins. long, 2 1/2 ins. diam.,
 27 ins. in the ground, with brass cap mkd. as
 shown
 Dig pits, 18 x 18 x 12 ins., SW and NW of iron post,
 3 ft. dist.
 Bury a clear DEEP-1 magnet at the base of
 the iron post.



Recovered an iron post, 3 ins. diam., firmly
 set, projecting 6 ins. above ground, mkd.
 S1573 COR 3 on the NE side.
 No remaining evidence of the original
 accessories.



Recovered an alum post, 2 1/2 ins. diam.,
 firmly set, projecting 7 ins. above ground, with
 alum. cap mkd. as shown
 No remaining evidence of the original
 accessories.

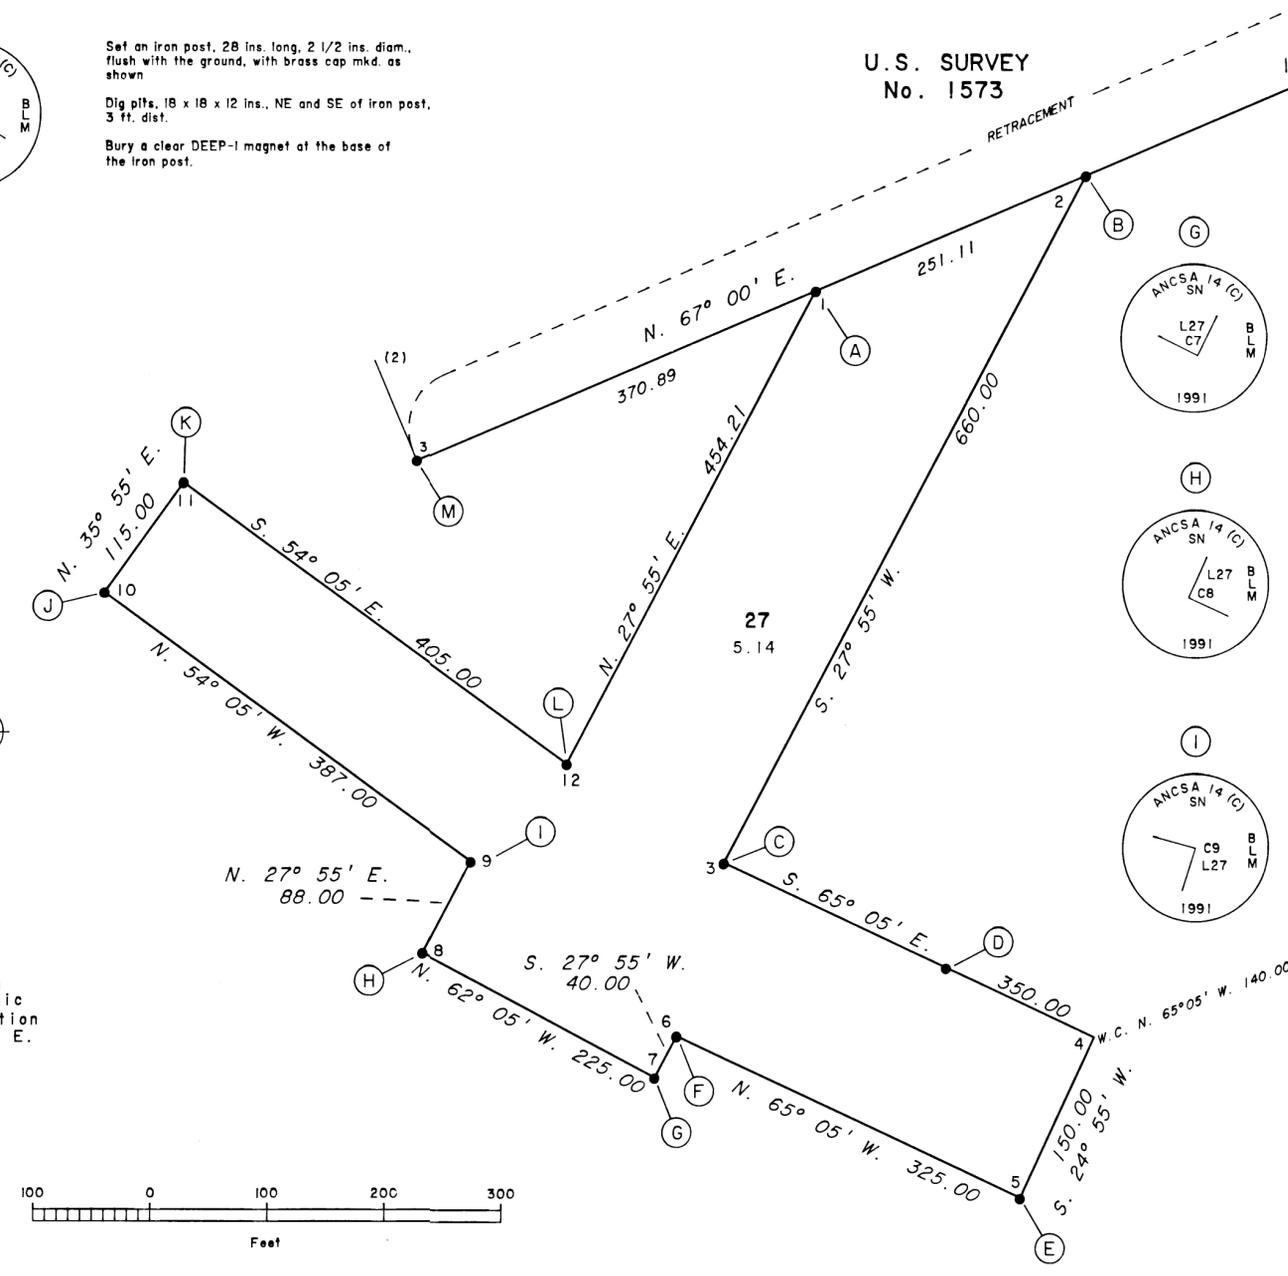

93-4
 RECORDED - FILED 70-
 KVICIAK REC. DIST.
 DATE 5/12 19 93
 TIME 8:30 A.M.
 Registered by (USA, BLM)
 Address

