

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14 (c) P.L. 92-203 (85 STAT. 688, 702, 703)

TRACTS 1 THROUGH 22 STEBBINS NATIVE CORPORATION

IN THE VICINITY OF STEBBINS, ALASKA

AND THE RETRACEMENT OF PORTIONS OF U.S. SURVEY No. 9512, ALASKA; A PORTION OF U.S. SURVEY No. 12670, ALASKA; AND A PORTION OF THE EAST BOUNDARY OF TOWNSHIP 25 SOUTH, RANGE 19 WEST, KATEEL RIVER MERIDIAN, ALASKA AND THE DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY OF TOWNSHIP 22 SOUTH, RANGE 19 WEST KATEEL RIVER MERIDIAN, ALASKA; THE SOUTH BOUNDARY OF TOWNSHIP 25 SOUTH, RANGE 19 WEST KATEEL RIVER MERIDIAN, ALASKA; U.S. SURVEY No. 2049, ALASKA; U.S. SURVEY No. 4241, ALASKA; A PORTION OF U.S. SURVEY No. 4491 TRACTS A AND B; PORTIONS OF STEBBINS SUBDIVISION ADDITION No. 1; PORTIONS OF BLUEBERRY SUBDIVISION; AND PORTIONS OF TAPRAQ SUBDIVISION

This plot, sheets 1 through 9, contains the entire survey record.

The pertinent history of surveys, azimuth determination, geographic position, location and land description for each tract of this survey are located on the appropriate sheet, as depicted on the Location Diagram.

This survey was executed by Scott Nations, for LCMF, Incorporated, July 11, 2000 through July 19, 2000, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973; Special Instructions approved November 23, 1999; Stebbins Native Corporation, ANCSA 14(c) Map of Boundaries; and Resolution Agreement No. 95-06-06-05 for Stebbins Native Corporation, approved October 30, 1995.

Field Assistants were: Chris E. Zeimet, Office Technician; Jeremy J. Kukowski, Crew Chief; Robert B. Patterson, Crew Chief; Leon G. Moline, Surveying Technician; Richard D. Kakaruk, Surveying Technician; Dale F. Tom, Survey Trainee; Leonard Raymond, Jr., Monument Technician

Area Surveyed: 1147.66 Acres

The magnetic declination was determined by Geomagix software using the 2000 magnetic model generated by the National Geomagnetic Information Center (U.S. Geological Survey) and indicated a mean value of 19 1/2' E.

COPY

LCMF Incorporated A subsidiary of Ukpagak Inupiat Corporation Anchorage, Alaska (907) 273-1830 Barrow, Alaska (907) 852-8212

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT Anchorage, Alaska



The survey represented by this plot, sheets 1 through 9, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

Deputy State Director for Cadastral Survey, Alaska

Date

LOCATION DIAGRAM

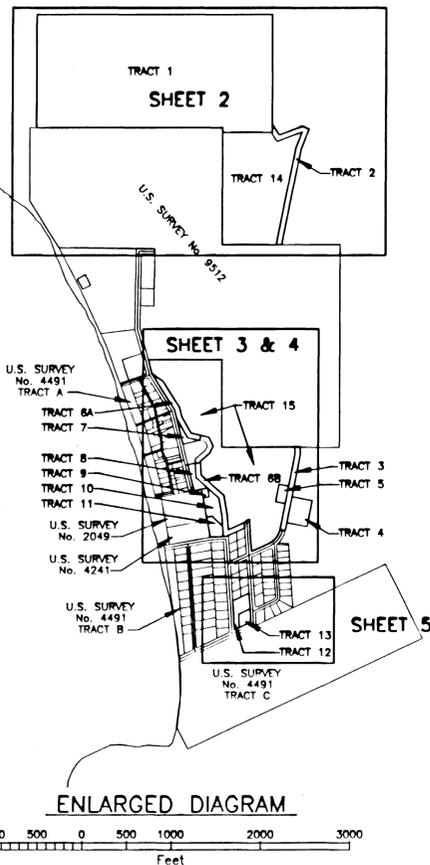

The undersigned parties hereby certify that the Tracts represented on this plot of survey are on lands interim conveyed in the Stebbins Native Corporation by Interim Conveyance Nos. 549 and 952, issued by the United States of America. This survey accurately describes the lands intended to be conveyed pursuant to the requirements of ANCSA 14(c) as requested by Stebbins Native Corporation Resolution Agreement No. 95-06-06-05 and the Stebbins Native Corporation ANCSA 14(c) Map of Boundaries approved October 30, 1995.

Date 3/13/2002, President, Stebbins Native Corporation

2002-8 NOME REPORT DATE 4-8-2002 TIME 1:23 P.M. Requested by BLM

I, Scott Nations, HEREBY CERTIFY that I am properly registered and licensed to practice land surveying in the State of Alaska, I, or those under my direct supervision, have executed the ANCSA 14(c) Survey depicted on this plot in conformance with the Map of Boundaries, the Assignment Instructions dated January 2, 1998, and agreements set forth in the contract with Stebbins Native Corporation. The monuments shown hereon actually exist as described, and all dimensions and other details are correct.



Date 2/25/2002, Registered Land Surveyor

PLOTTING DATE: 1/22/2002 (10:44) AUTOCAD DRAWING NAME: 00219CRY.DWG

CEZ

NOME 2002-8

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (c)
P.L. 92-203 (85 STAT. 688, 702, 703)

TRACTS 1 THROUGH 22
STEBBINS NATIVE CORPORATION

IN THE VICINITY OF
STEBBINS, ALASKA

Reference should be made to Sheet No. 1 for additional survey information.

The north, south and west boundaries of Township 22 South, Range 19 West, Kateel River Meridian, Alaska was surveyed by Walkon Redbird and Associates in 1979. The plat is unapproved as of this date.

U.S. Survey No. 9512 was surveyed by John A. Pex, Cadastral Surveyor, in 1987.

The azimuth for tracts 1, 2 and 14 was obtained from Global Positioning System methods, and refers to the true meridian.

The geographic position of the southwest corner of Tract 1, as determined by a Global Positioning System tie to the witness corner to the meander corner of sections 3 and 34, Townships 22 and 23 South, Ranges 19 West, River Meridian, Alaska, is:

Latitude: 63°31'57.29" North NAD 27
Longitude: 162°17'45.39" West

Tract 1 is located approximately 1/2 mile northerly of Stebbins, Alaska, within Township 22 South, Range 19 West, Kateel River Meridian, Alaska.


Tracts 2 and 14 are located approximately 1/2 mile northwesterly of Stebbins, Alaska, within Townships 22 and 23 South, Ranges 19 West, Kateel River Meridian, Alaska.

The land is generally rolling tundra, vegetated with scattered alder and willow brush. A portion of the Stebbins - Saint Michael Road and a portion of the Landfill Access Road are located within Tract 2.


The corner positions for Tract 1 were determined by Global Positioning System methods. The bearings shown for Tract 1 and the dependent resurvey of a portion of the South Boundary of Townships 22 and 23 South, Range 19 West, Kateel River Meridian, Alaska are mean geodetic bearings.

LEGEND



- ⊕ Recovered a 3 1/4" Aluminum Cap monument on a 3/4" Aluminum Rod.
- ⓪ Recovered a 3 1/4" Aluminum Cap monument on a 2 1/2" Aluminum Post.
- ⊙ Set a 3 1/4" Brass Cap monument on a 2 1/2" Stainless Steel Post.
- Ⓢ Set a 2" Aluminum Cap monument on a 5/8" x 30" Rebar.
- ⓐ Monument Identifier. Number indicates the Sheet. Letter indicates the Monument.



LCMF Incorporated
A subsidiary of Ukpengvik Inupiat Corporation
Anchorage, Alaska (907) 273-1830
Barrow, Alaska (907) 852-8212



TYPICAL 2" ALUMINUM CAP MARKINGS

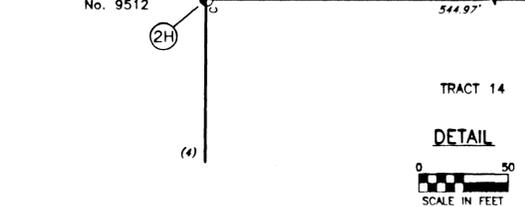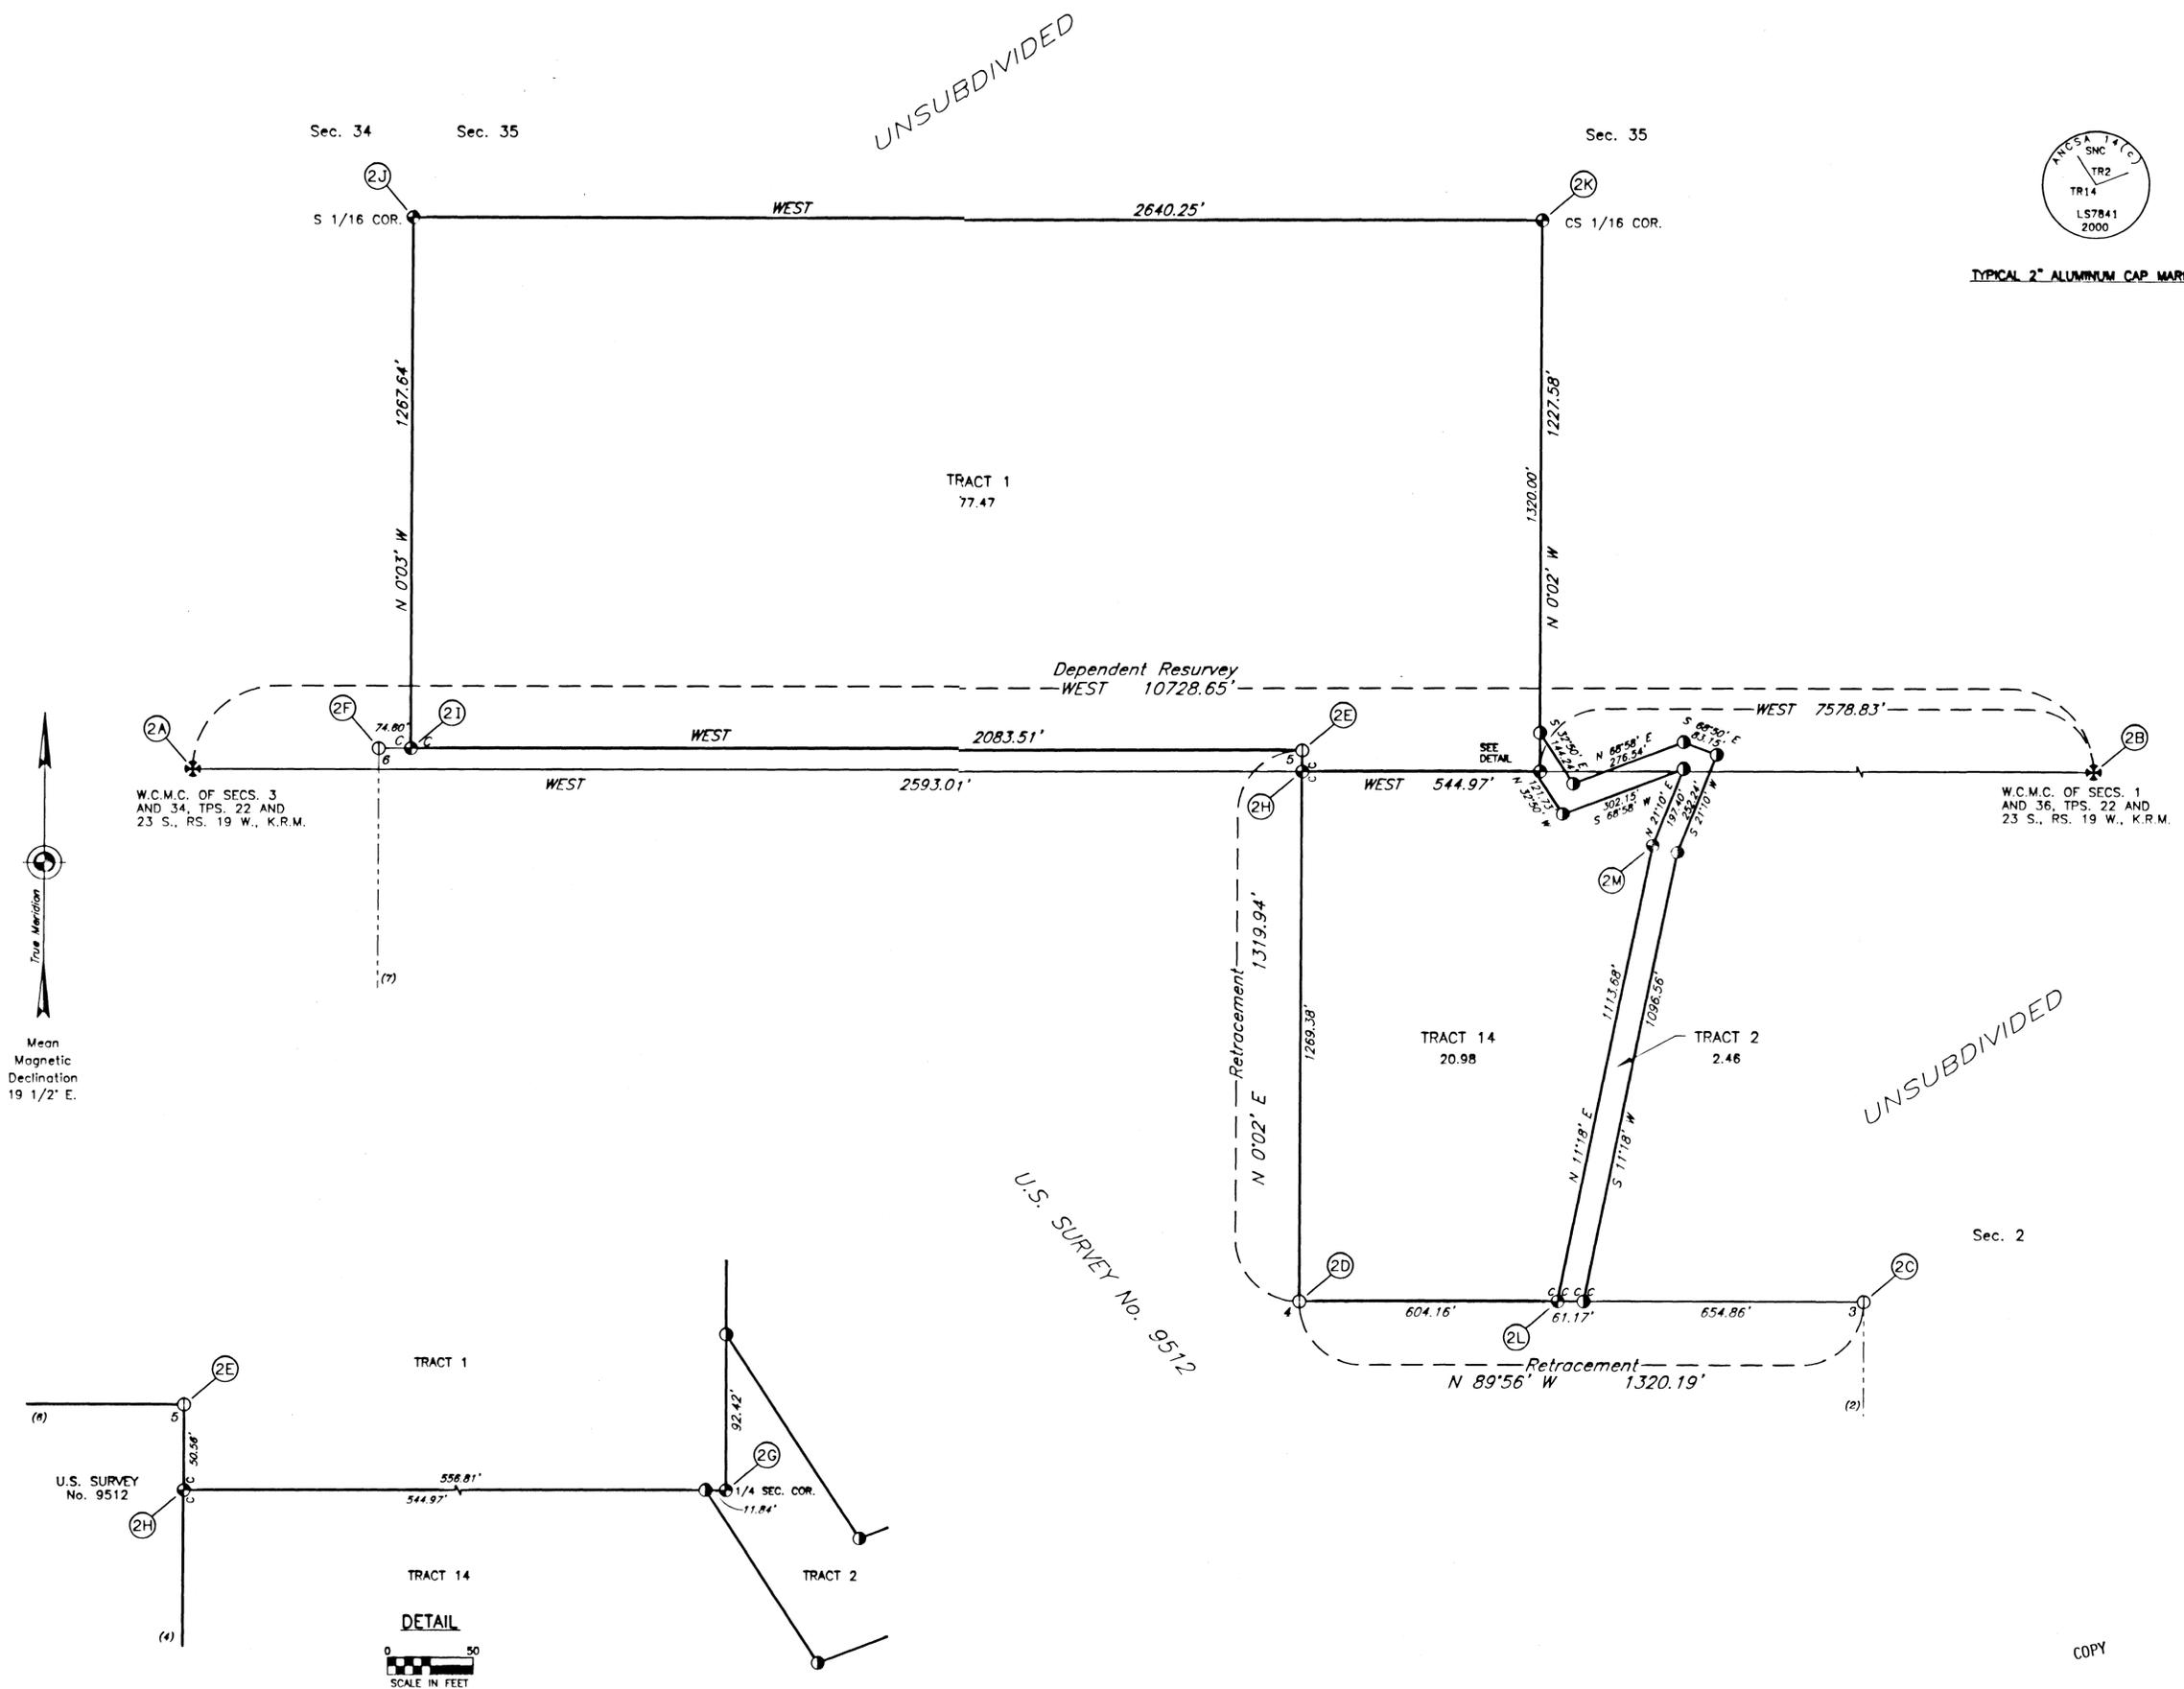

COPY

NOME 2002-8

PLOTTING DATE: 1/22/2002 (10:44)
AUTOCAD DRAWING NAME: 00219.DWG

CEZ

TRACTS 1 THROUGH 22
STEBBINS NATIVE CORPORATION

IN THE VICINITY OF
STEBBINS, ALASKA

Reference should be made to Sheet No. 1 for additional survey information.

U.S. Survey No. 2049 was surveyed by Floyd G. Betts, Cadastral Engineer, in 1931.

U.S. Survey No. 4241 was surveyed by Oswald P. Jensen, Cadastral Surveyor, in 1963.

U.S. Survey No. 4491, Tracts A and B, was surveyed by Ralph J. Ellis, Cadastral Surveyor, in 1968.

U.S. Survey No. 9512 was surveyed by John A. Pex, Cadastral Surveyor, in 1987.

Stebbins Addition No. 1, Plat No. 91-7, Cape Nome Recording District, was surveyed by Michael S. Kahler, Registered Alaska Professional Land Surveyor No. 6504, for AMTEC, Inc., in 1991.

Tapraq Subdivision, Plat No. 97-1, Cape Nome Recording District, was surveyed by William McClintock, Registered Alaska Professional Land Surveyor No. 5480, for McClintock Land Associates, Inc., in 1994.

Stebbins Blueberry Subdivision, Plat No. 97-7, Cape Nome Recording District, was surveyed by William McClintock, Registered Alaska Professional Land Surveyor No. 5480, for McClintock Land Associates, Inc., in 1995.

U.S. Survey No. 2049, Alaska, was dependently resurveyed concurrently by Scott Nations, for LCMF Incorporated, under Contract No. NAC000056.

U.S. Survey No. 4241, Alaska, was dependently resurveyed concurrently by Scott Nations, for LCMF Incorporated, under Contract No. NAC000056.

The azimuth for tracts 3 through 11 and 15 was obtained from Global Positioning System methods, and refers to the true meridian.

The geographic position of corner No. 13, U.S. Survey No. 9512, identical with the most northwesterly corner of Tract 15, as determined by a Global Positioning System tie to the witness corner to the meander corner of sections 3 and 34, Townships 22 and 23 South, Ranges 19 West, Koteel River Meridian, Alaska, is:

Latitude: 63°31'31.29" North


NAD 27

Longitude: 162°17'17.67" West

Tracts 3 through 11 and 15 are located in and around Stebbins, Alaska, within Township 23 South, Range 19 West, Koteel River Meridian, Alaska.

LEGEND

- ⊕ Recovered a 3 1/4" Aluminum Cap monument on a 3/4" Aluminum Rod.
- ⊕ Recovered a 3 1/4" Brass Cap monument on a 2 1/2" Iron Post.
- ⊕ Recovered a 3 1/4" Aluminum Cap monument on a 2 1/2" Aluminum Post.
- ⊕ Recovered a 1" plastic cap on a 5/8" rebar.
- Recovered a 5/8" rebar.
- ⊕ Recovered Aluminum Cap monument on 5/8" Rebar, as described.
- ⊕ Set a 3 1/4" Brass Cap monument on a 2 1/2" Stainless Steel Post.
- ⊕ Set 2" Aluminum Cap monument on a 5/8" x 30" rebar.
- ⊕ Monument Identifier: Number indicated the sheet, Letter indicates the monument.



LCMF Incorporated
A subsidiary of Utkpaugvik Inupiat Corporation
Anchorage, Alaska (907) 273-1830
Barrow, Alaska (907) 852-8212



TYPICAL 2" ALUMINUM CAP MARKINGS

U.S. SURVEY
No. 9512

Mean
Magnetic
Declination
19 1/2' E.

UNSUBDIVIDED

TRACT 4
1.58

TRACT 5
0.51

TRACT 15
29.68

TRACT 6B

TRACT 11

TRACT 10

TRACT 9

TRACT 8

TRACT 7

TRACT 6A

W.C.M.C. OF SECS. 3
AND 34, TPS. 22 AND
23 S., RS. 19 W., K.R.M.

Nome 2002-8

COPY

PLOTTING DATE: 1/22/2002 (10:44)
AUTOCAD DRAWING NAME: 00219.DWG

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (c)
P.L. 92-203 (85 STAT. 688, 702, 703)

TRACTS 1 THROUGH 22
STEBBINS NATIVE CORPORATION

IN THE VICINITY OF
STEBBINS, ALASKA

Reference should be made to Sheet No. 1 for additional survey information.

U.S. Survey No. 2049 was surveyed by Floyd G. Betts, Cadastral Engineer, in 1931.

U.S. Survey No. 4241 was surveyed by Oswald P. Jensen, Cadastral Surveyor, in 1963.

U.S. Survey No. 4491, Tracts A and B, was surveyed by Ralph J. Ellis, Cadastral Surveyor, in 1968.

U.S. Survey No. 9512 was surveyed by John A. Pex, Cadastral Surveyor, in 1987.

Stebbins Addition No. 1, Plat No. 91-7, Cape Nome Recording District, was surveyed by Michael S. Kohler, Registered Alaska Professional Land Surveyor No. 6504, for AMTEC, Inc., in 1991.

Tapraq Subdivision, Plat No. 97-1, Cape Nome Recording District, was surveyed by William McClintock, Registered Alaska Professional Land Surveyor No. 5480, for McClintock Land Associates, Inc., in 1994.

Stebbins Blueberry Subdivision, Plat No. 97-7, Cape Nome Recording District, was surveyed by William McClintock, Registered Alaska Professional Land Surveyor No. 5480, for McClintock Land Associates, Inc., in 1995.

U.S. Survey No. 2049, Alaska, was dependently resurveyed concurrently by Scott Nations, for LCMF Incorporated, under Contract No. NAC000056.

U.S. Survey No. 4241, Alaska, was dependently resurveyed concurrently by Scott Nations, for LCMF Incorporated, under Contract No. NAC000056.

The azimuth for tracts 3 through 11 and 15 was obtained from Global Positioning System methods, and refers to the true meridian.

The geographic position of corner No. 13, U.S. Survey No. 9512, identical with the most northwesterly corner of Tract 15, as determined by a Global Positioning System tie to the witness corner to the meander corner of sections 3 and 34, Townships 22 and 23 South, Ranges 19 West, Koteel River Meridian, Alaska, is:

Latitude: 63°31'31.29" North

NAD 27

Longitude: 162°17'17.67" West


Tracts 3 through 11 and 15 are located in and around Stebbins, Alaska, within Township 23 South, Range 19 West, Koteel River Meridian, Alaska.

LEGEND

- ⊕ Recovered a 3 1/4" Brass Cap monument on a 2 1/2" Iron Post.
- ⓪ Recovered a 3 1/4" Aluminum Cap monument on a 2 1/2" Aluminum Post.
- ⊠ Recovered a 1" plastic cap on a 5/8" rebar.
- Recovered a 5/8" rebar.
- ⊖ Recovered Aluminum Cap monument on 5/8" Rebar.
- ⊕ Set a 3 1/4" Brass Cap monument on a 2 1/2" Iron Post.
- ⓪ Set 2" Aluminum Cap monument on a 5/8" x 30" rebar.
- ⓪ Monument Identifier: Number indicated the sheet, Letter indicates the monument.




TYPICAL 2" ALUMINUM CAP MARKINGS



COPY

LCMF Incorporated
A subsidiary of Ukpeagvik Inupiat Corporation
Anchorage, Alaska (907) 273-1830
Barrow, Alaska (907) 852-8212

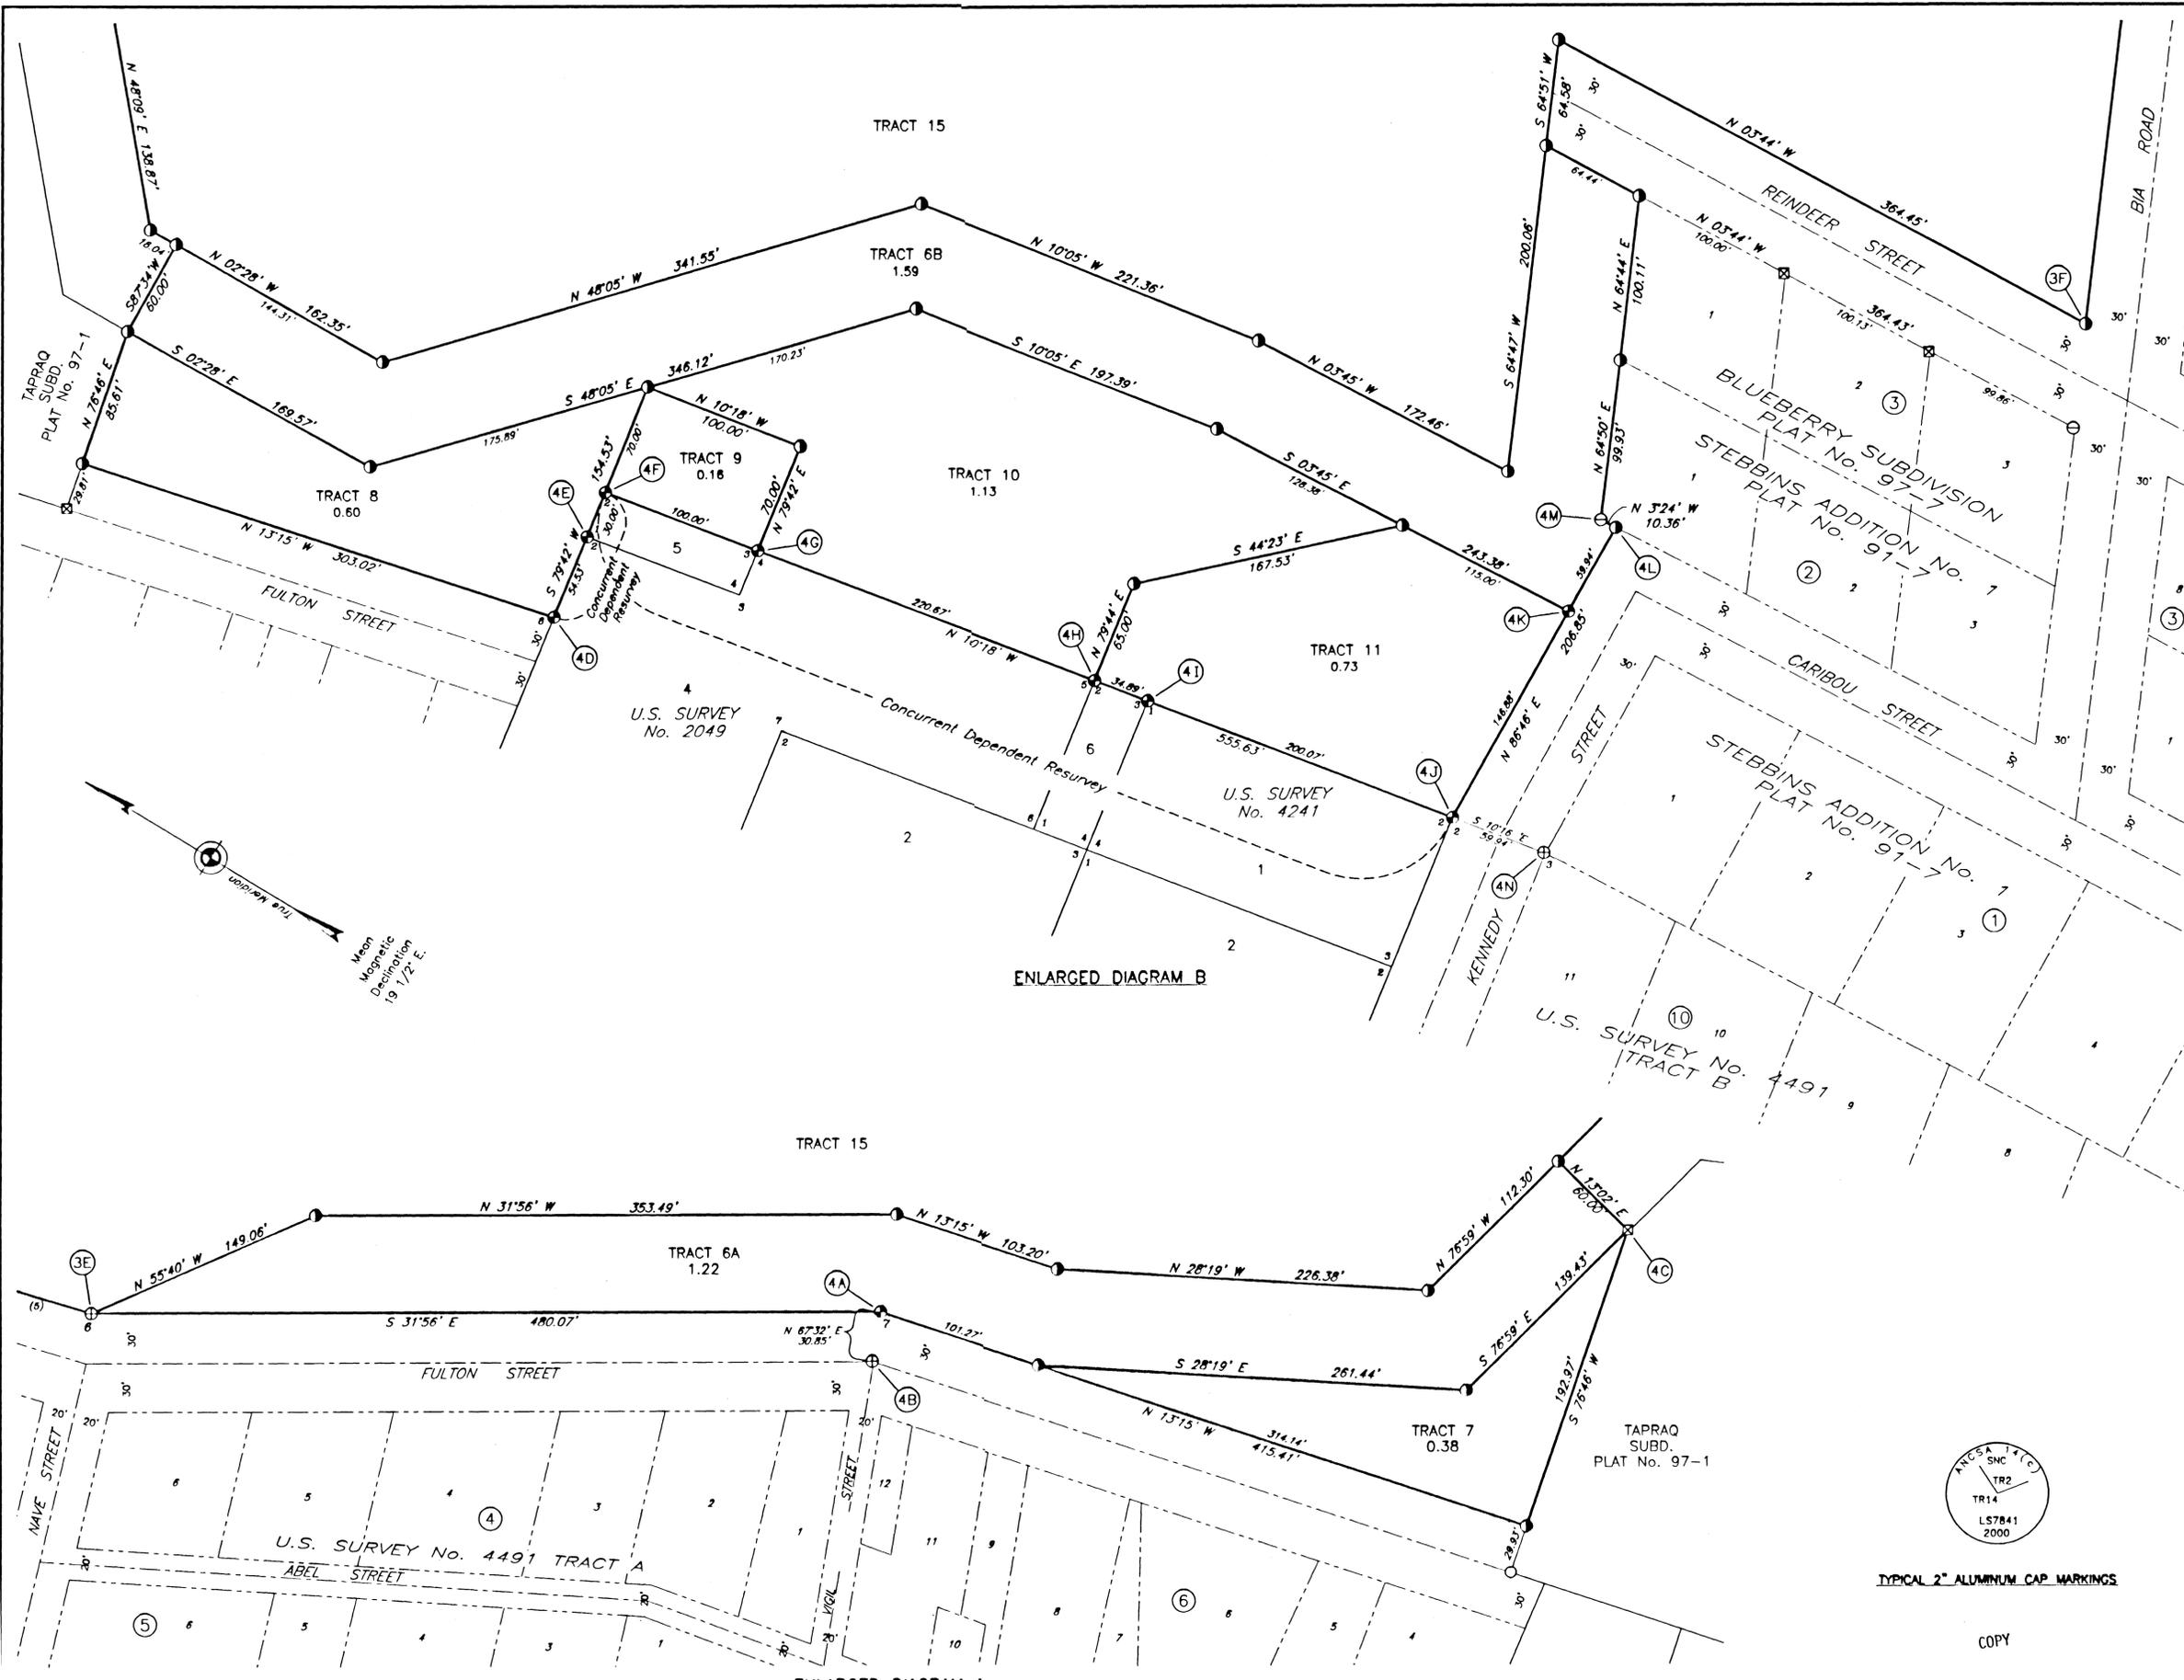

WOME 2002-8

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (c)
P.L. 92-203 (85 STAT. 688, 702, 703)

TRACTS 1 THROUGH 22
STEBBINS NATIVE CORPORATION

IN THE VICINITY OF
STEBBINS, ALASKA

Reference should be made to Sheet No. 1 for additional survey information.

The north, south and west boundaries of Township 25 South, Range 19 West, Koteel River Meridian, Alaska was surveyed by Walkon Redbird and Associates in 1979. The plot is unapproved as of this date.

Stebbins Addition No. 1, Plat No. 91-7, Cape Nome Recording District, was surveyed by Michael S. Kahler, Registered Alaska Professional Land Surveyor No. 6504, for AMTEC, Inc., in 1991.

Stebbins Blueberry Subdivision, Plat No. 97-7, Cape Nome Recording District, was surveyed by William McClintock, Registered Alaska Professional Land Surveyor No. 5480, for McClintock Land Associates, Inc., in 1995.

The azimuth for tracts 12 and 13 was obtained from the record of the line defined by W.C.M.C. No. 1, Tract C, U.S. Survey No. 4491 and the corner common to Lots 3 and 4, Block 2, Stebbins Blueberry Subdivision, and refers to the true meridian.


The azimuth for tract 16 was obtained from Global Positioning System methods, and refers to the true meridian.

The geographic position of the witness corner to corner No. 4, Tract 16, as determined by a Global Positioning System tie to the corner of sections 19, 24, 25 and 30, Townships 25 South, Ranges 18 and 19 West, Koteel River Meridian, Alaska, is:

Latitude: 63°19'17.59" North NAD 27
Longitude: 162°14'52.16" West

Tracts 12 and 13 are located in Stebbins, Alaska, within Township 23 South, Range 19 West, Koteel River Meridian, Alaska.

Tract 16 is located approximately 14 miles southerly of Stebbins, Alaska, within Township 25 South, Range 19 West, Koteel River Meridian, Alaska.

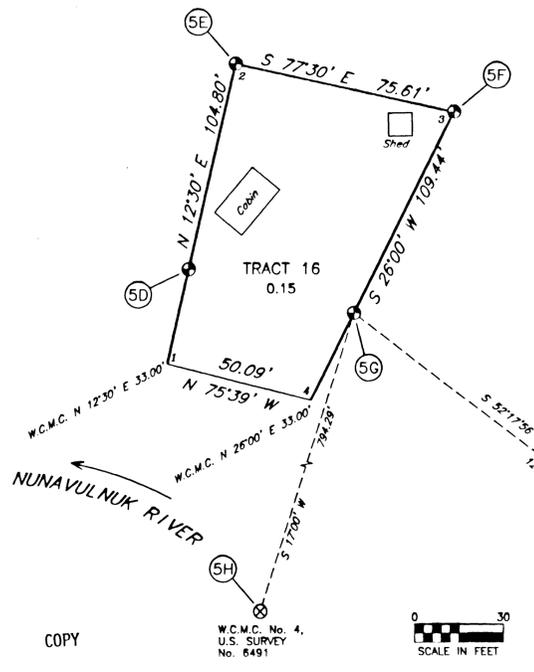


Tract 16 Improvements
From the witness cor. to cor. No. 1, a meander cor.,
The most westerly corner of a cabin, 12' x 20', bears N 24°07' E, 21.0', long side extends N 39°39' E.
From cor. No. 3,
The most northeasterly corner of a shed, 8' x 8', bears S 88°58' W, 14.2', sides extend S 0°54' E and S 89°06' W.

LEGEND

- ⊕ Recovered a 3 1/4" Brass Cap monument on a 2 1/2" Iron Post.
- Ⓛ Recovered 2" Aluminum Cap monument on a 5/8" Rebar
- ⊠ Recovered a 1" plastic cap on a 5/8" rebar.
- Recovered a 5/8" rebar.
- ⊖ Recovered a 1 1/2" Aluminum Cap monument on a 5/8" Rebar
- ⊗ Recovered a 3 1/4" Aluminum Cap monument on a 3/4" Aluminum Rod
- ⊕ Set a 3 1/4" Brass Cap monument on a 2 1/2" Stainless Steel Post.
- Ⓛ Set 2" Aluminum Cap monument on a 5/8" x 30" rebar.
- Ⓜ Monument Identifier: Number indicated the sheet. Letter indicates the monument.

U.S. SURVEY
No. 4491
TRACT C



TYPICAL 2" ALUMINUM CAP MARKINGS



COR. OF SECS. 19, 24, 25 AND 30, T25 S., R18 AND 19 W., K.R.M.

LCMF Incorporated
A subsidiary of Ukepegiuk Inupiat Corporation
Anchorage, Alaska (907) 273-1830
Barrow, Alaska (907) 852-8212

PLOT DATE: 1/22/2002 (10:44)
AUTOCAD DRAWING NAME: 00219.DWG

NOV 2002 8

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (c)
P.L. 92-203 (85 STAT. 688, 702, 703)

TRACTS 1 THROUGH 22
STEBBINS NATIVE CORPORATION

IN THE VICINITY OF
STEBBINS, ALASKA

Reference should be made to Sheet No. 1 for additional survey information.

The north, east and south boundaries of Township 25 South, Range 19 West, Kateel River Meridian, Alaska were surveyed by Walkon Redbird and Associates in 1979. The plot is unapproved as of this date.

U.S. Survey No. 12670 was surveyed by Scott Nations, Alaska Professional Land Surveyor, for LCMF Incorporated, in 1999.

The azimuth for tracts 17 through 22 was obtained from Global Positioning System methods, and refers to the true meridian.


The geographic position of the southwest corner of Tract 17, as determined by a Global Positioning System tie to the corner of Townships 25 and 26 South, Ranges 18 and 19 West, Kateel River Meridian, Alaska, is:

Latitude: 63°16'21.23" North
Longitude: 162°21'01.10" West
NAD 27

Tracts 17 through 22 are located approximately 16 miles southerly of Stebbins, Alaska, within Township 25 South, Range 19 West, Kateel River Meridian, Alaska.

The land is generally rolling tundra, vegetated with scattered alder and willow brush.

The corner positions for Tract 17 through 22 were determined by Global Positioning System methods. The bearings shown for Tract 17 through 22, the retracement of the South Boundary of Townships 25 and 26 South, Ranges 19 West, Kateel River Meridian, Alaska and the retracement of portions of the east boundary of Townships 25 South, Ranges 18 and 19 West, Kateel River Meridian, Alaska, are mean geodetic bearings.

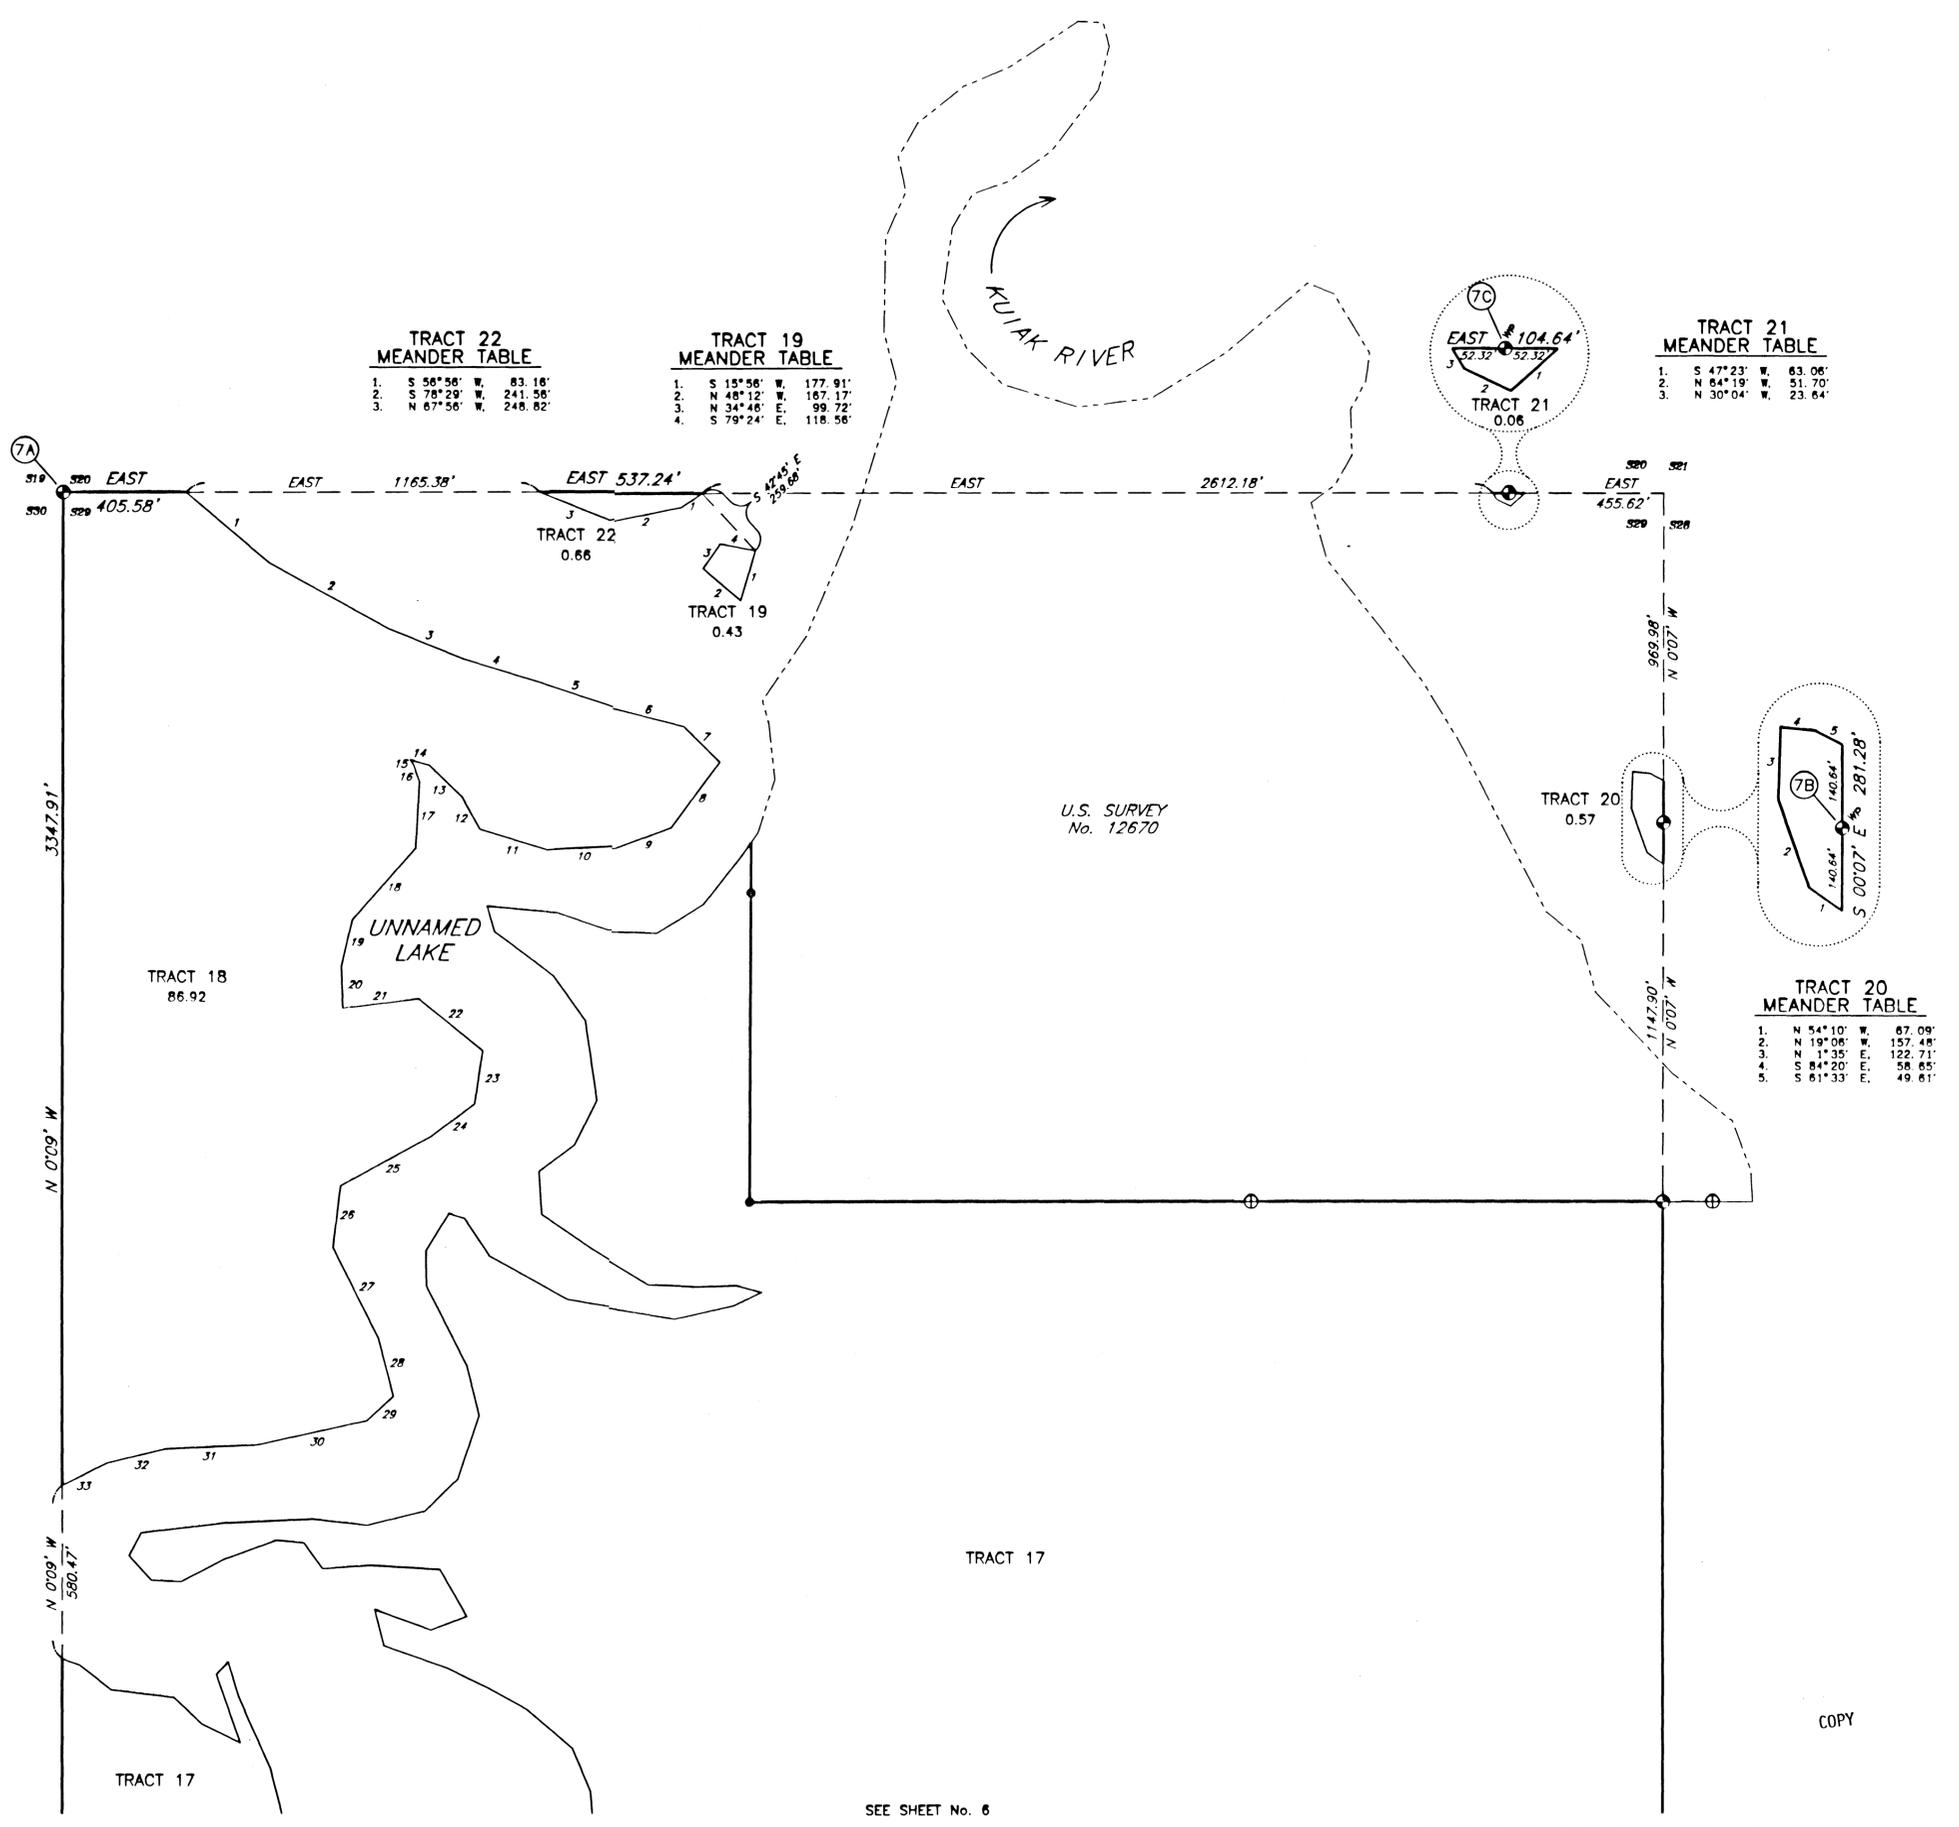

TRACT 22 MEANDER TABLE

- S 56°56' W, 83.18'
- S 78°29' W, 241.56'
- N 67°56' W, 248.82'

TRACT 19 MEANDER TABLE

- S 15°56' W, 177.91'
- N 48°12' W, 167.17'
- N 34°48' E, 99.72'
- S 79°24' E, 118.56'

TRACT 21 MEANDER TABLE

- S 47°23' W, 63.06'
- N 64°19' W, 51.70'
- N 30°04' W, 23.64'

TRACT 18 MEANDER TABLE

- S 49°22' E, 363.17'
- S 60°18' E, 453.80'
- S 67°31' E, 267.24'
- S 72°55' E, 249.91'
- S 71°27' E, 266.66'
- S 75°12' E, 243.42'
- S 44°13' E, 171.06'
- S 36°06' W, 272.14'
- S 69°29' W, 195.23'
- S 87°13' W, 227.32'
- N 72°25' W, 232.02'
- N 28°38' W, 121.31'
- N 45°20' W, 153.49'
- N 73°56' W, 83.53'
- S 28°24' E, 20.80'
- S 19°26' E, 86.09'
- S 2°54' W, 225.00'
- S 40°35' W, 319.44'
- S 12°40' W, 160.67'
- S 2°08' E, 142.44'
- N 82°59' E, 252.59'
- S 50°10' E, 275.25'
- S 8°11' W, 180.51'
- S 52°29' W, 183.73'
- S 60°23' W, 339.78'
- S 6°44' W, 209.81'
- S 26°27' E, 337.68'
- S 14°31' E, 200.34'
- S 47°21' W, 118.14'
- S 77°30' W, 374.17'
- S 87°28' W, 300.71'
- S 76°12' W, 198.75'
- S 63°00' W, 164.44'


TRACT 20 MEANDER TABLE

- N 54°10' W, 67.09'
- N 19°08' W, 157.48'
- N 1°35' E, 122.71'
- S 84°20' E, 58.65'
- S 61°33' E, 49.61'

True Meridian
Mean Magnetic Declination
19 1/2' E.

LEGEND

- ⊕ Recovered a 3 1/4" Brass Cap monument on a 2 1/2" Stainless Steel Post.
- ⊙ Set a 3 1/4" Brass Cap monument on a 2 1/2" Stainless Steel Post.
- Monument of record, not surveyed.
- Ⓡ Monument Identifier: Number indicated the sheet. Letter indicates the monument.



LCMF Incorporated
A subsidiary of Ukpukvik Inupiat Corporation
Anchorage, Alaska (907) 273-1830
Barrow, Alaska (907) 852-8212

COPY

SEE SHEET No. 6

NAME 2002-8

AUTOCAD DRAWING NAME: 00219.DWG

CEZ

TRACTS 1 THROUGH 22 STEBBINS NATIVE CORPORATION

IN THE VICINITY OF STEBBINS, ALASKA

2A

Found an alum. rod, 3/4 in. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown, from which

An alum. rod, 3/4 in. diam., firmly set, projecting 2.5 ft. above ground, with an orange triangular marker on the top, bears East, 6.6 ft.

The monument is located in a cut clearing, 25 ft. diam., in alder brush on a gentle westerly slope.

2G

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below gravel road surface, with brass cap mkd. as shown, from which

A magnet in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 18 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

The monument is located in the landfill road, 3.5 ft. easterly of westerly shoulder of road.

2M

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A magnet in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 12 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

The monument is located on a gentle southeasterly tundra slope. The centerline of the Stebbins - Saint Michael Road bears easterly, approximately 30 ft. dist.

3F

Found a rebar, 5/8 in. diam., bent over with no cap.

Set a rebar, 30 ins. long, 5/8 in. diam., flush with ground, with an alum. cap, 2 ins. diam. mkd. as shown.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

4B

Found an iron post, 2 1/2 ins. diam., buried 1.8 ft. below ground and bent over, with brass cap missing.

There are no record accessories.

2B

Found an alum. rod, 3/4 in. diam., firmly set, projecting 3 ft. above ground, leaning easterly, with alum. cap mkd. as shown, from which

An alum. rod, 3/4 in. diam., firmly set, projecting 3 ft. above ground, leaning easterly, with an orange triangular marker on the top, bears West, 5.6 ft.

The monument is located on a gentle easterly slope in open tundra.

2H

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A magnet in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 16 ins. below ground.

A magnet in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 16 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

The monument is located on a gentle westerly tundra slope, vegetated with dense alder brush and tundra grass.

3A

Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap, mkd. as shown.

The original magnet accessories were not exhumed.

3G

Found a rebar, 5/8 in. diam., firmly set, projecting 2 ins. above ground, with alum. cap, 2 ins. diam., mkd. as shown.

4C

Found a rebar, 5/8 in. diam., firmly set, projecting 3 ins. above ground, with plastic cap, 1 in. diam., mks. obliterated.

4H

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 31 ins. in the ground, with brass cap mkd. as shown, from which

The most northwesterly corner of the Native Corporation Building, bears S. 82°3' E., 8.7 ft. dist.

The most northeasterly corner of School Building, bears N. 62°19' W., 138.7 ft. dist.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

2C

Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, leaning slightly easterly, with an alum. cap mkd. as shown.

The original magnet accessories were not exhumed.

The monument is located in level, open tundra.

2I

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A magnet in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 14 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

The monument is located on a moderate northeasterly slope, vegetated with scattered willow brush and tundra grass.

3B

Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap, mkd. as shown.

The original magnet accessories were not exhumed.

The monument is located on gentle southerly tundra slope.

3H

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A magnet in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

The monument is located on wet, grassy tundra. The centerline of the Stebbins - Saint Michael Road bears easterly, approximately 30 ft. dist.

4D

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 31 ins. in the ground, with brass cap mkd. as shown, from which

The most northwesterly corner of the Teen Center Building, bears N. 87°09' E., 95.7 ft. dist.

The most westerly corner of the Teen Center Building, bears S. 66°48' E., 98.5 ft. dist.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

4I

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, with brass cap mkd. as shown, from which

The most northwesterly corner of an apartment Building, bears S. 82°3' E., 40.8 ft. dist.

The most southeasterly corner of the Native Corporation Building bears N. 24°54' W., 5.7 ft. dist.

Found an alum. cap, 2 ins. diam., flush with ground, bears S. 73°28' E., 0.6 ft. dist., mkd. ASCG 952SE 2000 57835.

Found an iron pipe 1 in. diam., bent, 8 ins. below ground, bears S. 85°24' W., 3.5 ft. dist.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

2D

Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.

The original magnet accessories were not exhumed.

The monument is located in grassy pot hole, 100 ft. diam.

2J

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap erroneously mkd. as shown, from which

A magnet in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 16 ins. below ground.

Drive an alum. rod, 3.0 ft. long, 3/4 in. diam., 2.5 ft. in the ground, East, 6.6 ft. dist., with an orange triangular marker on the top.

A magnet in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 16 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

The monument is located on southeasterly slope in dense willow brush and tall grass.

3C

Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap, mkd. as shown.

The original magnet accessories were not exhumed.

The monument is located on open, level tundra. A pond, bears East, 17 ft. dist., edge bears S. 22° E. and N. 22° W.

3I

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A magnet in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 16 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 16 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

The monument is located in scattered alder brush and tundra grass. The centerline of the Stebbins - Saint Michael Road bears easterly, approximately 30 ft. dist.

4E

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 35 ins. in the ground, with brass cap mkd. as shown, from which

The most northwesterly corner of the Teen Center Building, bears S. 83°14' E., 42.2 ft. dist.

The most westerly corner of the Teen Center Building, bears S. 37°15' E., 61.0 ft. dist.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

4J

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 31 ins. in the ground, with brass cap mkd. as shown, from which

The most southeasterly corner of the School Building, bears N. 76°01' W., 120.5 ft. dist.

The most southwesterly corner of an Apartment Building, bears N. 21°05' W., 146.1 ft. dist.

An alum. cap, 2 ins. diam., mks. illegible, on 5/8 in. rebar, bears S. 16°21' E., 0.70 ft.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

2E

Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with an alum. cap mkd. as shown.

The original magnet accessories were not exhumed.

The monument is located in a cut clearing, 10 ft. diam., in alder brush.

2K

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 16 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 16 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

The monument is located on a gentle easterly tundra slope, in open grassy tundra.

3D

Found an alum. post, 2 1/2 ins. diam., loosely set, projecting 3 ins. above ground, with alum. cap, mkd. as shown.

The original magnet accessories were not exhumed.

The monument is located on gentle southeasterly tundra slope. A pond, bears East, 18 ft. dist., edge bears northeasterly and southwesterly.

3J

Found an iron post, 2 1/2 ins. diam., firmly set, buried 4 ins. below ground, with a brass cap mkd. as shown.

There are no record accessories.

The most northwesterly corner of the a quonset building, bears S. 85°26' E., 48.0 ft. dist.

The most southwesterly corner of the a quonset building, bears S. 35°35' E., 102.6 ft. dist.

4F

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 31 ins. in the ground, with brass cap mkd. as shown, from which

The most northwesterly corner of the Teen Center Building, bears N. 88°25' E., 55.2 ft. dist.

The most northwesterly corner of the Teen Center Building, bears S. 50°13' E., 16.2 ft. dist.

A rebar, 5/8 in. diam., with an alum. cap, 2 ins. diam., mkd. ASCG 2000 57835, bears S. 75°39' E., 1.0 ft. dist.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

4K

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 40 ins. in the ground, with brass cap mkd. as shown.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

The Monument is located in gravel pad, 12 ins. below surface.

2F

Found an alum. post, 2 1/2 ins. diam., loosely set, leaning northerly, projecting 8 ins. above ground, with an alum. cap mkd. as shown.

The original magnet accessories were not exhumed.

The monument is located on rolling tundra, vegetated with scattered alder brush and native grasses.

2L

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A magnet in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 12 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 12 ins. below ground.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

The monument is located on a gentle southeasterly tundra slope, in open grassy tundra. The centerline of the Stebbins - Saint Michael Road bears easterly, approximately 30 ft. dist.

3E

Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap, mkd. as shown.

There are no record accessories.

4A

Found an iron post, 2 1/2 ins. diam., buried 2.5 ft. below ground and bent over, with brass cap, missing.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 12 ins. below ground, with brass cap mkd. as shown.

There are no record accessories.

4G

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with brass cap mkd. as shown, from which

The most southwesterly corner of Teen Center, bears N. 35°10' E., 31.5 ft. dist.

The most westerly corner of Teen Center, bears N. 13°16' W., 45.7 ft. dist.

Bury a magnet in a clear plastic case at the base of the stainless steel post.

4L

Found a rebar, 5/8 in. diam., bent over, with no cap.

Set a rebar, 30 ins. long, 5/8 in. diam., flush with ground, with an alum. cap, 2 ins. diam. mkd. as shown.

COPY


NOTE 2002-8

CEZ
PLOTING DATE: 1/22/2002 (10:44)
AUTOCAD DRAWING NAME: 00219.DWG

TRACTS 1 THROUGH 22
STEBBINS NATIVE CORPORATION


IN THE VICINITY OF
STEBBINS, ALASKA

4M
6504-S
Found a rebar, 5/8 in. diam., firmly set, projecting 4 ins. above ground, with an alum. cap, 1 1/2 ins. diam., mkd. as shown.



1991

5E
SNC
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
A 6 in. spike, driven into a volcanic rock, 3 ft. x 3 ft. x 1 ft., bears S. 81°47' W., 12.3 ft. dist.
Bury a magnet in a clear plastic case at the base of the stainless steel post.
The monument is located on level, open tundra.




LS7841
2000

6C
SNC
T255 R19W
TR17
S32 S33
S51 S54
T285
LS7841
2000
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
Drive an alum. rod, 3/4 in. diam., 3.0 ft. long, 2.0 ft. in the ground, North, 6.6 ft. dist., with an orange triangular marker on the top.
Bury a magnet in a clear plastic case at the base of the stainless steel post.
The monument is located on level, open tundra.




7A
SNC
T255 R19W
S19 S20
S30 S29
TR18
LS7841
2000
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
Drive an alum. rod, 3/4 in. diam., 3.0 ft. long, 2.0 ft. in the ground, South, 6.6 ft. dist., with an orange triangular marker on the top.
Bury a magnet in a clear plastic case at the base of the stainless steel post.
The monument is located on level, open tundra.



4N
S4491
C3
TR8
BL10
1988
Found an iron post, 2 1/2 ins. diam., firmly set, flush with ground, with brass cap mkd. as shown.
There are no record accessories.



5F
SNC
C3
TR18
LS7841
2000
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
Bury a magnet in a clear plastic case at the base of the stainless steel post.
The monument is located on open, level tundra.




6D
T255
R19W R18W
S36 S31
S1 S6
T285
2000
Found an alum. rod, 3/4 in. diam., loosely set and projecting 4.4 ft. above ground, with alum. cap mkd. T255 R19W R18W S36 S31 S1 S6 T285 1979, from which
The original accessory, an alum. rod, 3/4 in. diam., projecting 2 ft. above ground and broken off, with an orange triangular marker, bears South, 6.6 ft.
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown.
Deposit the remains of the original monument, inverted alongside the stainless steel post.



7B
SNC
WP
T255 R19W
S29 S28
TR20
LS7841
2000
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 18 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 18 ins. below ground.
Drive an alum. rod, 3/4 in. diam., 3.0 ft. long, 2.0 ft. in the ground, North, 6.6 ft. dist., with an orange triangular marker on the top.
Bury a magnet in a clear plastic case at the base of the stainless steel post.
The monument is located on level, open tundra.




5A
DOT/PF
WPWC
TR1
13300
RLS 4928
Found brass cap, 3 1/2 ins. diam., firmly set, 6 ins. below ground, mkd. as shown.



5G
SNC
WP
TR18
C4
MC
LS7841
2000
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
Bury a magnet in a clear plastic case at the base of the stainless steel post.
The monument is located on level, open tundra, at northerly end of a small tundra puddle.




6E
T255
R19W R18W
S24 S19
S25 S30
2000
Found an alum. rod, 3/4 in. diam., projecting 2.0 ft. above ground and bent over, with alum. cap mkd. T255 R19W R18W S24 S19 S25 S30 1979, from which
The original accessory, an alum. rod, 3/4 in. diam., projecting 3 ft. above ground and bent over, with the orange triangular marker broken off the alum. rod, bears West, 6.6 ft.
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown.
Deposit the remains of the original monument, inverted alongside the stainless steel post.



7C
SNC
WP
T255 R19W
S20
S29
TR21
LS7841
2000
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 18 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 18 ins. below ground.
Bury a magnet in a clear plastic case at the base of the stainless steel post.
The monument is located on low level grassy tundra.



5B
B2
L4
B3
L3
LS5480 1995
Found a rebar, 5/8 in. diam., firmly set flush with ground, with alum. cap, 2 ins. diam., mkd. as shown.



5H
WC
C4
S6491
1980
Found an alum. rod, 3/4 in. diam., projecting 11 ins. above ground and bent to ground, with alum. cap mkd. as shown.
There are no record accessories.



6F
WP
S12670
1999
Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown, from which
The original magnet accessories were not exhumed.
The monument is located on level, open tundra.



5C
L4
BL3
1991
Found a rebar, 5/8 in. diam., firmly set and slightly bent, with alum. cap, 1 1/2 ins. diam., mkd. as shown.



6A
T255
R20W R19W
S36 S31
S1 S6
T285
2000
Found an alum. rod, 3/4 in. diam., loosely set and projecting 1.9 ft. above ground and bent over, with alum. cap mkd. T255 R20W R19W S36 S31 S1 S6 T285 1979, from which
The original accessory, an alum. rod, 3/4 in. diam., projecting 2 ft. above ground and bent over, with the orange triangular marker broken off the alum. rod, bears South, 6.6 ft.
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown.
Deposit the remains of the original monument, inverted alongside the stainless steel post.



6G
SNC
S12670
S29 S28
TR17
T255 R19W
C4
LS7841
2000
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
Bury a magnet in a clear plastic case at the base of the stainless steel post.
The monument is located on a gentle easterly slope, in open grassy tundra.




5D
SNC
WP
TR18
C1
MC
LS7841
2000
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
Bury a magnet in a clear plastic case at the base of the stainless steel post.
The monument is located on level, open tundra.



6B
SNC
T255 R19W
TR17
S31 S32
S8 S5
T285
LS7841
2000
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
Drive an alum. rod, 3/4 in. diam., 3.0 ft. long, 2.0 ft. in the ground, North, 6.6 ft. dist., with an orange triangular marker on the top.
Bury a magnet in a clear plastic case at the base of the stainless steel post.
The monument is located on a gentle southerly tundra slope, in open grassy tundra.



6H
WC
S12670
C3
MC
1999
Found a stainless steel post, 2 1/2 ins. diam., firmly set, flush with ground, with brass cap mkd. as shown, from which
The original magnet accessories were not exhumed.
The monument is located on level, open tundra.



2002-8
NONE
DATE 4-8-02
TIME 1:23 P.
BY DLM

COPY

NONE 2002-8