

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA), SECTION 14(c), LOTS 1 THROUGH 3  
P.L. 92-203 (85 STAT. 688, 702, 703)  
MTNT LIMITED  
AT  
TELIDA, ALASKA  
AND  
THE RETRACEMENT OF PORTIONS OF  
U.S. SURVEY NO. 7916

This plat contains the entire survey record.  
U.S. Survey No. 7916 was surveyed by Bruce E. Ogonowski, Cadastral Surveyor, in 1985.

This survey was executed by Steven G. Schmitt, Cadastral Surveyor, July 15 through July 22, 1991, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, Special Instructions approved March 6, 1990, Amended Special Instructions, approved July 8, 1991, the Telida ANCSA 14(c) Map of Boundaries approved June 8, 1989, and Assignment Instructions dated May 17, 1990.

Field assistants were:

Patrick S. Twohy, Land Surveyor  
David B. Smith, Student Trainee (LS)  
Robert M. Devine, Surveying Technician

Area: 166.37 Acres.

The azimuth of Lot 1 was obtained from the retracement of line 1-2, Lot 2, U.S. Survey No. 7916, and refers to the true meridian. The azimuth for Lots 2 and 3 and the Landfill Road was obtained from the retracement of line 3-4, Lot 3, U.S. Survey No. 7916, and verified by direct observations of the sun, using the hour angle method, and refers to the true meridian.

The geographic position of corner No. 1, ANCSA 14(c) Lot 1, identical with corner No. 2, Lot 2, and corner No. 1, Lot 3, U.S. Survey No. 7916, as determined from the record of U.S. Survey No. 7916, is:

Latitude: 63° 22' 53.53" North NAD 27  
Longitude: 153° 16' 27.95" West

The mean magnetic declination was observed during the execution of this survey.

This survey is located at the village of Telida, Alaska, within Township 24 South, Range 29 East, Kateel River Meridian, Alaska.

The land is mostly level, with spruce, tamarack, and birch timber and alder and willow brush.

The soil is sandy loam with clay.


The term DEEP-1 magnet refers to a magnetic marker composed of strontium encased in a color coded plastic container. The units are 1 inch diameter and 2 1/2 inches long.

UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Anchorage, Alaska


The survey represented by this plat, sheets 1-2, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director


*Randy D. Evans* October 7, 1992  
Date  
Deputy State Director for Cadastral Survey, Alaska  
*Acting*




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees  
A spruce stump, 3 ins. diam., bears S. 87° E., 45 lks. dist., with no visible marks.  
A spruce, 6 ins. diam., bears S. 32 1/2° W., 98 lks. dist., mkd. X BT on open blazes.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees  
A spruce stump, 4 ins. diam., bears N. 46 3/4° E., 91 lks. dist., mkd. X BT on open blazes.  
An aspen, 6 ins. diam., bears S. 38 1/4° E., 102 lks. dist., mkd. C4 L3 S7916 BT in the bark.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees  
A spruce, 5 ins. diam., bears N. 39° E., 48 lks. dist., mkd. C3 L3 S7916 BT on open blazes.  
A spruce, 4 ins. diam., bears N. 36 3/4° W., 16 lks. dist., mkd. X BT on open blazes.

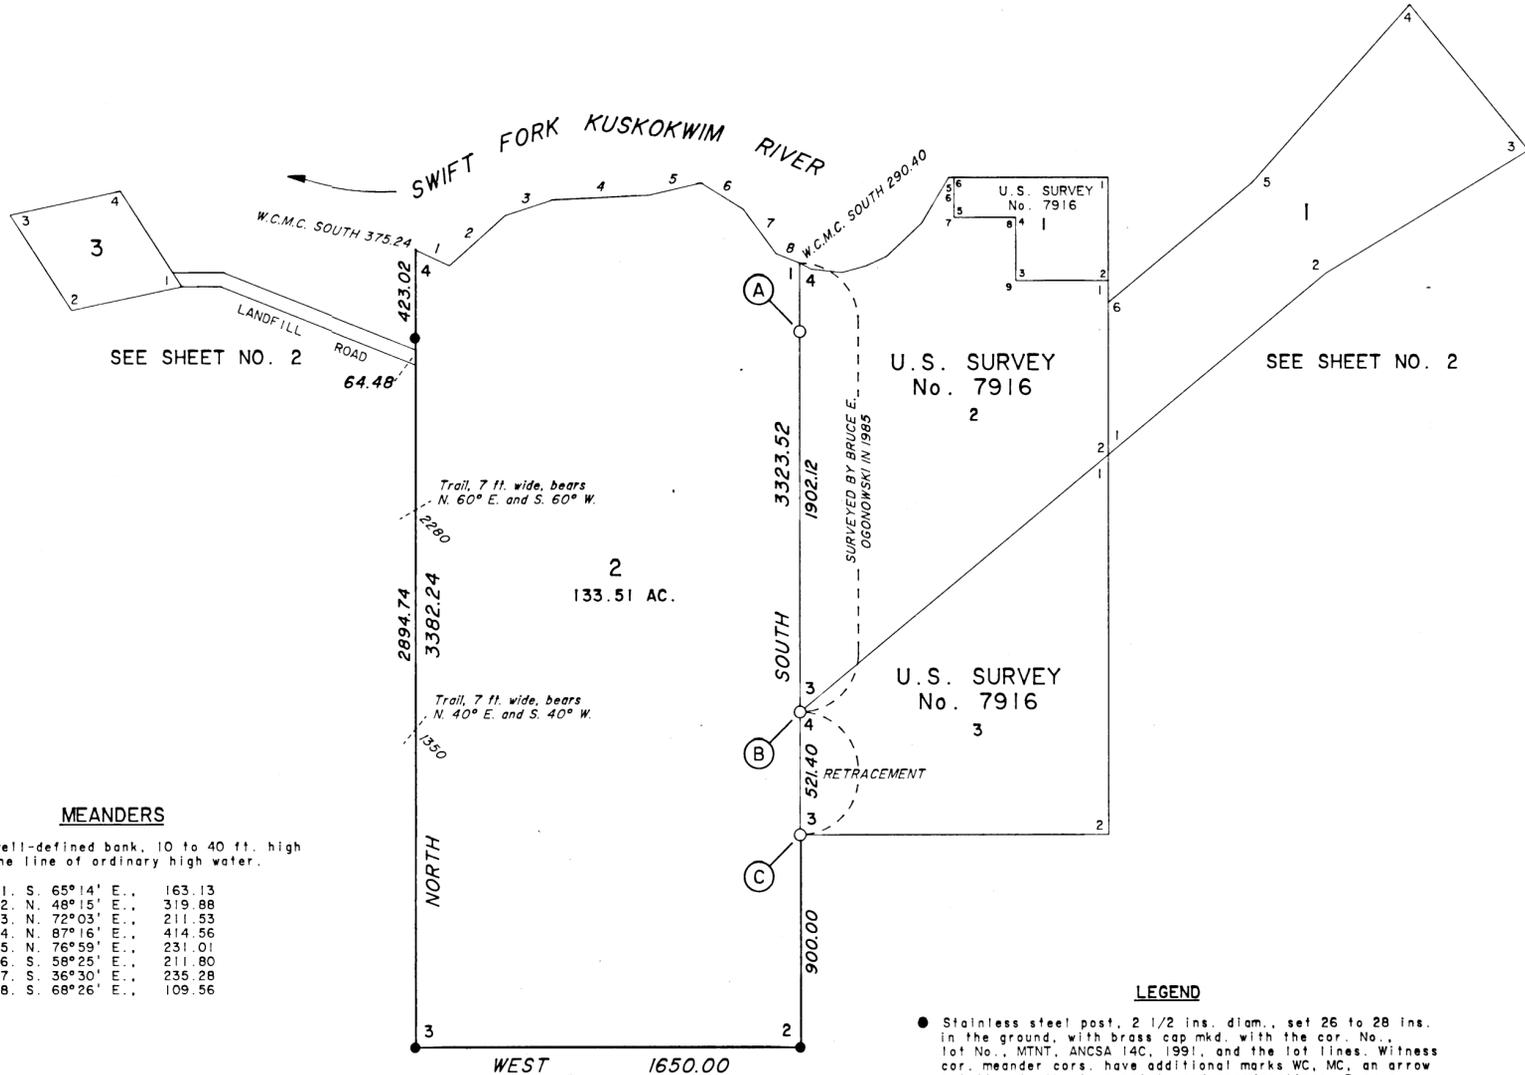

MEANDERS

Along a well-defined bank, 10 to 40 ft. high at the line of ordinary high water.

1. S. 65° 14' E..	163.13
2. N. 48° 15' E..	319.88
3. N. 72° 03' E..	211.55
4. N. 87° 16' E..	414.56
5. N. 76° 59' E..	231.01
6. S. 58° 25' E..	211.80
7. S. 36° 30' E..	235.28
8. S. 68° 26' E..	109.56


LEGEND

- Stainless steel post, 2 1/2 ins. diam., set 26 to 28 ins. in the ground, with brass cap mkd. with the cor. No., lot No., MTNT, ANCSA 14C, 1991, and the lot lines. Witness cor., meander cors. have additional marks WC, MC, an arrow pointing to the true point, and meander lines. Bury a clear DEEP-1 magnet at the base of the stainless steel post.
- Recovered monument.

BEARING TREES

Cor.	Species	Diam.	Bearing	Distance
Cor. No. 2, Lot 2	Spruce	4 ins.	S. 64 3/4° W.	46.1 FT.
Cor. No. 2, Lot 2	Spruce	4 ins.	N. 57 1/4° W.	38.2 FT.
Cor. No. 3, Lot 2	Tamarack	5 ins.	N. 70 3/4° E.	35.2 FT.
Cor. No. 3, Lot 2	Tamarack	4 ins.	S. 78 3/4° W.	21.8 FT.
W.C.M.C. No. 4, Lot 2	Spruce	6 ins.	S. 57 1/2° E.	21.2 FT.
W.C.M.C. No. 4, Lot 2	Spruce	7 ins.	S. 89° W.	7.4 FT.

All bearing trees are marked X BT.



I, hereby certify that the Lots 1 through 3 and the Landfill Road represented on this plat of survey are on lands Interim Conveyed to MTNT Limited by Interim Conveyance No. 319 issued by the United States of America; said lots and road also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by MTNT Limited Resolution Agreement No. 88-19, and the Telida ANCSA 14(c) Map of Boundaries approved June 8, 1989.


9-10-92 *Lo Royal*  
Date President, MTNT Limited

I, Steven G. Schmitt, Cadastral Surveyor, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-2, in conformity with the Special Instructions approved March 6, 1990, and Amended Special Instruction approved July 8, 1991, the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.


9 JUL 92 *SG Schmitt*  
Date Cadastral Surveyor

92-9  
RECORDED - FILED 25-  
MT. MCKINLEY Co. DIST  
DATE Oct 26 1992  
TIME 10:00 A.M.  
Requested by USA/BLM  
222 7th Ave  
Anch. AK 99510


ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA), SECTION 14(c), LOTS 1 THROUGH 3  
P.L. 92-203 (85 STAT. 688, 702, 703)  
MTNT LIMITED  
AT  
TELIDA, ALASKA




Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above the ground, with alum. cap mkd. as shown.  
The original accessory was not searched for.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 32 ins. in the ground, with brass cap mkd. as shown, from which:  
A birch, 4 ins. diam., bears N. 14 3/4° E., 42.0 ft. dist., mkd. X BT in the bark.  
A spruce, 5 ins. diam., bears S. 59° W., 70.7 ft. dist., mkd. X BT.  
Bury a clear DEEP-1 magnet at the base of the stainless steel post.  
Cor. located in trail, 4 ft. wide, bears S. 45° E. and N. 45° W.



Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees:  
A spruce, 6 ins. diam., bears N. 87 1/2° E., 9 lks. dist., mkd. X BT on open blazes.  
A spruce, 6 ins. diam., bears S. 6 1/4° W., 57 lks. dist., mkd. C1 L3 S7916 BT on open blazes.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown.  
Dig pits, 18 x 18 x 12 ins., NE of stainless steel post, 3 and 6 ft. dist.  
Bury a clear DEEP-1 magnet at the base of the stainless steel post.

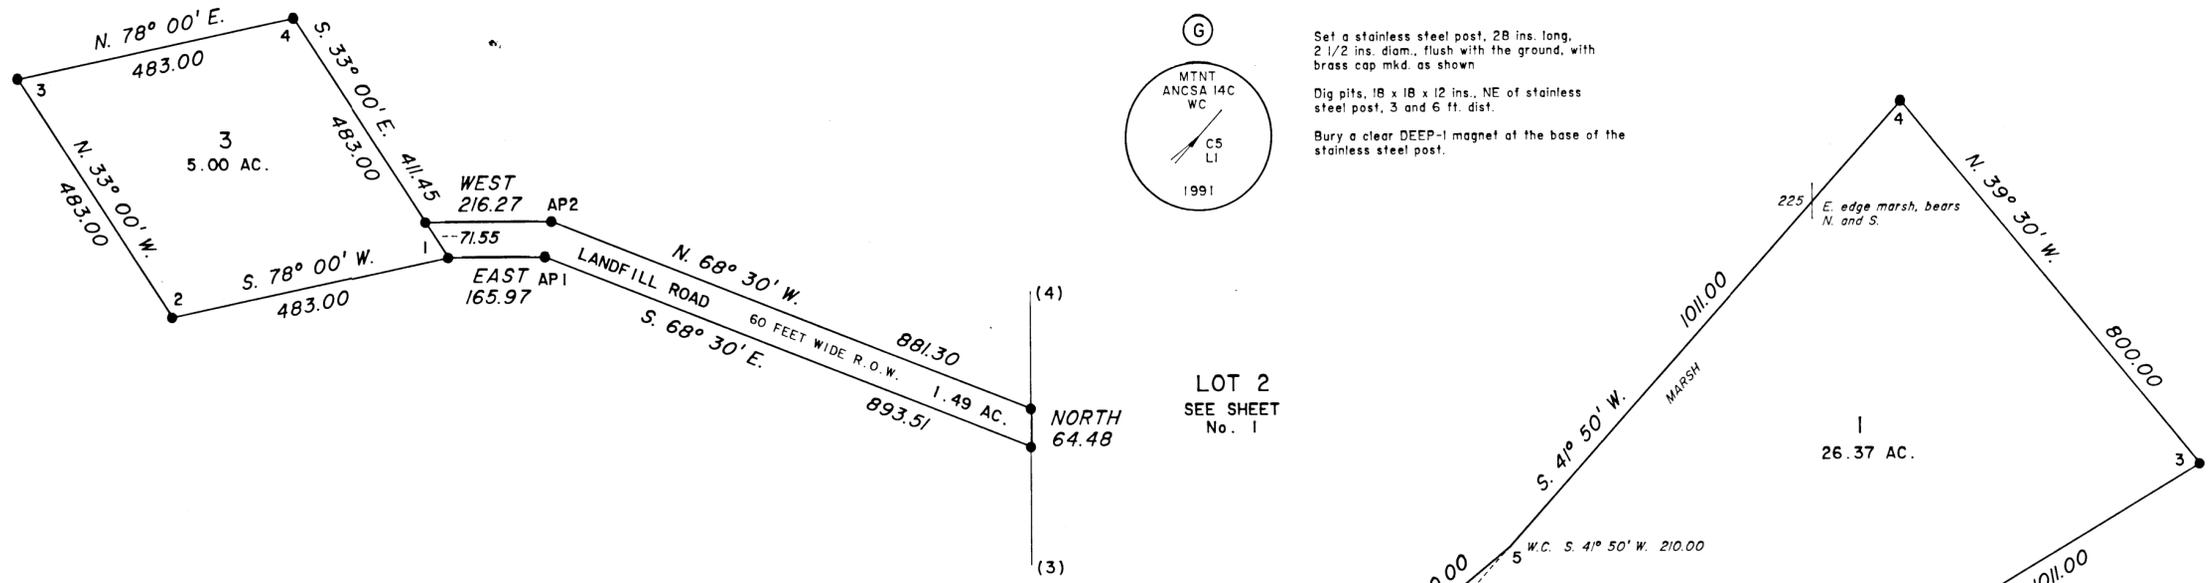

LEGEND

- Stainless steel post, 2 1/2 ins. diam., set 26 to 28 ins. in the ground, with brass cap mkd. with the cor. No., lot No., MTNT, ANCSA 14C, 1991, and the lot lines unless otherwise shown. Road right of way cors. have additional marks ROW, and the right of way lines. Bury a clear DEEP-1 magnet at the base of the stainless steel post.
- ☒ Alum. rod, 15 ft. long, 3/4 in. diam., driven 14 ft. in the ground, with alum. cap mkd. with the cor. No., lot No., MTNT, ANCSA 14C, 1991, and the lot lines. Bury a clear DEEP-1 magnet alongside of the alum. rod, 18 ins. below the ground.
- Recovered monument.

BEARING TREES

Cor.	Species	Diam.	Bearing	Distance
Cor. No. 2, Lot 1	Tamarack	7 ins.	N. 25° E.	118.8 FT.
Cor. No. 2, Lot 1	Spruce	5 ins.	N. 81 3/4° E.	65.4 FT.
Cor. No. 3, Lot 1	Spruce	5 ins.	N. 66 3/4° E.	12.7 FT.
Cor. No. 3, Lot 1	Spruce	5 ins.	S. 15 3/4° E.	18.7 FT.
Cor. No. 4, Lot 1	Spruce	5 ins.	S. 13 3/4° W.	41.2 FT.
Cor. No. 1, Lot 3	Spruce	4 ins.	N. 60 1/4° W.	18.6 FT.
Cor. No. 1, Lot 3	Spruce	5 ins.	S. 61 1/4° E.	25.8 FT.
Cor. No. 2, Lot 3	Spruce	4 ins.	S. 18 3/4° W.	33.2 FT.
Cor. No. 2, Lot 3	Spruce	5 ins.	N. 79 1/4° W.	17.1 FT.
Cor. No. 3, Lot 3	Spruce	4 ins.	S. 53 1/4° W.	36.7 FT.
Cor. No. 3, Lot 3	Spruce	4 ins.	N. 40 3/4° W.	18.4 FT.
Cor. No. 4, Lot 3	Spruce	5 ins.	N. 45 3/4° E.	90.2 FT.
Cor. No. 4, Lot 3	Spruce	5 ins.	N. 43 1/2° W.	72.2 FT.
Lot 3 Road ROW	Spruce	5 ins.	N. 60° E.	25.6 FT.
Lot 3 Road ROW	Spruce	5 ins.	N. 16° W.	47.2 FT.
Road ROW AP-1	Spruce	5 ins.	S. 37 1/2° E.	56.2 FT.
Road ROW AP-1	Spruce	4 ins.	S. 38 1/2° W.	73.1 FT.
Road ROW AP-2	Spruce	4 ins.	N. 51° E.	27.4 FT.
Road ROW AP-2	Spruce	6 ins.	N. 7 1/2° W.	44.0 FT.
Lot 2 S Road ROW	Spruce	7 ins.	S. 43 3/4° E.	28.1 FT.
Lot 2 S Road ROW	Spruce	7 ins.	S. 40° W.	24.3 FT.
Lot 2 N Road ROW	Spruce	4 ins.	N. 58 1/4° E.	27.7 FT.
Lot 2 N Road ROW	Birch	6 ins.	N. 35 1/2° W.	15.6 FT.

All bearing trees are marked X BT.

U.S. SURVEY No. 7916 LOT 1

U.S. SURVEY No. 7916 LOT 2 SEE SHEET No. 1

U.S. SURVEY No. 7916 LOT 3

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

