

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A1 THROUGH G, P.L. 92-203 (85 STAT. 688, 702, 703)
TANACROSS INCORPORATED AT TANACROSS, ALASKA

This plat contains the entire survey record.

A portion of the south boundary, a portion of the north boundary and a portion of the subdivisional lines of Township 18 North, Range 11 East, of the Copper River Meridian, was surveyed by Edward T. Hutchinson, Cartographer (Cadastral) in 1955.

A portion of the west boundary and a portion of the north boundary of Township 18 North, Range 11 East, of the Copper River Meridian, was surveyed by Ray Harpin, Supervisory Cadastral Surveyor and Wayne C. Fields, Supervisory Cartographer, in 1962.

This survey was executed by Eric Stahlke, Registered Alaska Land Surveyor No. LS-6945, for Tanana Chiefs Conference, July 23 through September 7, 2005, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated March 10, 2005 and approved March 14, 2005, the Tanacross Incorporated ANCSA 14(c) Map of Boundaries accepted March 20, 2003, Contract No. NAA050006, dated June 20, 2005 and Notice to Proceed dated July 22, 2005.

Field assistants were:

- Albert G. Macica, Land Surveyor
- Todd A. Jantzi, Crew Chief
- Evan G. Bobby, Survey Technician
- Alvin W. Dayton, Survey Technician
- Henzie Williams, Jr., Survey Technician

Area: 1191.62 Acres

The azimuth was obtained from the Global Positioning System, using static relative positioning techniques and refers to the true meridian.

The geographic position of Corner No. 2, U.S. Survey No. 4343, identical with the northeasterly corner of Tract A4-4, based on a direct tie to N.G.S. triangulation station ASTRO, is:

Latitude: 63°22'20.30" North (NAD 27)
 Longitude: 143°20'38.41" West

The magnetic declination was observed during the execution of this survey.

This survey is situated in and around the village of Tanacross, Alaska, within Sections 4-9, Township 18 North, Range 11 East and Sections 31-33, Township 19 North, Range 11 East, all of the Copper River Meridian.


The topography consists generally of level ground, with an elevation of approximately 1550 ft. above sea level. Vegetation in this area is primarily subarctic taiga, containing spruce and birch forests intermingled with areas of muskeg and low willow, alder and berry brush. The soils consist of sand and sandy loam with occasional areas of permafrost.

UNITED STATES DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT
 Anchorage, Alaska

The survey represented by this plat, sheets 1-5, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

John Sroufe August 16, 2006
 Date
 Deputy State Director for Cadastral Survey, Alaska

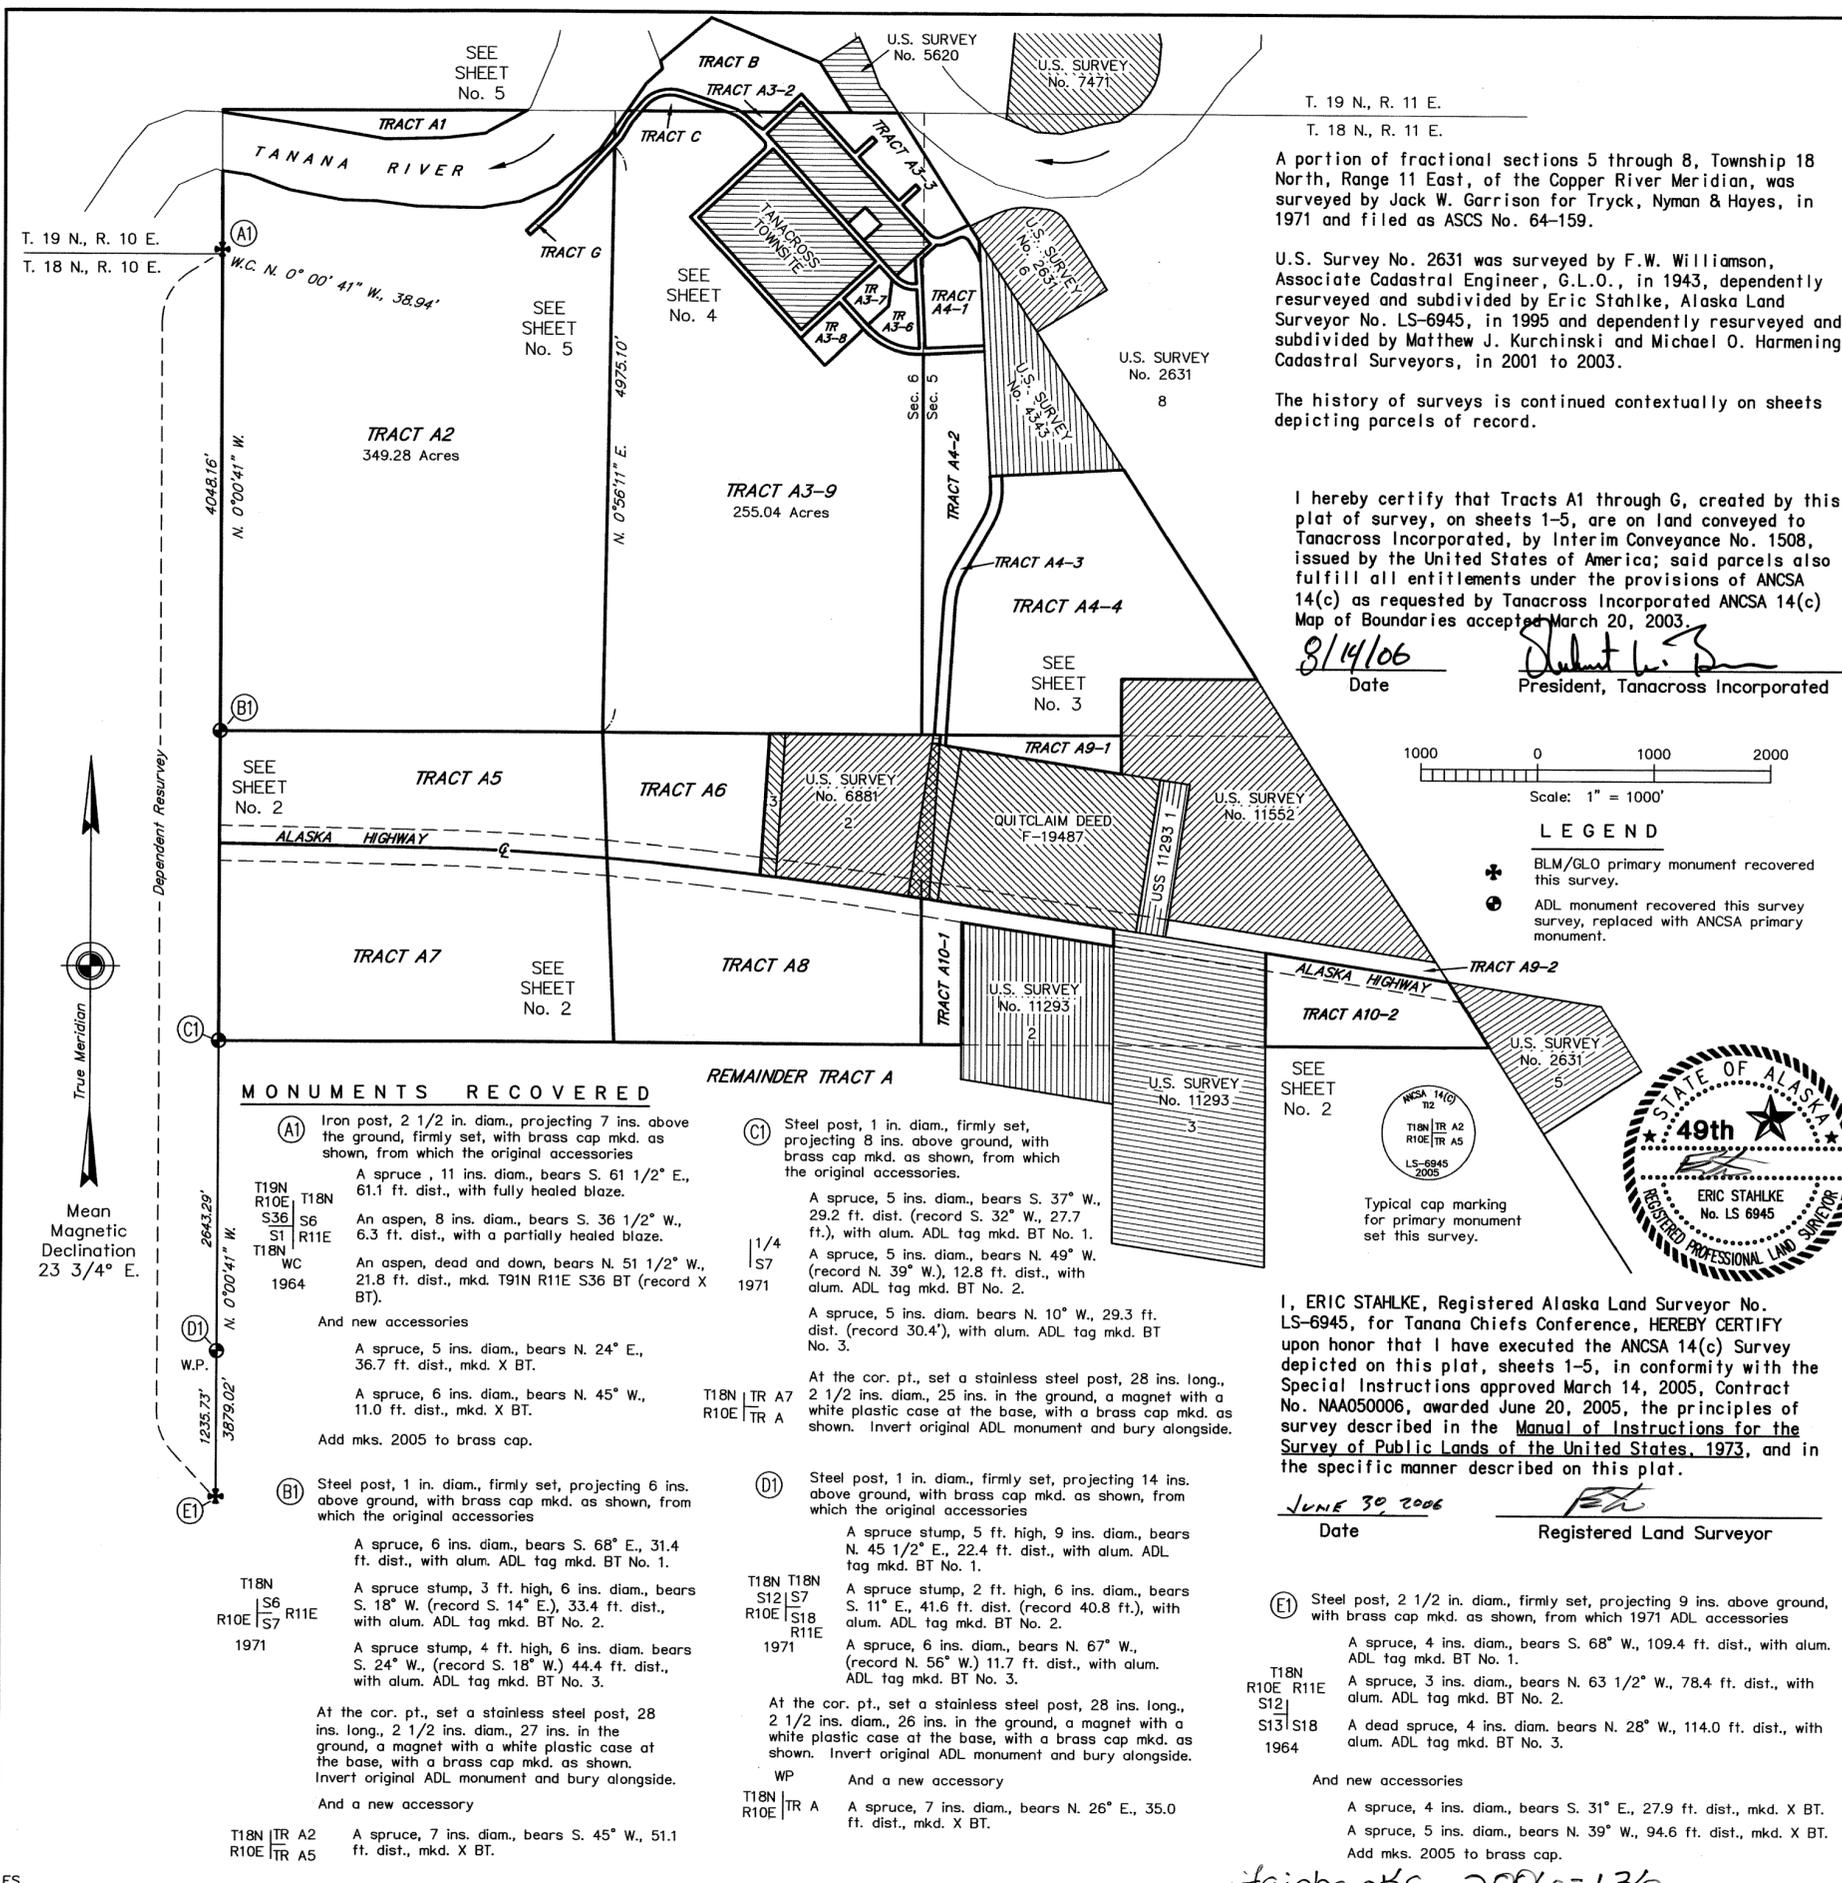

T. 19 N., R. 11 E.
 T. 18 N., R. 11 E.


A portion of fractional sections 5 through 8, Township 18 North, Range 11 East, of the Copper River Meridian, was surveyed by Jack W. Garrison for Tryck, Nyman & Hayes, in 1971 and filed as ASCS No. 64-159.

U.S. Survey No. 2631 was surveyed by F.W. Williamson, Associate Cadastral Engineer, G.L.O., in 1943, dependently resurveyed and subdivided by Eric Stahlke, Alaska Land Surveyor No. LS-6945, in 1995 and dependently resurveyed and subdivided by Matthew J. Kurchinski and Michael O. Harmenting, Cadastral Surveyors, in 2001 to 2003.

The history of surveys is continued contextually on sheets depicting parcels of record.


I hereby certify that Tracts A1 through G, created by this plat of survey, on sheets 1-5, are on land conveyed to Tanacross Incorporated, by Interim Conveyance No. 1508, issued by the United States of America; said parcels also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Tanacross Incorporated ANCSA 14(c) Map of Boundaries accepted March 20, 2003.

8/14/06
 Date
 Eric Stahlke
 President, Tanacross Incorporated



LEGEND

- BLM/GLO primary monument recovered this survey.
- ADL monument recovered this survey survey, replaced with ANCSA primary monument.



Typical cap marking for primary monument set this survey.



I, ERIC STAHLKE, Registered Alaska Land Surveyor No. LS-6945, for Tanana Chiefs Conference, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-5, in conformity with the Special Instructions approved March 14, 2005, Contract No. NAA050006, awarded June 20, 2005, the principles of survey described in the Manual of Instructions for the Survey of Public Lands of the United States, 1973, and in the specific manner described on this plat.

JUNE 30, 2006
 Date
 Eric Stahlke
 Registered Land Surveyor

- (E) Steel post, 2 1/2 in. diam., firmly set, projecting 9 ins. above ground, with brass cap mkd. as shown, from which 1971 ADL accessories
 - A spruce, 4 ins. diam., bears S. 68° W., 109.4 ft. dist., with alum. ADL tag mkd. BT No. 1.
 - A spruce, 3 ins. diam., bears N. 63 1/2° W., 78.4 ft. dist., with alum. ADL tag mkd. BT No. 2.
 - A dead spruce, 4 ins. diam. bears N. 28° W., 114.0 ft. dist., with alum. ADL tag mkd. BT No. 3.

- And new accessories
 - A spruce, 4 ins. diam., bears S. 31° E., 27.9 ft. dist., mkd. X BT.
 - A spruce, 5 ins. diam., bears N. 39° W., 94.6 ft. dist., mkd. X BT.
 - Add mks. 2005 to brass cap.

MONUMENTS RECOVERED

- (A1) Iron post, 2 1/2 in. diam., projecting 7 ins. above the ground, firmly set, with brass cap mkd. as shown, from which the original accessories
 - A spruce, 11 ins. diam., bears S. 61 1/2° E., 61.1 ft. dist., with fully healed blaze.
 - An aspen, 8 ins. diam., bears S. 36 1/2° W., 6.3 ft. dist., with a partially healed blaze.
 - An aspen, dead and down, bears N. 51 1/2° W., 21.8 ft. dist., mkd. T19N R11E S36 BT (record X BT).
 - And new accessories
 - A spruce, 5 ins. diam., bears N. 24° E., 36.7 ft. dist., mkd. X BT.
 - A spruce, 6 ins. diam., bears N. 45° W., 11.0 ft. dist., mkd. X BT.
 - Add mks. 2005 to brass cap.
- (B1) Steel post, 1 in. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, from which the original accessories
 - A spruce, 6 ins. diam., bears S. 68° E., 31.4 ft. dist., with alum. ADL tag mkd. BT No. 1.
 - A spruce stump, 3 ft. high, 6 ins. diam., bears S. 18° W. (record S. 14° E.), 33.4 ft. dist., with alum. ADL tag mkd. BT No. 2.
 - A spruce stump, 4 ft. high, 6 ins. diam. bears S. 24° W., (record S. 18° W.) 44.4 ft. dist., with alum. ADL tag mkd. BT No. 3.
 - At the cor. pt., set a stainless steel post, 28 ins. long., 2 1/2 ins. diam., 27 ins. in the ground, a magnet with a white plastic case at the base, with a brass cap mkd. as shown. Invert original ADL monument and bury alongside.
 - And a new accessory
 - A spruce, 7 ins. diam., bears S. 45° W., 51.1 ft. dist., mkd. X BT.

REMAINDER TRACT A


- (C1) Steel post, 1 in. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown, from which the original accessories
 - A spruce, 5 ins. diam., bears S. 37° W., 29.2 ft. dist. (record S. 32° W., 27.7 ft.), with alum. ADL tag mkd. BT No. 1.
 - A spruce, 5 ins. diam., bears N. 49° W. (record N. 39° W.), 12.8 ft. dist., with alum. ADL tag mkd. BT No. 2.
 - A spruce, 5 ins. diam. bears N. 10° W., 29.3 ft. dist. (record 30.4°), with alum. ADL tag mkd. BT No. 3.
 - At the cor. pt., set a stainless steel post, 28 ins. long., 2 1/2 ins. diam., 26 ins. in the ground, a magnet with a white plastic case at the base, with a brass cap mkd. as shown. Invert original ADL monument and bury alongside.
- (D1) Steel post, 1 in. diam., firmly set, projecting 14 ins. above ground, with brass cap mkd. as shown, from which the original accessories
 - A spruce stump, 5 ft. high, 9 ins. diam., bears N. 45 1/2° E., 22.4 ft. dist., with alum. ADL tag mkd. BT No. 1.
 - A spruce stump, 2 ft. high, 6 ins. diam., bears S. 11° E., 41.6 ft. dist. (record 40.8 ft.), with alum. ADL tag mkd. BT No. 2.
 - A spruce, 6 ins. diam., bears N. 67° W., (record N. 56° W.) 11.7 ft. dist., with alum. ADL tag mkd. BT No. 3.
 - At the cor. pt., set a stainless steel post, 28 ins. long., 2 1/2 ins. diam., 26 ins. in the ground, a magnet with a white plastic case at the base, with a brass cap mkd. as shown. Invert original ADL monument and bury alongside.
 - And a new accessory
 - A spruce, 7 ins. diam., bears N. 26° E., 35.0 ft. dist., mkd. X BT.

Fairbanks 2006-136

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A1 THROUGH G, P.L. 92-203 (85 STAT. 688, 702, 703)

TANACROSS INCORPORATED AT TANACROSS, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

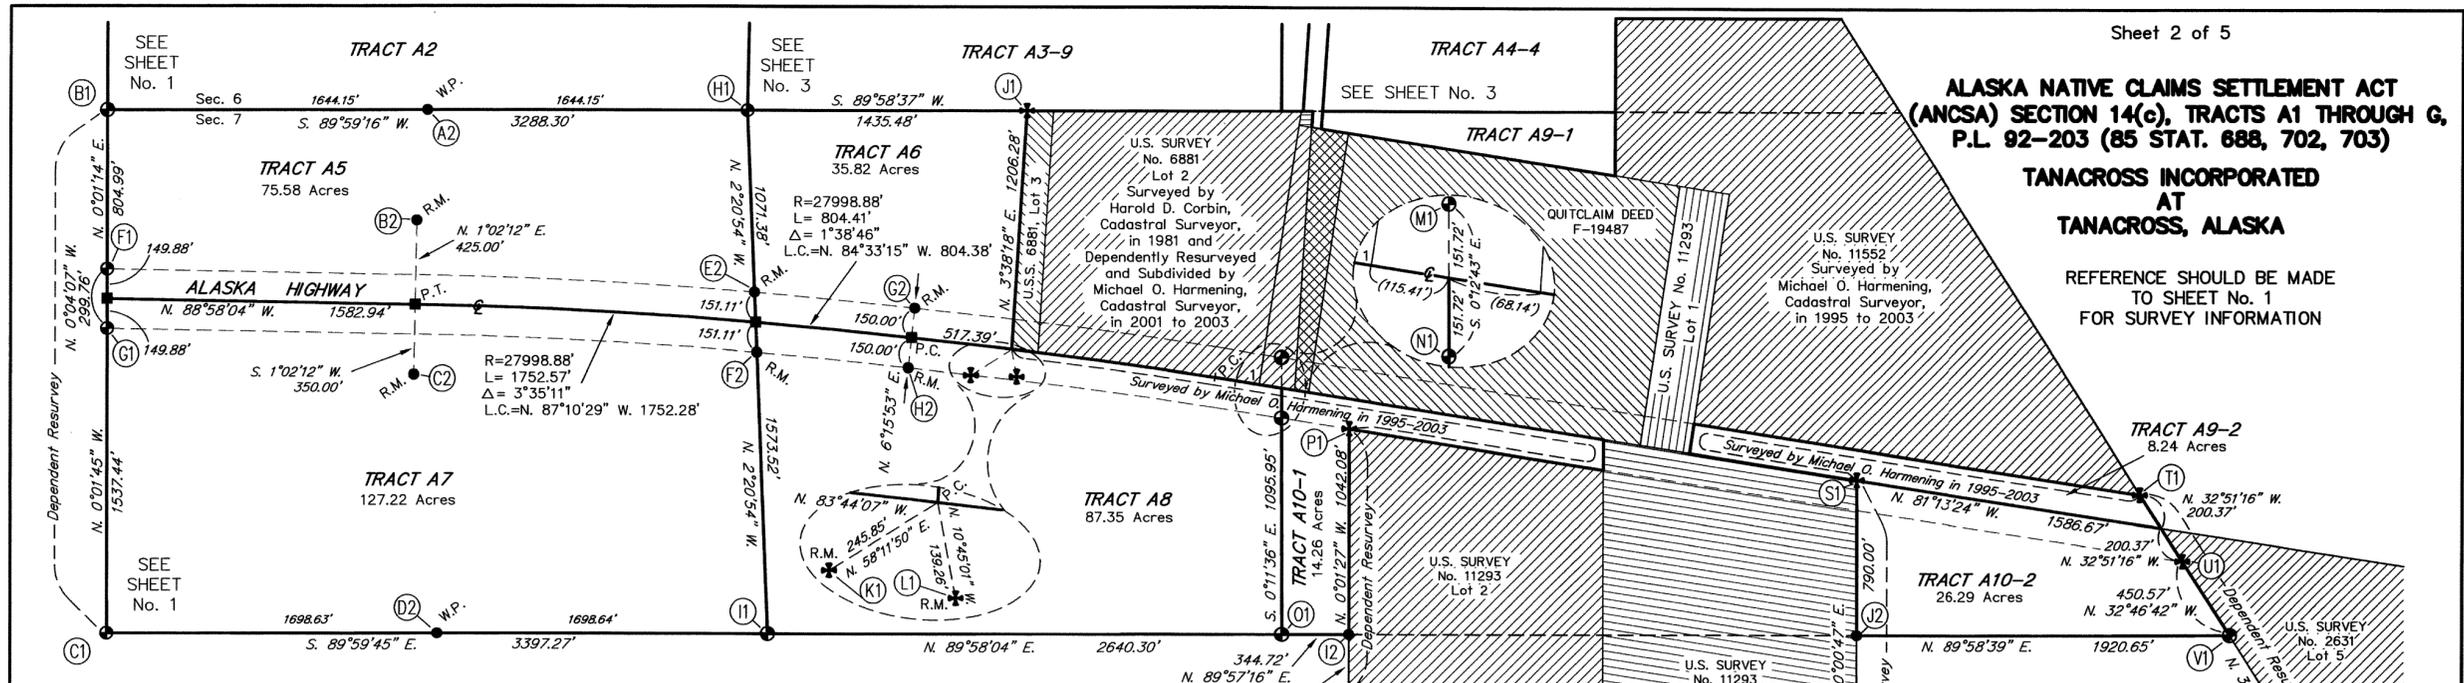


MONUMENTS RECOVERED

- Monument descriptions including steel rebar, stainless steel posts, spruce trees, and aspen trees with their respective bearings and distances.



LEGEND

- Legend symbols for BLM/GLO primary monument, ADL primary monument, ANCSA primary monument, and ANCSA secondary monument.





- Monument descriptions for 'MONUMENTS SET' including stainless steel posts, spruce trees, and aspen trees with bearings and distances.

MONUMENTS SET

Set a stainless steel post, 28 ins. long., 2 1/2 ins. diam., 26 to 27 ins. in the ground, with a magnet with a white plastic case at the base, with a brass cap mkd. as shown.

- Monument descriptions for 'MONUMENTS SET' including spruce trees, magnets, and aspen trees with bearings and distances.

The following set monuments were established as above, mkd. as shown, with no accessories.

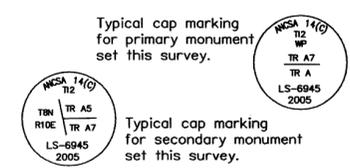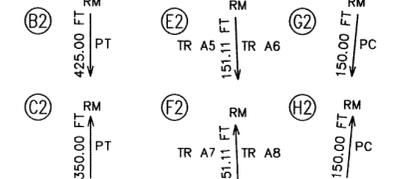

Fairbanks 2006-136

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A1 THROUGH G, P.L. 92-203 (85 STAT. 688, 702, 703)

TANACROSS INCORPORATED AT TANACROSS, ALASKA



REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

LEGEND

- BLM/GLO primary monument recovered this survey.
ADL primary monument recovered this survey, replaced with ANCSA primary monument.
ANCSA primary monument set this survey.
ANCSA secondary monument set this survey, 5/8 in. rebar, 30 ins. long with 2 in. alum. cap.

CURVE TABLE

Table with columns: CURVE, RADIUS, ARC, CHORD, CHORD BEARING, CHORD ANGLE. Rows C1, C2, C3, C4.






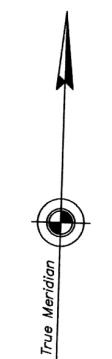



MONUMENTS RECOVERED

- (A3) Steel post, 1 in. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown.
T18N S61S5 S71S8 R11E 1971
A spruce stump, 3 ft. high, 4 ins. diam., bears S. 59 1/2° E., 43.5 ft. dist., with alum. ADL tag mkd. BT No. 3.
A spruce, 4 ins. diam. bears N. 82° W., 21.9 ft. dist., with alum. ADL tag mkd. BT No. 1.
At the cor. pt., set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, a magnet with a white plastic case at the base, with a brass cap mkd. as shown. Invert original ADL monument and bury alongside.
And a new accessory
A spruce, 3 ins. diam., bears N. 35° E., 15.2 ft. dist., mkd. X BT.
(B3) Stainless steel post, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which the original accessories
C2/C3 L2/L1 S6881 2003
A spruce, 4 ins. diam., bears S. 50 3/4° W., 30.4 ft. dist., mkd. C2 L2 S6881 BT.
A spruce, 5 ins. diam., bears N. 47 3/4° W., 14.5 ft. dist., mkd. X BT.
(C3) Iron post, 2 1/2 ins. diam., buried 8 ins. below gravel road, with brass cap mkd. as shown, from which the original accessory
L1 C2 S6881 1981 2003
A spruce, 12 ins. diam., bears S. 63 1/2° E., 81.2 ft. dist., mkd. X BT on partially healed blaze.
(D3) Stainless steel post, 2 1/2 ins. diam., buried 12 ins. below gravel road, with brass cap mkd. as shown, from which there are no original accessories.
L1 C1 S6881 QCD F19487 2003
Stainless steel post, 2 1/2 ins. diam., projecting 5 ins. above the ground, with brass cap mkd. as shown, from which the original accessories
T18N R11E 93-143
A spruce, 5 ins. diam., bears N. 28 1/4° E., 17.5 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears S. 16 3/4° E., 63.4 ft. dist., mkd. X BT.
(F3) Stainless steel post, 2 1/2 ins. diam., projecting 1 in. above the ground, with brass cap mkd. as shown, from which the original accessories
S11552 C4 93-143 1995
A poplar, 6 ins. diam., bears N. 25 1/4° E., 7.9 ft. dist., mkd. C4 S11552 BT.
A poplar, 7 ins. diam., bears N. 57 1/2° W., 34.6 ft. dist., mkd. X BT.
(G3) Stainless steel post, 2 1/2 ins. diam., projecting 3 ins. above the ground, with brass cap mkd. as shown, from which the original accessories
C5 S11552 1995
A poplar, 6 ins. diam., bears S. 65 3/4° E., 33.8 ft. dist. (record 38.9 ft.), mkd. C5 S11552 BT.
A poplar, 6 ins. diam., bears S. 35 1/4° W., 3.6 ft. dist., mkd. X BT.
(H3) Iron post, 1 in. diam., projecting 12 ins. above the ground, bent 90°, with brass cap mkd. as shown, from which the original accessories
S4343 C3 S11552 1995 1943
An aspen, 10 ins. diam., bears S. 56 1/2° W., 36.3 ft. dist., mkd. S2631 3M BT.
A poplar, 8 ins. diam., bears N. 24 3/4° W., 22.8 ft. dist., mkd. X BT.
(I3) Iron post, 2 1/2 ins. diam., projecting 3 ins. above the ground, with brass cap mkd. as shown, from which the original accessories
S4343 C3 1964
A dead and down spruce, 8 ins. diam., bears N. 26 3/4° E., 30.5 ft. dist. (record 37.0 ft.), with a healed blaze.
A dead and down spruce, 7 ins. diam., bears N. 78 1/4° W., 37.1 ft. dist. (record 30.4 ft.), mkd. X BT on partially healed blaze.
And new accessories
A spruce, 5 ins. diam., bears S. 54° W., 35.5 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 45° W., 7.2 ft. dist., mkd. X BT.
Add mks. 2005 to brass cap.

MONUMENTS SET

- Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 to 31 ins. in the ground, with a magnet with a white plastic case at the base, with a brass cap mkd. as shown.
(A4) A spruce, 5 ins. diam., bears N. 57 1/2° E., 31.9 ft. dist., mkd. X BT.
(E4) WP An aspen, 6 ins. diam., bears S. 59° E., 21.6 ft. dist., mkd. X BT.
TR A4-3 TR A9-1 QCD F19487
A spruce, 4 ins. diam., bears N. 29 1/2° W., 19.4 ft. dist., mkd. X BT.
A spruce, 4 ins. diam., bears S. 21 1/2° W., 31.4 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears N. 47° E., 30.0 ft. dist., mkd. X BT.
(F4) TR G TR A3-9 TR A4-2
A spruce, 4 ins. diam., bears S. 29 1/2° E., 23.1 ft. dist., mkd. X BT.
A spruce, 4 ins. diam., bears S. 25° W., 27.0 ft. dist., mkd. X BT.
A spruce, 7 ins. diam., bears S. 53° W., 20.2 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 31 1/2° W., 10.9 ft. dist., mkd. X BT.
A spruce, 8 ins. diam., bears S. 11 1/2° E., 27.0 ft. dist., mkd. X BT.
(H4) S4343 TR A4-3 TR A4-4
A spruce, 5 ins. diam., bears N. 49° E., 17.8 ft. dist., mkd. X BT.
A spruce, 6 ins. diam., bears S. 78 1/2° W., 23.7 ft. dist., mkd. X BT.
An aspen, 7 ins. diam., bears S. 32 1/2° E., 28.3 ft. dist., mkd. X BT.

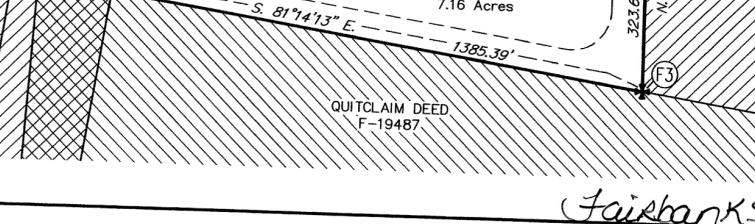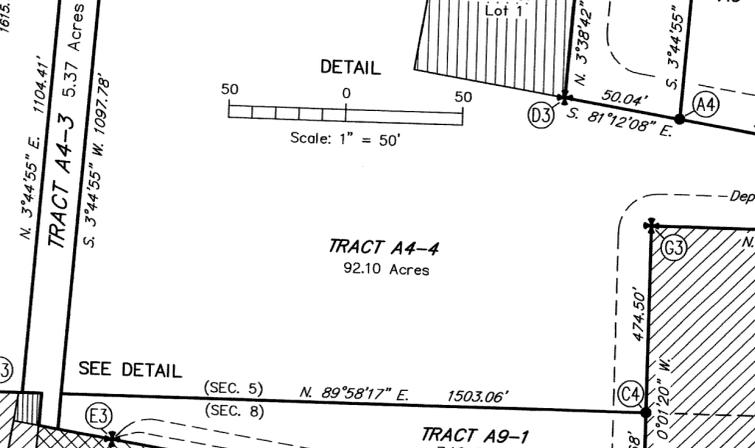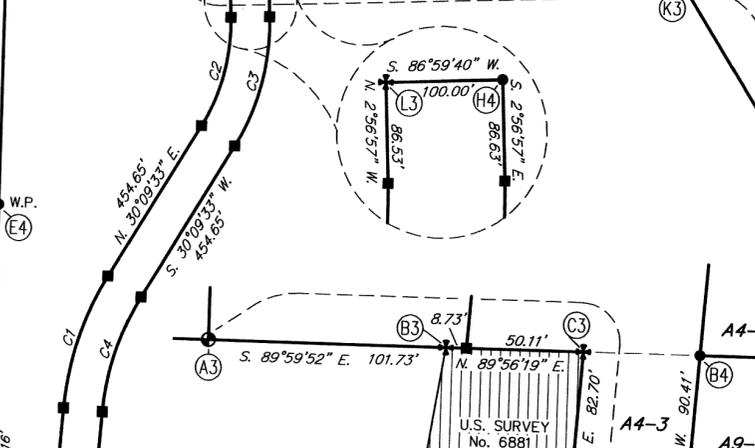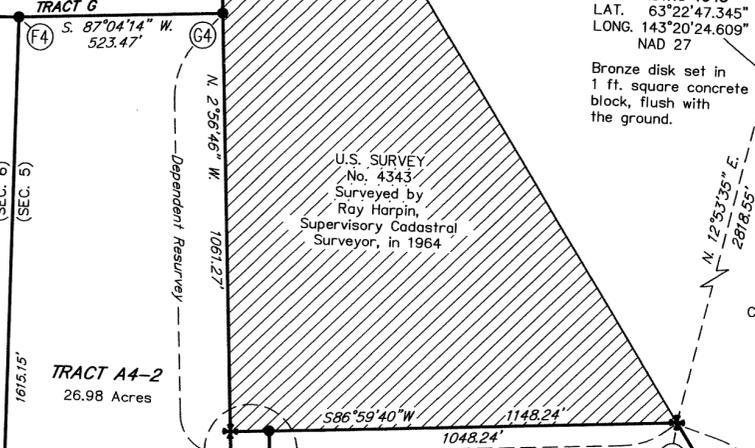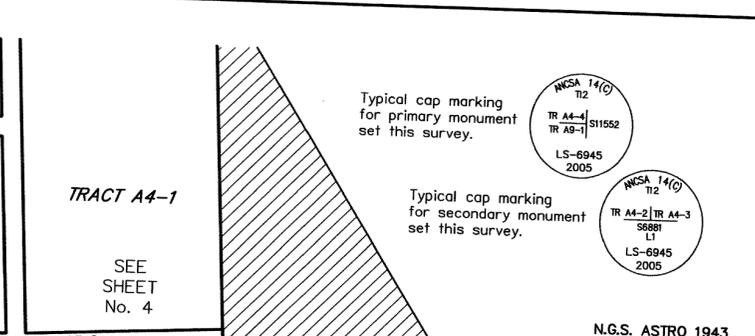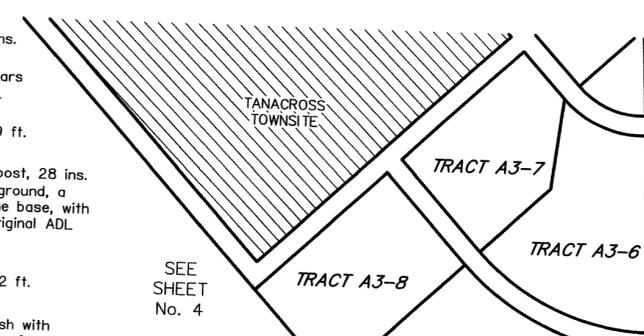

Fairbanks 2006-136

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A1 THROUGH G, P.L. 92-203 (85 STAT. 688, 702, 703)

TANACROSS INCORPORATED AT TANACROSS, ALASKA

REFERENCE SHOULD BE MADE TO SHEET No. 1 FOR SURVEY INFORMATION

MONUMENTS RECOVERED

- (A5) Iron post, 2 1/2 ins. diam., projecting 7 ins. above the ground, with brass cap mkd. as shown, from which the 2003 accessories
(S2631) A spruce, 3 ins. diam., bears N. 46 1/2° E., 18.5 ft. dist., with fully healed blazes.
(S4343) A utility pole, 11 ins. diam., bears S. 22 3/4° E., 83.2 ft. dist., with alum. tag mkd. 369.
(B5) Steel rebar, 5/8 in. diam., buried 3 ins. below the ground, from which the original reference monuments
Stainless steel post, 2 1/2 ins. diam., firmly set, flush, with brass cap mkd. RM S2631 L8 C15 120 LKS 2003, and an arrow pointing towards the cor., bears N. 16°18' E., 79.2 ft. dist.
Stainless steel post, 2 1/2 ins. diam., firmly set, flush, with brass cap mkd. RM S2631 L6 C1 120 LKS 2003, and an arrow pointing towards the cor., bears S. 73°42' E., 79.2 ft. dist.
(C5) Iron post, 2 1/2 ins. diam., projecting 8 ins. above the ground, with brass cap mkd. as shown, from which the original accessories
(T19N R11E) An aspen, 7 ins. diam., bears N. 35° E., 110.2 ft. dist., mkd. T19N R11E S33 CC BT.
(S4) An aspen, 6 ins. diam., bears N. 78 1/4° E., 118.1 ft. dist., mkd. S2631 BT.
(T18N) S2631 A spruce, 3 ins. diam., bears S. 60 1/4° W., 173.6 ft. dist., mkd. X BT.
(D5) Iron post, 1 in. diam., buried 5 ins. below surface of a gravel road, with brass cap mkd. as shown, from which the 2003 accessories
(T19N S5620) S2631 A spruce, 3 ins. diam., bears S. 2 1/4° E., 43.9 ft. dist., mkd. X BT.
(S5) T18N A spruce, 7 ins. diam., bears N. 75 1/4° W., 66.7 ft. dist., with visible scribe mks. on mostly healed blaze.
(E5) Iron post, 2 1/2 ins. diam., projecting 9 ins. above the ground, with brass cap mkd. as shown, from which the remaining accessories
(WC) S5620 S2631 A spruce, 11 ins. diam., bears S. 44 1/2° E., 42.2 ft. dist., with a healed blaze.
(C1) C8 2001 A spruce, 7 ins. diam., bears S. 8 1/4° W., 52.1 ft. dist., mkd. X BT.
(F5) Stainless steel post, 2 1/2 ins. diam., buried 12 ins. below the ground, with brass cap mkd. as shown.
(G5) Stainless steel post, 2 1/2 ins. diam., buried 9 ins. below the ground, with brass cap mkd. as shown.
(H5) Stainless steel post, 2 1/2 ins. diam., buried 9 ins. below the ground, with brass cap mkd. as shown.
(I5) Stainless steel post, 2 1/2 ins. diam., buried 12 ins. below the ground, with brass cap mkd. as shown.
(J5) Stainless steel post, 2 1/2 ins. diam., buried 3 ins. below the ground, with brass cap mkd. as shown.
(K5) Stainless steel post, 2 1/2 ins. diam., buried 9 ins. below the ground, with brass cap mkd. as shown.
(L5) Stainless steel post, 2 1/2 ins. diam., buried 3 ins. below the ground, with brass cap mkd. as shown.
(M5) Stainless steel post, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown.
(N5) Steel rebar, 5/8 in. diam., buried 3 ins. below the ground, with alum. cap mkd. as shown.
(O5) Steel rebar, 5/8 in. diam., buried 3 ins. below the ground, with alum. cap mkd. as shown.

MONUMENTS RECOVERED


- (P5) Steel rebar, 5/8 in. diam., projecting 5 ins. above the ground, with alum. cap mkd. as shown.
(Q5) Steel rebar, 5/8 in. diam., buried 2 ins. below the ground, with alum. cap mkd. as shown.
(R5) Steel rebar, 5/8 in. diam., projecting 3 ins. above the ground, with alum. cap mkd. as shown.
(S5) Steel rebar, 5/8 in. diam., projecting 1 in. above the ground, with alum. cap mkd. as shown.
(T5) Steel rebar, 5/8 in. diam., projecting 2 ins. above the ground, with alum. cap mkd. as shown.
(U5) Steel rebar, 5/8 in. diam., projecting 1 in. above the ground, with alum. cap mkd. as shown.

MONUMENTS SET

- (A6) A spruce, 5 ins. diam., bears S. 25 1/4° W., 12.5 ft. dist., mkd. X BT.
(B6) A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist.
(C6) A spruce, 7 ins. diam., bears S. 10 1/2° W., 11.0 ft. dist., mkd. X BT.
(D6) Monument buried 33 ins. deep. A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist.
(E6) Monument buried 34 ins. deep. A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist.
(F6) Monument buried 33 ins. deep. A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist.
(G6) Monument buried 33 ins. deep. A magnet, in a fluorescent orange plastic case, bears S. 45° E., 9.9 ft. dist.
(H6) Monument buried 31 ins. deep. A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist.
(I6) Monument buried 32 ins. deep. A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist.
(J6) Monument buried 33 ins. deep. A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist.
(K6) Monument buried 33 ins. deep. A utility pole, bears S. 64° E., 11.9 ft. dist.
(L6) Monument buried 34 ins. deep. No accessories taken
(M6) An aspen, 7 ins. diam., bears N. 23 1/2° E., 61.3 ft. dist., mkd. X BT.
(N6) Monument buried 32 ins. deep. A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist.
(O6) Monument buried 32 ins. deep. A magnet, in a fluorescent pink plastic case, bears N. 45° W., 9.9 ft. dist.
(P6) Monument buried 32 ins. deep. A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist.
(Q6) Monument buried 32 ins. deep. A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist.
(R6) Monument buried 32 ins. deep. A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist.
(S6) Monument buried 32 ins. deep. A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist.
(T6) Monument buried 32 ins. deep. A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist.
(U6) Monument buried 32 ins. deep. A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist.

CURVE TABLE



Table with columns: CURVE, RADIUS, ARC, CHORD, CHORD BEARING, CEN. ANG.
C1 515.00' 99.26' 99.11' N. 25°48'43" W. 11°02'36"
C2 70.00' 102.43' 93.53' N. 73°15'10" W. 83°50'18"
C3 165.00' 93.32' 92.08' N. 81°01'48" E. 32°24'14"
C4 105.00' 132.60' 123.97' S. 78°59'35" E. 72°21'29"
C5 220.00' 193.02' 186.89' N. 67°56'21" W. 50°16'09"
C6 270.00' 236.77' 229.26' S. 67°55'36" E. 50°14'40"
C7 600.00' 496.97' 482.89' S. 66°31'59" E. 47°27'26"
C8 650.00' 568.65' 550.69' S. 67°52'01" E. 50°07'30"
C9 50.00' 81.04' 72.45' N. 0°45'46" E. 92°51'35"



Scale: 1" = 200'

LEGEND

- BLM/GLO primary monument recovered this survey.
ANCSA monument, Tanacross Townsite, recovered this survey.
ANCSA primary monument set this survey.
ANCSA secondary monument set this survey.

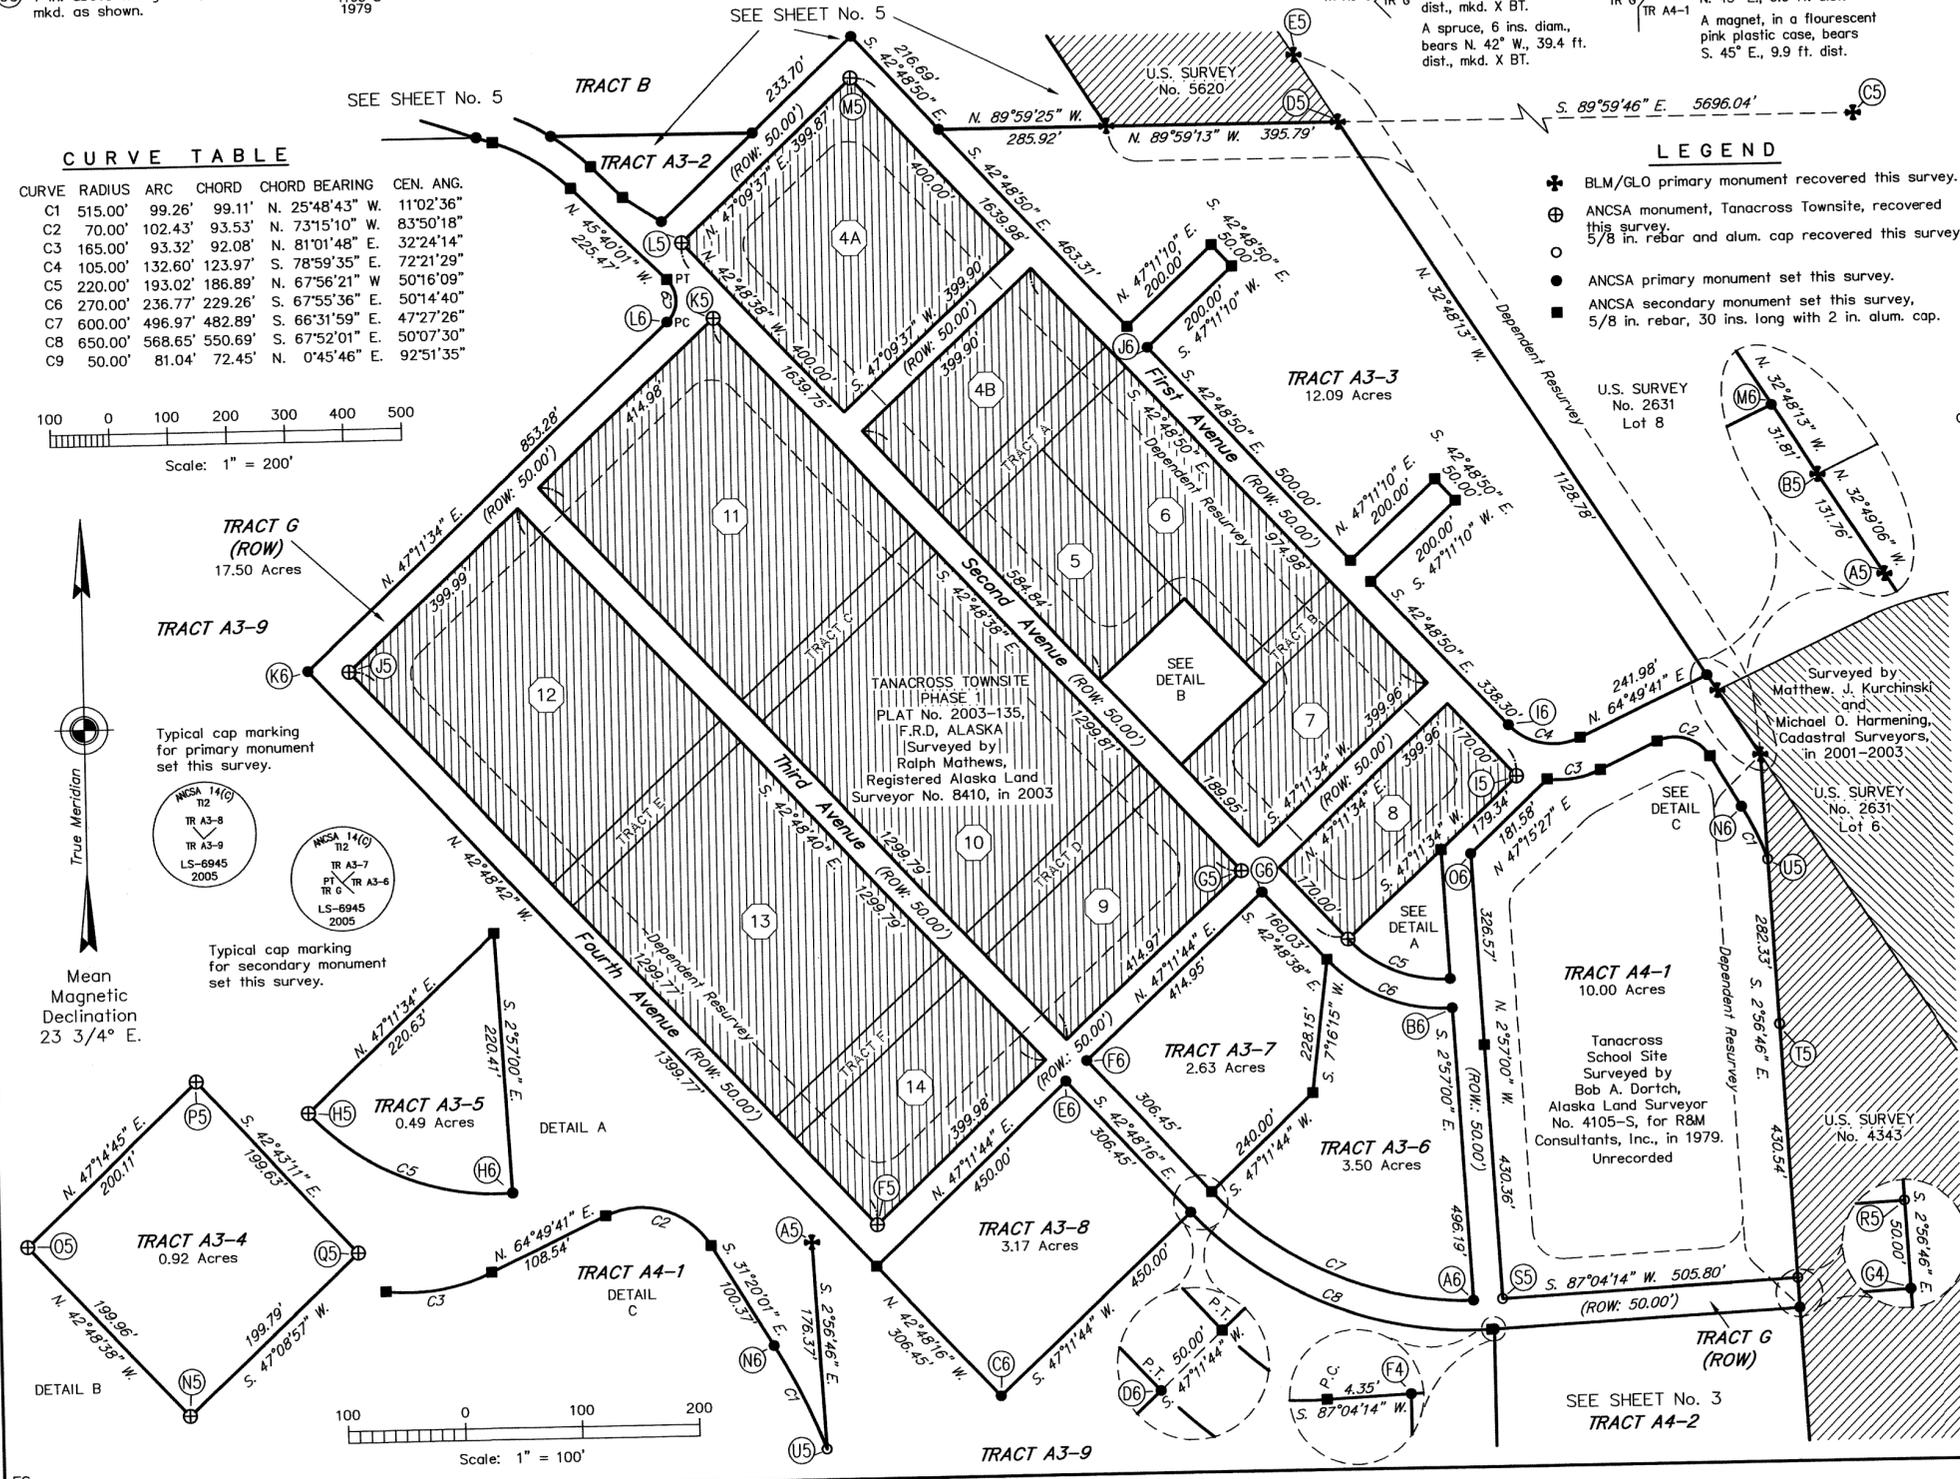

Scale: 1" = 100'

Fairbanks 2006-136

**ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS A1 THROUGH G,
P.L. 92-203 (85 STAT. 688, 702, 703)**

**TANACROSS INCORPORATED
AT
TANACROSS, ALASKA**

REFERENCE SHOULD BE MADE
TO SHEET No. 1
FOR SURVEY INFORMATION

CURVE TABLE

CURVE	RADIUS	ARC	CHORD	CHORD BEARING	CEN. ANGLE
C1	385.00'	85.45'	85.27'	N. 52°01'31" W.	12°43'00"
C2	385.00'	92.99'	92.77'	N. 65°18'11" W.	13°50'20"
C3	335.00'	155.27'	153.88'	N. 58°56'41" W.	26°33'20"
C4	325.00'	382.17'	360.53'	S. 74°05'26" W.	67°22'27"
C5	275.00'	323.37'	305.06'	S. 74°05'26" W.	67°22'27"

MEANDERS


Downstream, along the left bank of the Tanana River, at the line of ordinary high water.

LINE	BEARING	LENGTH
M1	S. 15°14'19" E.	67.81'
M2	S. 47°28'26" W.	190.22'
M3	S. 35°07'24" W.	286.11'
M4	S. 34°55'59" W.	216.39'
M5	S. 50°16'11" W.	487.94'
M6	S. 65°52'25" W.	332.16'
M7	S. 80°39'21" W.	355.44'
M8	N. 88°45'06" W.	542.53'
M9	N. 82°31'30" W.	344.69'
M10	N. 88°29'45" W.	308.82'
M11	N. 79°20'16" W.	459.78'
M12	N. 70°11'02" W.	361.86'
M13	N. 81°43'46" W.	235.61'

Upstream, along the right bank of the Tanana River, at the line of ordinary high water.

LINE	BEARING	LENGTH
M14	S. 81°35'29" E.	562.95'
M15	S. 80°33'47" E.	857.18'
M16	N. 88°44'24" E.	516.57'
M17	N. 83°48'15" E.	338.13'
M18	N. 61°35'52" E.	419.32'


Typical cap marking for primary monument set this survey.



Typical cap marking for secondary monument set this survey.

LEGEND

- ✦ BLM/GLO primary monument recovered this survey.
- ⊕ ADL monument replaced with ANCSA primary monument.
- ANCSA primary monument set this survey.
- ANCSA secondary monument set this survey, 5/8 in. rebar, 30 ins. long with 2 in. alum. cap.

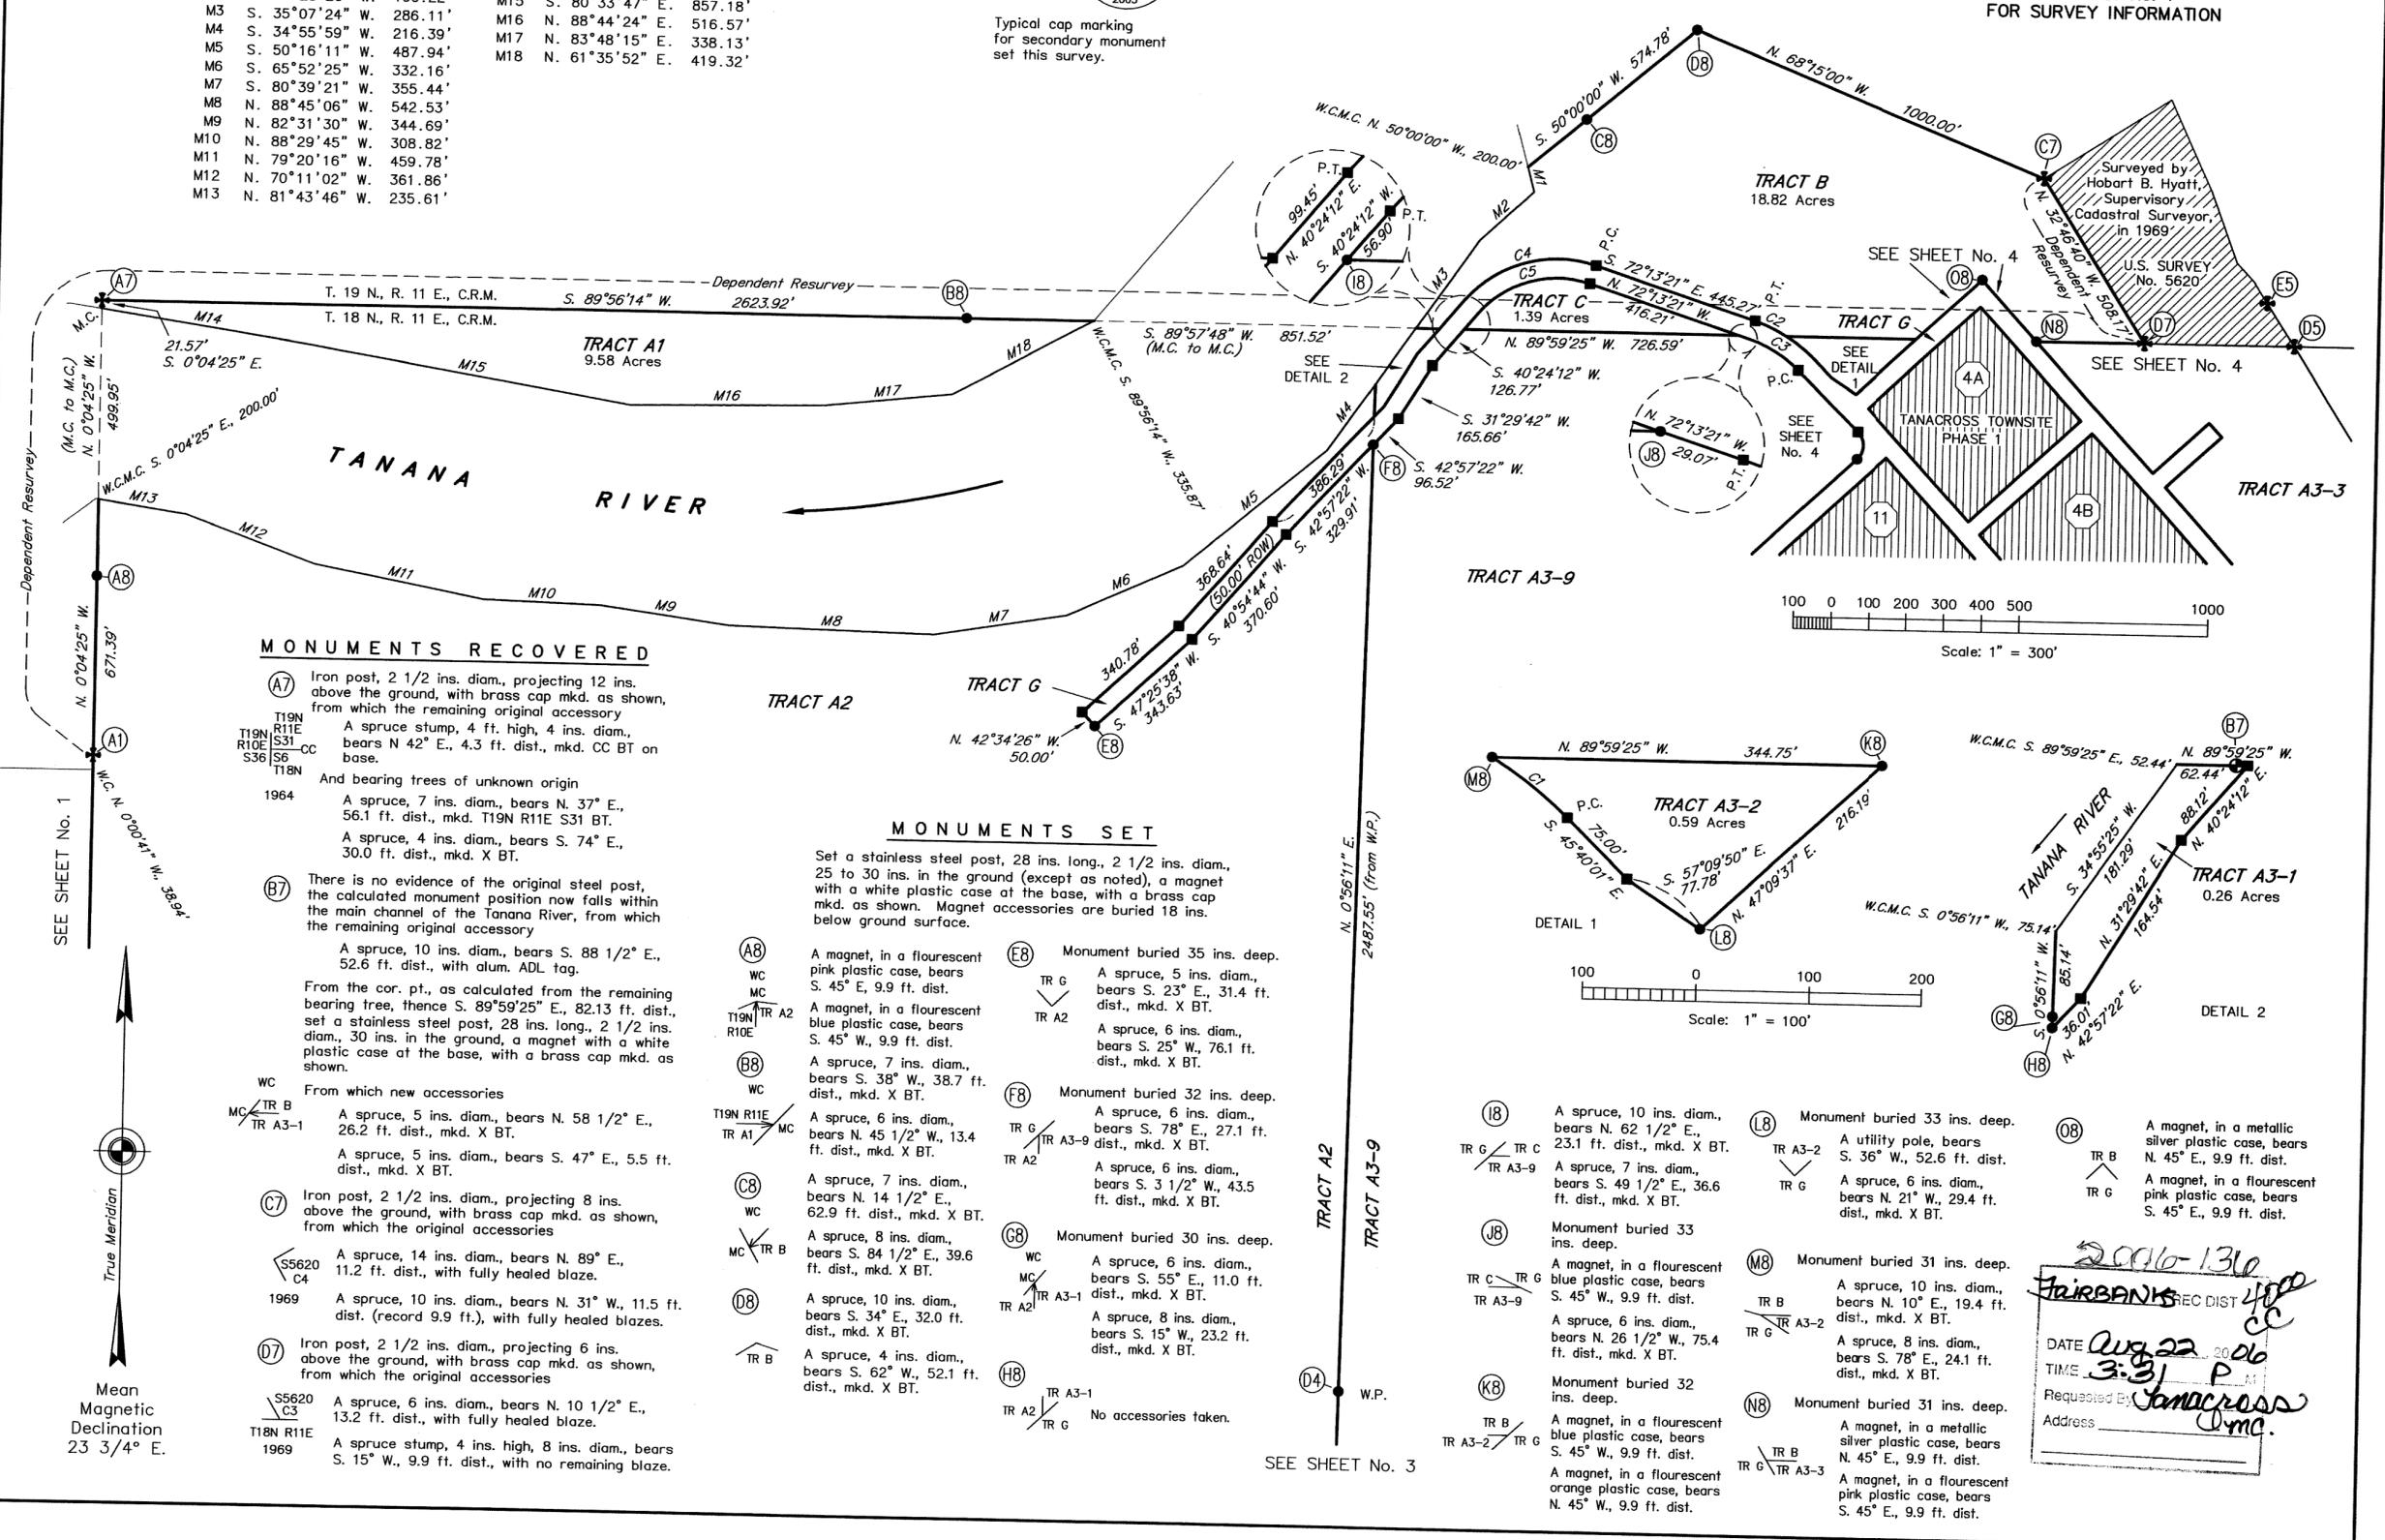




MONUMENTS RECOVERED

- (A7) Iron post, 2 1/2 ins. diam., projecting 12 ins. above the ground, with brass cap mkd. as shown, from which the remaining original accessory
- (A8) A spruce stump, 4 ft. high, 4 ins. diam., bears N 42° E., 4.3 ft. dist., mkd. CC BT on base.
- (A9) And bearing trees of unknown origin
- (A10) 1964 A spruce, 7 ins. diam., bears N. 37° E., 56.1 ft. dist., mkd. T19N R11E S31 BT.
- (A11) A spruce, 4 ins. diam., bears S. 74° E., 30.0 ft. dist., mkd. X BT.
- (A12) There is no evidence of the original steel post, the calculated monument position now falls within the main channel of the Tanana River, from which the remaining original accessory
- (A13) A spruce, 10 ins. diam., bears S. 88 1/2° E., 52.6 ft. dist., with alum. ADL tag.
- (A14) From the cor. pt., as calculated from the remaining bearing tree, thence S. 89°59'25" E., 82.13 ft. dist., set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, a magnet with a white plastic case at the base, with a brass cap mkd. as shown.
- (A15) From which new accessories
- (A16) A spruce, 5 ins. diam., bears N. 58 1/2° E., 26.2 ft. dist., mkd. X BT.
- (A17) A spruce, 5 ins. diam., bears S. 47° E., 5.5 ft. dist., mkd. X BT.
- (A18) Iron post, 2 1/2 ins. diam., projecting 8 ins. above the ground, with brass cap mkd. as shown, from which the original accessories
- (A19) A spruce, 14 ins. diam., bears N. 89° E., 11.2 ft. dist., with fully healed blaze.
- (A20) 1969 A spruce, 10 ins. diam., bears N. 31° W., 11.5 ft. dist. (record 9.9 ft.), with fully healed blazes.
- (A21) Iron post, 2 1/2 ins. diam., projecting 6 ins. above the ground, with brass cap mkd. as shown, from which the original accessories
- (A22) 1969 A spruce, 6 ins. diam., bears N. 10 1/2° E., 13.2 ft. dist., with fully healed blaze.
- (A23) A spruce stump, 4 ins. high, 8 ins. diam., bears S. 15° W., 9.9 ft. dist., with no remaining blaze.

MONUMENTS SET

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 to 30 ins. in the ground (except as noted), a magnet with a white plastic case at the base, with a brass cap mkd. as shown. Magnet accessories are buried 18 ins. below ground surface.

- (B8) A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist.
- (B9) A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist.
- (B10) A spruce, 7 ins. diam., bears S. 38° W., 38.7 ft. dist., mkd. X BT.
- (B11) A spruce, 6 ins. diam., bears N. 45 1/2° W., 13.4 ft. dist., mkd. X BT.
- (B12) A spruce, 7 ins. diam., bears N. 14 1/2° E., 62.9 ft. dist., mkd. X BT.
- (B13) A spruce, 8 ins. diam., bears S. 84 1/2° E., 39.6 ft. dist., mkd. X BT.
- (B14) A spruce, 10 ins. diam., bears S. 34° E., 32.0 ft. dist., mkd. X BT.
- (B15) A spruce, 4 ins. diam., bears S. 62° W., 52.1 ft. dist., mkd. X BT.
- (B16) Monument buried 35 ins. deep.
- (B17) A spruce, 5 ins. diam., bears S. 23° E., 31.4 ft. dist., mkd. X BT.
- (B18) A spruce, 6 ins. diam., bears S. 25° W., 76.1 ft. dist., mkd. X BT.
- (B19) Monument buried 32 ins. deep.
- (B20) A spruce, 6 ins. diam., bears S. 78° E., 27.1 ft. dist., mkd. X BT.
- (B21) A spruce, 6 ins. diam., bears S. 3 1/2° W., 43.5 ft. dist., mkd. X BT.
- (B22) Monument buried 30 ins. deep.
- (B23) A spruce, 6 ins. diam., bears S. 55° E., 11.0 ft. dist., mkd. X BT.
- (B24) A spruce, 8 ins. diam., bears S. 15° W., 23.2 ft. dist., mkd. X BT.
- (B25) No accessories taken.
- (B26) Monument buried 33 ins. deep.
- (B27) A spruce, 10 ins. diam., bears N. 62 1/2° E., 23.1 ft. dist., mkd. X BT.
- (B28) A spruce, 7 ins. diam., bears S. 49 1/2° E., 36.6 ft. dist., mkd. X BT.
- (B29) Monument buried 33 ins. deep.
- (B30) A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist.
- (B31) A spruce, 6 ins. diam., bears N. 26 1/2° W., 75.4 ft. dist., mkd. X BT.
- (B32) Monument buried 32 ins. deep.
- (B33) A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist.
- (B34) A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist.
- (B35) Monument buried 33 ins. deep.
- (B36) A utility pole, bears S. 36° W., 52.6 ft. dist.
- (B37) A spruce, 6 ins. diam., bears N. 21° W., 29.4 ft. dist., mkd. X BT.
- (B38) Monument buried 31 ins. deep.
- (B39) A spruce, 10 ins. diam., bears N. 10° E., 19.4 ft. dist., mkd. X BT.
- (B40) A spruce, 8 ins. diam., bears S. 78° E., 24.1 ft. dist., mkd. X BT.
- (B41) Monument buried 31 ins. deep.
- (B42) A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist.
- (B43) A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist.



2006-1316
Fairbanks REC DIST 400
DATE Aug 22 2006
TIME 3:31 P
Requested By Tanacross
Address _____

SEE SHEET No. 1

SEE SHEET No. 3

Mean Magnetic Declination 23 3/4° E.



Fairbanks 2006-136
United States Department of the Interior

BUREAU OF LAND MANAGEMENT
ALASKA STATE OFFICE
222 W. 7th Avenue, #13
ANCHORAGE, ALASKA 99513-7599



9600 (927)
ANCSA 14(c)
TANACROSS

August 16, 2006

FAIRBANKS RECORDING DISTRICT
1648 S. Cushman St., #201
Fairbanks, AK 99701-6206

Dear District Recorder:

The ANCSA 14(c) plat for TANACROSS INCORPORATED at TANACROSS, consisting of five (5) original sheets, transmitted to you by this letter of compliance, portrays a Cadastral Survey conducted to fulfill statutory requirements mandated by the Alaska Native Claims Settlement Act (ANCSA), pursuant to Public Law 92-203 (Stat. 688, 702, 703), and satisfies the federal guidelines and requirements proclaimed for ANCSA 14(c) Surveys.

The plat represents surveyed parcels of land selected for ANCSA 14(c) reconveyances situated on portions of surface estate lands transferred from the United States of America by Interim Conveyance No. 1508, issued to Tanacross Incorporated.

ANCSA 14(c) Surveys have been authorized as federally mandated surveys, under the provisions of Section 13 of ANCSA, 43 U.S.C. Stat. 1612. The authority to execute all federal land surveys in Alaska is delegated by the Secretary of the Interior to the Director, Bureau of Land Management (BLM) and subsequently redelegated to the Deputy State Director for Cadastral Survey, Alaska State Office. Accordingly, BLM requests that this plat be filed with the FAIRBANKS RECORDING DISTRICT to comply with the federal platting regulations and the agreements set forth between the Bureau of Land Management and the State Recording Authority.

Sincerely,

John Sroufe
Deputy State Director
for Cadastral Survey, Alaska