

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
(ANCSA) SECTION 14(c),  
TRACTS 1 THROUGH 10,  
P.L. 92-203 (85 STAT. 688, 702, 703)  
THE TWIN HILLS NATIVE CORPORATION  
AT  
TWIN HILLS, ALASKA  
AND THE RETRACEMENT OF PORTIONS OF  
U.S. SURVEYS Nos. 878, 5580 AND 9819  
AND PORTIONS OF PLAT Nos. 97-07 AND  
98-09, BRISTOL BAY RECORDING DISTRICT

This plat contains the entire survey record.

The history of surveys is referenced on sheet 2.

This survey was executed by Stanley E. Sears,  
Registered Alaska Land Surveyor No. LS-2087, for  
Twin Hills Native Corporation, August 4, 2006  
through August 11, 2007, in accordance with the  
specifications set forth in the Manual of  
Surveying Instructions, 1973, Special Instructions  
dated February 22, 2006, approved April 13, 2006,  
under Contract No. NAA060010, awarded July 21,  
2006, and Notice to Proceed dated July 24, 2006.

This survey was accomplished using the global  
positioning system (GPS). The control was obtained  
using fast static with GPS carrier phase  
receivers. Monuments were positioned using RTK,  
and positions were confirmed with a redundant fast  
static observation.

Field assistants were:

Kathleen M. Burnham-Evans, Surveying Technician  
Jake L. Maxwell, Surveying Technician  
Taylor M. Moore, Surveying Technician  
Tom R. Moore, Surveying Technician  
Lindsey S. Vaughan, Surveying Technician

Area: 99.04 Acres

The direction of all the lines returned on this  
plat are reported as mean bearings with reference  
to the true meridian as determined by global  
positioning survey methods.

The geographic position of the witness corner to  
corner No. 4, Tract No. 1, a meander cor., as  
determined by a tie to National Geodetic Survey  
Triangulation Station "Togiak", is:

Latitude: 59° 04' 47.19" North (NAD 27)  
Longitude: 160° 17' 11.84" West

The magnetic declination was computed with the  
U.S. Geological Survey Geomag Program using the  
IGRF-2005.COF model as of July 30, 2006, and  
indicates a mean value of 15 1/4° East.

This survey is situated in the vicinity of the  
village of Twin Hills Alaska, within Township 13  
South, Range 66 West, Seward Meridian, Alaska.

The land is primarily gently rolling tundra  
vegetated with berries and occasional clusters of  
alder. The soil is silty loam and gravel.

Access to the survey was by helicopter and four  
wheeler.


UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Anchorage, Alaska

The survey represented by this plat, sheets 1 - 8,  
having been properly executed and examined, is  
hereby accepted for having fulfilled the  
requirements of Section 14(c) of the Alaska Native  
Claims Settlement Act.

For the Director

*John S. [Signature]* July 3, 2008  
Date

Deputy State Director for Cadastral Survey, Alaska

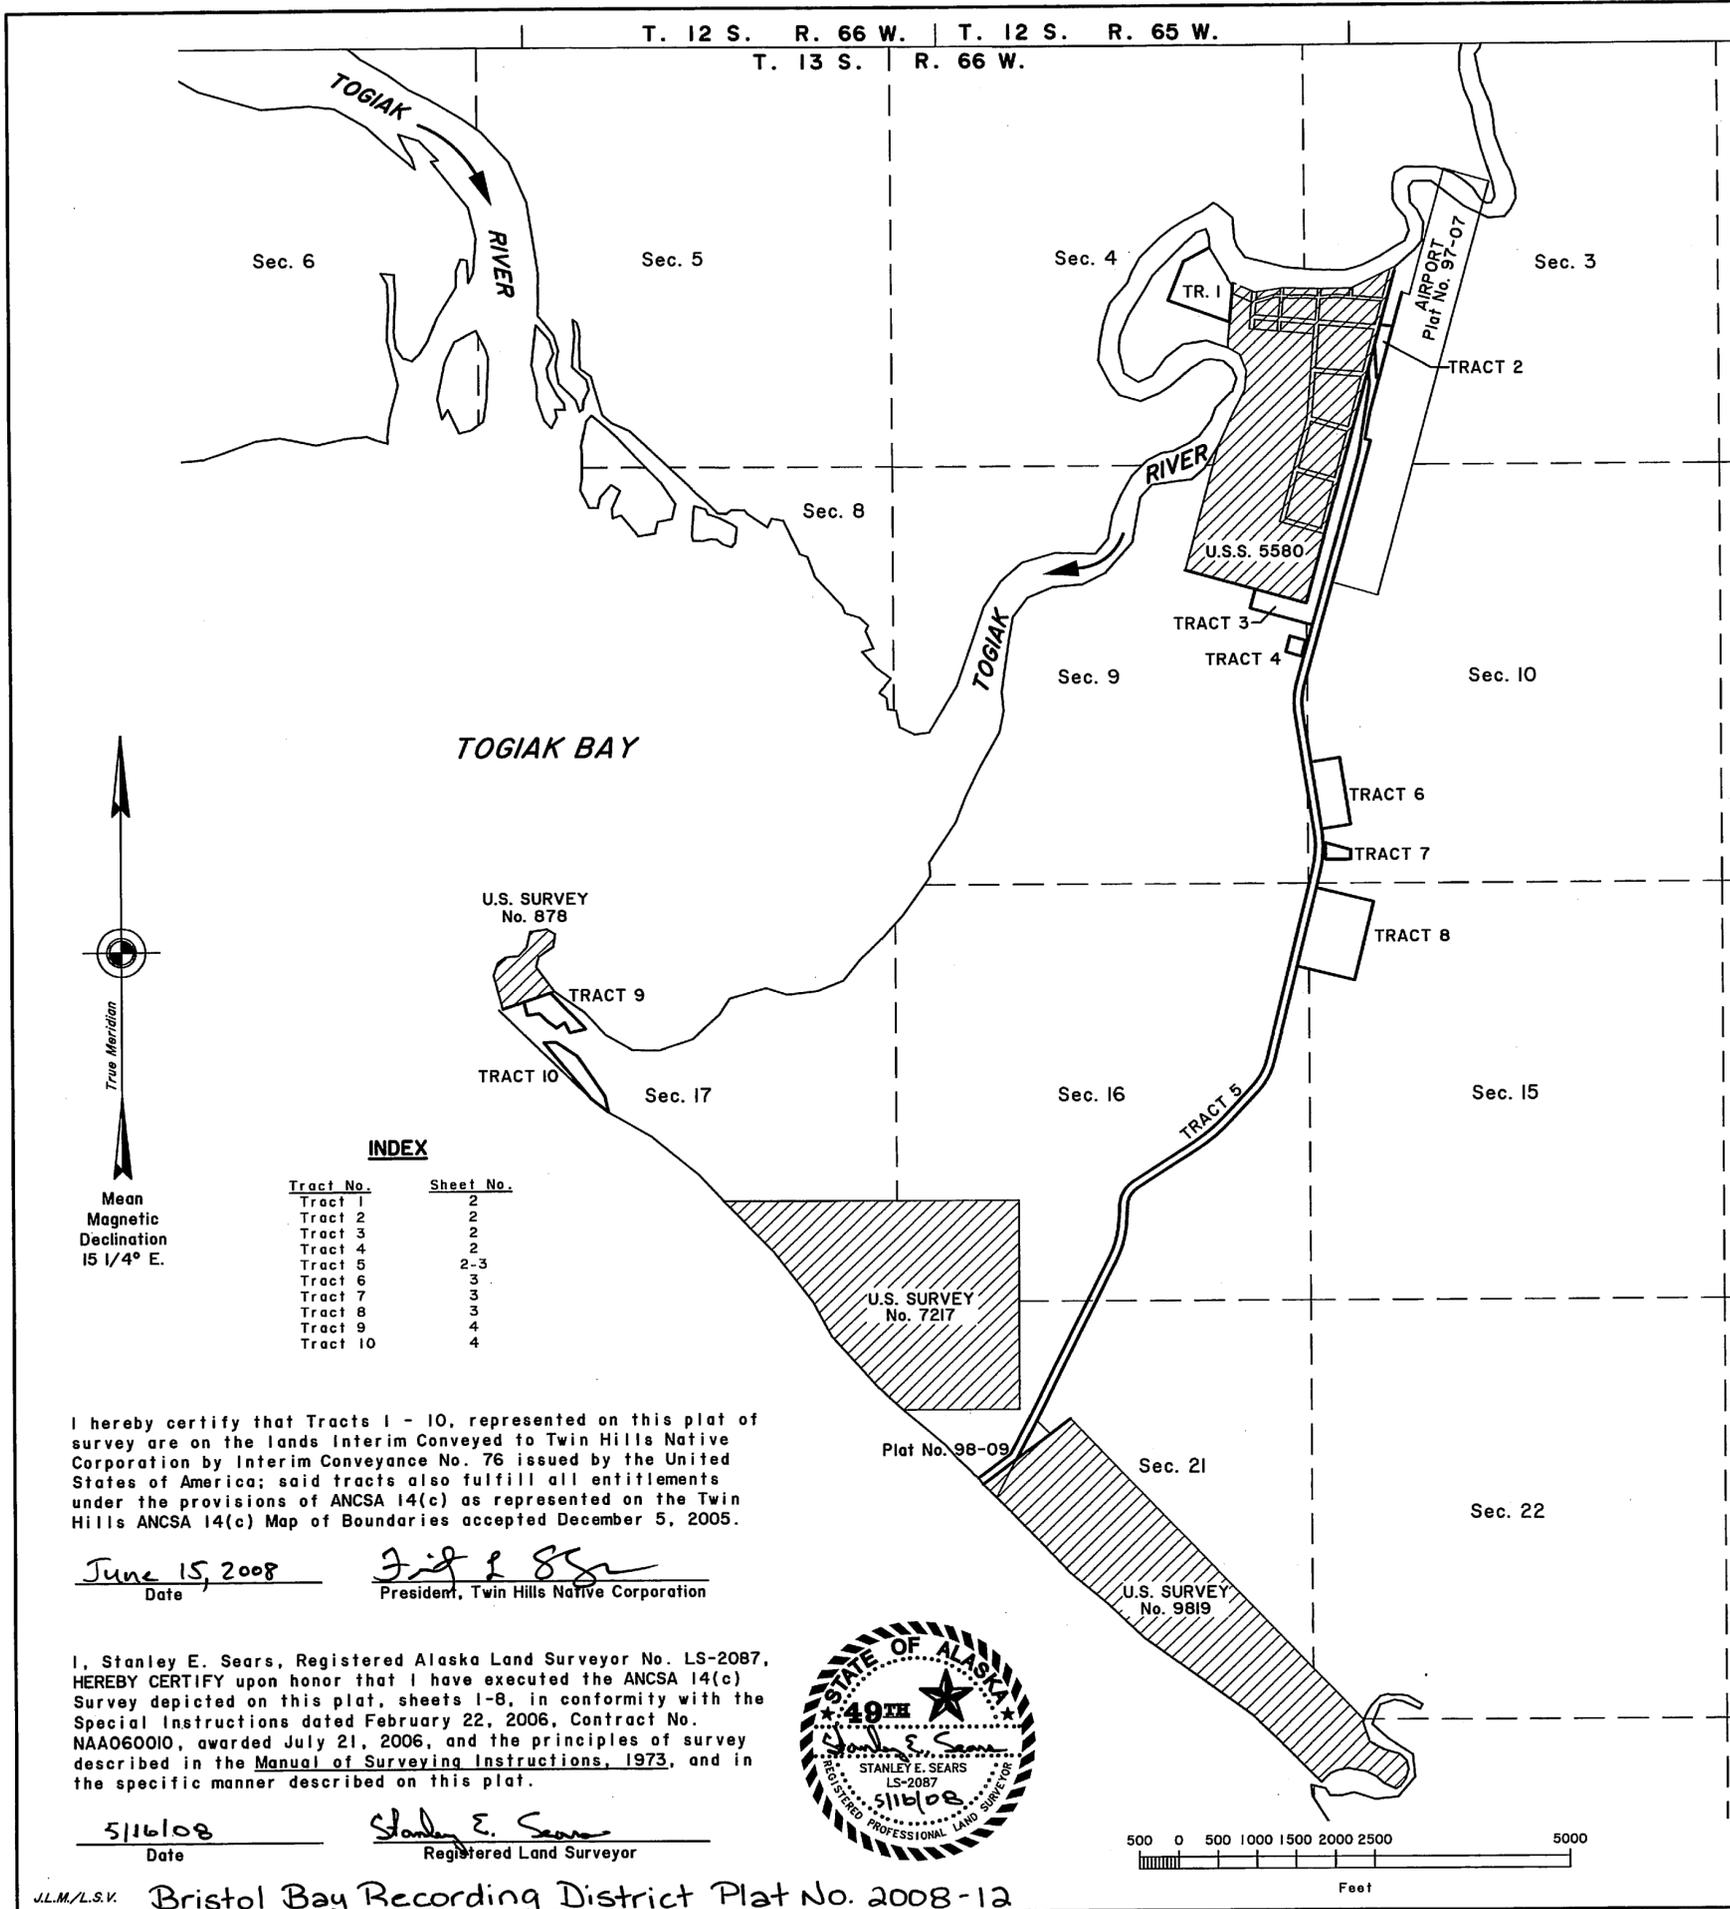

**INDEX**


Tract No.	Sheet No.
Tract 1	2
Tract 2	2
Tract 3	2
Tract 4	2
Tract 5	2-3
Tract 6	3
Tract 7	3
Tract 8	3
Tract 9	4
Tract 10	4

I hereby certify that Tracts 1 - 10, represented on this plat of survey are on the lands Interim Conveyed to Twin Hills Native Corporation by Interim Conveyance No. 76 issued by the United States of America; said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as represented on the Twin Hills ANCSA 14(c) Map of Boundaries accepted December 5, 2005.

June 15, 2008  
Date  
*John E. [Signature]*  
President, Twin Hills Native Corporation



I, Stanley E. Sears, Registered Alaska Land Surveyor No. LS-2087, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-8, in conformity with the Special Instructions dated February 22, 2006, Contract No. NAA060010, awarded July 21, 2006, and the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.

5/16/08  
Date  
*Stanley E. Sears*  
Registered Land Surveyor





ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c),  
 TRACTS 1 THROUGH 10,  
 P.L. 92-203 (85 STAT. 688, 702, 703)  
 THE TWIN HILLS NATIVE CORPORATION  
 AT  
 TWIN HILLS, ALASKA  
 AND THE RETRACEMENT OF PORTIONS OF  
 U.S. SURVEYS Nos. 878, 5580 AND 9819  
 AND PORTIONS OF PLAT Nos. 97-07 AND  
 98-09, BRISTOL BAY RECORDING DISTRICT

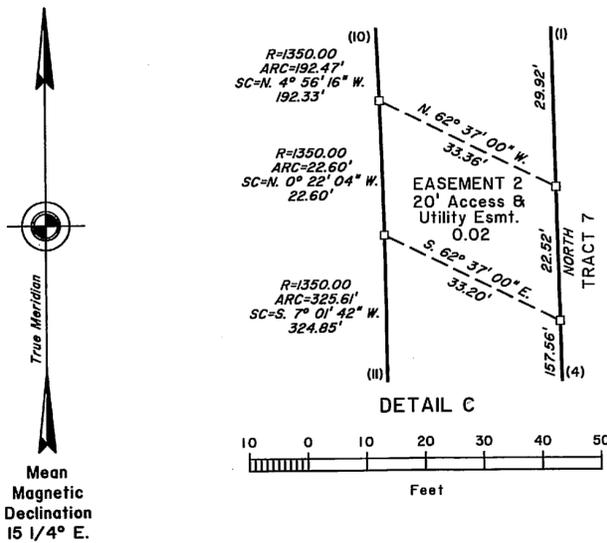
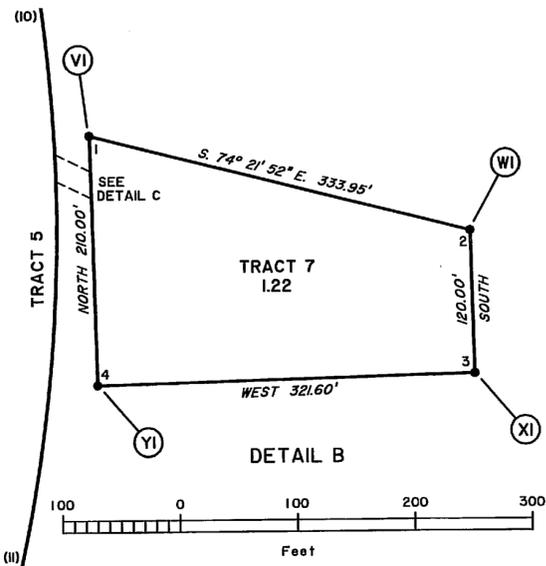


LEGEND

- Recovered B.L.M. monument, more fully described herein.
- Recovered private monument, more fully described herein.
- Set ANCSA 14(c) primary monument, more fully described herein.
- Set ANCSA 14(c) secondary monument. (See Monument X2 for typical.)
- Set ANCSA 14(c) secondary monument. (See Monument Y2 for typical.)


REFERENCE SHOULD BE MADE TO  
 SHEET NO. 1  
 FOR SURVEY INFORMATION

J.L.M./L.S.V.

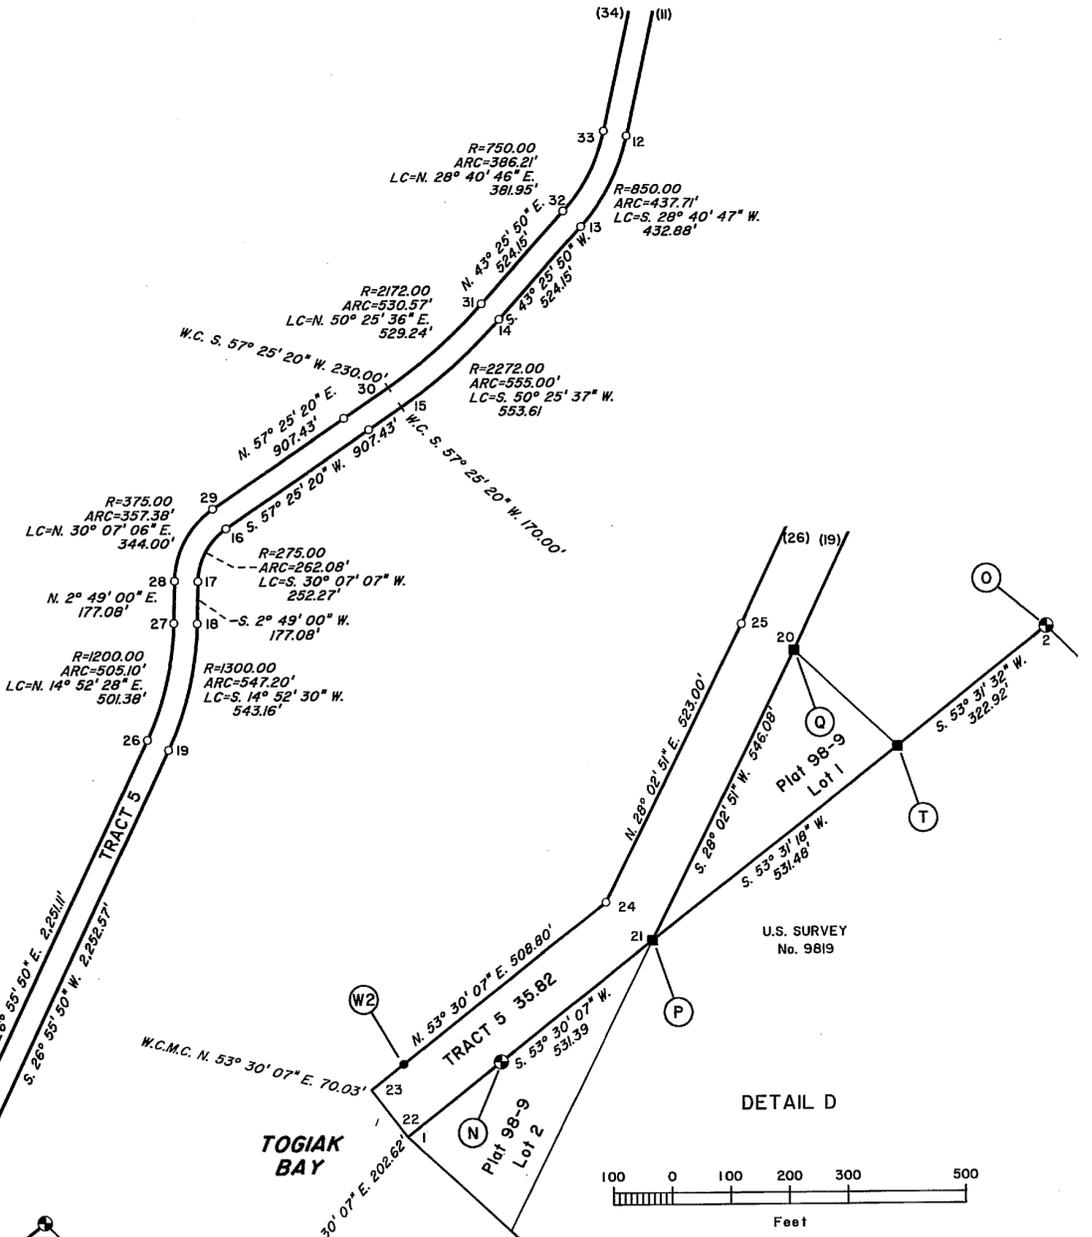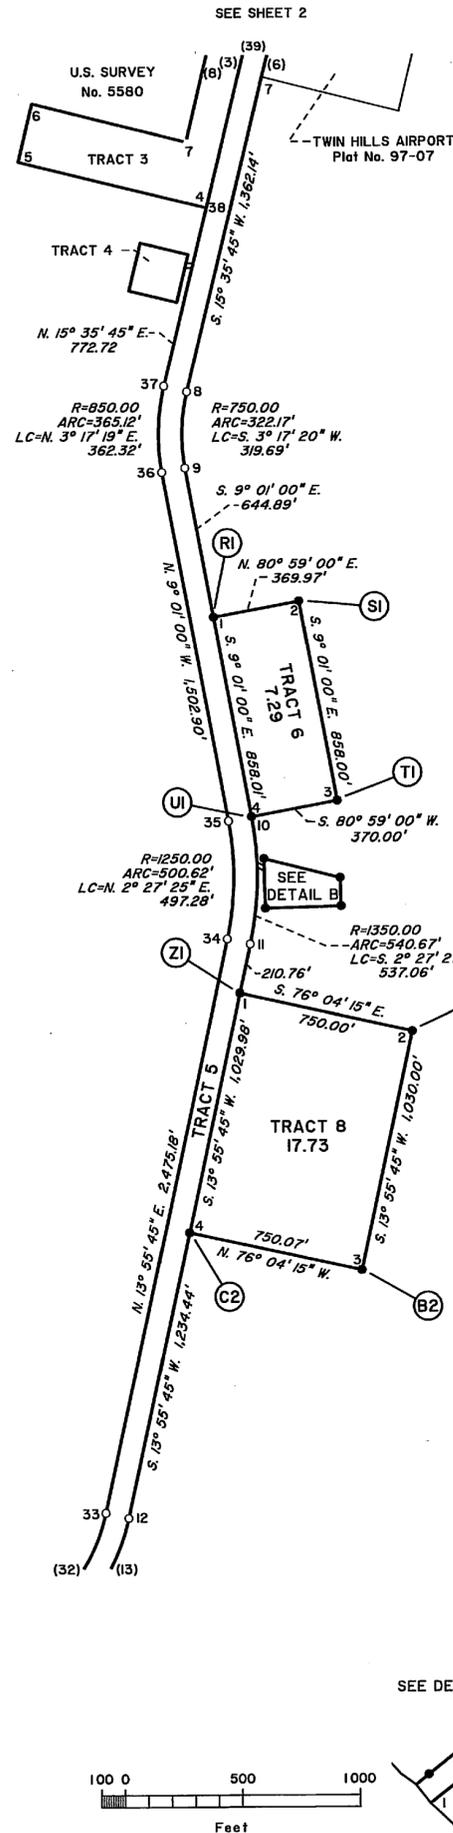

Bristol Bay Recording District Plat No. 2008-12




ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c),  
 TRACTS 1 THROUGH 10,  
 P.L. 92-203 (85 STAT. 688, 702, 703)  
 THE TWIN HILLS NATIVE CORPORATION  
 AT  
 TWIN HILLS, ALASKA  
 AND THE RETRACEMENT OF PORTIONS OF  
 U.S. SURVEYS Nos. 878, 5580 AND 9819  
 AND PORTIONS OF PLAT Nos. 97-07 AND  
 98-09, BRISTOL BAY RECORDING DISTRICT

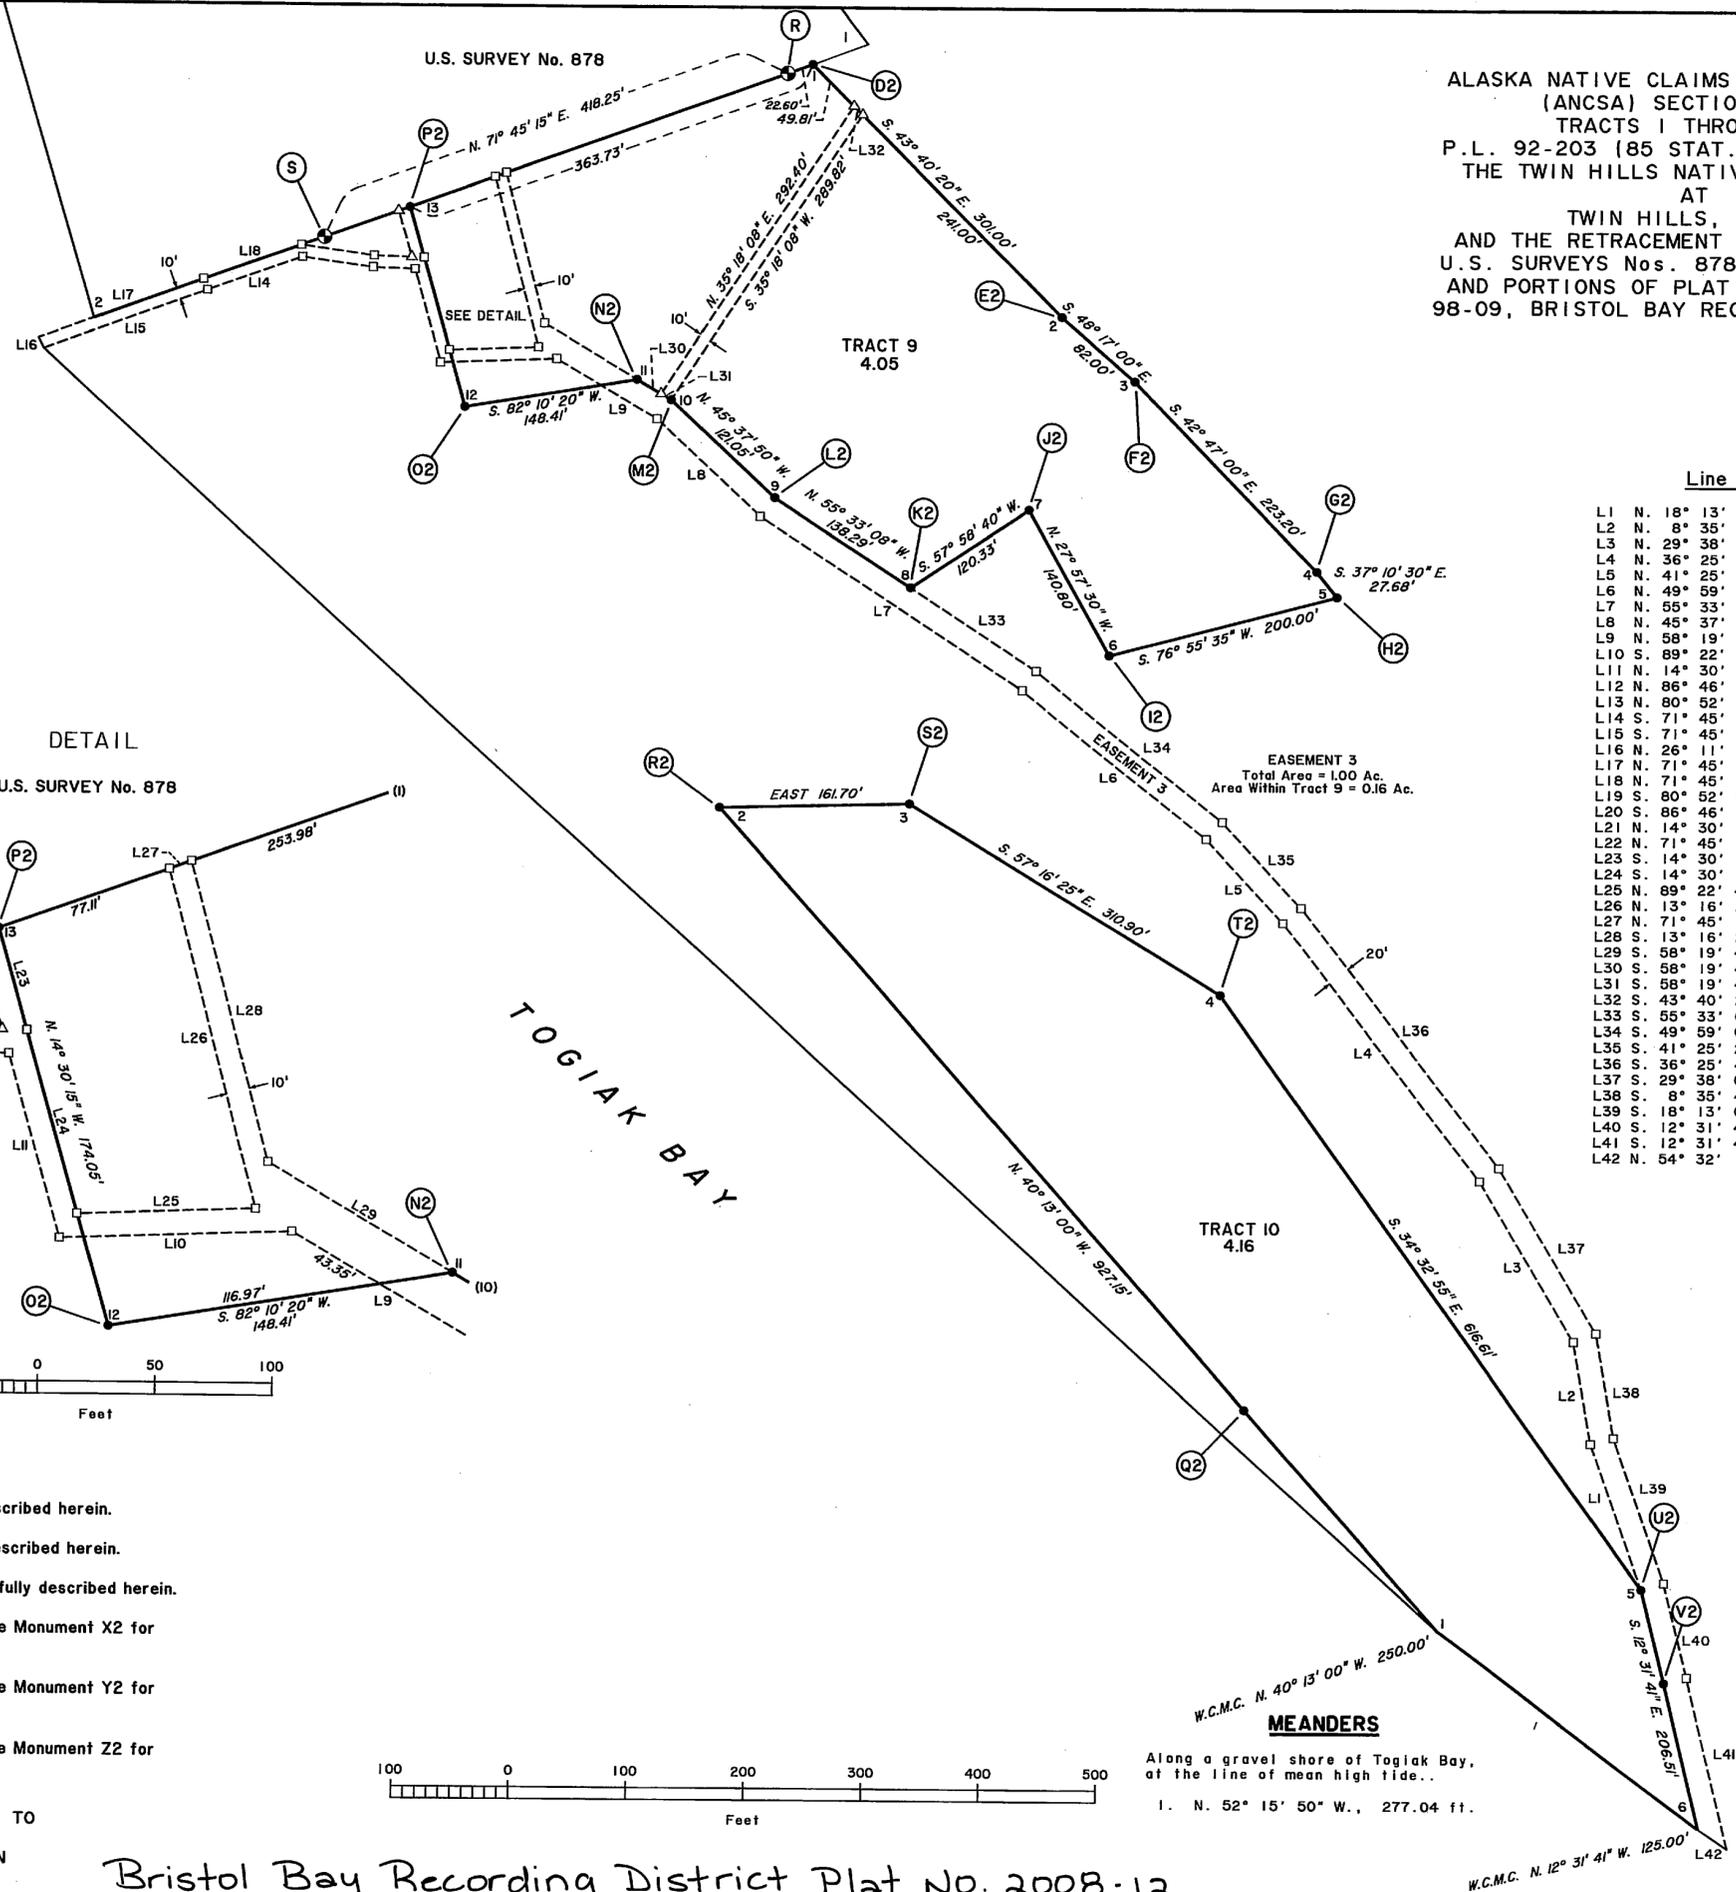

Line Table

L1	N. 18° 13' 09" W.	130.94 ft.
L2	N. 8° 35' 40" W.	86.70 ft.
L3	N. 29° 38' 09" W.	157.19 ft.
L4	N. 36° 25' 44" W.	275.14 ft.
L5	N. 41° 25' 25" W.	96.97 ft.
L6	N. 49° 59' 00" W.	201.57 ft.
L7	N. 55° 33' 08" W.	266.99 ft.
L8	N. 45° 37' 50" W.	120.57 ft.
L9	N. 58° 19' 42" W.	99.20 ft.
L10	S. 89° 22' 48" W.	99.05 ft.
L11	N. 14° 30' 15" W.	80.81 ft.
L12	N. 86° 46' 55" W.	35.59 ft.
L13	N. 80° 52' 30" W.	60.93 ft.
L14	S. 71° 45' 15" W.	85.75 ft.
L15	S. 71° 45' 15" W.	147.65 ft.
L16	N. 26° 11' 57" W.	10.09 ft.
L17	N. 71° 45' 15" E.	149.05 ft.
L18	N. 71° 45' 15" E.	88.18 ft.
L19	S. 80° 52' 30" E.	62.85 ft.
L20	S. 86° 46' 55" E.	31.88 ft.
L21	N. 14° 30' 15" W.	40.64 ft.
L22	N. 71° 45' 15" E.	10.02 ft.
L23	S. 14° 30' 15" E.	44.49 ft.
L24	S. 14° 30' 15" E.	80.28 ft.
L25	S. 89° 22' 48" E.	75.98 ft.
L26	N. 13° 16' 25" W.	148.07 ft.
L27	N. 71° 45' 15" E.	10.04 ft.
L28	S. 13° 16' 25" E.	131.11 ft.
L29	S. 58° 19' 42" E.	91.36 ft.
L30	S. 58° 19' 42" E.	23.79 ft.
L31	S. 58° 19' 42" E.	10.04 ft.
L32	S. 43° 40' 20" E.	10.19 ft.
L33	S. 55° 33' 08" E.	127.94 ft.
L34	S. 49° 59' 00" E.	204.04 ft.
L35	S. 41° 25' 25" E.	99.34 ft.
L36	S. 36° 25' 44" E.	277.20 ft.
L37	S. 29° 38' 09" E.	162.09 ft.
L38	S. 8° 35' 40" E.	86.73 ft.
L39	S. 18° 13' 09" E.	130.25 ft.
L40	S. 12° 31' 41" E.	82.50 ft.
L41	S. 12° 31' 41" E.	147.21 ft.
L42	N. 54° 32' 16" W.	29.88 ft.


DETAIL

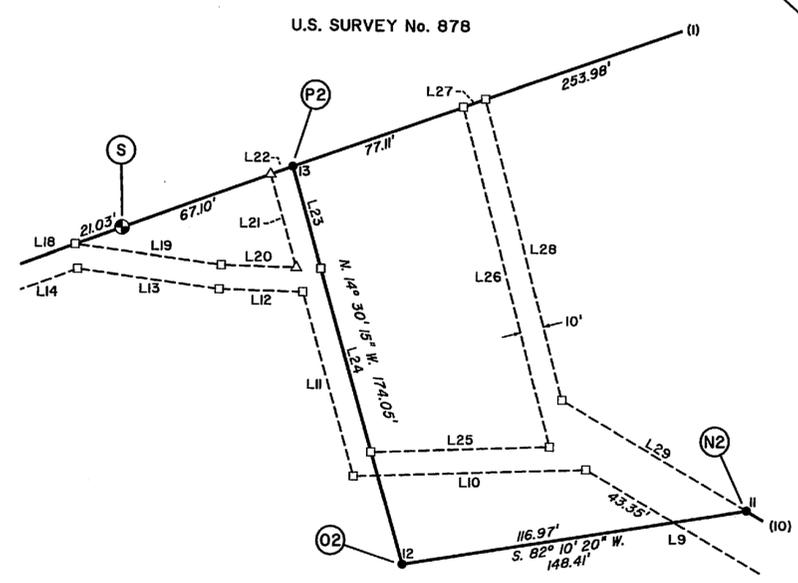

LEGEND


- Recovered B.L.M. monument, more fully described herein.
- Recovered private monument, more fully described herein.
- Set ANCSA 14(c) primary monument, more fully described herein.
- Set ANCSA 14(c) secondary monument. (See Monument X2 for typical.)
- Set ANCSA 14(c) secondary monument. (See Monument Y2 for typical.)
- △ Set ANCSA 14(c) secondary monument. (See Monument Z2 for typical.)

REFERENCE SHOULD BE MADE TO  
 SHEET NO. 1  
 FOR SURVEY INFORMATION




ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c),  
 TRACTS 1 THROUGH 10,  
 P.L. 92-203 (85 STAT. 688, 702, 703)  
 THE TWIN HILLS NATIVE CORPORATION  
 AT  
 TWIN HILLS, ALASKA  
 AND THE RETRACEMENT OF PORTIONS OF  
 U.S. SURVEYS Nos. 878, 5580 AND 9819  
 AND PORTIONS OF PLAT Nos. 97-07 AND  
 98-09, BRISTOL BAY RECORDING DISTRICT


REFERENCE SHOULD BE MADE TO  
 SHEET NO. 1  
 FOR SURVEY INFORMATION




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with a brass cap mkd. as shown.  
 There is no remaining evidence of the record pits.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with a brass cap mkd. as shown.  
 There is no remaining evidence of the record pits.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with a brass cap mkd. as shown.  
 There is no remaining evidence of the record pits.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with a brass cap mkd. as shown.  
 There is no remaining evidence of the record pits.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with a brass cap mkd. as shown.  
 There is no remaining evidence of the record pits.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 9 ins. above the ground, leaning easterly, with a brass cap mkd. as shown.  
 There is no remaining evidence of the record pits.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with a brass cap mkd. as shown.  
 There is no remaining evidence of the record pits.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above the ground, leaning northerly, with a brass cap mkd. as shown.  
 There is no remaining evidence of the record pits.  
 The East Channel of the Togiak River bears West, 65 ft. dist., loam and grass bank 3 ft. high, approximately 200 ft. wide flows S. 70° W.



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with an alum. cap mkd. as shown, from which  
 A fiberglass post bears S. 45° E., 11 ft. dist. from monument.



Found an alum. post, 2 1/2 ins. diam., 5 ins. below the road surface, with an alum. cap mkd. as shown, from which  
 The remains of a fiberglass post, broken off, projecting 4 ins. bears S. 45° E., 7.5 ft. dist. from the monument.




Found an alum. pipe, 3 ins. below the road surface, with an alum. cap mkd. as shown, from which  
 A fiberglass post bears East, 10 ft. dist. from monument.




Found an alum. post, 2 1/2 ins. diam., 3 ins. above the ground, with an alum. cap mkd. as shown, from which  
 A fiberglass post bears East, 1.2 ft. dist. from monument.



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 18 ins. above the ground, with an alum. cap mkd. as shown, from which  
 A broken fiberglass post was found and placed at the base of monument.  
 Reset the original monument to project 4 ins. out of the ground.



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with a brass cap mkd. as shown, from which  
 An alum. rod, 5/8 in. diam., projecting 1.4 ft. above the ground, bears S. 33° W., 9.8 ft. dist.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with a brass cap mkd. as shown.  
 There is no evidence of a rock collar.  
 The record magnets were detected, but not exhumed.




Found a rebar, 1/2 ins. diam. flush with the ground, with an alum. cap, 2 ins. diam. mkd. as shown.  
 There are no accessories of record.



Found a rebar, 1/2 in. diam. firmly set, projecting 3 ins. above the ground, with an alum. cap, 2 ins. diam. mkd. as shown.  
 There are no accessories of record.



Found an alum. rod, 5/8 in. diam., firmly set, projecting 15 ins. out of the ground, with no cap, from which the remaining original accessories  
 U.S.L.M. No. 878, monumented with an alum. rod, 5/8 in. diam., projecting 3 ins. above ground, firmly set, with an alum. cap mkd. USLM 878 1979, bears N. 40° 53' W., 127.1 ft. dist. (Record: N. 40° 59' W., 126.7 ft.)  
 The SE cor. of a generator building, bears N. 44° 54' W., 132.4 ft., dist. (Record: N. 44° 32' W., 132.7ft)



Found an alum. rod, 5/8 in. diam., bent and broken, 16 ins. below grade, with no cap, from which the remaining original accessories  
 The stump of a power pole, bears N. 5° 43' E., 236.7 ft. dist. (Record: N. 5° 38' W., 236.9)  
 The SW cor. of a corrugated steel building bears N. 35° 36' E., 173.6 ft. dist. (Record: N. 35° 45' E.)  
 The SW cor. of a generator building bears N. 51° 18' E., 365.4 ft. dist. (Record: N. 51° 26' E., 365.0)




Found a rebar, 1/2 ins. diam. flush with the ground, with an alum. cap, 2 ins. diam. mkd. as shown.  
 There are no accessories of record.

At the corner point,  
 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with a brass cap mkd. as shown, from which new accessories  
 A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.  
 A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 8 ins. below the ground.  
 A wood post, 4 ins. square, painted yellow, bears N. 40° W., 1.2 ft. dist.  
 Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.  
 Left original alum. rod alongside stainless steel post.

At the corner point,  
 Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below grade, with a brass cap mkd. as shown,  
 Deposit 4 magnets without cases, at the base of the stainless steel post.  
 Left the original alum. rod alongside the new stainless steel post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c),  
 TRACTS 1 THROUGH 10,  
 P.L. 92-203 (85 STAT. 688, 702, 703)  
 THE TWIN HILLS NATIVE CORPORATION  
 AT  
 TWIN HILLS, ALASKA  
 AND THE RETRACEMENT OF PORTIONS OF  
 U.S. SURVEYS Nos. 878, 5580 AND 9819  
 AND PORTIONS OF PLAT Nos. 97-07 AND  
 98-09, BRISTOL BAY RECORDING DISTRICT

REFERENCE SHOULD BE MADE TO  
 SHEET NO. 1  
 FOR SURVEY INFORMATION




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.

True point falls in a marsh, unsuitable for monumentation.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.

True point falls on the left bank of the East Channel of the Togiak River, at the line of mean high tide, not suitable for monumentation.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, surrounded by a rock collar 2 ft. in diam., and 8 ins. high, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 20 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 11 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with a brass cap mkd. as shown, from which

The footing of SW cor. of DOT building, bears N. 76 1/2° E., 35.2 ft. dist.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with a brass cap mkd. as shown, from which

The footing of NW cor. of DOT building, bears N. 56° 1/4° E., 86.5 ft. dist.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 17 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 10 ins. below the ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 11 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.

True point falls in a vegetated boulder field, not suitable for monumentation.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 11 ins. below the ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 20 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 19 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 20 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 17 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 19 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 19 ins. below the ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 20 ins. below the ground.


A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 20 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



ALASKA NATIVE CLAIMS SETTLEMENT ACT  
 (ANCSA) SECTION 14(c),  
 TRACTS 1 THROUGH 10,  
 P.L. 92-203 (85 STAT. 688, 702, 703)  
 THE TWIN HILLS NATIVE CORPORATION  
 AT  
 TWIN HILLS, ALASKA  
 AND THE RETRACEMENT OF PORTIONS OF  
 U.S. SURVEYS Nos. 878, 5580 AND 9819  
 AND PORTIONS OF PLAT Nos. 97-07 AND  
 98-09, BRISTOL BAY RECORDING DISTRICT

REFERENCE SHOULD BE MADE TO  
 SHEET NO. 1  
 FOR SURVEY INFORMATION




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 10 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 9 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 7 ins. below the ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 11.2 ft. dist., buried 8 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 13 ins. below the ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 8 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 3 ins. below the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 44° E., 16.5 ft. dist., buried 8 ins. below the ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 16.5 ft. dist., buried 7 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below the ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 14 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 14 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below the ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 13 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with a brass cap mkd. as shown, from which

A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 8 ins. below the ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 14 ins. below the ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap mkd. as shown, from which


A magnet, in a fluorescent silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 18 ins. below the ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 13 ins. below the ground.


Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set an ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 27 to 30 ins. in the ground, with an alum. cap, 2 ins. diam., mkd. with the appropriate lines, tract identifiers, and '2006'.



Set ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 27 to 30 ins. in the ground, with an alum. cap, 2 ins. diam., mkd. with a center punch and the easement identifiers in the appropriate quadrant and '2007'.



Set ANCSA 14(c) secondary monument, either an iron rebar, 5/8 in. diam., 18 ins. long, driven 16 to 20 ins. in the ground, or an alum. rod, 3/4 in. diam., 36 ins. long, driven 30 ins. in the ground, with an alum. cap, 3 1/4 ins. diam., mkd. with a center punch and the easement identifiers in the appropriate quadrant 'THNC' and '2007'.

2008-12  
 Bristol Bay REC DIST  
 Date 07-03 2008  
 Time 10:15 A M  
 Requested By Twin Hills  
 Native Corporation  
 Address