

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 9 P.L. 92-203 (85 STAT. 688, 702, 703)

KAKTOVIK INUPIAT CORPORATION AT KAKTOVIK, ALASKA

This plat contains the entire survey record.

The history of surveys is contained on Sheet 2 and also contextually on sheets depicting parcels of record.

This survey was executed by Eric Stahlke, Registered Alaska Land Surveyor No. LS-6945, for Tanana Chiefs Conference, July 24 through August 4, 2007, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated March 19, 2007 and approved April 6, 2007, the Kaktovik Inupiat Corporation ANCSA 14(c) Maps of Boundaries accepted July 27, 2000 and May 1, 2006, Contract No. NAA070006, dated June 25, 2007, and Notice to Proceed dated July 23, 2007.

Field assistants were:

- Albert G. Macica, Land Surveyor
Todd A. Jantzi, Crew Chief
Alvin W. Dayton, Survey Technician
Charles Yatlin, Survey Technician

Area: 850.00 Acres

The azimuth was obtained from the Global Positioning System, using static relative positioning techniques and refers to the true meridian. All bearings shown on this plat are true mean bearings and all distances shown are geodetic distances at sea level.

Aliquot part corners in sections 13, 14, 22, 23, 24 and 26, Township 9 North, Range 33 East, U.M., Alaska, were established at protracted positions based on Bureau of Land Management Protraction Diagram U1-1.

The geographic position of the NW corner of Tract 3, based on a direct tie to N.G.S. triangulation station "Barter Astro", is:

Latitude: 70°07'36.66" North NAD 27
Longitude: 143°39'16.75" West

The magnetic declination was observed during the execution of this survey.

This survey is situated in and around the village of Kaktovik Alaska, within Sections 13, 14, 22, 23, 24, 25 and 26, Township 9 North, Range 33 East; Section 30, Township 9 North, Range 34 East; and Section 36, Township 9 North, Range 35 East, all of the Umiat Meridian.

The topography is that of a coastal island on the Beaufort Sea, about 10 square miles in size, composed of generally flat ground and low hills interspersed with tundra lakes, swamps and salt marshes, and encompassed by an ocean shore which is characterized by gravel beaches and cut banks, with occasional sand spits. The soils consist of frozen peat and permafrost.


UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT Anchorage, Alaska

The survey represented by this plat, sheets 1-5, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director

John Swope December 10, 2008 Date

Deputy State Director for Cadastral Survey, Alaska

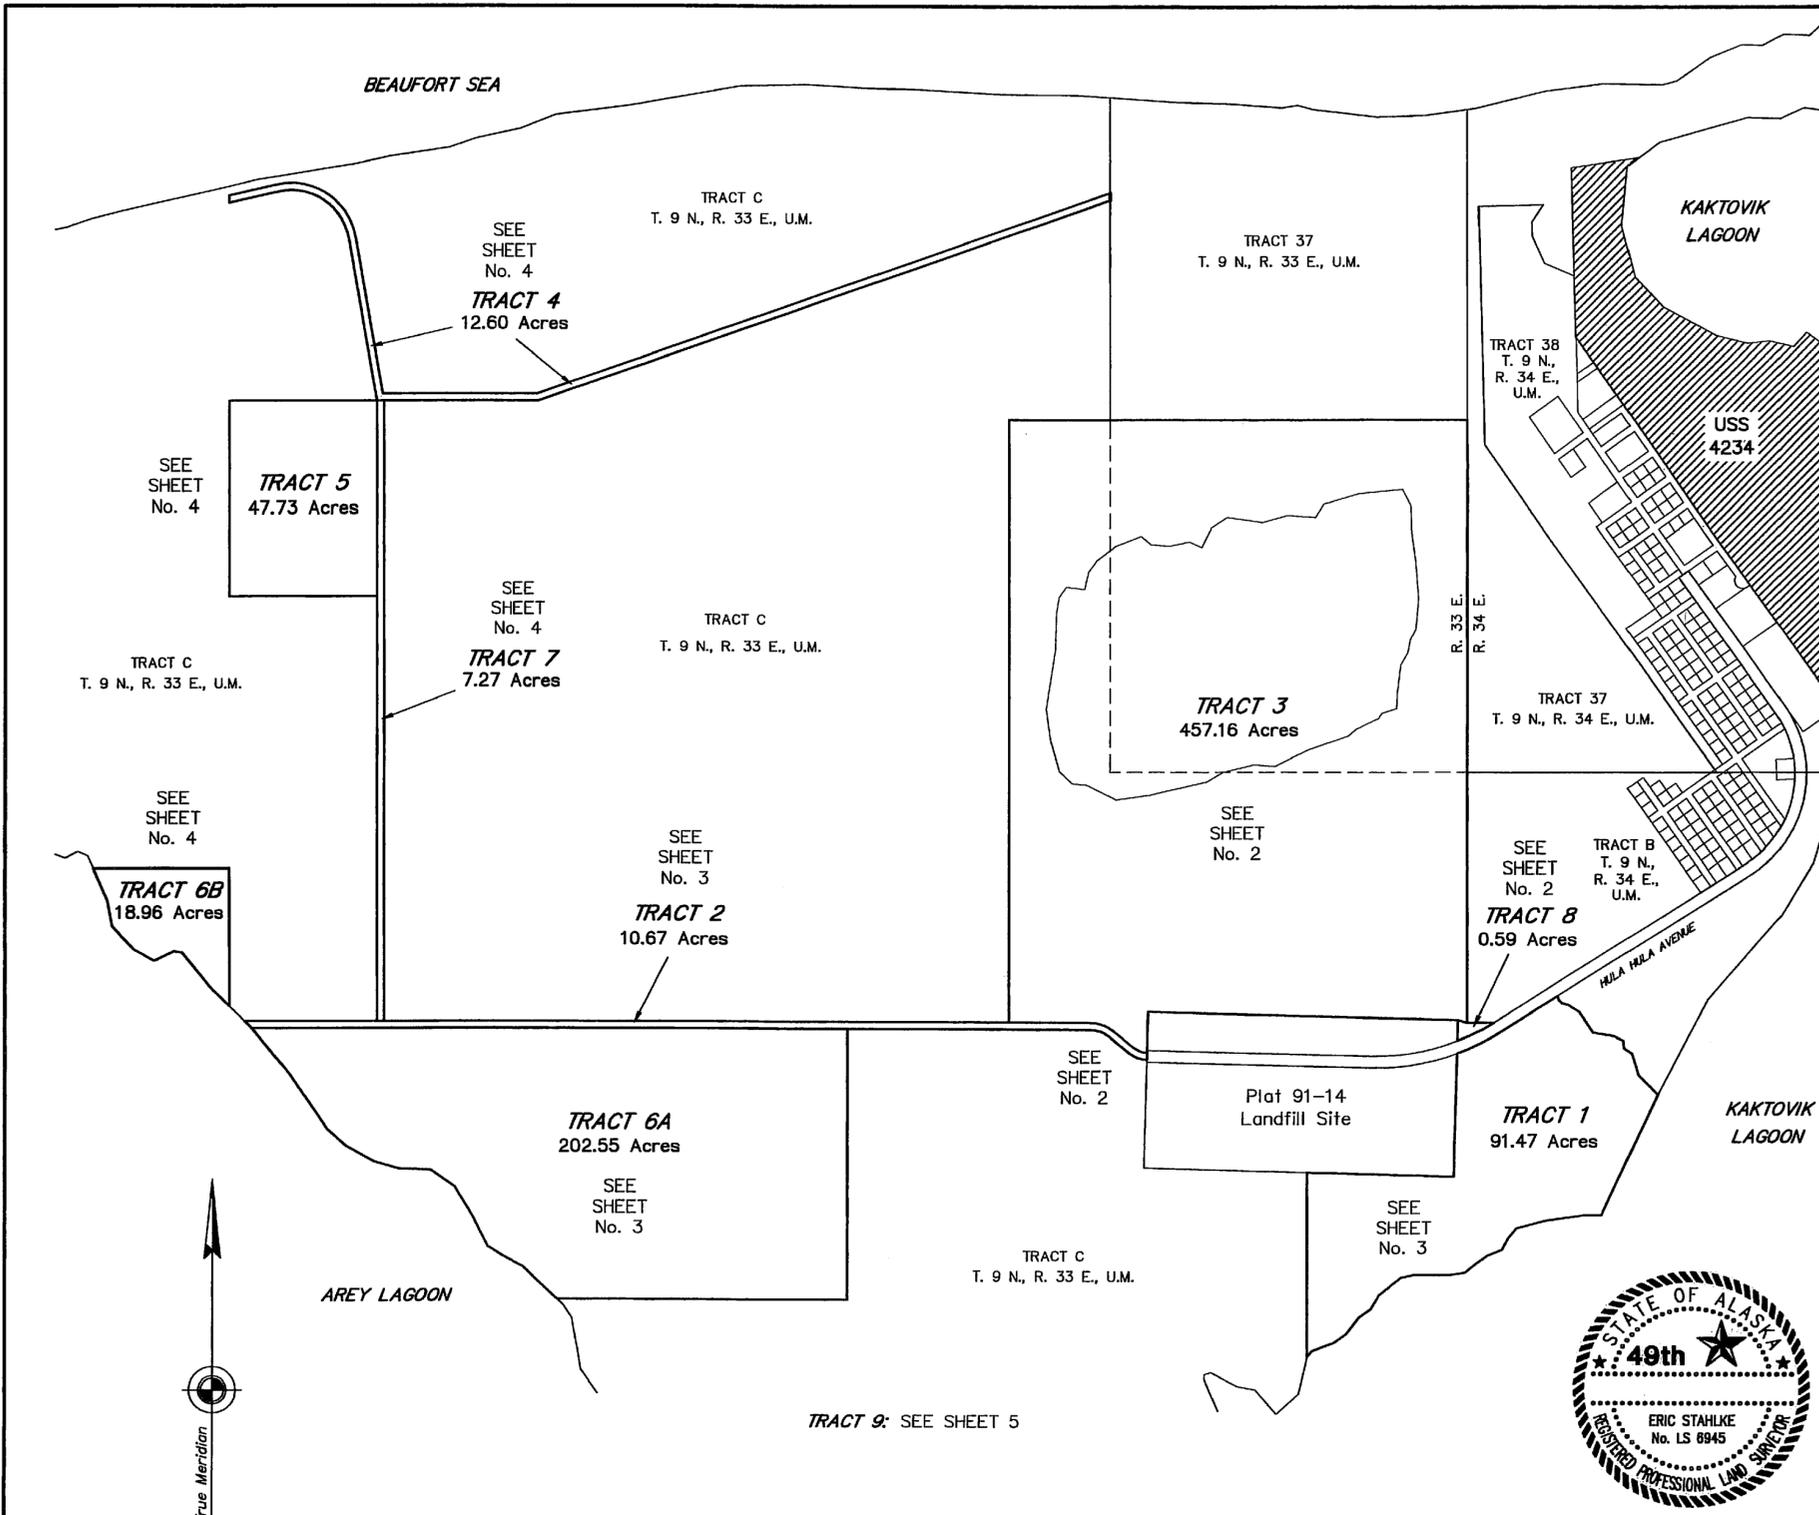

I hereby certify that Tracts 1-9 created by this plat of survey, on sheets 1-5, are on land conveyed to Kaktovik Inupiat Corporation, by Interim Conveyance Nos. 052, 808 and 1250, and Patent No. 50-77-0046, all issued by the United States of America; said parcels also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Kaktovik Inupiat Corporation ANCSA 14(c) Maps of Boundaries accepted July 27, 2000 and May 1, 2006.



11-25-08 Date

Signature of President, Kaktovik Inupiat Corporation

I, ERIC STAHLKE, Registered Alaska Land Surveyor No. LS-6945, for Tanana Chiefs Conference, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-5, in conformity with the Special Instructions approved April 6, 2007, Contract No. NAA070006, awarded June 25, 2007, the principles of survey described in the Manual of Instructions for the Survey of the Public Lands of the United States, 1973, and in the specific manner described on this plat.

OCT. 29, 2008 Date

Signature of Registered Land Surveyor




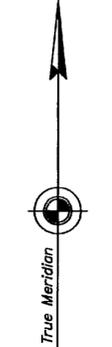


MONUMENTS RECOVERED

- (A1) WC MC S13 C3 TR37 T9N R33E 2007
Stainless steel post, 2 1/2 in. diam., projecting 1 in. above the ground, firmly set, with brass cap mkd. as shown. Magnetic accessories were not searched for.
- (B1) WC MC C4 C10 TR37 TR34E R33E R34E T9N 2007
Stainless steel post, 2 1/2 in. diam., projecting 1 in. above the ground, firmly set, with brass cap mkd. as shown. Magnetic accessories were not searched for.
- (C1) T9N R33E R34E TR37 TR34E AP1 AP9 S24 S19 2007
Stainless steel post, 2 1/2 in. diam., projecting 1 in. above the ground, firmly set, with brass cap mkd. as shown. Magnetic accessories were not searched for.
- (D1) T9N R33E R34E S24 S19 S25 S30 2007
Stainless steel post, 2 1/2 in. diam., projecting 1 in. above the ground, firmly set, with brass cap mkd. as shown. Magnetic accessories were not searched for.
- (E1) ASCG LAND FILL S7335 1991
Steel rebar, 5/8 in. diam., projecting 12 ins. above the ground, firmly set, restore to project 2 ins. above ground, with 2 in. alum. cap mkd. as shown.
- (F1) ASCG LAND FILL ROW S7335 1991
Steel rebar, 5/8 in. diam., projecting 5 ins. above the ground, firmly set, restore to project 2 ins. above ground, with 2 in. alum. cap mkd. as shown.
- (G1) ASCG ROW S7335 1991
Steel rebar, 5/8 in. diam., projecting 15 ins. above the ground, firmly set, restore to project 2 ins. above ground, with 2 in. alum. cap mkd. as shown.
- (H1) ASCG LAND FILL S7335 1991
Steel rebar, 5/8 in. diam., projecting 7 ins. above the ground, firmly set, restore to project 2 ins. above ground, with 2 in. alum. cap mkd. as shown.
- (I1) ASCG LAND FILL ROW S7335 1991
Steel rebar, 5/8 in. diam., projecting 8 ins. above the ground, firmly set, restore to project 2 ins. above ground, with 2 in. alum. cap mkd. as shown.
- (J1) ASCG LAND FILL ROW S7335 1991
Steel rebar, 5/8 in. diam., projecting 10 ins. above the ground, firmly set, restore to project 2 ins. above ground, with 2 in. alum. cap mkd. as shown.
- (K1) WC T9N R33E S24 TR37 MC1 2007
Stainless steel post, 2 1/2 in. diam., projecting 1 in. above the ground, firmly set, with brass cap mkd. as shown. Magnetic accessories were not searched for.
- (L1) BARTER ASTRO 1948
Iron post, 2 ins. diam., projecting 36 ins. above the ground, firmly set, with brass cap mkd. as shown.

LEGEND

- ✱ BLM monument recovered this survey
- 5/8 in. rebar and alum. cap recovered this survey.
- ANCSA primary monument set this survey.
- ANCSA secondary monument set this survey, 5/8 in. rebar, 30 ins. long with 2 in. alum. cap.

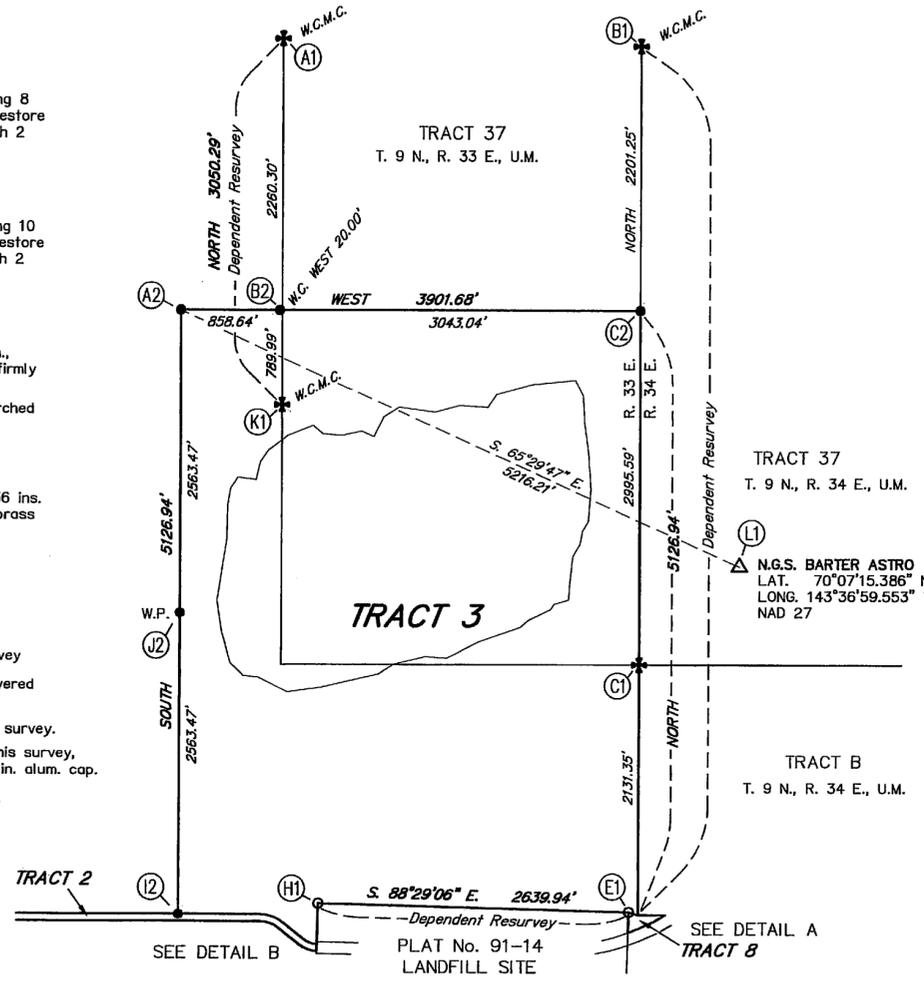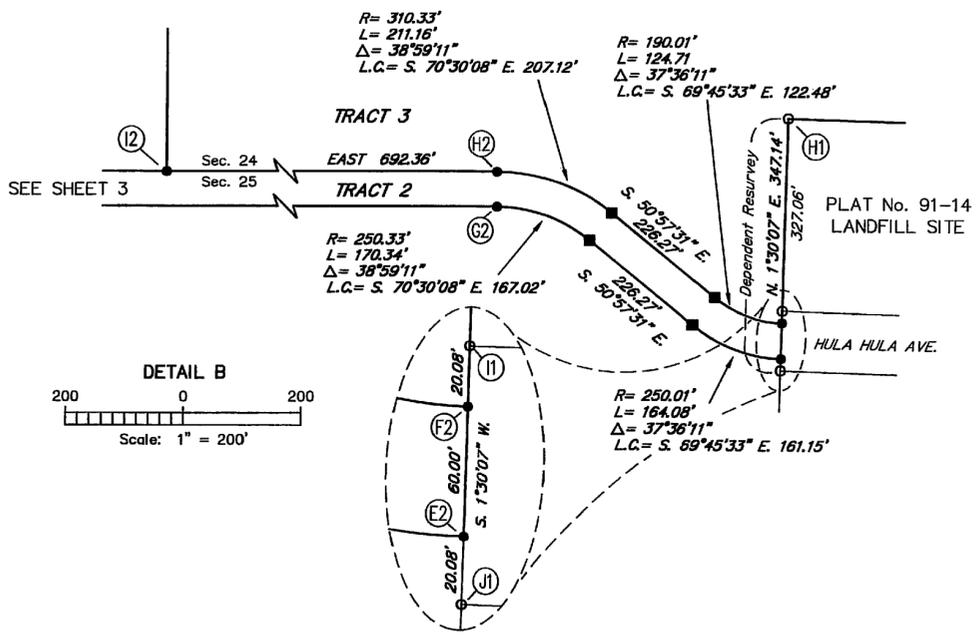

MONUMENTS SET

- Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 to 28 ins. in the ground, a magnet with a white plastic case at the base, with a brass cap mkd. as shown.
- (A2) TR3
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
 - (B2) WC T9N R33E TR37 TR3
A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
 - (C2) T9N R33E R34E TR37 TR3
A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 14 ins. below ground.
 - (D2) T9N R34E S19 S30 TR8 ROW
A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
 - (E2) TR2 ROW
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 18 ins. below ground.
 - (F2) TR3 TR2 ROW
A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 18 ins. below ground.
 - (G2) PC TR2
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
 - (H2) TR3 TR2 PC
A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 14 ins. below ground.
 - (I2) T9N R33E S24 TR3 S25 TR2
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
 - (J2) WP TR3
A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below ground.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 9 P.L. 92-203 (85 STAT. 688, 702, 703)


KAKTOVIK INUPIAT CORPORATION AT KAKTOVIK, ALASKA

The east boundary of sections 13, 24 and 25, and Tract 37, Township 9 North, Range 33 East, of the Umiait Meridian, Alaska, were surveyed by Eric Stahlke, Registered Alaska Land Surveyor No. LS-6945, in 2007. The plat has not been accepted to date.



Tract 37 and Tract B, Township 9 North, Range 34 East, of the Umiait Meridian, Alaska, were surveyed by Eric Stahlke, Registered Alaska Land Surveyor No. LS-6945, in 2007. The plat has not been accepted to date.

Plat 91-14, Barrow Recording District, Alaska, "The Access Road to the Landfill and Sewage Lagoon Site of Kaktovik, Alaska", was surveyed by Keith A. McNeil in 1991 for Arctic Slope Consulting Group.

Typical cap marking for primary monument set this survey.



Typical cap marking for secondary monument set this survey.

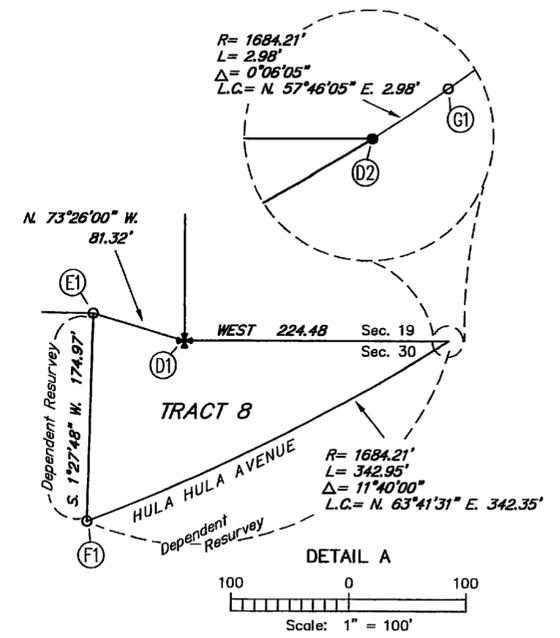

Barrow 2008-3

MONUMENTS RECOVERED

- (A3) ASCG LAND FILL S7335 1991 Steel rebar, 5/8 in. diam., projecting 12 ins. above the ground, firmly set, restore to project 2 ins. above ground, with 2 in. alum. cap mkd. as shown.
- (B3) ASCG LAND FILL S7335 1991 Steel rebar, 5/8 in. diam., projecting 12 ins. above the ground, firmly set, restore to project 2 ins. above ground, with 2 in. alum. cap mkd. as shown.
- (C3) ASCG ROW LAND FILL S7335 1991 Steel rebar, 5/8 in. diam., projecting 10 ins. above the ground, firmly set, restore to project 2 ins. above ground, with 2 in. alum. cap mkd. as shown.
- (D3) ASCG ROW S7335 1991 Steel rebar, 5/8 in. diam., projecting 12 ins. above the ground, firmly set, bent, restore to straight to project 2 ins. above ground, with 2 in. alum. cap mkd. as shown.
- (E3) ASCG ROW S7335 1991 Steel rebar, 5/8 in. diam., projecting 12 ins. above the ground, firmly set, bent, restore to straight to project 2 ins. above ground, with 2 in. alum. cap mkd. as shown.

MONUMENTS SET

Set a stainless steel post, 28 ins. long., 2 1/2 ins. diam., 25 to 28 ins. in the ground, a magnet with a white plastic case at the base, with a brass cap mkd. as shown.

- (A4) WC MC/TR2 A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (B4) WC MC/TR2 TR6A A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (C4) T9N R33E S23 S26 TR7 TR2 S26 A magnet, in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 14 ins. below ground.
- (D4) WC MC/TR6A A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (E4) T9N R33E S26 S25 TR6A A magnet, in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 14 ins. below ground.
- (F4) T9N R33E S23 S24 S26 S25 TR2 A magnet, in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 14 ins. below ground.
- (G4) LANDFILL TR1 A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 18 ins. below ground.
- (H4) WC MC/TR1 A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 18 ins. below ground.
- (I4) WC MC/TR1 A magnet, in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 18 ins. below ground.
- (J4) WC MC/TR1 A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below ground.
- (K4) WC ROW/TR1 A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 18 ins. below ground.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 THROUGH 9 P.L. 92-203 (85 STAT. 688, 702, 703)

KAKTOVIK INUPIAT CORPORATION AT KAKTOVIK, ALASKA

TRACT 1 CREEK TRAVERSE

Along the thread of an unnamed creek.

LINE	BEARING	LENGTH
1	S. 19°25'05" E.	37.57'
2	S. 43°58'00" E.	37.12'
3	S. 75°57'08" E.	51.36'
4	S. 57°45'27" E.	116.81'
5	S. 34°12'53" E.	209.86'
6	S. 80°38'25" E.	177.74'
7	S. 62°52'55" E.	92.91'
8	S. 6°33'56" E.	61.55'
9	S. 53°21'19" E.	77.58'
10	S. 17°17'54" E.	193.17'
11	S. 45°24'41" E.	232.01'

Along the northwesterly shore of Kaktovik Lagoon, at the line of mean high tide.

LINE	BEARING	LENGTH
12	S. 25°27'52" W.	1118.12'
13	S. 82°22'14" W.	320.52'
14	S. 75°33'07" W.	260.80'
15	S. 38°41'09" W.	110.19'
16	S. 28°38'26" W.	114.53'
17	S. 67°50'26" W.	143.68'
18	S. 52°27'21" W.	229.32'
19	S. 81°20'03" W.	137.81'
20	N. 89°44'11" W.	292.06'
21	S. 77°53'56" W.	118.29'
22	S. 51°23'27" W.	236.11'
23	S. 30°48'23" W.	140.25'
24	S. 54°34'29" W.	125.75'
25	S. 36°52'08" W.	180.52'
26	S. 54° 9'27" W.	138.51'
27	S. 69° 6'12" W.	189.09'
28	S. 40°40'24" W.	65.58'

TRACT 2 MEANDERS



Along the northeasterly shore of Arey Lagoon, at the line of mean high tide.

LINE	BEARING	LENGTH
1	S. 46°19'31" E.	86.89'

TRACT 6A MEANDERS

Along the northeasterly shore of Arey Lagoon, at the line of mean high tide.

LINE	BEARING	LENGTH
1	S. 39°18'35" E.	508.93'
2	S. 34°53'35" E.	562.76'
3	S. 48°24'02" E.	211.59'
4	S. 60°59'21" E.	266.11'
5	S. 74°35'16" E.	223.62'
6	S. 87°56'09" E.	267.67'
7	S. 56°05'46" E.	255.48'
8	S. 31°44'32" E.	293.13'
9	S. 27°06'46" E.	284.76'
10	S. 57°45'15" E.	143.78'
11	S. 62°49'48" E.	203.94'
12	S. 46°47'42" E.	407.71'


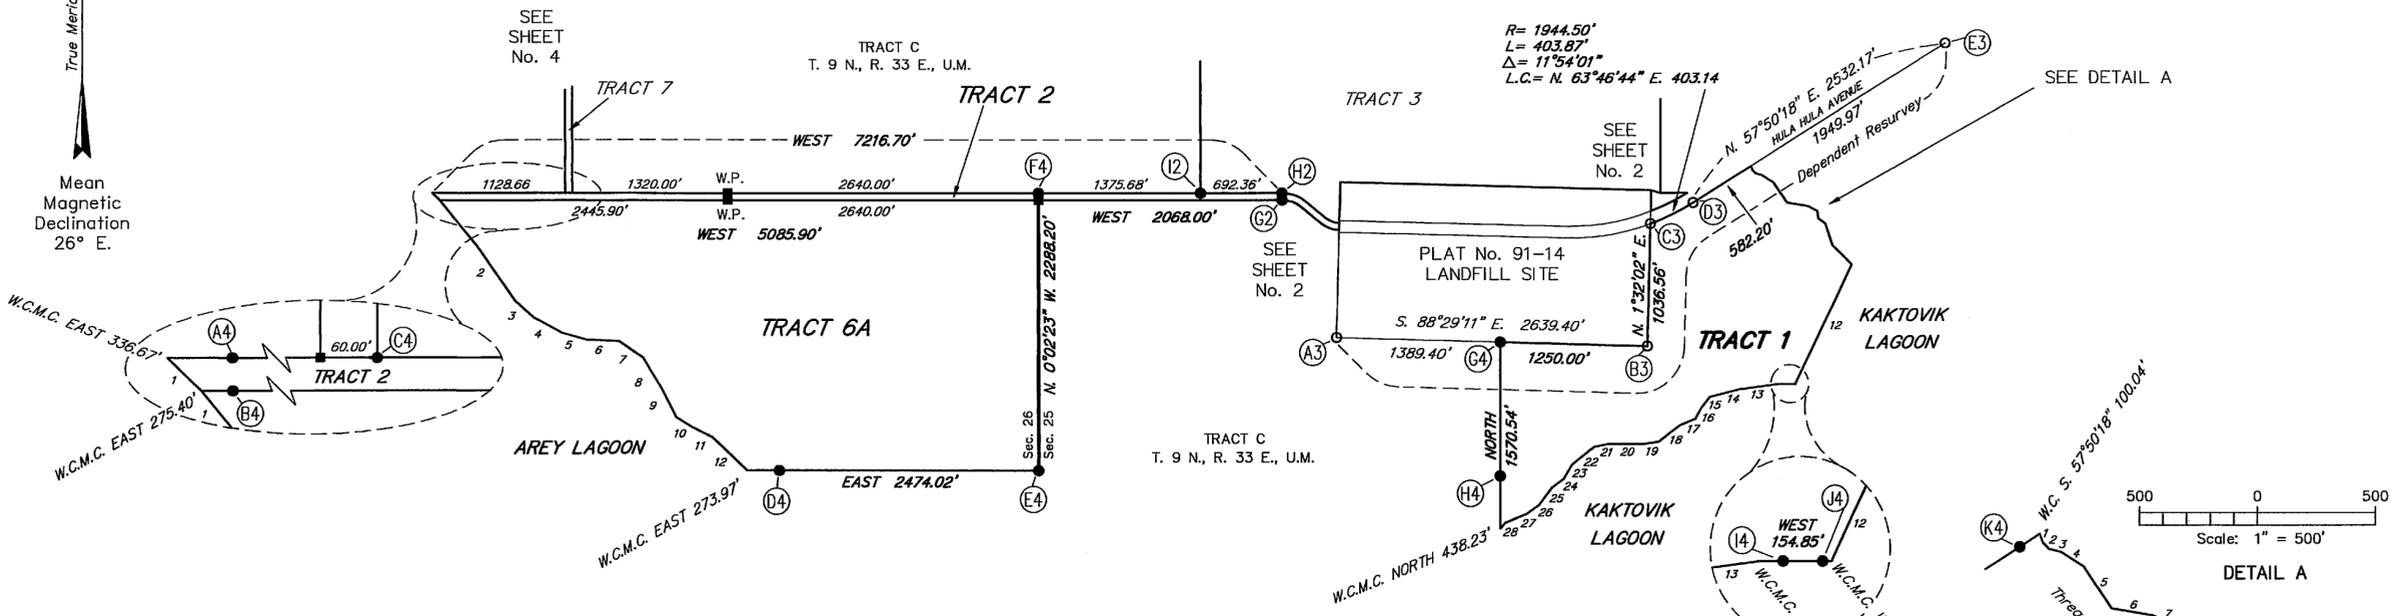
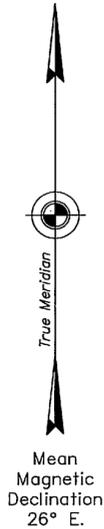


LEGEND

- 5/8 in. rebar and alum. cap recovered this survey.
- ANCSA primary monument set this survey.
- ANCSA secondary monument set this survey, 5/8 in rebar, 30 ins. long with 2 in. alum. cap.

Typical cap marking for primary monument set this survey.


Typical cap marking for secondary monument set this survey.



Barrow 2008-3

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 9
P.L. 92-203 (85 STAT. 688, 702, 703)

KAKTOVIK INUPIAT CORPORATION
AT
KAKTOVIK, ALASKA

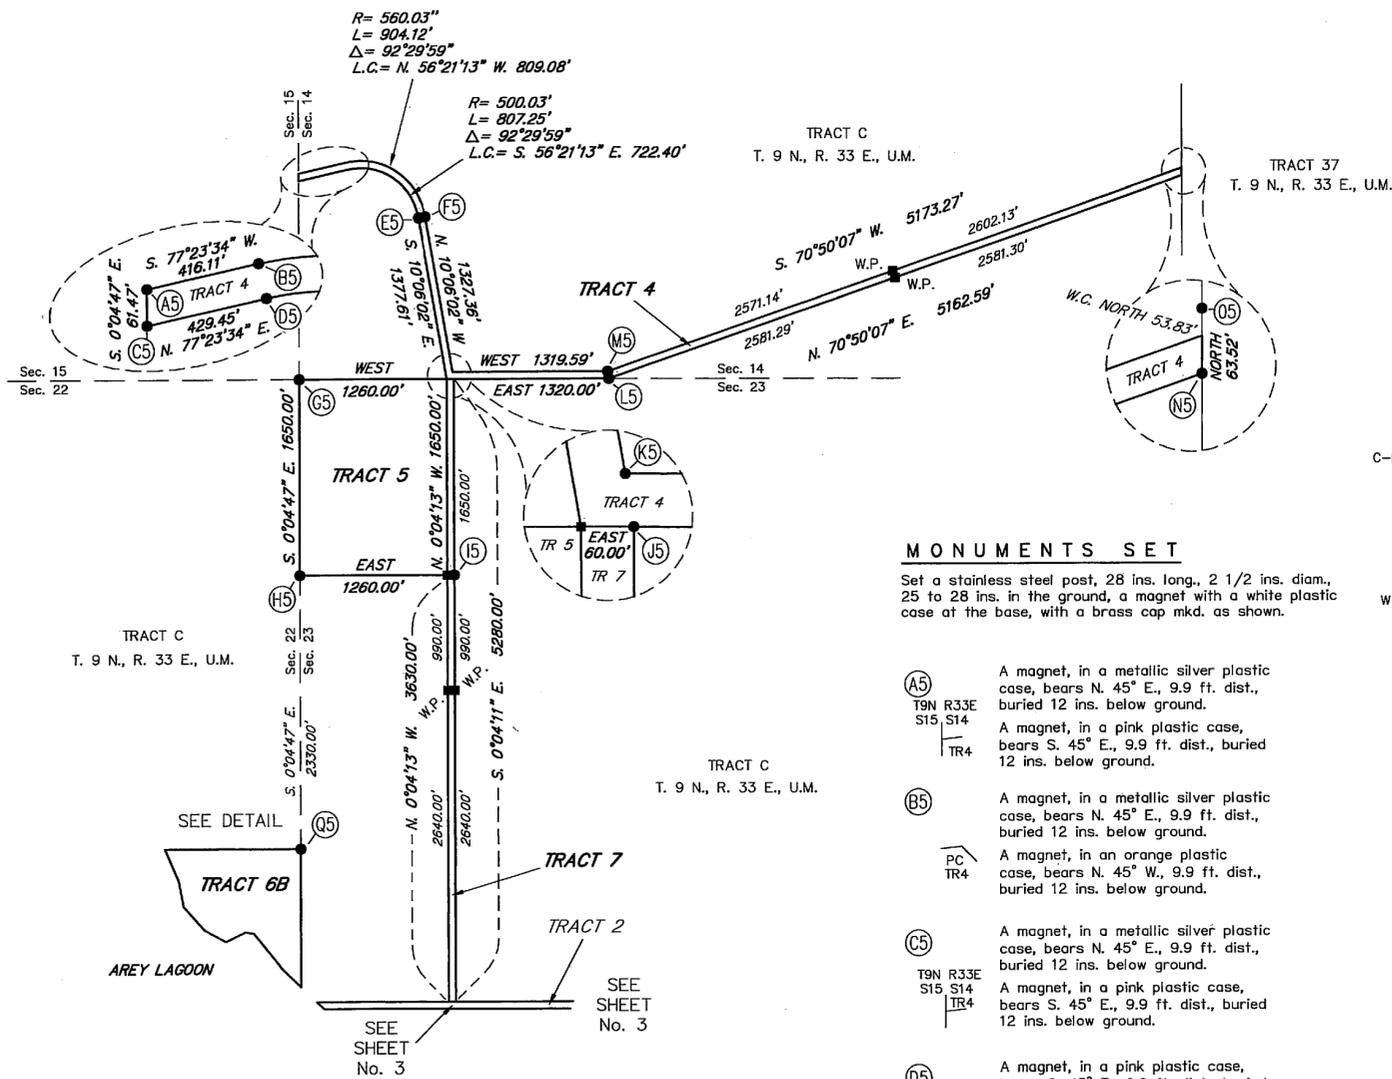

MONUMENTS SET

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 to 28 ins. in the ground, a magnet with a white plastic case at the base, with a brass cap mkd. as shown.

- (A5) T9N R33E S15 S14 TR4
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
- (B5) PC TR4
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
- (C5) T9N R33E S15 S14 TR4
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
- (D5) PC TR4
A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
- (E5) PC TR4
A magnet, in a blue plastic case, bears S. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (F5) PC TR4
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (G5) T9N R33E S15 S14 S22 S23 TR5
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (H5) N-S-N 1/256 TR5 S22 S23
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.

- (I5) S23 C-N-S-NW 1/256 TR7
A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 14 ins. below ground.
- (J5) T9N R33E S14 TR4 S23
A magnet, in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 14 ins. below ground.
- (K5) TR4
A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (L5) T9N R33E S14 TR4 S23
A magnet, in a metallic silver plastic case, bears S. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (M5) TR4
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (N5) TR4 PL0715
A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (O5) WC T9N R33E TR37
A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
- (P5) WC MC TR6B
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (Q5) T9N R33E S22 S23 TR6B
A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 14 ins. below ground.
- (R5) WC T9N R33E S22 S23 TR6B MC
A magnet, in a metallic silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 14 ins. below ground.

TRACT 8B MEANDERS

Along the northeasterly shore of Arey Lagoon, at the line of mean high tide.

LINE	BEARING	LENGTH
1	S. 24°19'29" E.	289.89'
2	S. 10°25'42" E.	224.00'
3	S. 41°59'22" E.	273.57'
4	S. 60°41'35" E.	197.20'
5	N. 64°33'41" E.	188.88'
6	S. 80°43'55" E.	70.40'
7	S. 39°01'19" E.	385.77'
8	S. 45°41'40" E.	225.33'


LEGEND

- ANCSA primary monument set this survey.
- ANCSA secondary monument set this survey, 5/8 in rebar, 30 ins. long with 2 in. alum. cap.



Typical cap marking for primary monument set this survey.



Typical cap marking for secondary monument set this survey.

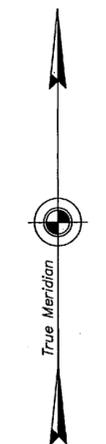

Mean Magnetic Declination 26° E.

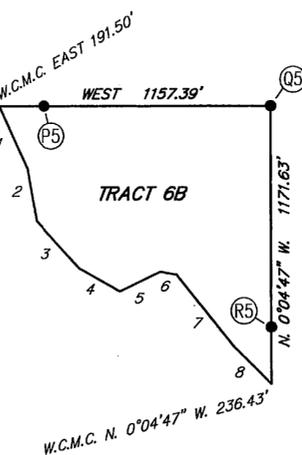

Scale: 1" = 500'

DETAIL




Scale: 1" = 1000'

Barrow 2008-3


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c), TRACTS 1 THROUGH 9
P.L. 92-203 (85 STAT. 688, 702, 703)

KAKTOVIK INUPIAT CORPORATION
AT
KAKTOVIK, ALASKA

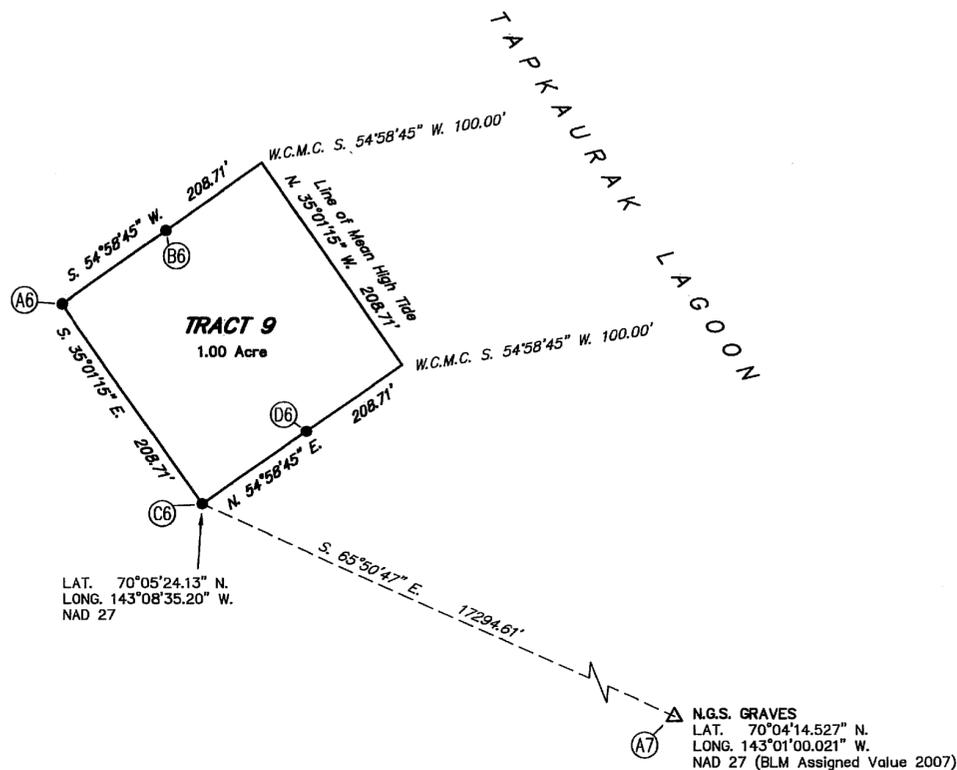

LAT. 70°05'24.13" N.
LONG. 143°08'35.20" W.
NAD 27

N.G.S. GRAVES
LAT. 70°04'14.527" N.
LONG. 143°01'00.021" W.
NAD 27 (BLM Assigned Value 2007)




MONUMENT RECOVERED

(A7) GRAVES Iron post, 2 1/2 ins. diam., projecting 42 ins. above the ground, firmly set, with brass cap mkd. as shown.
1952

LEGEND

● ANCSA primary monument set this survey.

Typical cap marking for primary monument set this survey.



MONUMENTS SET

Set a stainless steel post, 28 ins. long., 2 1/2 ins. diam., 25 to 28 ins. in the ground, a magnet with a white plastic case at the base, with a brass cap mkd. as shown.

- (A6) A magnet, in a metallic silver plastic case, bears N. 70° E., 9.9 ft. dist., buried 14 ins. below ground.
- TR9 A magnet, in a pink plastic case, bears S. 20° E., 9.9 ft. dist., buried 14 ins. below ground.
- (B6) WC A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 14 ins. below ground.
- MC A magnet, in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 14 ins. below ground.
- (C6) A magnet, in a blue plastic case, bears S. 70° W., 9.9 ft. dist., buried 14 ins. below ground.
- TR9 A magnet, in an orange plastic case, bears N. 20° W., 9.9 ft. dist., buried 14 ins. below ground.
- (D6) WC A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 14 ins. below ground.
- TR9 MC A magnet, in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 14 ins. below ground.

2008-3
Barton REC DIST 40
DATE December 16th 2008
TIME 3:39 P.M.
Requested By: Bureau of land management
Address:

Barrow 2008-3



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
ALASKA STATE OFFICE
222 W. 7th Avenue, #13
ANCHORAGE, ALASKA 99513-7599



In Reply Refer To:
KAKTOVIK
ANCSA 14(c)
9600 (927)

December 11, 2008

BARROW RECORDING DISTRICT
1648 S. Cushman Street, #201
Fairbanks, AK 99701-6206

Dear District Recorder:

The ANCSA 14(c) plat for Kaktovik Inupiat Corporation at Kaktovik, consisting of five (5) original sheets, transmitted to you by this letter of compliance, portrays a Cadastral Survey conducted to fulfill statutory requirements mandated by the Alaska Native Claims Settlement Act (ANCSA), pursuant to Public Law 92-203 (Stat. 688, 702, 703), and satisfies the federal guidelines and requirements proclaimed for ANCSA 14(c) Surveys.

The plat represents surveyed parcels of land selected for ANCSA 14(c) reconveyances situated on portions of surface estate lands transferred from the United States of America by Interim Conveyance Nos. 052, 808 and 1250 and Patent No. 50-77-0046, all to Kaktovik Inupiat Corporation.

ANCSA 14(c) Surveys have been authorized as federally mandated surveys, under the provisions of Section 13 of ANCSA, 43 U.S.C. Stat. 1612. The authority to execute all federal land surveys in Alaska is delegated by the Secretary of the Interior to the Director, Bureau of Land Management (BLM) and subsequently redelegated to the Deputy State Director for Cadastral Survey, Alaska State Office. Accordingly, BLM requests that this plat be filed with the BARROW RECORDING DISTRICT to comply with the federal platting regulations and the agreements set forth between the Bureau of Land Management and the State Recording Authority.

Sincerely,

John Sroufe
Deputy State Director
for Cadastral Survey, Alaska