

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (C)
 TRACTS A THROUGH I
 (P.L. 92-203, 85 STAT. 688, 702, 703)
 IGIUGIG NATIVE CORPORATION
 AT
 IGIUGIG, ALASKA

This plat, in 8 sheets, contains the entire survey record.

The history of surveys is referenced on sheet 3.

This survey was executed by Stephen C. Smith, Registered Alaska Land Surveyor No. LS-7538, for Iliamna Lake Contractors, LLC, September 27 through October 5, 2011, in accordance with the principles set forth in the Manual of Surveying Instructions (2009), Amended Special Instructions dated June 15, 2011 and approved June 20, 2011, the Igiugig Native Corporation ANCSA Map of Boundaries accepted September 8, 2009, Contract No. L11AV20007, dated September 9, 2011, Assignment Instructions dated September 16, 2011, and Notice to Proceed dated September 26, 2011.

Field Assistants were:

- Kenton T. Bloom, Land Surveyor
- Garry A. Betley, Crew Chief
- Robert R. Melrose, Survey Technician
- Tony I. Wassillie, Survey Technician

Area: 89.19 Acres

The azimuth was obtained from the Global Positioning System (GPS), using static relative positioning techniques and refers to the true meridian. The direction of all lines are mean bearings.

The geographic position of Corner No. 1, Tract A, determined by GPS observations utilizing the National Geodetic Survey Online Positioning User Service (OPUS) is:

Latitude: 59° 18' 35.56" North
 Longitude: 155° 55' 06.55" West
 NAD 83

The mean magnetic declination was observed during the execution of this survey.

This survey is situated in and around the village of Igiugig, Alaska, within Sections 7, 14, 15, 16, 17 and 18, Township 10 South, Range 39 West; and Section 20, Township 10 South, Range 40 West, all of the Seward Meridian, Alaska.

The topography consists of level areas and low rolling hills, wetlands, intermediate size lakes and rivers. Vegetation in this area contains spruce, dwarf birch, willow and alder. The soil ranges from sandy loam to pure sand.

The meanders were obtained using Global Positioning System (GPS) Real Time Kinematic (RTK) observations.

UNITED STATES DEPARTMENT OF THE INTERIOR
 BUREAU OF LAND MANAGEMENT
 Anchorage, Alaska


The survey represented by this plat, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director




MARCH 11, 2014
 Date

Chief Cadastral Surveyor for Alaska

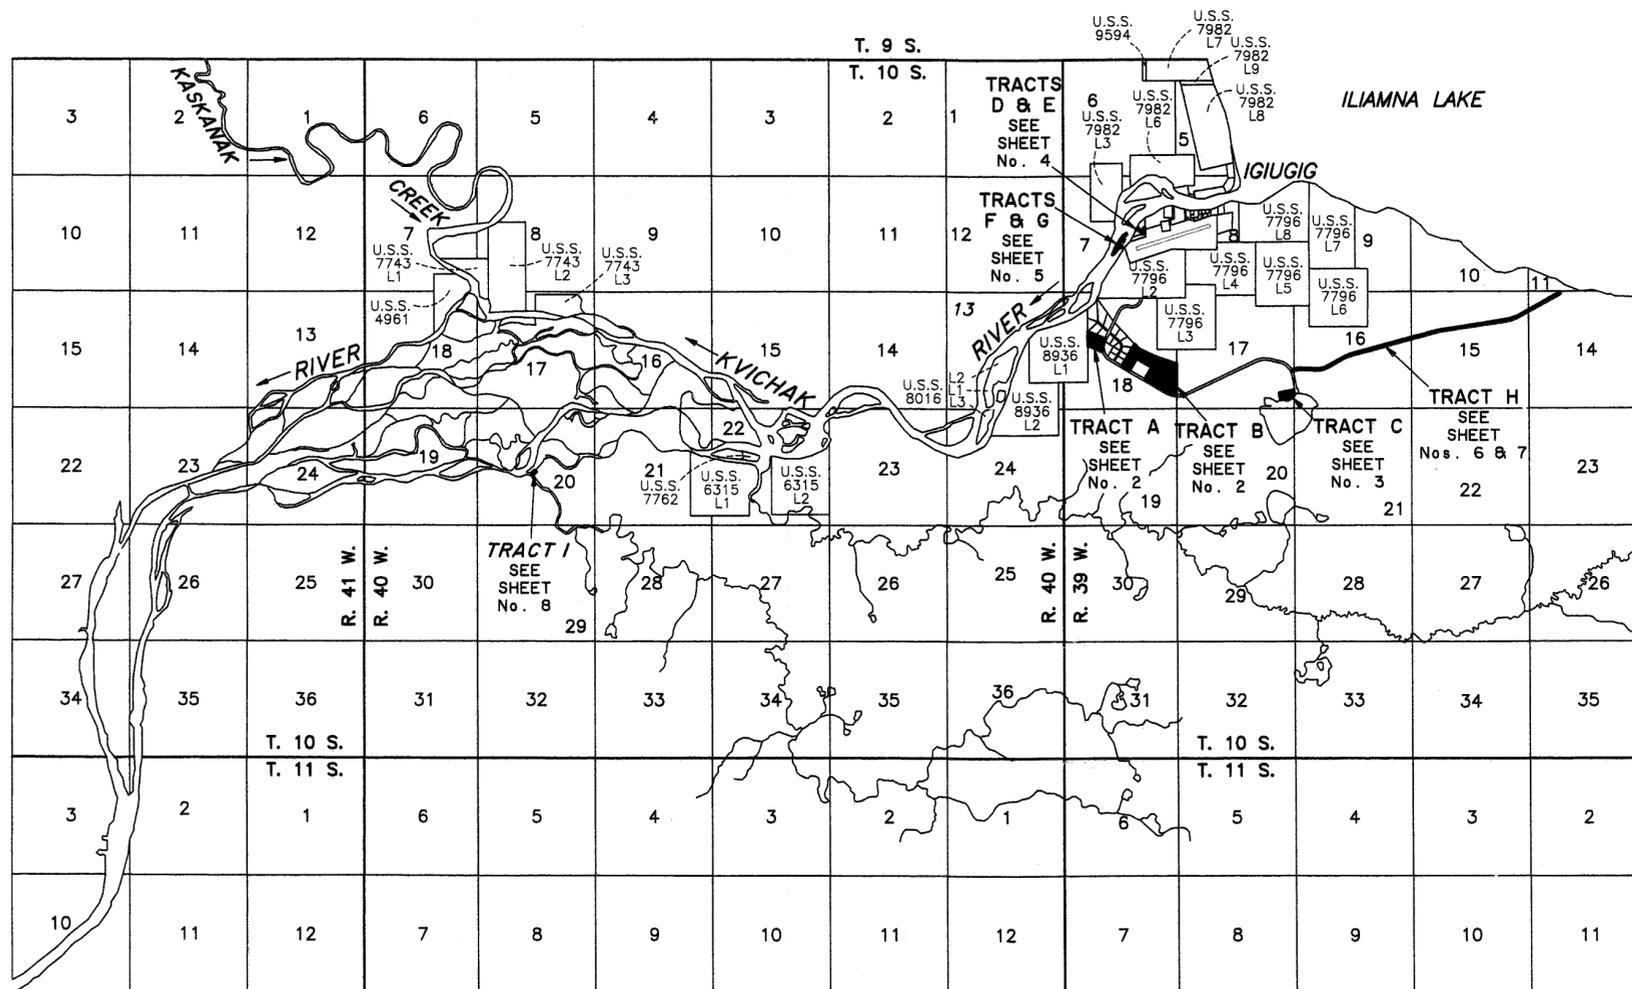

True Meridian
 Mean Magnetic Declination 15 1/2° E.



I, Stephen C. Smith, Registered Alaska Land Surveyor No. LS-7538, for Iliamna Lake Contractors, LLC, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-8, in conformity with the Amended Special Instructions approved June 20, 2011, Contract No. L11AV20007, awarded September 9, 2011, the principles of survey described in the Manual of Surveying Instructions (2009), and in the specific manner described on this plat.



I hereby certify that Tracts A through I created by this plat of survey, on sheets 1-8, are on land conveyed to Igiugig Native Corporation by Patent Nos. 50-89-0710, and 50-2005-0051, issued by the United States of America; said parcels also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Igiugig Native Corporation ANCSA 14(c) Map of Boundaries accepted September 8, 2008.

6/5/12
 Date

Stephen C. Smith
 Registered Alaska Land Surveyor

3/3/14
 Date

Julia Salmon
 President, Igiugig Native Corporation

Iliamna Recording District PL-2014-1

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (C)
 TRACTS A THROUGH I
 (P.L. 92-203, 85 STAT. 688, 702, 703)
 IGIUGIG NATIVE CORPORATION
 AT
 IGIUGIG, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

LEGEND

- ⊗ BLM monument recovered this survey.
- 5/8" rebar and alum. cap recovered this survey.
- ANCSA primary monument set this survey.



Typical cap marking
 for primary monument
 set this survey.

MONUMENTS SET

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, in a collar of stone, a magnet in a clear plastic case at the base, with brass cap mkd. as shown, from which the following accessories:

- C1 TR A
MOR
A magnet, in a blue plastic case, bears S. 47 1/2° W., 10.0 ft. dist., buried 12 ins. below ground.
- 7538-S 2011
- L1 C2 TR A
S8936
A magnet, in a pink plastic case, bears S. 24 3/4° E., 9.8 ft. dist., buried 12 ins. below ground.
- 7538-S 2011
- WC TR B
ROW
A magnet, in a blue plastic case, bears S. 45 1/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- 7538-S 2011
- C1 TR B
ROW
A magnet, in a pink plastic case, bears S. 42 3/4° E., 9.9 ft. dist., buried 12 ins. below ground.
- 7538-S 2011
- C2 TR B
A magnet, in a blue plastic case, bears S. 43 1/2° W., 9.9 ft. dist., buried 12 ins. below ground.
- 7538-S 2011
- C2 TR B
A magnet, in an orange plastic case, bears N. 48 3/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- 7538-S 2011

MONUMENTS SET



- Q1 C3 TR B
7538-S 2011
A magnet, in a blue plastic case, bears S. 43 1/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- Q2 C4 TR B
7538-S 2011
A magnet, in an orange plastic case, bears N. 45 1/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- Q3 C4 TR B
7538-S 2011
A magnet, in a silver plastic case, bears N. 49 1/4° E., 9.8 ft. dist., buried 12 ins. below ground.
- Q4 C4 TR B
7538-S 2011
A magnet, in a blue plastic case, bears S. 48 3/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- S1 C7 TR B
ROW
7538-S 2011
A magnet, in a silver plastic case, bears N. 46° E., 10.0 ft. dist., buried 12 ins. below ground.
- S2 C7 TR B
ROW
7538-S 2011
A magnet, in an orange plastic case, bears N. 45 1/4° W., 9.7 ft. dist., buried 12 ins. below ground.
- T1 C10 TR B
ROW
7538-S 2011
A magnet, in a pink plastic case, bears S. 39 1/2° E., 10.0 ft. dist., buried 12 ins. below ground.
- T2 C10 TR B
ROW
7538-S 2011
A magnet, in an orange plastic case, bears N. 41 3/4° W., 9.9 ft. dist., buried 12 ins. below ground.

- A1 Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with the ground, with alum. cap mkd. as shown, from which the original bearing trees
- S8936 L1 C2 L2 1986
A spruce, 5 ins. diam., bears N. 66 1/4° E., 19.9 ft. dist., mkd. X BT.
- A spruce, 5 ins. diam., bears S. 50 1/2° E., 39.9 ft. dist., mkd. X BT. (Record, S. 49 3/4° E.)
- B1 Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with alum. cap mkd. as shown, there are no accessories of record.
- WC S8936 C3 L1 1986
From which the new accessories
- A magnet, in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
- Add the marks 2011 to the alum. cap.

- C1 Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with the ground, with alum. cap mkd. as shown, there are no accessories of record.
- WP S8936 L1 1986
from which the new accessories
- A magnet, in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 12 ins. below ground.
- Add the marks 2011 to the alum. cap.

- D1 Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- 7538-S PC ROW 2007
- E1 Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- 7538-S PT ROW 2007
- SS Recovered a rebar, 5/8 in. diam., with 2 in. alum. cap unreadable and corroded

- F1 Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- 7538-S PT ROW 2010
- G1 Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- 7538-S PC ROW 2010
- TT Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- GPS INC C4 2007-S 2000

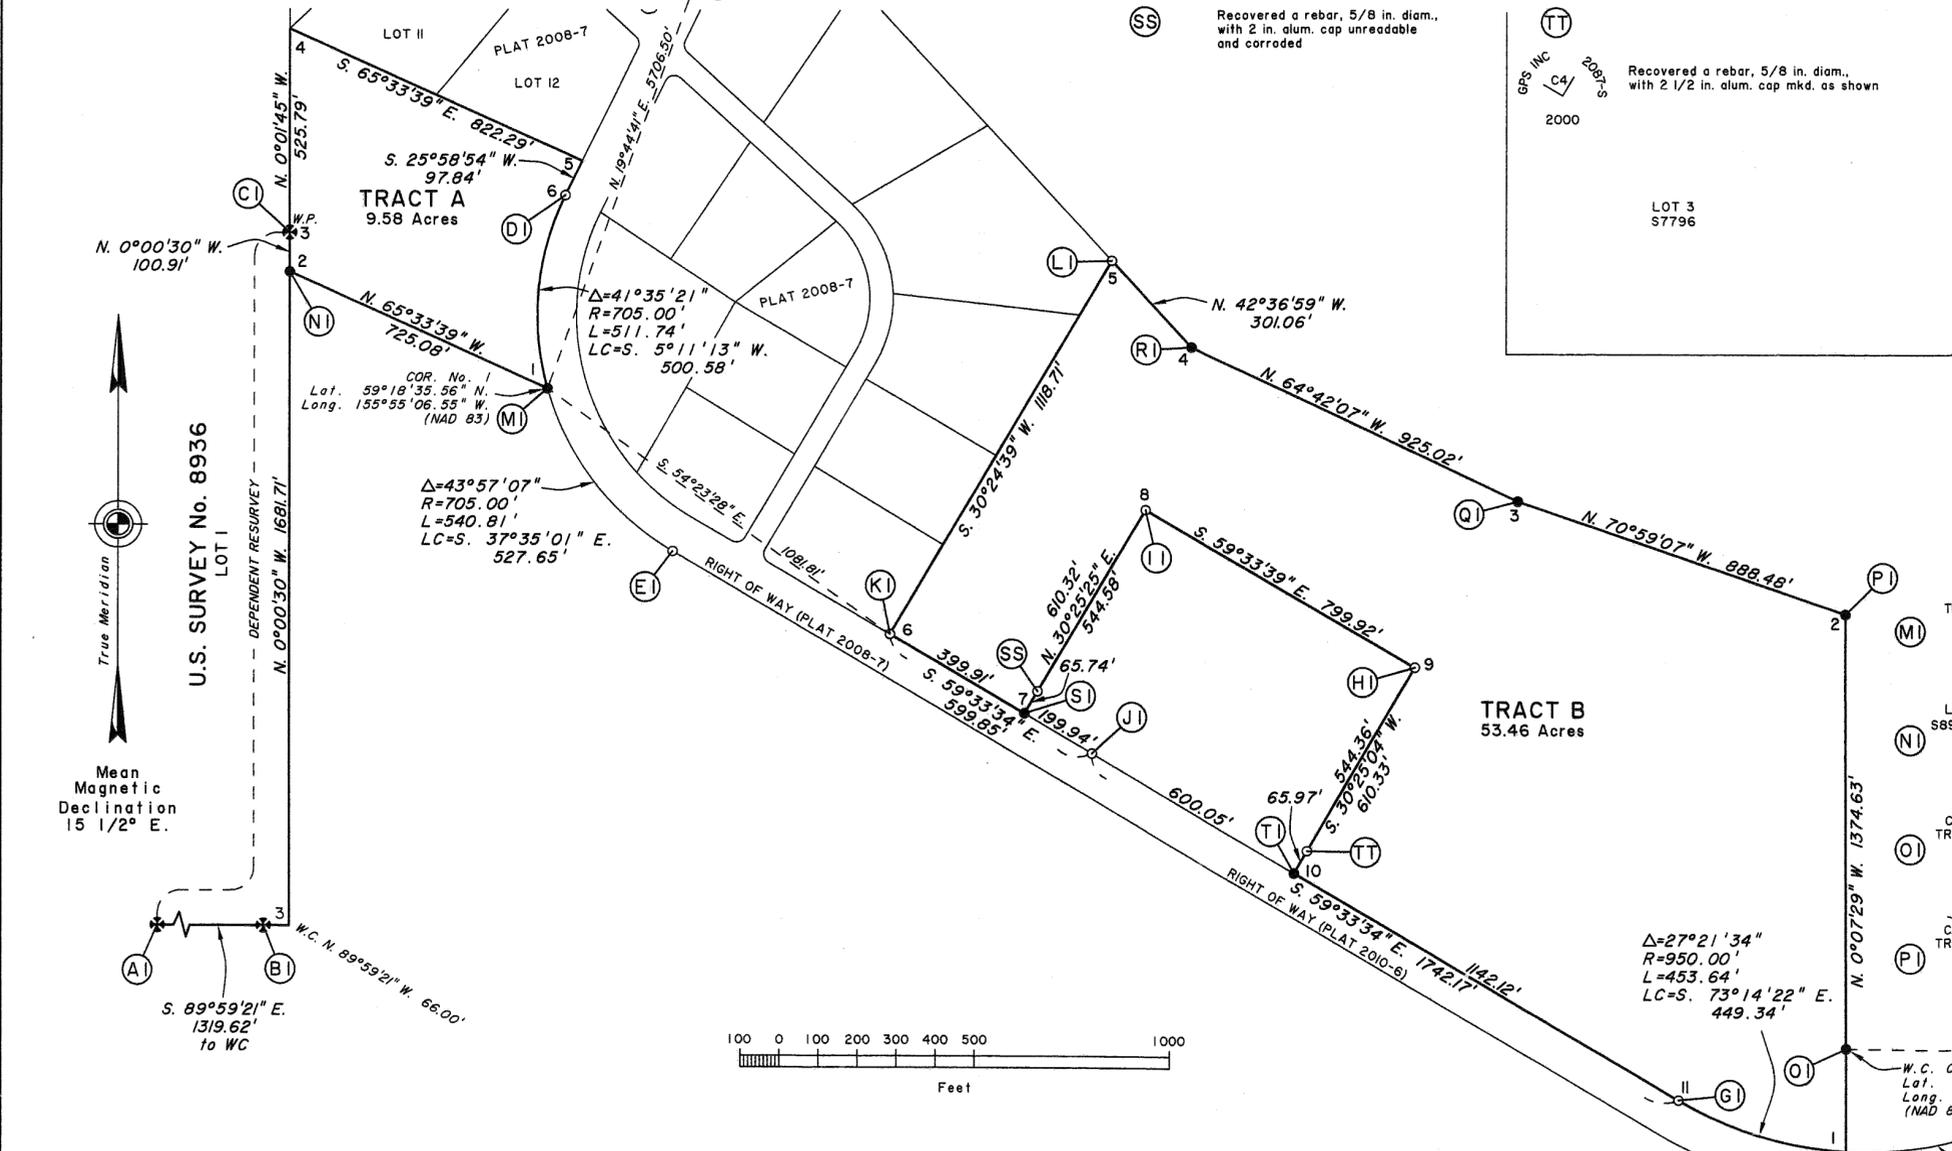

- H1 Recovered a rebar, 5/8 in. diam., with 2 in. alum. cap mkd. as shown
- GPS INC C3 2007-S 2000
- I1 Recovered a rebar, 5/8 in. diam., with 2 in. alum. cap mkd. as shown
- GPS INC C2 2007-S 2000
- J1 Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- 7538-S ROW 2007
- K1 Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- 7538-S L1 ROW 2007

- L1 Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- 7538-S L4 2007

- Q1 Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- 7538-S 2011
- R1 Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- 7538-S 2011

- S1 Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- 7538-S 2011
- T1 Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- 7538-S 2011

- C2 C2 TR C
A magnet, in a blue plastic case, bears S. 43 1/2° W., 9.9 ft. dist., buried 12 ins. below ground.
- 7538-S 2011
- F1 W.C. COR. No. 1
Lat. 59° 18' 18.97" N.
Long. 155° 54' 02.43" W.
(NAD 83)
A magnet, in a blue plastic case, bears S. 43 1/2° W., 9.9 ft. dist., buried 12 ins. below ground.
- 7538-S 2011
- F2 Δ=28° 23' 15"
R=950.00'
L=470.68'
LC=N. 78° 53' 14" E.
465.88'
A magnet, in a silver plastic case, bears N. 46° E., 10.0 ft. dist., buried 12 ins. below ground.
- 7538-S 2011

Tiliana Recording District PL 2014-1

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (C)
 TRACTS A THROUGH I
 (P.L. 92-203, 85 STAT. 688, 702, 703)
 IGIUGIG NATIVE CORPORATION
 AT
IGIUGIG, ALASKA
 REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

History of Surveys

Township 10 South, Range 39 West, Seward Meridian, was surveyed by Stanley E. King, Cadastral Surveyor, in 1979.

The retracement of portions of U.S. Survey Nos. 3877 and 4756, located in Township 10 South, Range 39 West, Seward Meridian, was surveyed by Jon L. Kehler, Cadastral Surveyor, in 1990.

The supplemental plat of Sections 5, 6, 7, 8, 9, 16, 17 and 18, Township 10 South, Range 39 West, Seward Meridian, was accepted January 12, 1994.

The supplemental plat of sections 7, 8, 9 and 18, Township 10 South, Range 39 West, Seward Meridian, was accepted March 6, 2001.

Township 10 South, Range 40 West, Seward Meridian, was surveyed by Stanley E. King, Cadastral Surveyor, in 1979.

An amended plat of sections 13, 17, 22 and 24, Township 10 South, Range 40 West, Seward Meridian, was accepted March 13, 1990.

A supplemental plat of sections 7, 8, 21 and 23, Township 10 South, Range 40 West, Seward Meridian, was accepted March 13, 1990.

A photogrammetric resurvey plat of section 22, Township 10 South, Range 40 West, Seward Meridian, was accepted January 14, 1994.

The corrective resurvey of the Tenth Guide Meridian West along a portion of the east boundary, the dependent resurvey of line 1-2, Lot 4, U.S. Survey No. 8020, and the survey of a portion of the south boundary, a portion of the subdivisional lines, and a portion of the meanders of Township 10 South, Range 41 West, Seward Meridian, were surveyed by Stephen C. Smith, Registered Alaska Land Surveyor No. 7538, in 2002-2003.

U.S. Survey No. 7796 was surveyed by Frank A. Hardt, Cadastral Surveyor, in 1985.

U.S. Survey No. 8936 was surveyed by Douglas A. Spence, Cadastral Surveyor, in 1986.

Alaska State Land Survey No. 91-III, Plat No. 92-06, Iliamna Recording District, a subdivision of U.S. Survey No. 7796, was surveyed by Tyler J. Sweet, Registered Alaska Land Surveyor No. 4758, in 1991.

Alaska State Land Survey No. 91-III A, Plat No. 93-11, Iliamna Recording District, a subdivision of U.S. Survey No. 7796, was surveyed by Tyler J. Sweet, Registered Alaska Land Surveyor No. 4758, in 1992.


Igiugig High Ridge Subdivision, Plat No. 2008-7, Iliamna Recording District, was surveyed by Stephen C. Smith, Registered Alaska Land Surveyor No. 7538, in 2007.

History of surveys continued on Sheet No. 4.

Iliamna Recording District PL 2014-1

LEGEND

- 5/8" rebar and alum. cap recovered this survey.
- ANCSA primary monument set this survey.

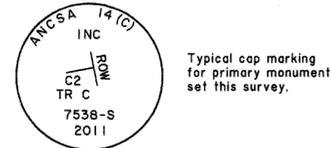

MEANDERS TRACT C



LINE	LENGTH	BEARING
M1	5.50'	N. 66°54'57" E.
M2	65.49'	N. 77°18'38" E.
M3	59.00'	S. 86°33'36" E.
M4	63.60'	S. 78°27'48" E.
M5	53.24'	S. 71°45'35" E.
M6	40.28'	S. 74°34'36" E.
M7	60.25'	N. 81°05'50" E.
M8	84.28'	N. 67°26'27" E.
M9	68.50'	N. 61°04'15" E.
M10	73.86'	N. 51°35'43" E.
M11	79.69'	N. 42°49'28" E.
M12	51.62'	N. 43°37'23" E.
M13	12.42'	N. 51°16'13" E.

MONUMENTS SET

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in a collar of stone, a magnet in a clear plastic case at the base, with brass cap mkd. as shown, from which the following accessories.

- (XI) C1 WC TR C ROW MC 7538-S 2011 A magnet, in a pink plastic case, bears S. 45 3/4° E., 9.9 ft. dist., buried 12 ins. below ground.
- (YI) C2 TR C ROW MC 7538-S 2011 A magnet, in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
- (ZI) WC TR C C3 7538-S 2011 A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
- (ZI) WC TR C C3 7538-S 2011 A magnet, in a blue plastic case, bears S. 45 1/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- (ZI) WC TR C C4 7538-S 2011 A magnet, in a silver plastic case, bears N. 45 1/4° E., 9.9 ft. dist., buried 12 ins. below ground.
- (A2) WC TR C MC 7538-S 2011 A magnet, in a silver plastic case, bears N. 45 1/4° E., 9.7 ft. dist., buried 12 ins. below ground.
- (A2) WC TR C MC 7538-S 2011 A magnet, in an orange plastic case, bears N. 45 1/4° W., 9.7 ft. dist., buried 12 ins. below ground.

- (U) 7538-S Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown 2010
- (V) 7538-S Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown 2010
- (W) 7538-S Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown 2010

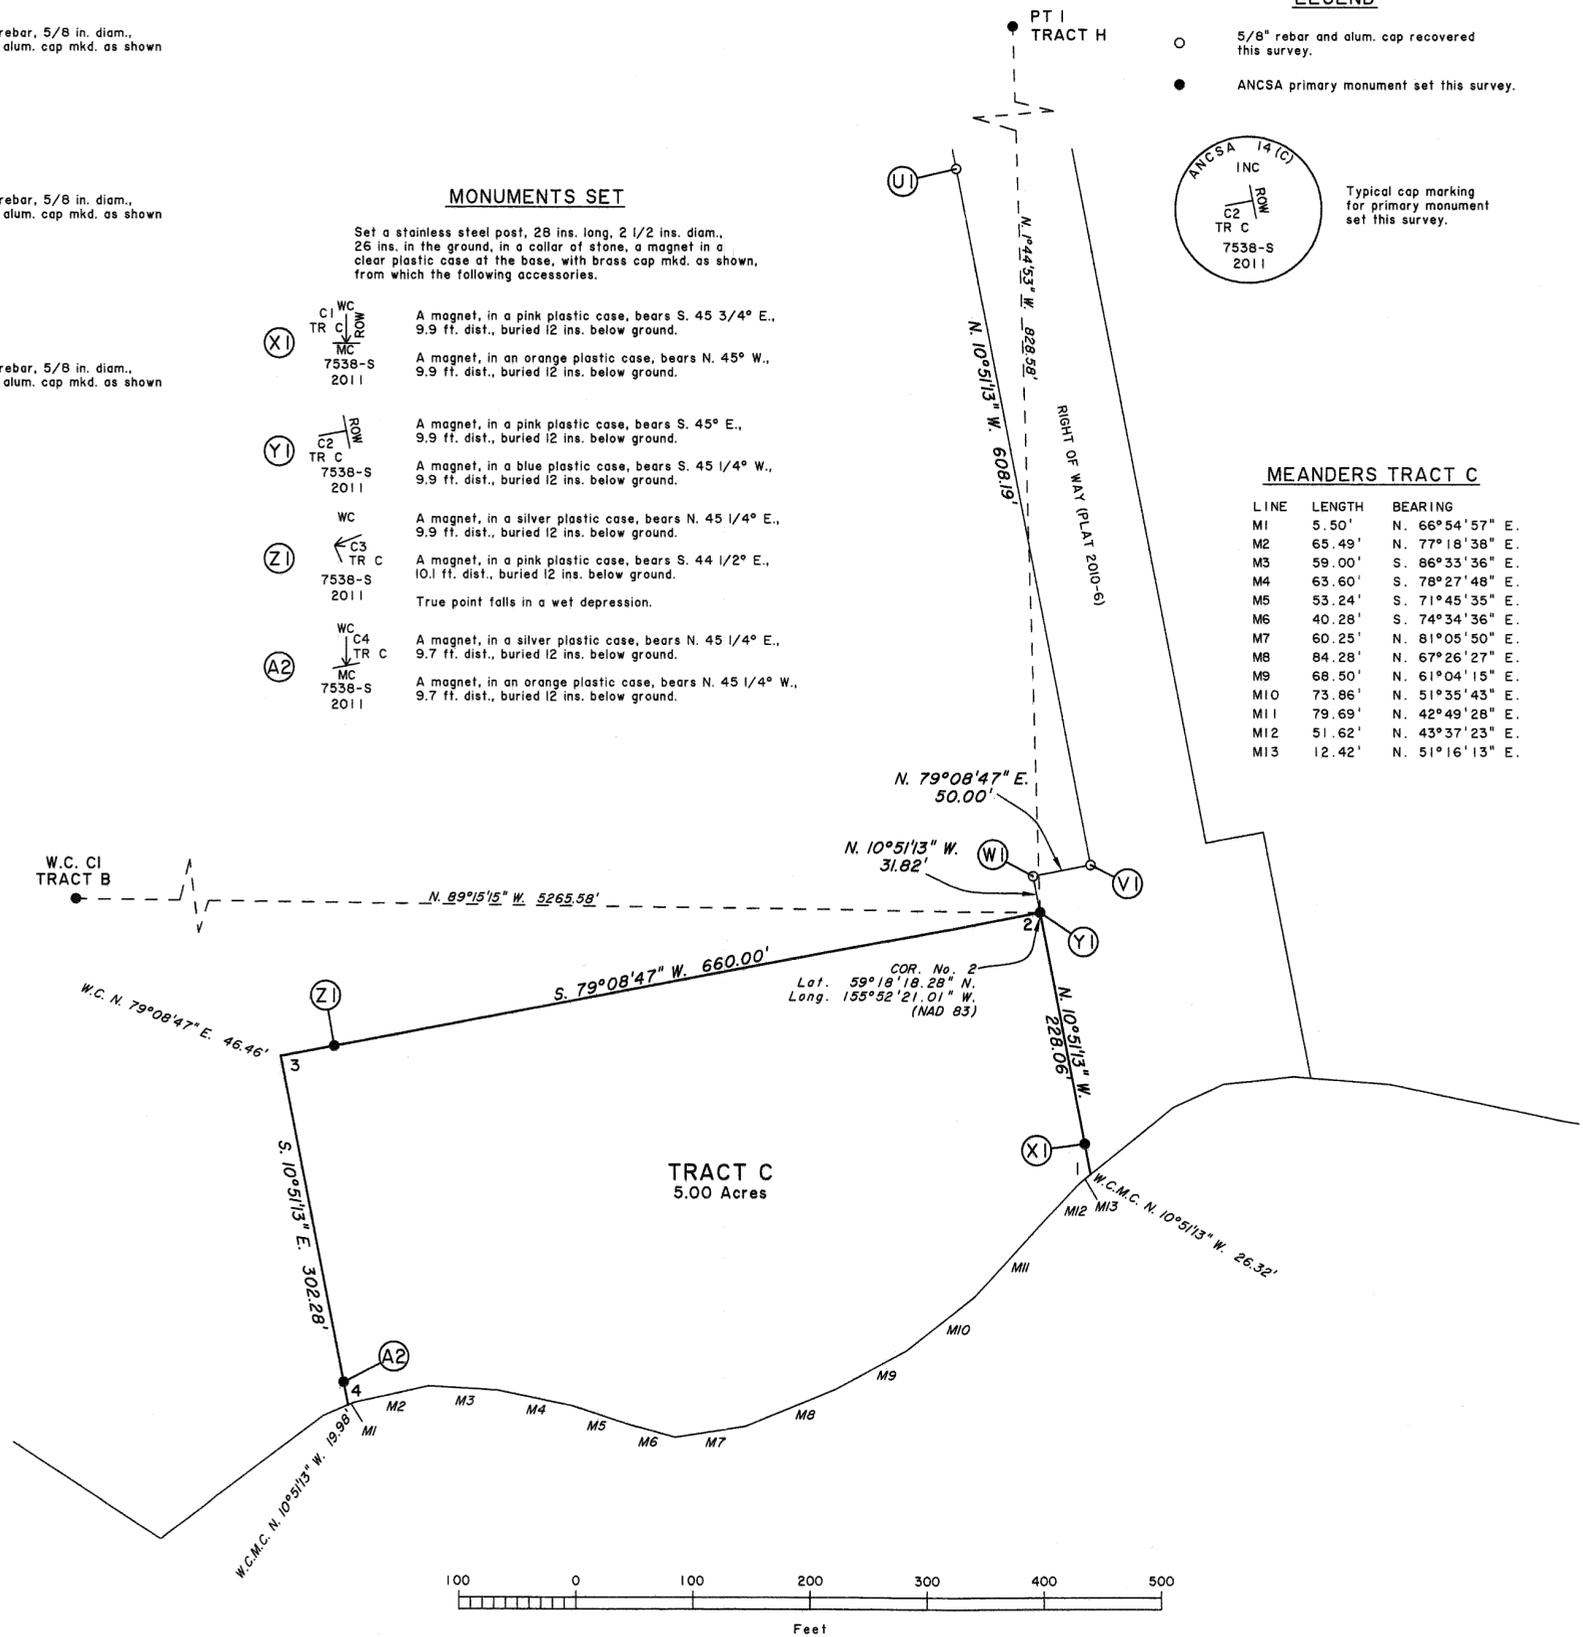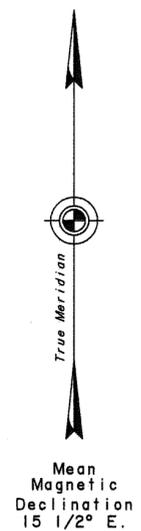

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C)
TRACTS A THROUGH I
(P.L. 92-203, 85 STAT. 688, 702, 703)
IGIUGIG NATIVE CORPORATION
AT
IGIUGIG, ALASKA

REFERENCE SHOULD BE MADE
TO
SHEET No. 1
FOR SURVEY INFORMATION

High Ridge Road Right of Way Dedication, Plat No. 2010-6, Iliamna Recording District, was surveyed by Stephen C. Smith, Registered Alaska Land Surveyor No. 7538, in 2010.

Unrecorded plat of Igiugig Landfill was surveyed by Stanley E. Sears, Alaska Registered Surveyor No. 2087, in 2000.

MONUMENTS SET

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in a collar of stone, a magnet in a clear plastic case at the base, with brass cap mkd. as shown, from which the following accessories:

- (F2) C4 TR E | C2 TR D
7538-S 2011
A magnet, in a silver plastic case, bears N. 45° E., 10.1 ft. dist., buried 12 ins. below ground.
- (G2) C3 TR D
7538-S 2011
A magnet, in a pink plastic case, bears S. 45 1/2° E., 9.9 ft. dist., buried 12 ins. below ground.
- (H2) C4 TR D
7538-S 2011
A magnet, in a blue plastic case, bears S. 45 1/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- (I2) WC TR E | C1 TR E
7538-S 2011
A magnet, in a silver plastic case, bears N. 44° E., 10.1 ft. dist., buried 12 ins. below ground.
- (J2) WC TR E | C1 TR E
7538-S 2011
A magnet, in an orange plastic case, bears N. 44 1/2° W., 10.0 ft. dist., buried 12 ins. below ground.
- (K2) WC TR E | C1 TR E
7538-S 2011
A magnet, in a pink plastic case, bears S. 44 3/4° E., 9.7 ft. dist., buried 12 ins. below ground.
- (L2) WC TR E | C1 TR E
7538-S 2011
A magnet, in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 12 ins. below ground.
- (M2) C2 TR E
7538-S 2011
A magnet, in a blue plastic case, bears S. 45 1/2° W., 10.0 ft. dist., buried 12 ins. below ground.
- (N2) C6 TR E
7538-S 2011
A magnet, in an orange plastic case, bears N. 45° W., 9.8 ft. dist., buried 12 ins. below ground.
- (O2) WC TR E | C1 TR E
7538-S 2011
A magnet, in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
- (P2) WC TR E | C1 TR E
7538-S 2011
A magnet, in a pink plastic case, bears N. 45 1/4° E., 9.8 ft. dist., buried 12 ins. below ground.
- (Q2) WC TR E | C1 TR E
7538-S 2011
A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 12 ins. below ground.

LEGEND

- ⊗ BLM monument recovered this survey.
- 2-1/2" alum. post primary monument recovered this survey.
- ANCSA primary monument set this survey.

MEANDERS TRACT E

LINE	LENGTH	BEARING
M1	12.53'	S. 22°53'39" W.
M2	28.32'	S. 31°41'24" W.
M3	21.20'	S. 30°19'30" W.
M4	27.72'	S. 36°56'25" W.
M5	13.78'	S. 29°46'29" W.

(B2) WC
MC C8 LI
S7796
1985
Recovered an alum. post, 2 1/2 ins. diam., loosely set, projecting 12 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing tree

A spruce, 12 ins. diam., bears S. 30° E., 72.6 ft. dist., mkd. X BT. (Record S. 31 1/4° E.)

And a new bearing object

A magnet, in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.

Add the marks 2011 to the alum. cap

(D2) DOWL ASLS 91-11
TR D
C8
C9
TR A
S4758
1991
Recovered an alum. post, 2 1/2 ins. diam., firmly set, flush with the ground, with alum. cap mkd. as shown,

(E2) WC
MC C10 LI
S7796
1985
Recovered an alum. post, 2 1/2 ins. diam., loosely set, projecting 12 ins. above the ground, with alum. cap mkd. as shown, there are no accessories of record.

From which the new accessories

A magnet, in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 12 ins. below ground.

A magnet, in a blue plastic case, bears S. 45° W., 9.8 ft. dist., buried 12 ins. below ground.

Add marks 2011 to the alum. cap.




(C2) C9 LI
S7796
1985
Recovered an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above the ground, with alum. cap mkd. as shown, from which the original bearing trees

A spruce, 13 ins. diam., bears S. 59 1/2° E., 132 ft. dist., mkd. C9 LI S7796 BT.

A spruce, 7 ins. diam., bears S. 29 1/4° W., 57.4 ft. dist., mkd. C9 LI S7796 BT.



Typical cap marking for primary monument set this survey.

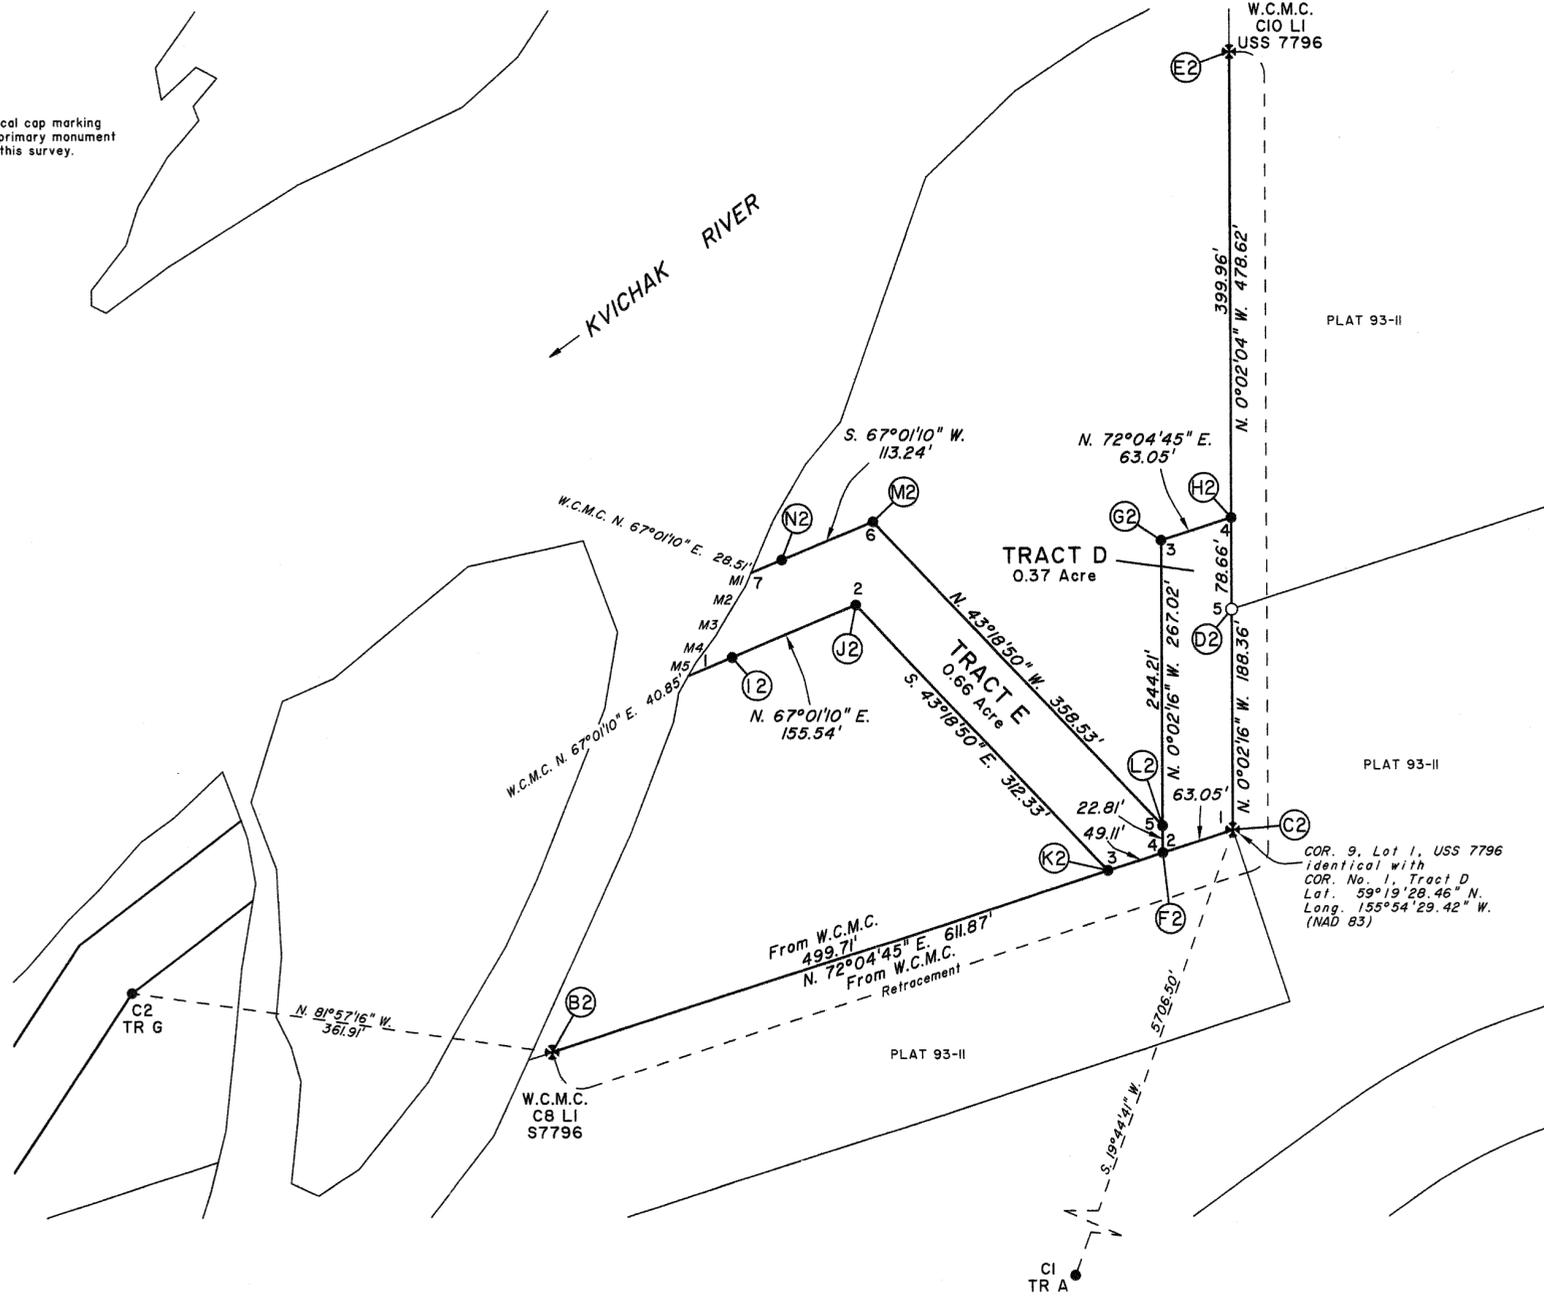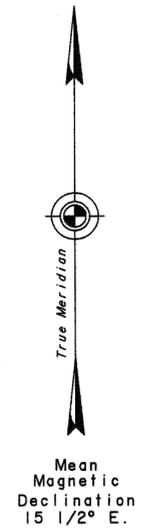

Iliamna Recording District PL2014-1

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (C)
 TRACTS A THROUGH I
 (P.L. 92-203, 85 STAT. 688, 702, 703)
 IGIUGIG NATIVE CORPORATION
 AT
 IGIUGIG, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

LEGEND

● ANCSA primary monument set this survey.



Typical cap marking
 for primary monument
 set this survey.

MONUMENTS SET

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in a collar of stone, a magnet in a clear plastic case at the base, with brass cap mkd. as shown, from which the following accessories.



- A magnet, in a silver plastic case, bears N. 45 1/2° E., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in an orange plastic case, bears N. 45 1/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in a pink plastic case, bears S. 24 3/4° E., 9.8 ft. dist., buried 12 ins. below ground.
- A magnet, in a blue plastic case, bears S. 46 1/4° W., 10.0 ft. dist., buried 12 ins. below ground.
- A magnet, in an orange plastic case, bears N. 45 1/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in a silver plastic case, bears N. 44 3/4° E., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in an orange plastic case, bears N. 54 3/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in a blue plastic case, bears S. 44 1/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in an orange plastic case, bears N. 44 1/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in a silver plastic case, bears N. 44 3/4° E., 9.8 ft. dist., buried 12 ins. below ground.
- A magnet, in a pink plastic case, bears S. 45 1/2° E., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in a silver plastic case, bears N. 45° E., 10.0 ft. dist., buried 12 ins. below ground.
- A magnet, in a pink plastic case, bears S. 45° E., 9.8 ft. dist., buried 12 ins. below ground.
- A magnet, in a blue plastic case, bears S. 45 1/4° W., 10.0 ft. dist., buried 12 ins. below ground.
- A magnet, in an orange plastic case, bears N. 45 1/4° W., 10.0 ft. dist., buried 12 ins. below ground.

MEANDERS TRACT F

LINE	LENGTH	BEARING
M1	62.62'	S. 26°55'44" W.
M2	74.74'	S. 22°35'23" W.
M3	58.27'	S. 4°23'36" W.
M4	41.13'	S. 44°24'56" W.
M5	34.33'	S. 26°22'53" W.
M6	78.57'	S. 21°58'54" W.
M7	53.09'	S. 25°07'08" W.
M8	41.88'	S. 12°59'55" W.
M9	57.76'	S. 29°55'24" W.
M10	56.59'	S. 21°42'46" W.
M11	21.40'	N. 85°10'54" E.
M12	93.64'	N. 44°08'20" E.
M13	72.63'	N. 34°55'04" E.
M14	75.95'	N. 49°09'24" E.
M15	131.04'	N. 36°27'11" E.
M16	141.08'	N. 14°50'32" E.
M17	83.63'	S. 75°54'54" E.
M18	102.75'	S. 26°01'03" W.
M19	62.20'	N. 66°44'39" E.
M20	79.58'	N. 36°23'18" E.

MEANDERS TRACT G

LINE	LENGTH	BEARING
M21	15.99'	S. 20°25'11" E.
M22	39.39'	S. 9°36'02" E.
M23	14.46'	S. 9°40'55" W.

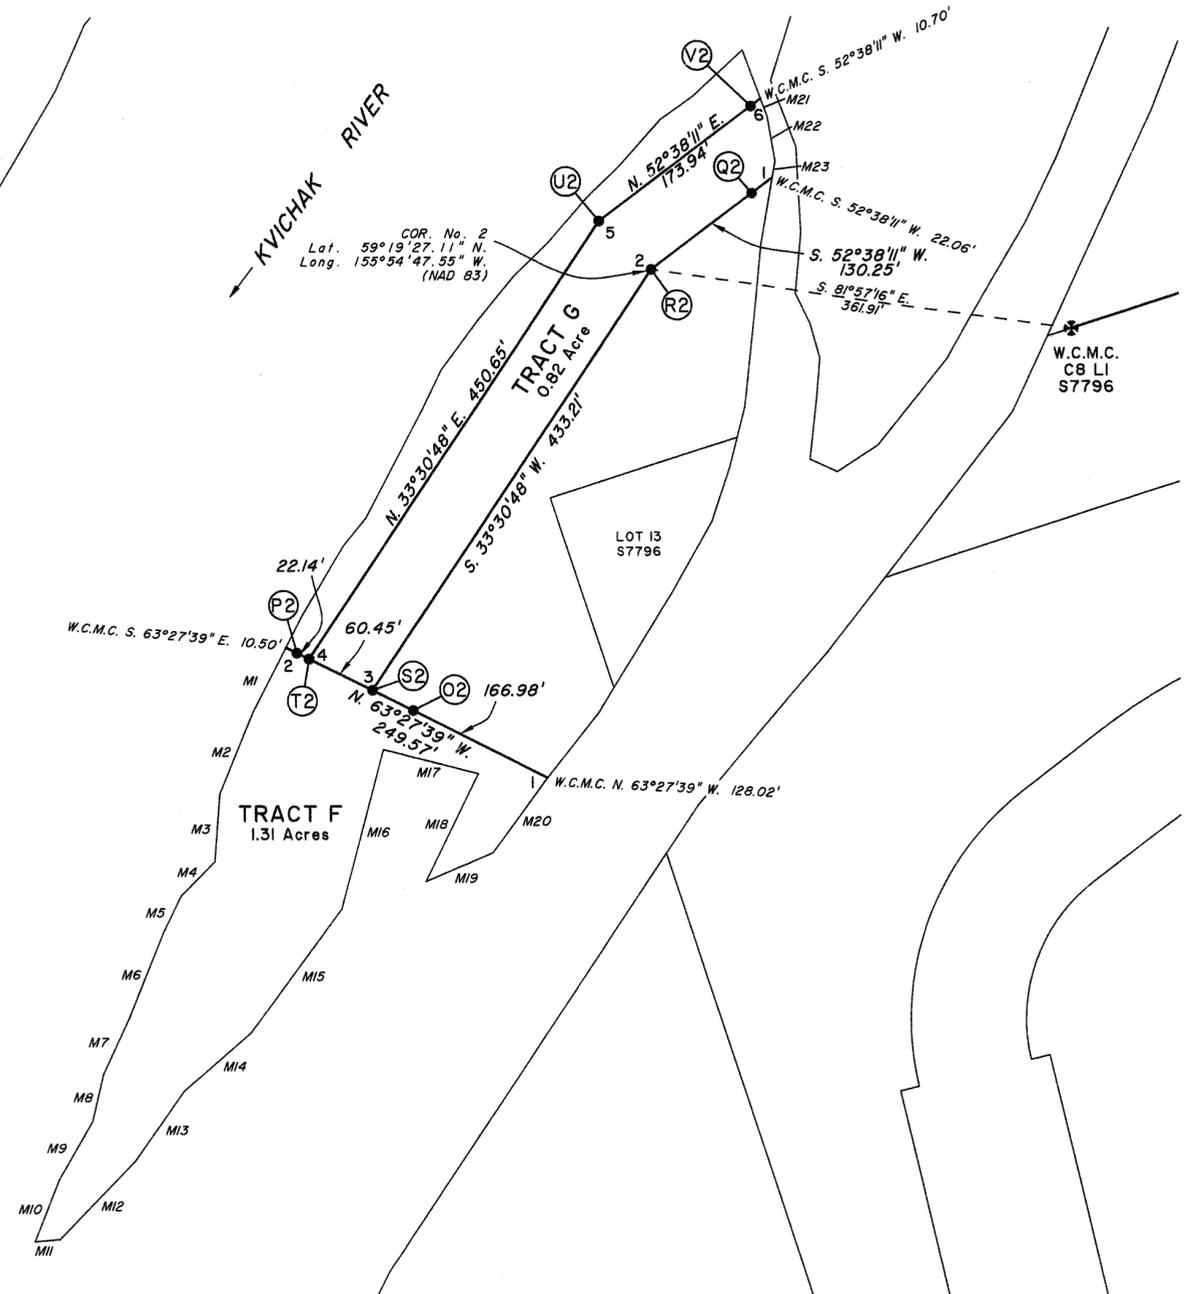

Diana Recording District 2014-1

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (C)
 TRACTS A THROUGH I
 (P.L. 92-203, 85 STAT. 688, 702, 703)
 IGIUGIG NATIVE CORPORATION
 AT
 IGIUGIG, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

LEGEND

- 5/8" rebar and alum. cap recovered this survey.
- ANCSA primary monument set this survey.




Typical cap marking for primary monument set this survey.

MONUMENTS SET


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in a collar of stone, a magnet in a clear plastic case at the base, with brass cap mkd. as shown, from which the following accessories.

- (Y2) + PT 1
+ TR H
7538-S
2011
A magnet, in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
- (Z2) + PC 1
+ TR H
7538-S
2011
A magnet, in a blue plastic case, bears S. 44 3/4° W., 9.9 ft. dist., buried 12 ins. below ground.
A magnet, in an orange plastic case, bears N. 45 1/2° W., 9.8 ft. dist., buried 12 ins. below ground.
- (A3) + PT 2
+ TR H
7538-S
2011
A magnet, in a pink plastic case, bears S. 45 1/4° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet, in a blue plastic case, bears S. 44 3/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- (B3) + PC 2
+ TR H
7538-S
2011
A magnet, in a blue plastic case, bears S. 45 1/4° W., 9.8 ft. dist., buried 12 ins. below ground.
A magnet, in an orange plastic case, bears N. 44 1/2° W., 10.0 ft. dist., buried 12 ins. below ground.
- (C3) + PT 3
+ TR H
7538-S
2011
A magnet, in a silver plastic case, bears N. 45° E., 9.8 ft. dist., buried 12 ins. below ground.
A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
- (D3) + PC 3
+ TR H
7538-S
2011
A magnet, in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet, in an orange plastic case, bears N. 44 3/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- (E3) + PT 4
+ TR H
7538-S
2011
A magnet, in a blue plastic case, bears S. 44 3/4° W., 9.8 ft. dist., buried 12 ins. below ground.
A magnet, in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
- (F3) WP
+ TR H
7538-S
2011
A magnet, in a blue plastic case, bears S. 45° W., 9.9 ft. dist., buried 12 ins. below ground.
A magnet, in an orange plastic case, bears N. 44 3/4° W., 9.9 ft. dist., buried 12 ins. below ground.

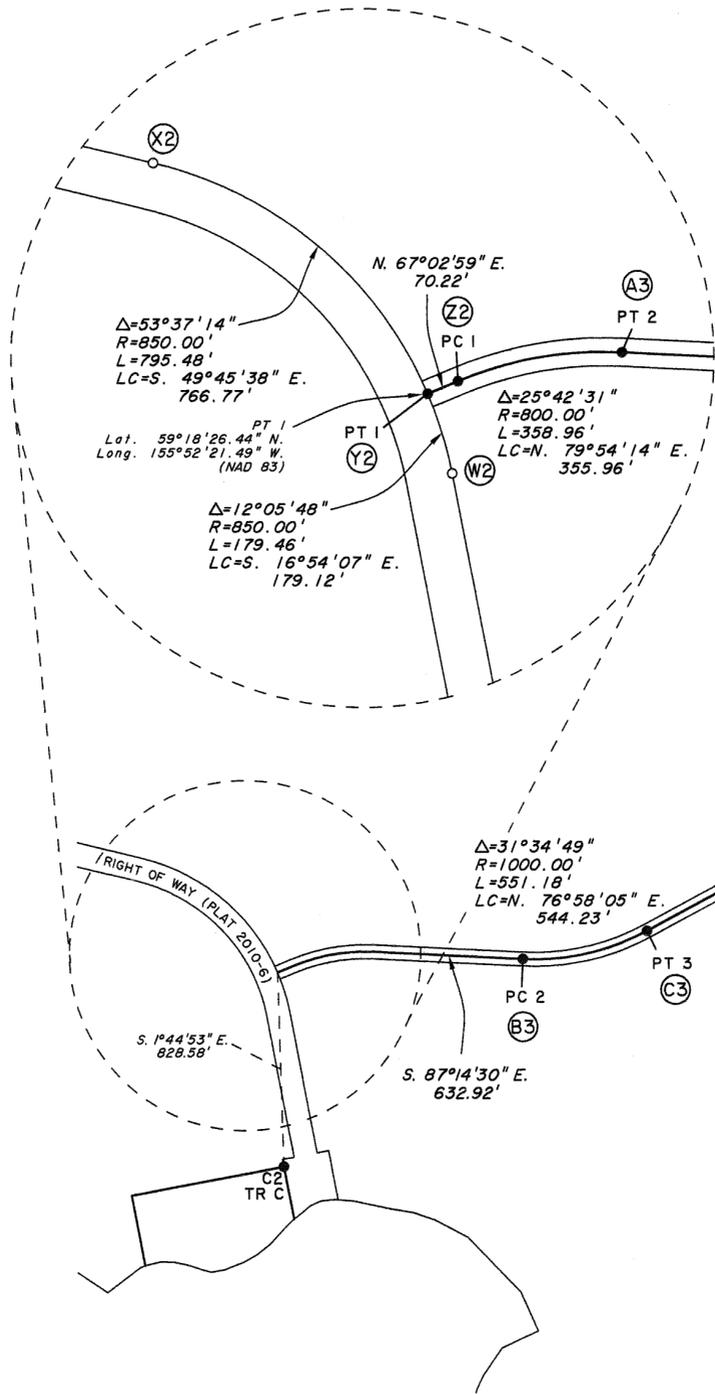


TRACT H
 17.50 Acres
 60 Ft. Right-of-Way
 30 Ft. on each side of
 centerline. Dimensions
 shown are on the centerline.

SEE SHEET 7

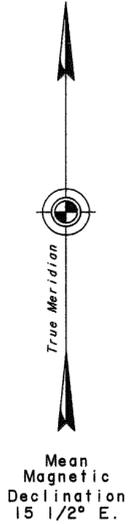

- (W2)
7538-S
PT 1
2010
Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown
- (X2)
7538-S
PC 1
2010
Recovered a rebar, 5/8 in. diam., with 2 1/2 in. alum. cap mkd. as shown



Iliamna Recording District PL 2014-1

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (C)
 TRACTS A THROUGH I
 (P.L. 92-203, 85 STAT. 688, 702, 703)
 IGIUGIG NATIVE CORPORATION
 AT
 IGIUGIG, ALASKA

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

LEGEND

● ANCSA primary monument set this survey.



Typical cap marking
 for primary monument
 set this survey.

MONUMENTS SET

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in a collar of stone, a magnet in a clear plastic case at the base, with brass cap mkd. as shown, from which the following accessories.

- (G3) + PC 4 TR H
 7538-S 2011
 A magnet, in a silver plastic case, bears N. 45 1/4° E., 9.9 ff. dist., buried 12 ins. below ground.
- (H3) + PT 5 TR H
 7538-S 2011
 A magnet, in a silver plastic case, bears N. 45 1/4° E., 9.9 ff. dist., buried 12 ins. below ground.
- (I3) + PC 5 TR H
 7538-S 2011
 A magnet, in a pink plastic case, bears S. 45° E., 9.9 ff. dist., buried 12 ins. below ground.
- (J3) + PT 6 TR H
 7538-S 2011
 A magnet, in a pink plastic case, bears S. 44 1/2° E., 10.0 ff. dist., buried 12 ins. below ground.
- (K3) + PT 7 TR H
 7538-S 2011
 A magnet, in a blue plastic case, bears S. 45 1/4° W., 9.9 ff. dist., buried 12 ins. below ground.

ILIAMNA LAKE

TRACT H
 17.50 Acres
 60 Ft. Right-of-Way
 30 Ft. on each side of
 centerline. Dimensions
 shown are on the centerline.


$\Delta=20^{\circ}34'55''$
 $R=2000.00'$
 $L=718.44'$
 $LC=N. 70^{\circ}50'56'' E.$
 $714.59'$

$N. 60^{\circ}33'28'' E.$
 $2061.31'$

$\Delta=6^{\circ}25'10''$
 $R=2000.00'$
 $L=224.08'$
 $LC=N. 77^{\circ}55'48'' E.$
 $223.96'$

$N. 81^{\circ}08'23'' E.$
 $2943.46'$


W.P. TO PC 4
 $N. 74^{\circ}43'13'' E.$
 $1926.04'$

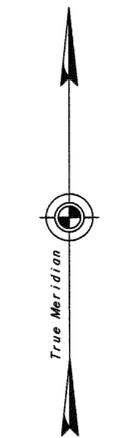

Mean
 Magnetic
 Declination
 $15 1/2^{\circ} E.$



SEE SHEET 6



Iliamna Recording District PL 2014-1

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14 (C)
 TRACTS A THROUGH I
 (P.L. 92-203, 85 STAT. 688, 702, 703)
 IGIUGIG NATIVE CORPORATION
 AT
 IGIUGIG, ALASKA

MEANDERS

LINE	LENGTH	BEARING
M1	63.72'	N. 37°45'04" W.
M2	38.58'	N. 59°57'47" W.
M3	28.06'	N. 55°54'57" E.
M4	48.89'	N. 41°48'49" E.
M5	68.78'	N. 41°36'51" E.
M6	72.92'	N. 56°34'16" E.

REFERENCE SHOULD BE MADE
 TO
 SHEET No. 1
 FOR SURVEY INFORMATION

LEGEND

- ⊗ BLM monument recovered this survey
- ANCSA primary monument set this survey.



Typical cap marking for primary monument set this survey.

MONUMENTS SET

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in a collar of stone, a magnet in a clear plastic case at the base, with brass cap mkd. as shown, from which the following accessories.

- A magnet, in a pink plastic case, bears S. 45 1/4° E., 10.0 ft. dist., buried 12 ins. below ground.
- A magnet, in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 12 ins. below ground.
- A magnet, in an orange plastic case, bears N. 44 3/4° W., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in a silver plastic case, bears N. 44 3/4° E., 9.9 ft. dist., buried 12 ins. below ground.
- A magnet, in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 12 ins. below ground.

Point for the cor. of secs. 20, 21, 28 and 29, reestablished from the remains of the original bearing tree

A spruce stump, 5 1/2 ins. diam., with rest of tree lying next to the stump, bears S. 60° W., 43.56' dist., mkd. X BT.

At the corner point, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in a collar of stone, a magnet in a clear plastic case at the base, with brass cap mkd as shown.



from which the new accessories

A magnet, in a silver plastic case, bears N. 45° E., 9.9 ft. dist., buried 12 ins. below ground.

A magnet, in a pink plastic case, bears S. 45° E., 9.9 ft. dist., buried 12 ins. below ground.

A magnet, in a blue plastic case, bears S. 44 3/4° W., 10.0 ft. dist., buried 12 ins. below ground.

A magnet, in an orange plastic case, bears N. 45° W., 9.9 ft. dist., buried 12 ins. below ground.

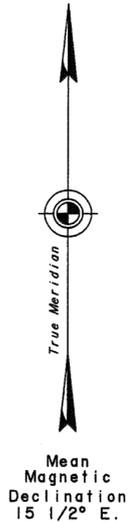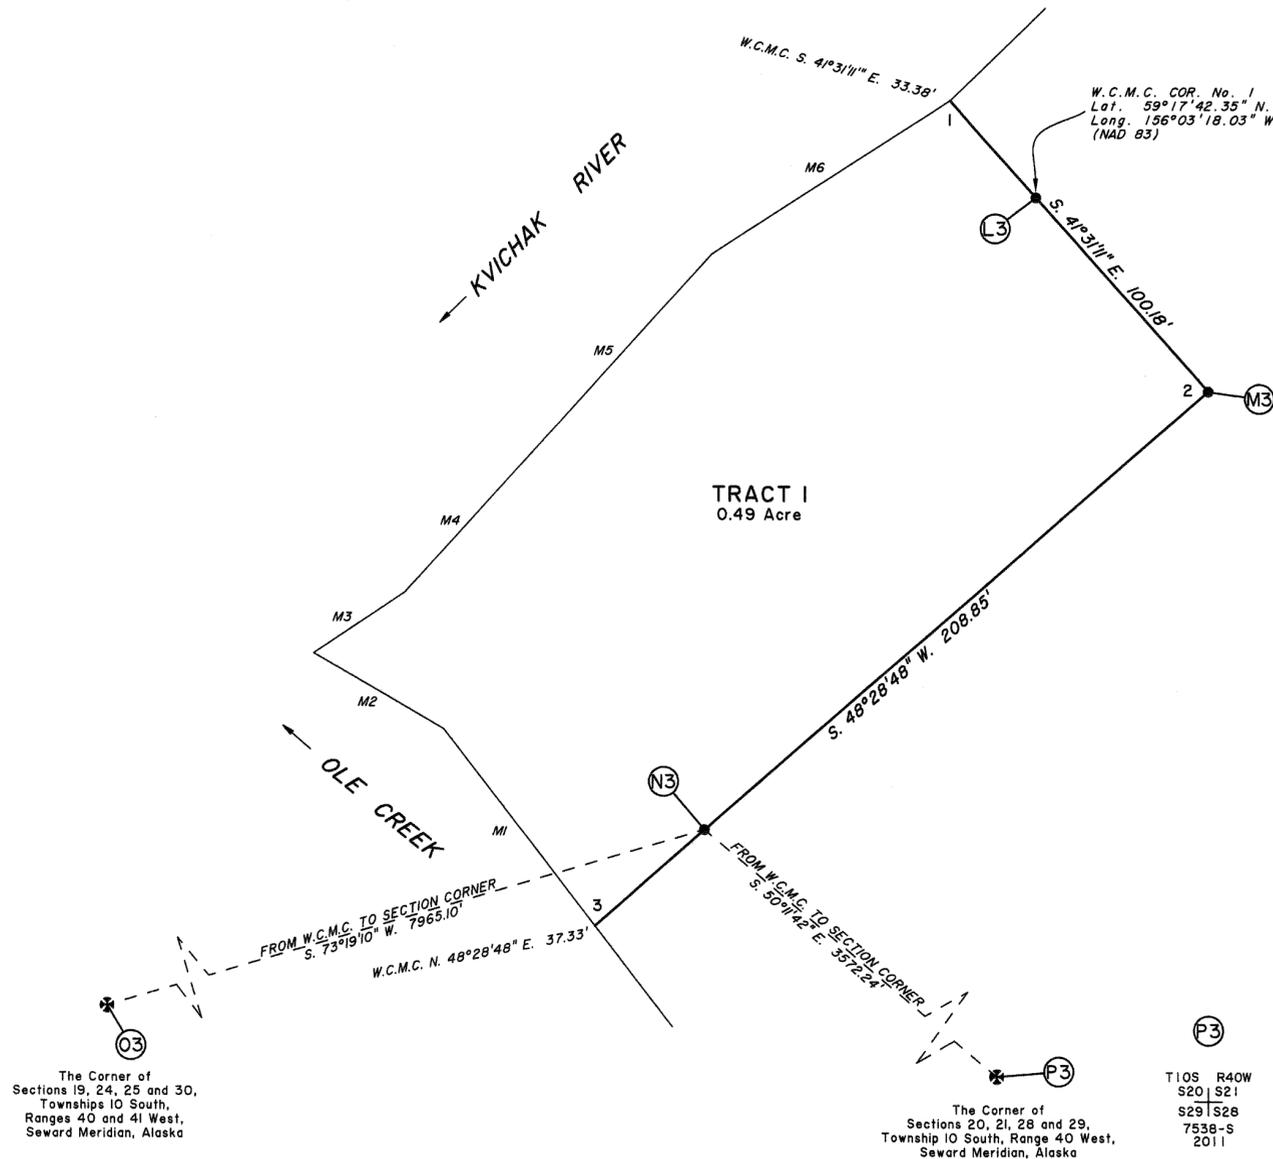


The Corner of Sections 19, 24, 25 and 30, Townships 10 South, Ranges 40 and 41 West, Seward Meridian, Alaska

Recovered an alum. rod, 3/4 in. diam., firmly set, projecting 12 ins. above the ground, with alum. cap mkd. as shown. Original accessories not looked for.

The Corner of Sections 20, 21, 28 and 29, Township 10 South, Range 40 West, Seward Meridian, Alaska

Recovered an alum. rod, 3/4 in. diam., firmly set, projecting 12 ins. above the ground, with alum. cap mkd. as shown. Original accessories not looked for.



2014-1
 Plat #
 Iliamna
 Rec Dist
 3 / 11 20 14
 Date
 Time 11:10 A M

Iliamna Recording District
PL 2014-1



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Alaska State Office
222 West Seventh Avenue, #13
Anchorage, Alaska 99513-7504
<http://www.blm.gov/ak>



In Reply Refer To:
IGIUGIG
ANCSA 14(c)
AK942100

March 11, 2014

ILIAMNA RECORDING DISTRICT
550 West 7th Ave., Suite 1200
Anchorage, AK 99501-3564

Dear District Recorder:

The Alaska Native Claims Settlement Act (ANCSA) Section 14(c) plat for Igiugig Native Corporation at Igiugig, Tracts A - I, consisting of eight (8) original sheets, transmitted to you by this letter of compliance, portrays a Cadastral Survey conducted to fulfill statutory requirements mandated by ANCSA, pursuant to Public Law 92-203 (Stat. 688, 702, 703), and satisfies the federal guidelines and requirements proclaimed for ANCSA 14(c) Surveys.

The plat represents surveyed parcels of land selected for ANCSA 14(c) reconveyances situated on portions of surface estate lands transferred from the United States of America by Patent Nos. 50-89-0710 and 50-2005-0051 to Igiugig Native Corporation.

ANCSA 14(c) Surveys have been authorized as federally mandated surveys, under the provisions of Section 13 of ANCSA, 43 U.S.C. Stat. 1612. The authority to execute all federal land surveys in Alaska is delegated by the Secretary of the Interior to the Director, Bureau of Land Management (BLM) and subsequently redelegated to me as the Chief Cadastral Surveyor, Alaska State Office. Accordingly, BLM requests that this plat be filed with the ILIAMNA RECORDING DISTRICT to comply with the federal platting regulations and the agreements set forth between the Bureau of Land Management and the State Recording Authority.

Sincerely,

Michael H. Schoder
Chief Cadastral Surveyor for Alaska