

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD.
AT
NAKNEK, ALASKA
AND

THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN T_s. 15 TO 18 S., R_s. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

This plat in 21 sheets contains the entire survey record.

This survey was executed by Ralph J. Mancuso, Alaska Registered Land Surveyor No. 7611, for Paug-Vik Inc. Ltd., September 15, 2005 through February 13, 2007, in accordance with the principals set forth in the Manual of Surveying Instructions, 1973; Special Instructions approved April 5, 2005; the Paug-Vik Inc. Ltd. ANCSA 14(c) Maps of Boundaries, accepted October 31, 2002 and August 27, 2003, Contract No. NAA050017, awarded September 13, 2005; and Notice to Proceed, dated September 15, 2005.

Field assistants were:

- Thomas S. Frost, RLS, Land Surveyor
- Kristine S. Ogonowski, RLS, Land Surveyor
- Richard L. Gaffey, LSIT, Party Chief
- Chester O. Chambers, Survey Technician
- R. Wakon Mancuso, Survey Technician
- Archie N. Gottschalk, Survey Aid
- Gilbert M. Gottschalk, Survey Aid
- Everett L. Thompson, Survey Aid
- Becky S. Savo, Office Manager

Area: 411.48 Acres

The azimuth was determined by Global Positioning Systems using static relative positioning techniques, and refers to the true meridian. The directions of all lines are mean bearings.

The geographic position of the standard corner of Townships 16 South, Ranges 46 and 47 West, Seward Meridian, Alaska, on the Fourth Standard Parallel South, as determined from the record information is:

Latitude: 58° 44' 24.42" North NAD 27
Longitude: 157° 01' 38.65" West

The magnetic declination was obtained from the National Oceanic and Atmospheric Administration National Geophysical Data Center, dated April 4, 2006 and indicates a mean value of 16 3/4° East.


This survey is situated in and around the villages of Naknek and King Salmon, Alaska, within Township 15 through 18 South, Range 44 through 48 West, Seward Meridian, Alaska.

The terrain is characterized by generally level, rolling tundra. The bluffs along Kvichak Bay are approximately 6 to 95 feet high. Spruce, birch, willow and alder are located in areas with good drainage. In areas dominated by permafrost, the tree growth is stunted. The understory is typically a well-developed carpet of moss with berry bushes, various ferns and grasses. Soils are generally a thin layer of organic material over gravel and sand.

Access to this survey was by motor vehicle, boat and foot.

INDEX

Sheet 2	Tracts 1,2,3,4, and 5
Sheet 3	Tracts 6,7, and 8
Sheet 4	Tracts 9, 10, 11, 12, 13, 14, 15, 16, and LOT 16 S3, T17S, R47W, S.M.
Sheet 5	Tracts 17A, 17B, 25A, LOTS 11A & 11B, and US Survey No. 3006 Lots 1 & 2
Sheet 6	Tracts 18 and 25
Sheet 7	Tracts 19, 20, 24, and SW1/4, SW1/4, SE1/4, SW1/4 S36, T16S, R46W, S.M.
Sheet 8	Tracts 23, 27, and US Survey No. 3539 LOTS 2A & 24A
Sheet 9	Tracts 21, 22, and US Survey No. 2356 LOTS 1A & 1B
Sheet 10 & 11	Tract 26
Sheets 12 thru 21	Monument Descriptions

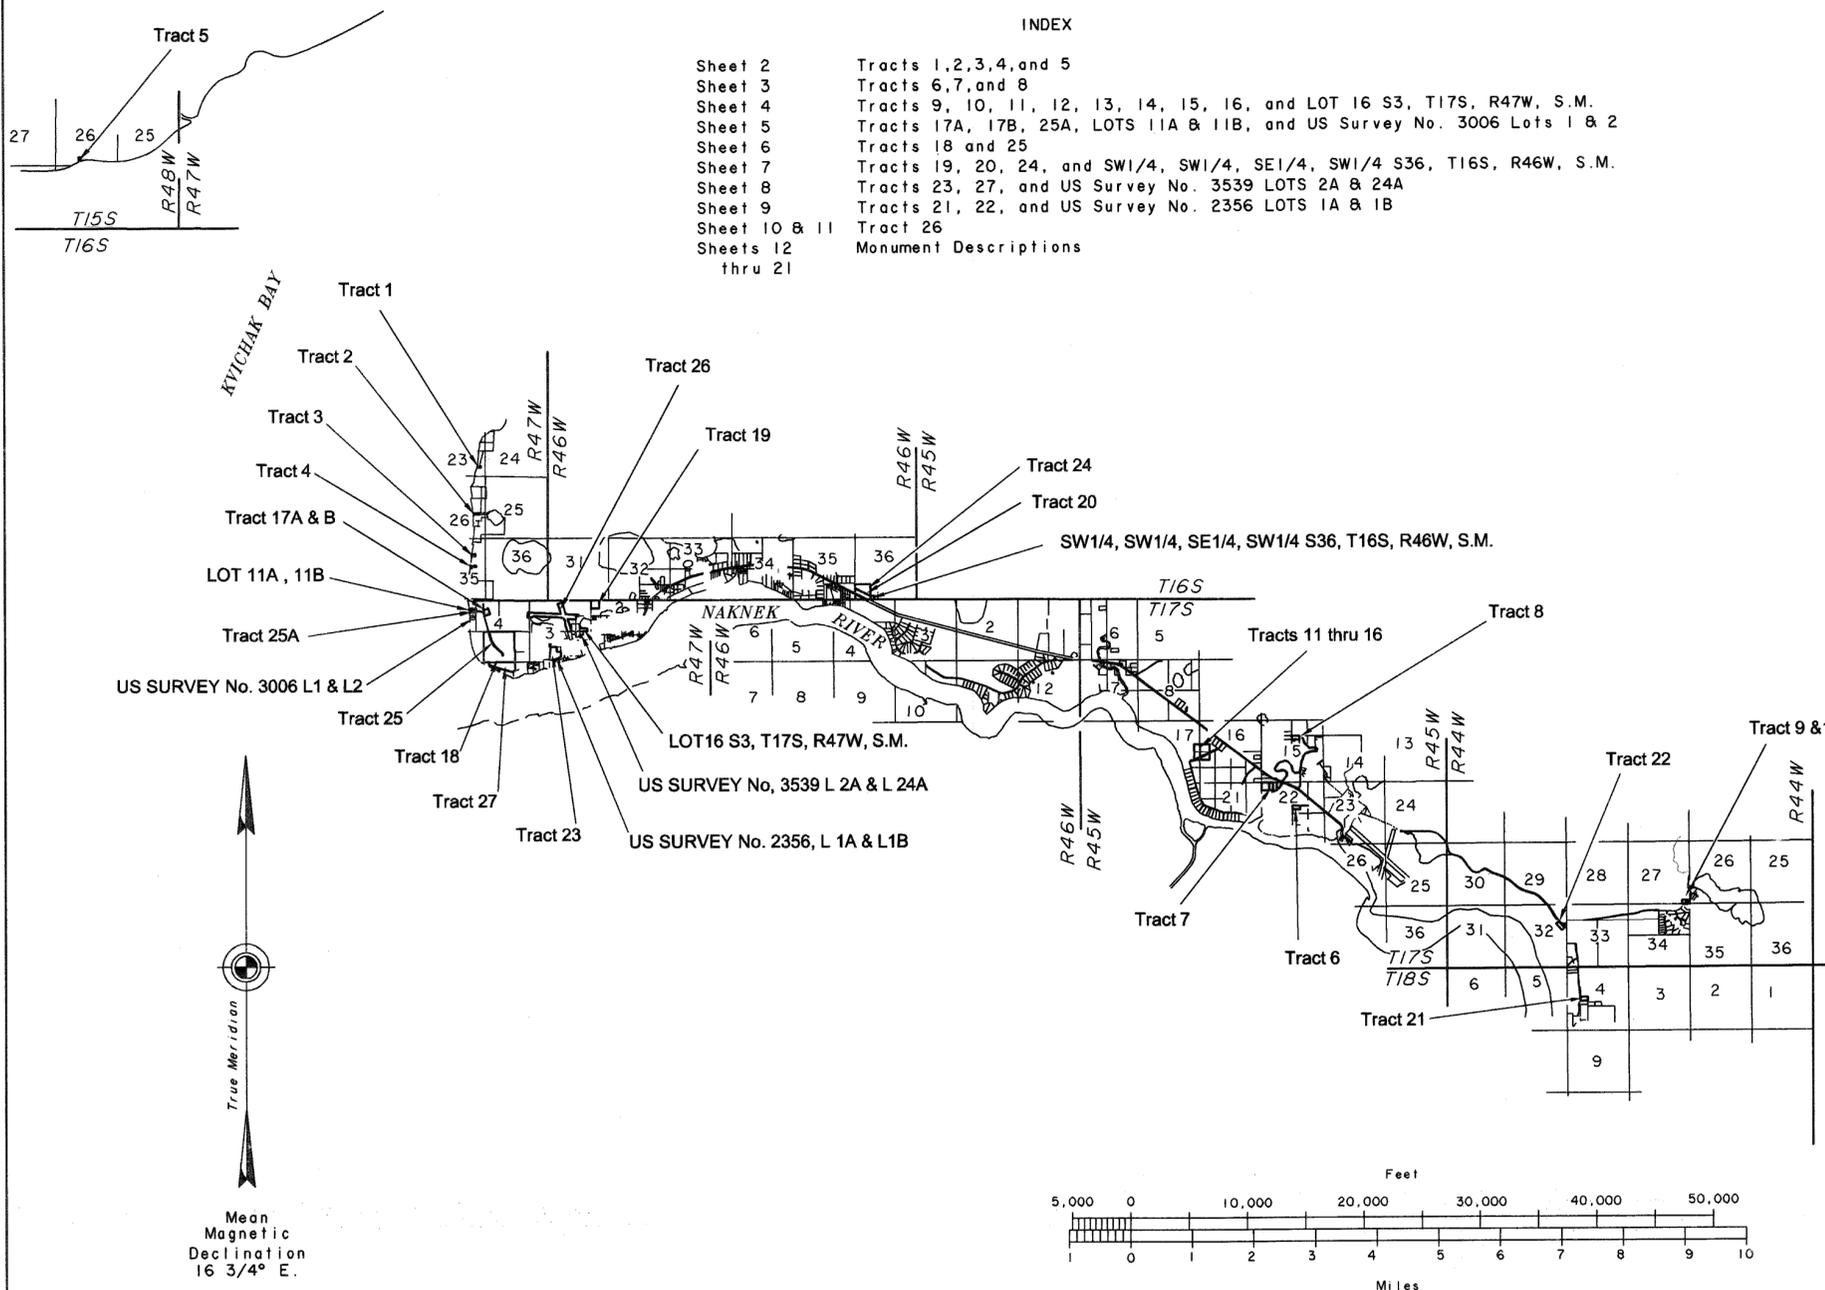

Village Corporation President Certificate:

I hereby certify that Tracts 1 through 27, Lots 1 & 2 US Survey No. 3006, Lots 1a & 1b US Survey No. 2356, Lots 2a & 24a US Survey No. 3539, Lots 11a & 11b S4, T17S, R47W, S.M., Lot 16 S3 T17S R47W, S.M., SW1/4 SW1/4 SE1/4 SW1/4 S36, T16S, R46W, S.M. represented on this plat of survey are the lands Interim Conveyed or patented to Paug-Vik Inc. Ltd. by Interim Conveyance No's. 265 and 1142 or Patent No's. 50-80-0017, 50-82-0068, 50-85-0670, 50-86-0109 or 50-91-0600 issued by the United States of America; said ANCSA 14(c) as requested by Paug-Vik Inc. Ltd. Resolution Agreements No(s). 2002-03 and 2002-04, and the Paug-Vik Inc. Ltd. ANCSA 14(c) Maps of Boundaries accepted Oct. 31, 2002 and Aug. 27, 2003.

8-11-13 Bill Hill
Date President, Paug-Vik Inc. Ltd.

Surveyor Certificate:

I, Ralph J. Mancuso, Alaska Registered Land Surveyor, No. 7611, for Paug-Vik Inc. Ltd., HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1 - 21, in conformity with the Special Instructions approved April 5, 2005, the principles of survey described in the Manual of Surveying Instructions, 1973, and in the specific manner described on this plat.

8-11-13 Ralph J. Mancuso
Date Alaska Registered Land Surveyor



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, sheets 1-21, having been properly executed and examined, is hereby accepted for having fulfilled the requirements of section 14(c) of the Alaska Native Claims Settlement Act.

For the Director
AUG. 15, 2013 [Signature]
Date Deputy State Director
for Cadastral Survey, Alaska
CHIEF CADASTRAL SURVEYOR, ALASKA

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN Ts. 15 TO 18 S., Rs. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

HISTORY OF SURVEYS

Surveyed by Charles S. Hubbell, Deputy Surveyor U.S. Survey No. 1582, in 1915. U.S. Survey No. 2300, in 1936. U.S. Survey No. 2301, in 1936. U.S. Survey No. 2329, in 1938. U.S. Survey No. 2356, in 1937. U.S. Survey No. 2399, in 1937. U.S. Survey No. 2425, in 1938. U.S. Survey No. 2429, in 1938. U.S. Survey No. 2445, in 1938.

Surveyed by Walter W. Cooley, Cadastral Surveyor U.S. Survey No. 3539, in 1957. U.S. Survey No. 3552, in 1957. U.S. Survey No. 3560, in 1957.

U.S. Survey No. 1020 was surveyed by Harold H. Waller, Deputy Surveyor, in 1912.

U.S. Survey No. 3006 was surveyed by Jack C. Means, Cadastral Engineer, in 1952.

U.S. Survey No. 3523 was surveyed by Edward A. Taylor, Cadastral Surveyor, in 1959.

U.S. Survey No. 4695 was surveyed by Harold O. Temme, Supervisory Cadastral Surveyor, in 1965.

U.S. Survey No. 7529 was surveyed by Douglas A. Spence, Cadastral Surveyor, in 1986.

Tibbetts Subdivision, Plat No. 83-4, Kvichak Recording District, was surveyed by Wakon I. Redbird, Alaska Registered Land Surveyor No. 3439, in 1983.

Brown Subdivision, Plat No. 84-4, Kvichak Recording District, was surveyed by William S. Smith, Alaska Registered Land Surveyor No. 4107, in 1983.

Smelt Creek Subdivision, Plat No. 88-12, Kvichak Recording District, was surveyed by Marvin L. Hansen, Alaska Registered Land Surveyor No. 3815, in 1988.

Rapids Subdivision, Plat No. 91-01, Kvichak Recording District, was surveyed by Ralph J. Mancuso, Alaska Registered Land Surveyor No. 7611, in 1990.

Bay View Subdivision, Plat No. 91-8, Kvichak Recording District, was surveyed by Ralph J. Mancuso, Alaska Registered Land Surveyor No. 7611, in 1991.

Creek View Subdivision, Plat No. 97-8, Kvichak Recording District, was surveyed by Marvin L. Hansen, Alaska Registered Land Surveyor No. 3815, in 1984.


Lake Camp Rapids Camp Road R-0-W, Plat No. 2005-6, Kvichak Recording District, was surveyed by Ralph J. Mancuso, Registered Alaska Land Surveyor No. 7611, in 2005.

HISTORY OF SURVEYS (cont'd. on sheet 3)

MEANDERS TRACT 1

From the point for Cor. No. 4, Tr. 1, a meander cor. along a gravel beach at the line of M.H.T. on the East shore of Kvichak Bay S. 19°12'17" W. 159.01 ft.

At the end of course, the true point for cor. No. 1, Tract 1, a meander cor.

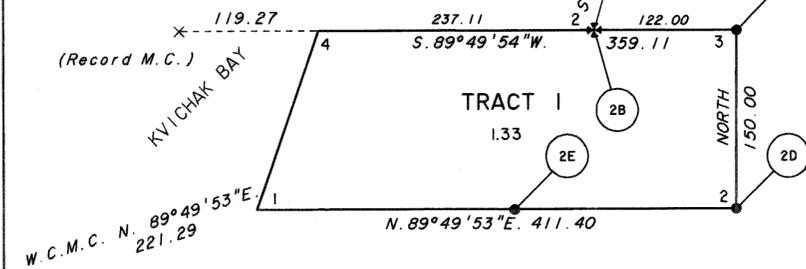

U.S.S. No. 4695
2

U.S.S. No. 2429

U.S.S. No. 2399

LEGEND

- Found BLM/GLO Monument
Set Monument This Survey
Set 5/8" Diam. Rebar With Alum. Cap This Survey
Found Primary Monument by Others
Lost Monument Searched Position

MEANDERS TRACT 2

From the true point for Cor. No. 2, Tract 2, a meander cor. along a 2' bank at the line of O.H.W. on the West shore of an Unnamed lake N. 56°48'05" E. 134.82 ft.

At the end of course, the true point for cor. No. 3, Tract 3, a meander cor.


U.S.S. No. 1020



MEANDERS TRACT 3

From the true point for Cor. No. 4, Tract 2, a meander cor. along a gravel beach at the line of M.H.T. on the East shore of Kvichak Bay S. 4°18'57" E. 89.35 ft.

At the end of course, the true point for cor. No. 1, Tract 2, a meander cor.

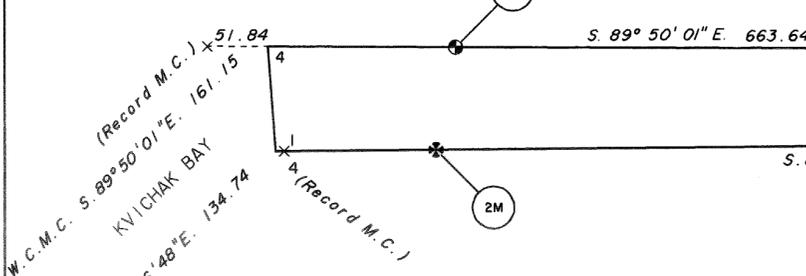


TRACT 2
2.33

U.S.S. No. 7529
1

MEANDERS TRACT 4

From the true point for Cor. No. 4, Tr. 3, a meander cor. along a gravel beach at the line of M.H.T. on the East shore of Kvichak Bay S. 8°47'34" W. 202.38 ft.

At the end of course, the true point for cor. No. 1, Tract 3, a meander cor.

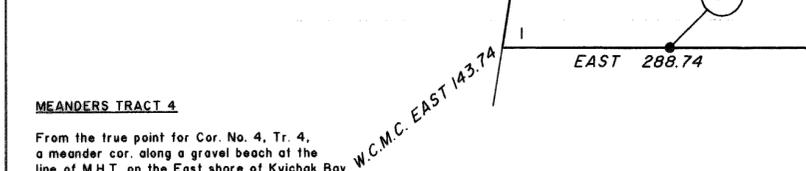


TRACT 3
1.26

TRACT 5
1.00

MEANDERS TRACT 5

From the true point for Cor. No. 4, Tr. 4, a meander cor. along a gravel beach at the line of M.H.T. on the East shore of Kvichak Bay S. 8°10'42" W. 101.02 ft.

At the end of course, the true point for cor. No. 1, Tract 4, a meander cor.


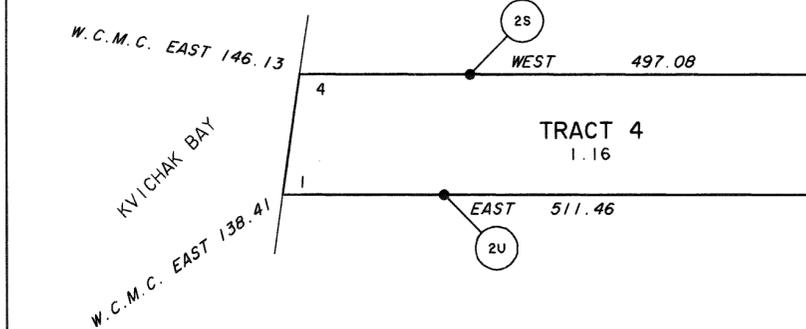


TRACT 4
1.16

U.S.S. No. 1582
witness cor. No. 4

KVICHAK RECORDING DISTRICT PLAT 2013-8

RJM/KSO/red

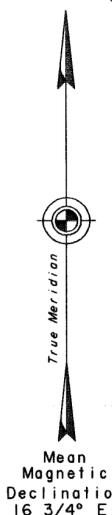

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN T_s. 15 TO 18 S., R_s. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

HISTORY OF SURVEYS (cont'd)

Hillcrest Drive Subdivision, unrecorded, was surveyed by Ralph J. Mancuso, Registered Alaska Land Surveyor No. 7611, in 1997.

Smelt Creek Subdivision # 2, Plat No. 2003-01, Kvichak Recording District, was surveyed by Ralph J. Mancuso, Registered Alaska Land Surveyor No. 7611, in 2003.

Township 15 South, Range 48 West, Seward Meridian, Alaska, was surveyed by Timothy A. Kent, Cadastral Surveyor, in 1978.

A portion of Township 16 South, Range 46 West, Seward Meridian, Alaska, was surveyed by Walter W. Cooley, Cadastral Surveyor, in 1957.

The remaining portion of the Township was surveyed by Douglas G. Minton, Cadastral Surveyor, in 1978.

A dependent resurvey and subdivision of section 33 was surveyed by Patrick S. Twohy, Cadastral Surveyor, in 1997.

A dependent resurvey and subdivision of section 31 was surveyed by Christopher D. Wiita, in 2004.

Supplemental plats were accepted on 12/23/1963, 10/20/1970, 06/08/1984 and 10/30/1987.

Township 17 South, Range 44 West, Seward Meridian, Alaska, was surveyed by Harold O. Temme, Cadastral Surveyor, in 1958.

A dependent resurvey and subdivision of sections 25 and 33 was surveyed by Brock R. Clifford, Cadastral Surveyor, in 1985.

A subdivision of section 36 was surveyed by Daniel A. Wiesner, Cadastral Surveyor, in 1992.

A dependent resurvey and subdivision of section 36 was surveyed by Ashley S. Harris, Cadastral Surveyor, in 1997.


A supplemental plat was accepted on 02/01/78.

A portion of Township 17 South, Range 45 West, Seward Meridian, Alaska, was surveyed by Harold O. Temme, Cadastral Surveyor, in 1958.

The remaining portion was surveyed by Douglas G. Minton and Tommy A. Noble, Cadastral Surveyors, in 1978 thru 1986.

Alaska Tidelands Survey No. 96 was surveyed by Harold H. Waller, Registered Alaska Professional Engineer No. 62-E, in 1962.

HISTORY OF SURVEYS (cont'd. on sheet 4)

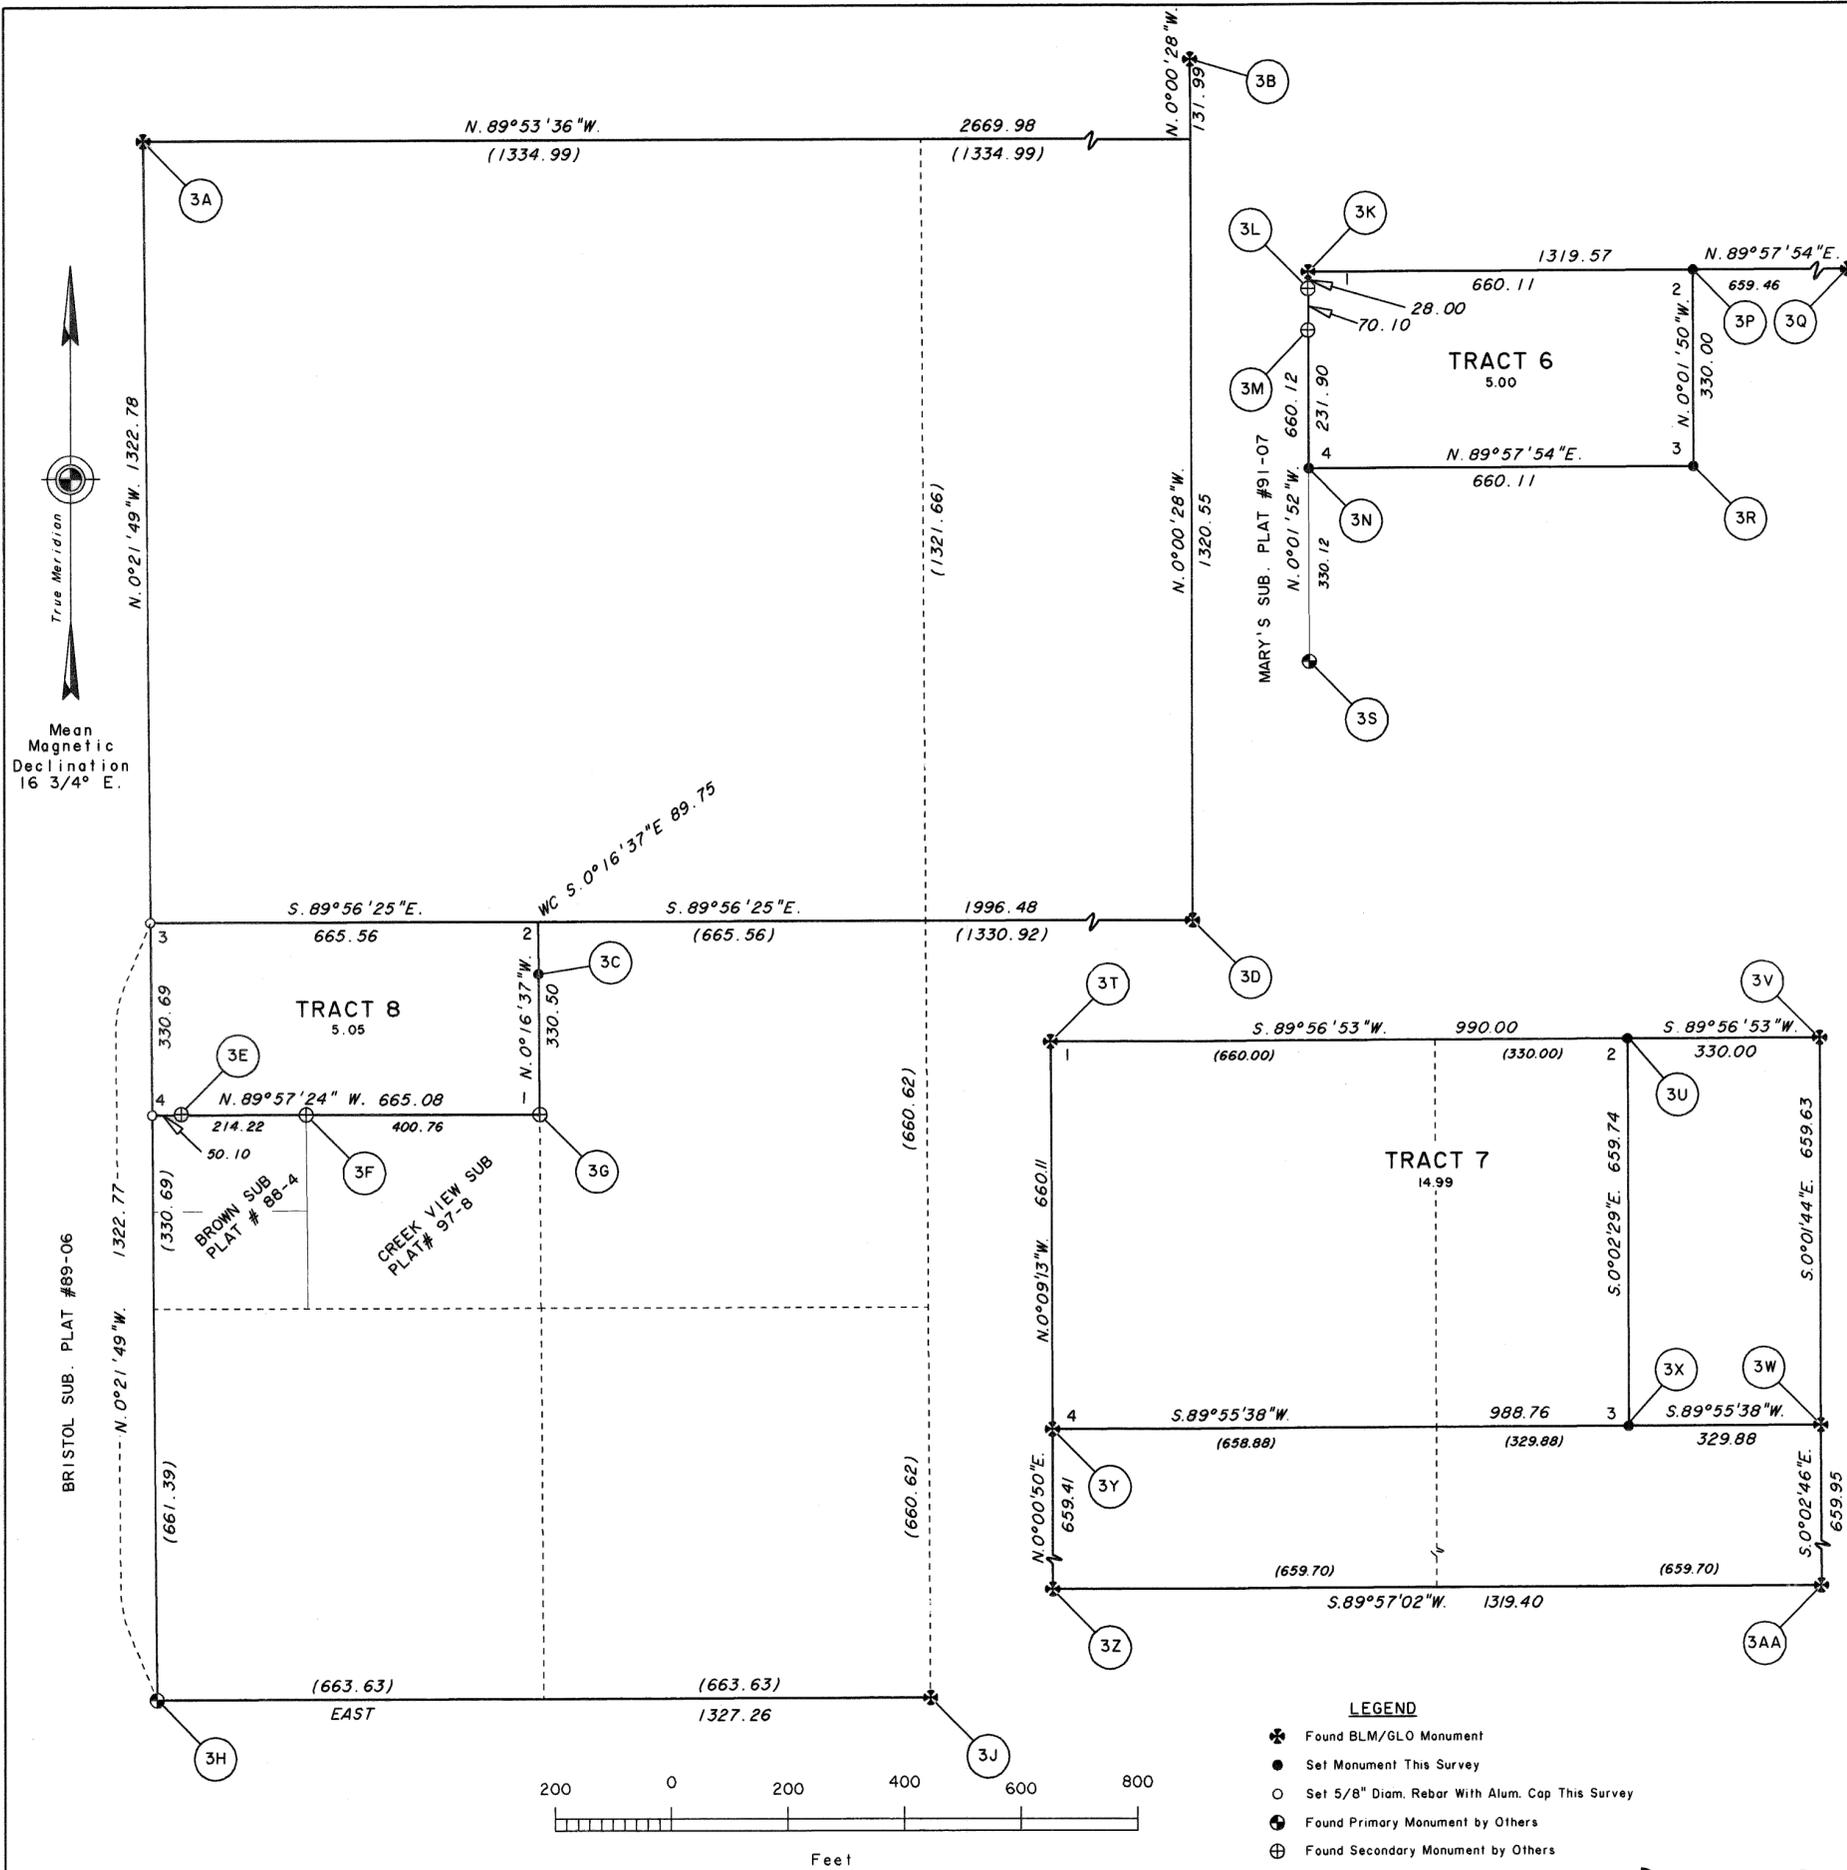

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD.
AT
NAKNEK, ALASKA
AND

THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN

Ts. 15 TO 18 S., Rs. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

HISTORY OF SURVEYS (cont'd)

Mary's Sub, Plat No. 91-07, Kvichak Recording District, was surveyed by Ralph J. Mancuso, Registered Alaska Land Surveyor No. 7611, in 1991.

Numerous section subdivisions were surveyed by Brock R. Clifford, Cadastral Surveyor, in 1985-86.

A portion of Township 17 South, Range 47 West, Seward Meridian, Alaska, was surveyed by Walter W. Cooley, Cadastral Surveyor, in 1957.

Another portion of the Township was surveyed by C. Norman Brown, Cadastral Surveyor, in 1972.

The remaining portion of the Township was surveyed by Douglas G. Minton and Tommy A. Noble, Cadastral Surveyors, in 1978 thru 1986.

Numerous section subdivisions were surveyed by Daniel A. Wiesner, Cadastral Surveyor, in 1992.

A dependent resurvey and subdivision of numerous sections was surveyed by Christopher D. Wiita, Cadastral Surveyor, in 2004.

Supplemental plats were accepted on 04/23/1964, 10/21/1983, 03/19/1985 and 05/11/2005.

Township 18 South, Range 44 West, Seward Meridian, Alaska, was surveyed by Douglas G. Minton and Tommy A. Noble, Cadastral Surveyors, in 1978 thru 1986.

A supplemental plat was accepted on 05/11/2005.

LEGEND


- ⊗ Found BLM/GLO Monument
- Set Monument This Survey
- Set 5/8" Diam. Rebar With Alum. Cap This Survey
- ⊕ Found Primary Monument by Others
- ⊖ Found Secondary Monument by Others

ADJUSTED RECORD MEANDERS Lot 16



From the true point for the N.W. Cor Lot 16, a meander cor, thence with the adjusted record meanders of Monsen Lake in front of Lot 16.

S. 25°02'27" E. 290.21 ft.
N. 87°57'33" E. 227.55 ft.
S. 85°12'30" E. 299.11 ft.

At the end of course, the true point for the N.E. Cor. of Lot 16, a meander cor.


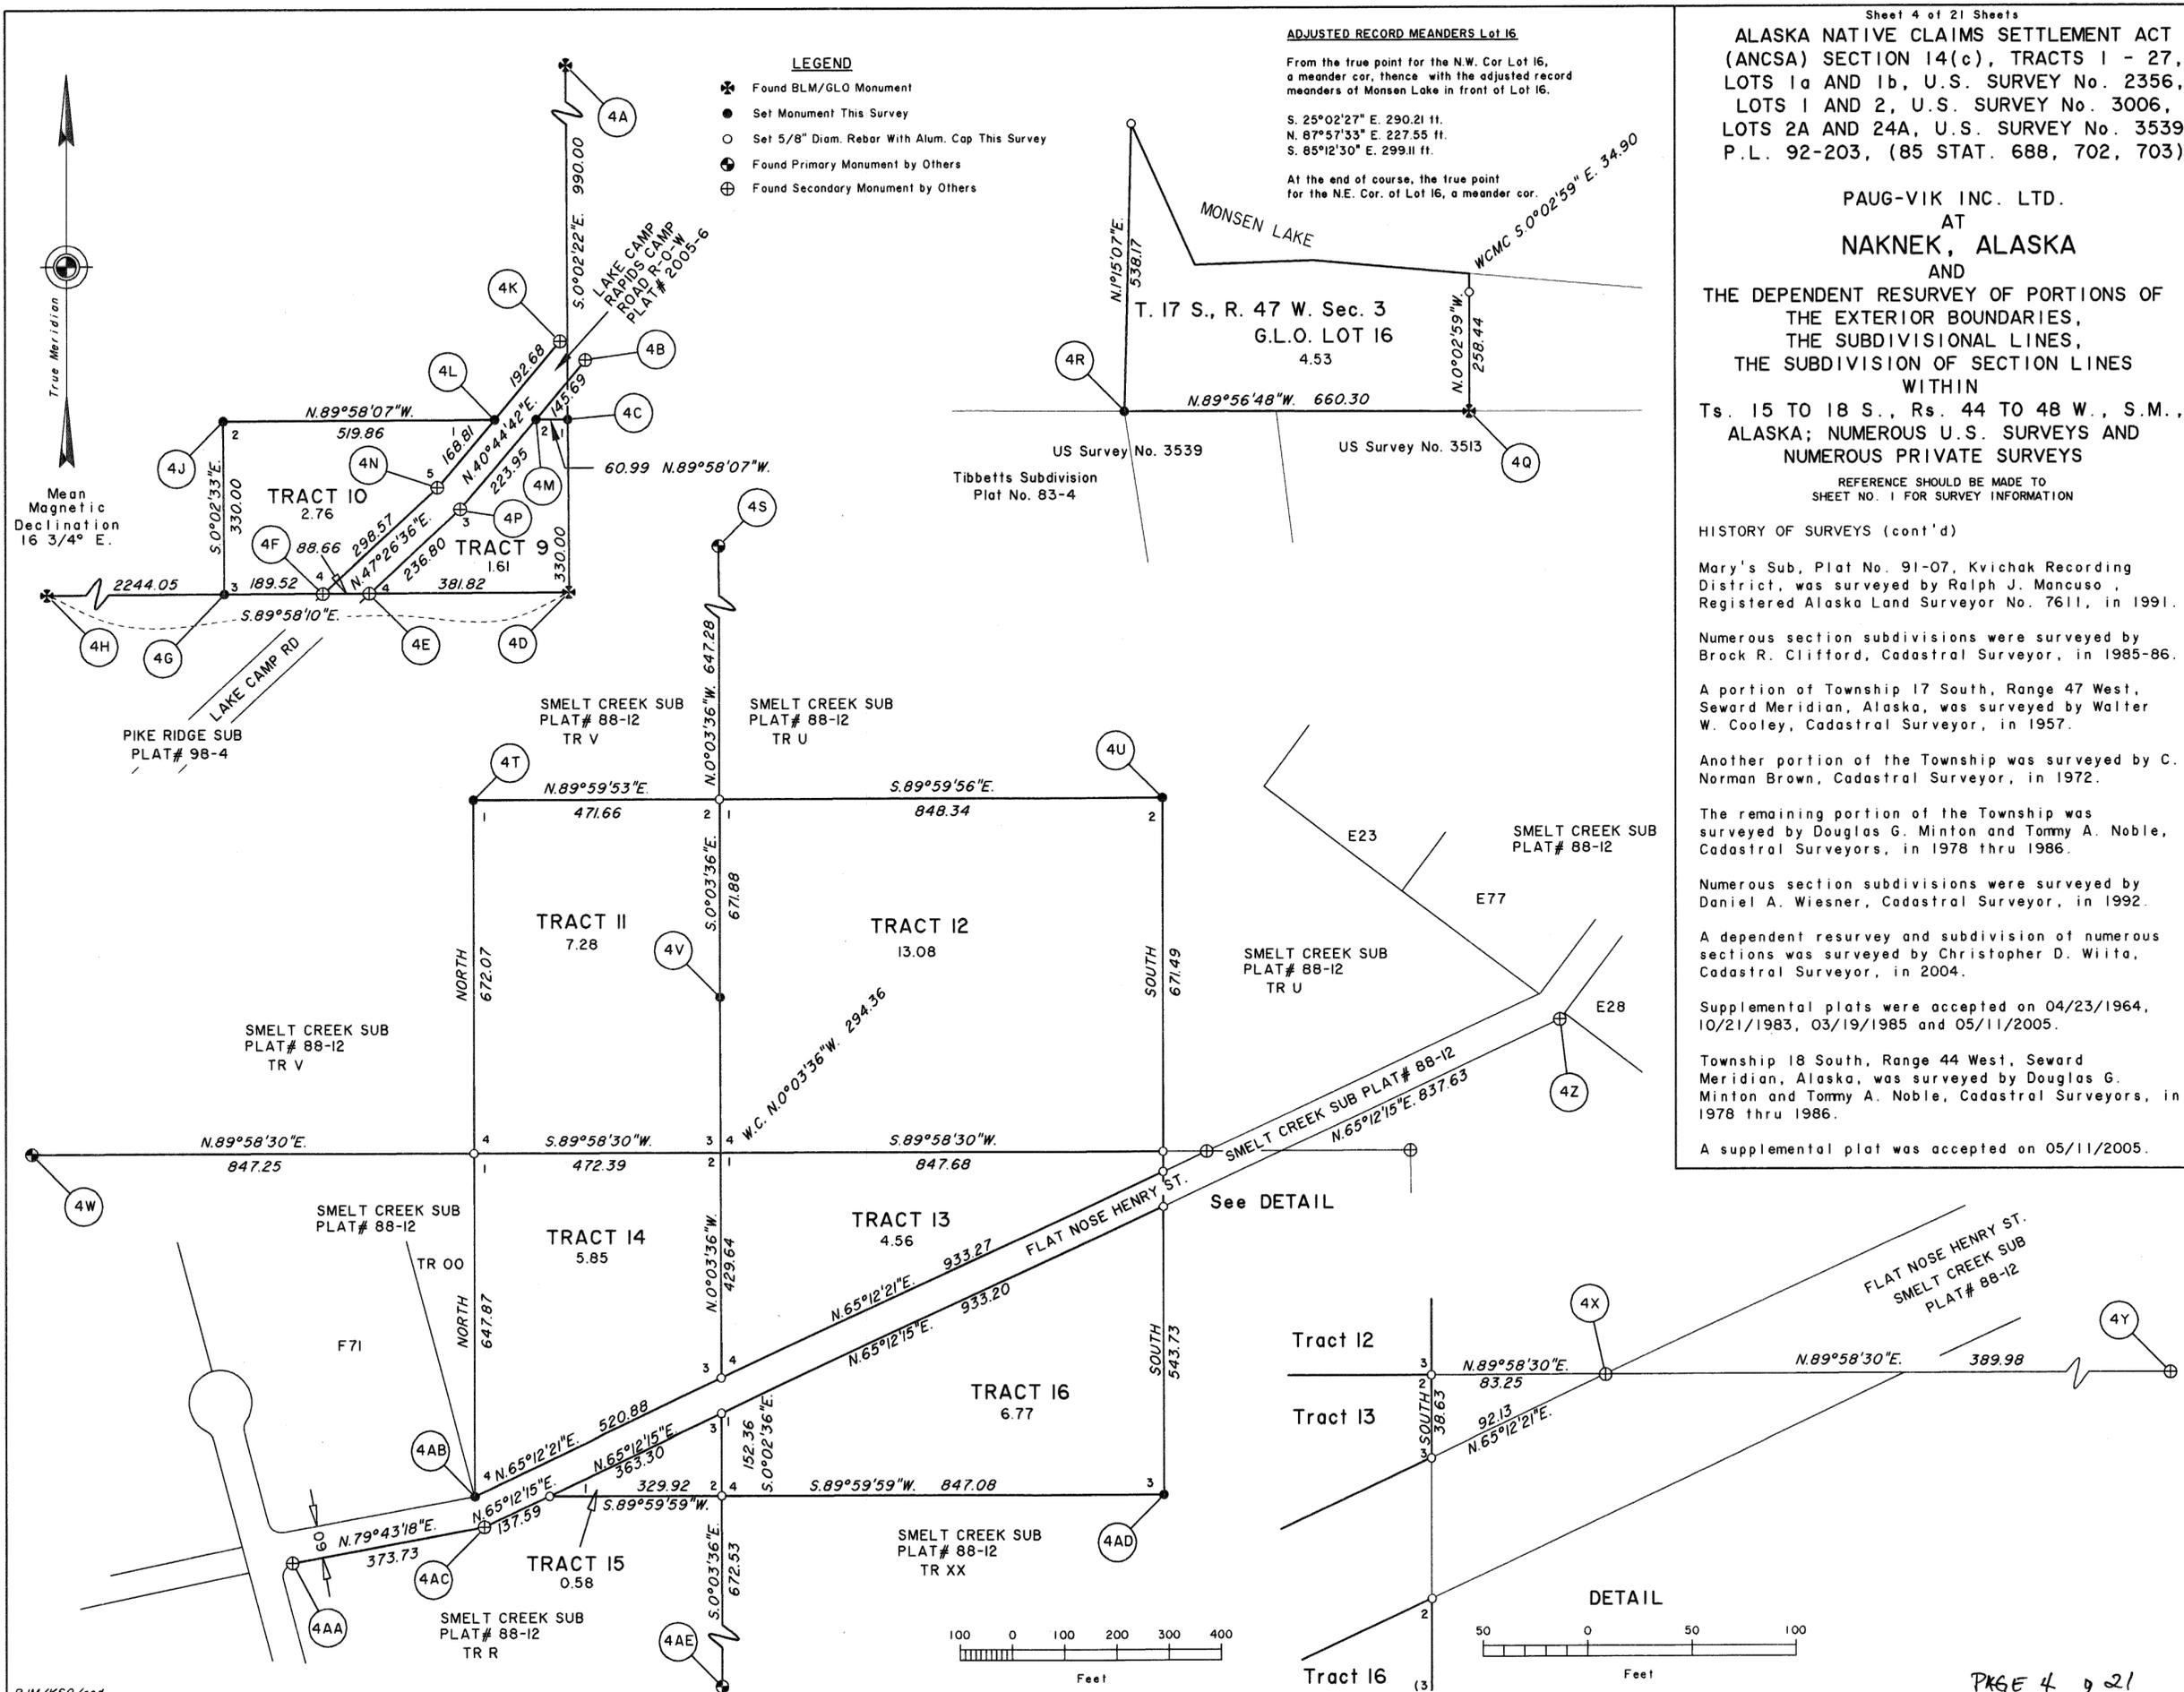


Mean Magnetic Declination 16 3/4° E.

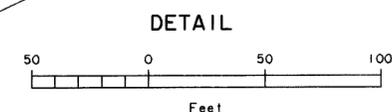



ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN Ts. 15 TO 18 S., Rs. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

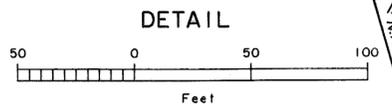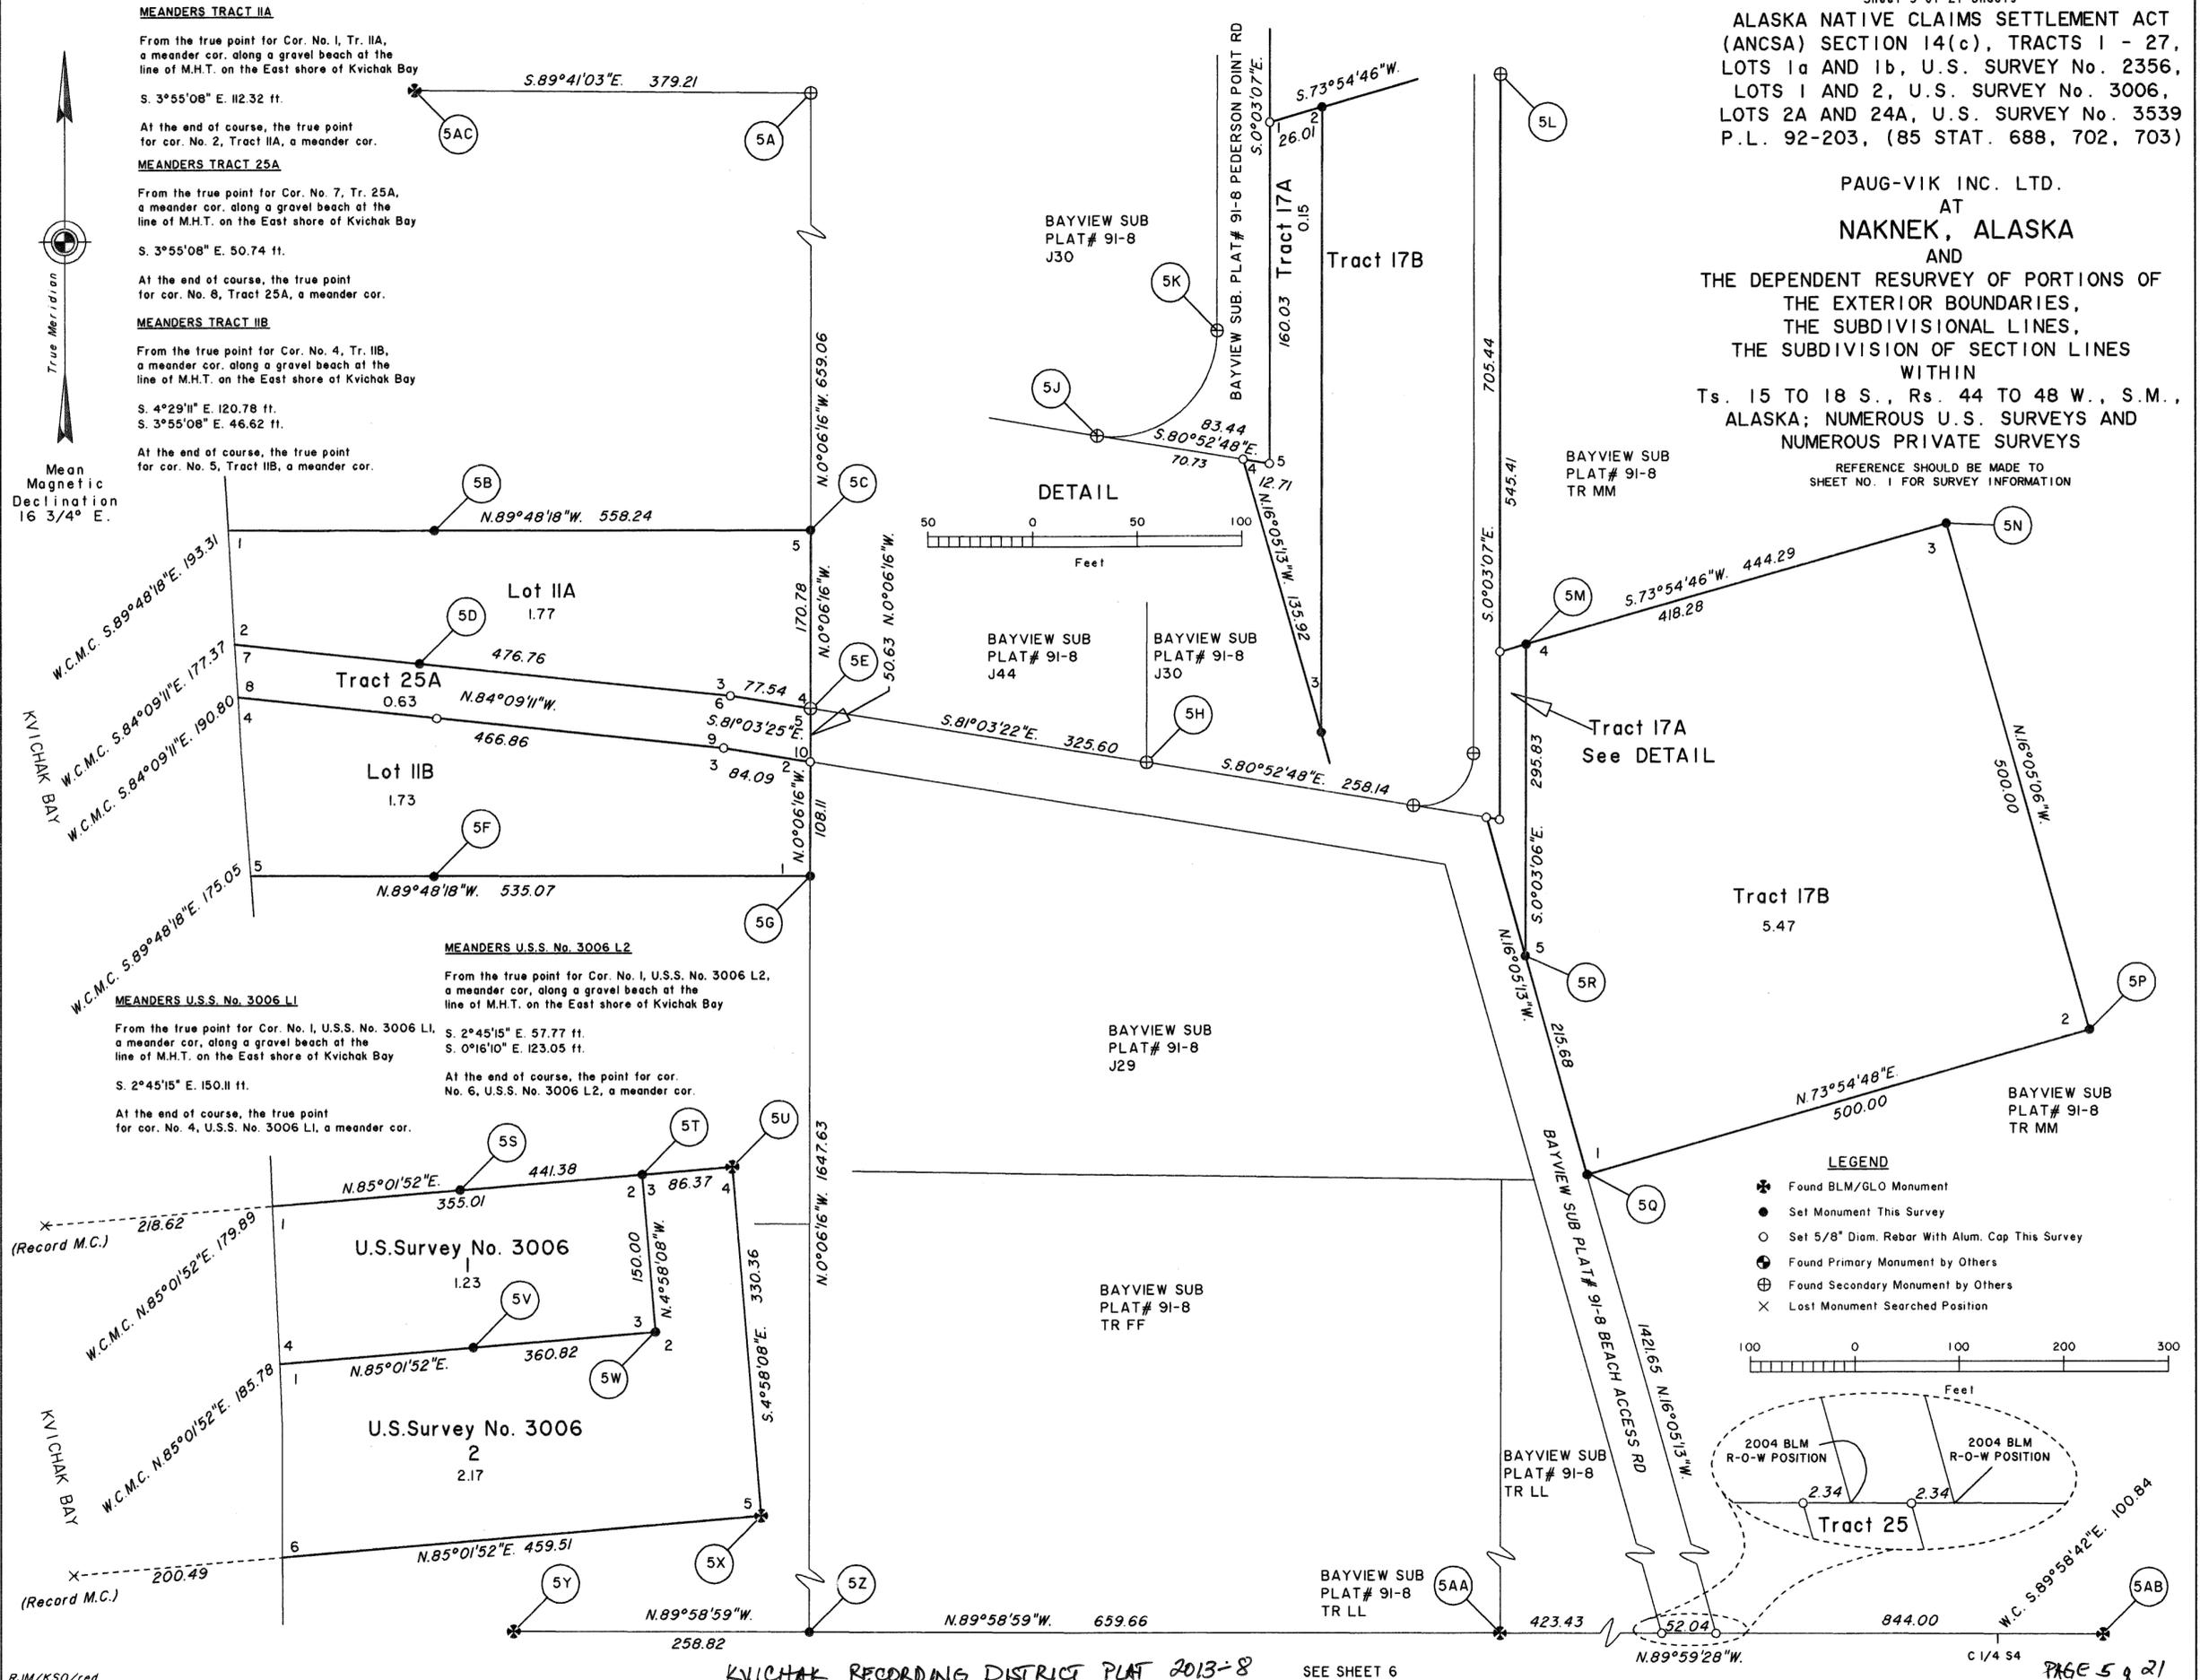

- LEGEND
- Found BLM/GLO Monument
- Set Monument This Survey
- Set 5/8" Diam. Rebar With Alum. Cap This Survey
- Found Primary Monument by Others
- Found Secondary Monument by Others
- Lost Monument Searched Position

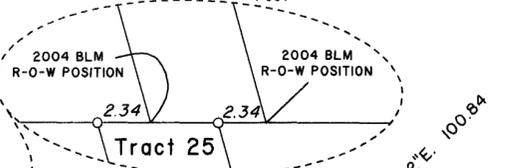

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)





PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN T_s. 15 TO 18 S., R_s. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

LEGEND

- ⊗ Found BLM/GLO Monument
- Set Monument This Survey
- Set 5/8" Diam. Rebor With Alum. Cap This Survey
- ⊕ Found Primary Monument by Others
- ⊗ Found Secondary Monument by Others

Mean Magnetic Declination 16 3/4° E.

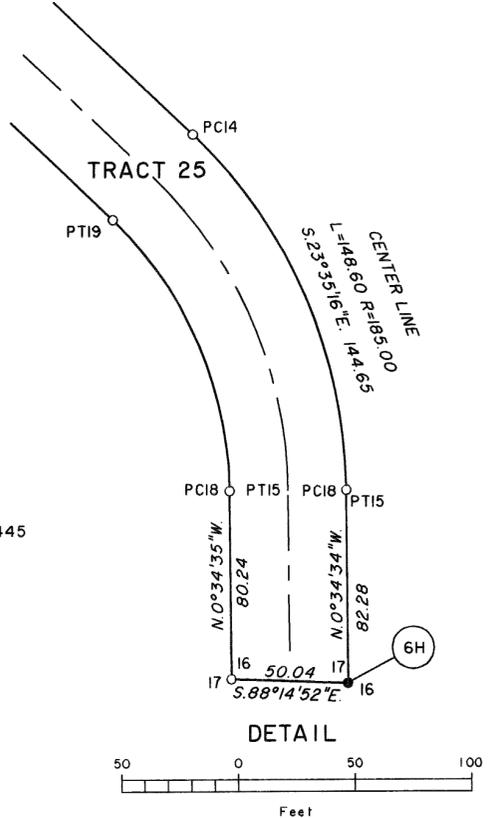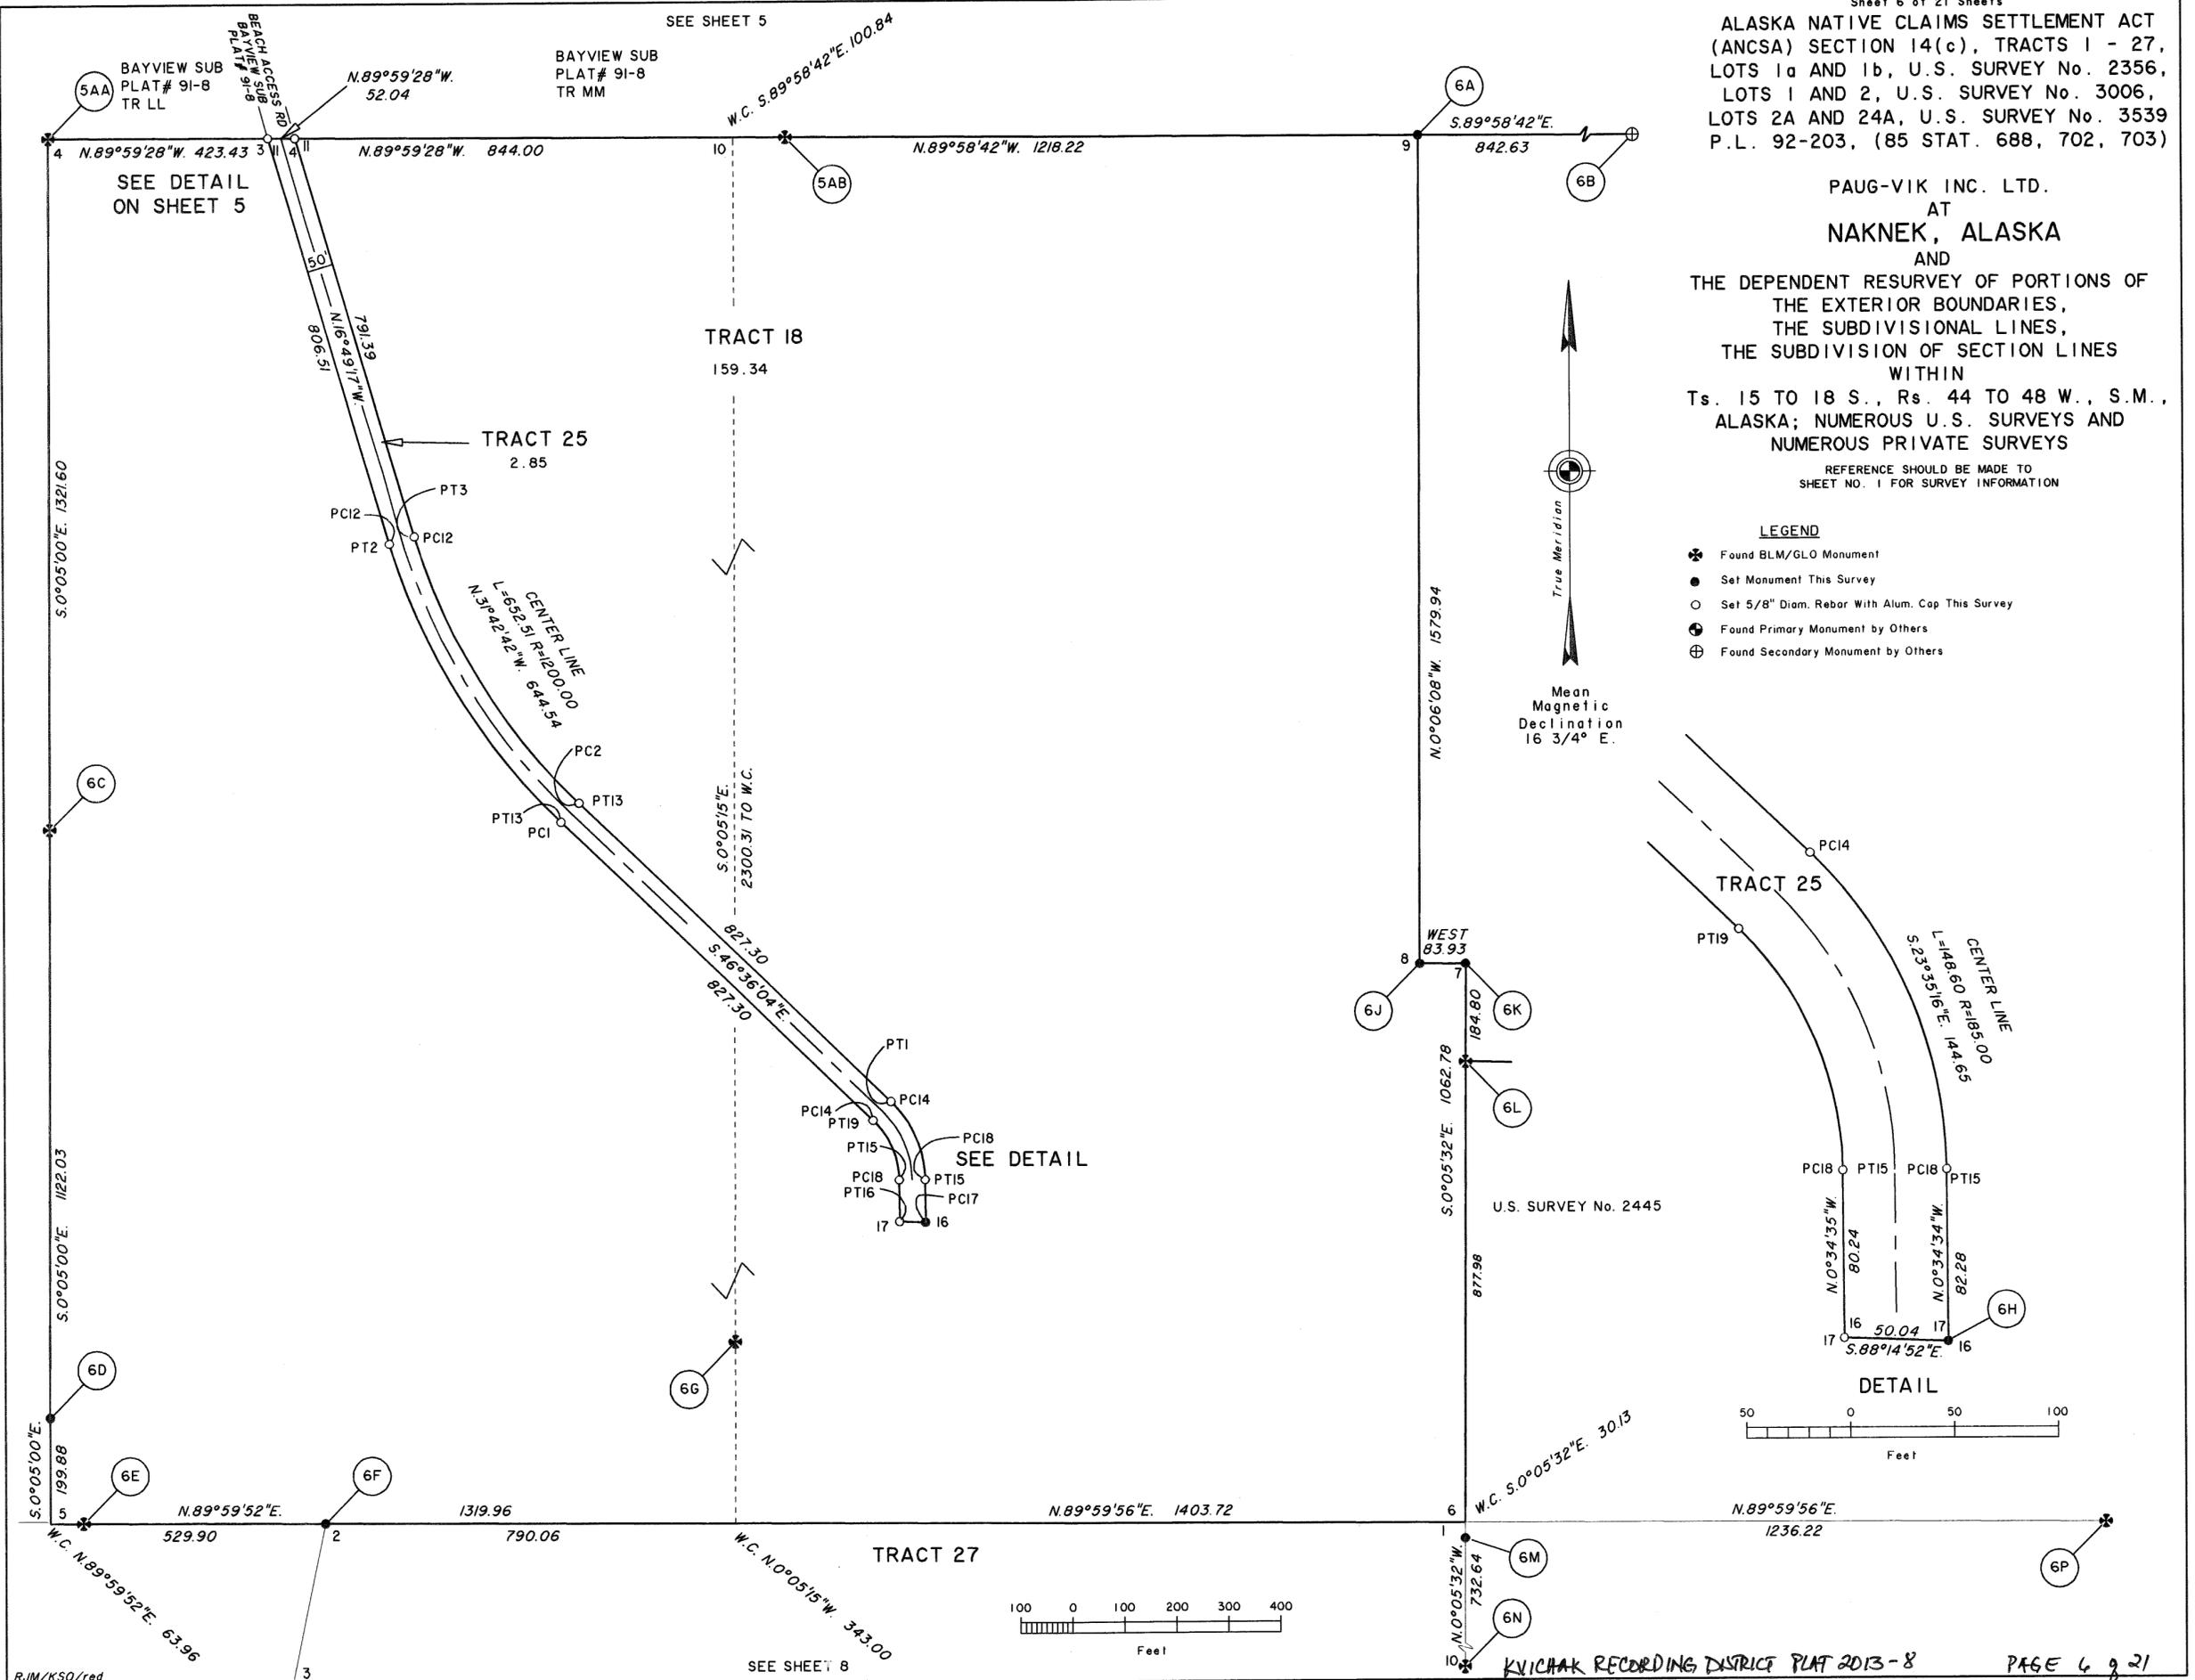


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA



AND THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN T_s. 15 TO 18 S., R_s. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

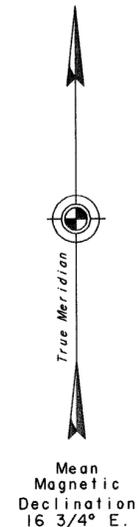

LEGEND

- Found BLM/GLO Monument
Set Monument This Survey
Set 5/8" Diam. Rebar With Alum. Cap This Survey
Found Primary Monument by Others
Found Secondary Monument by Others

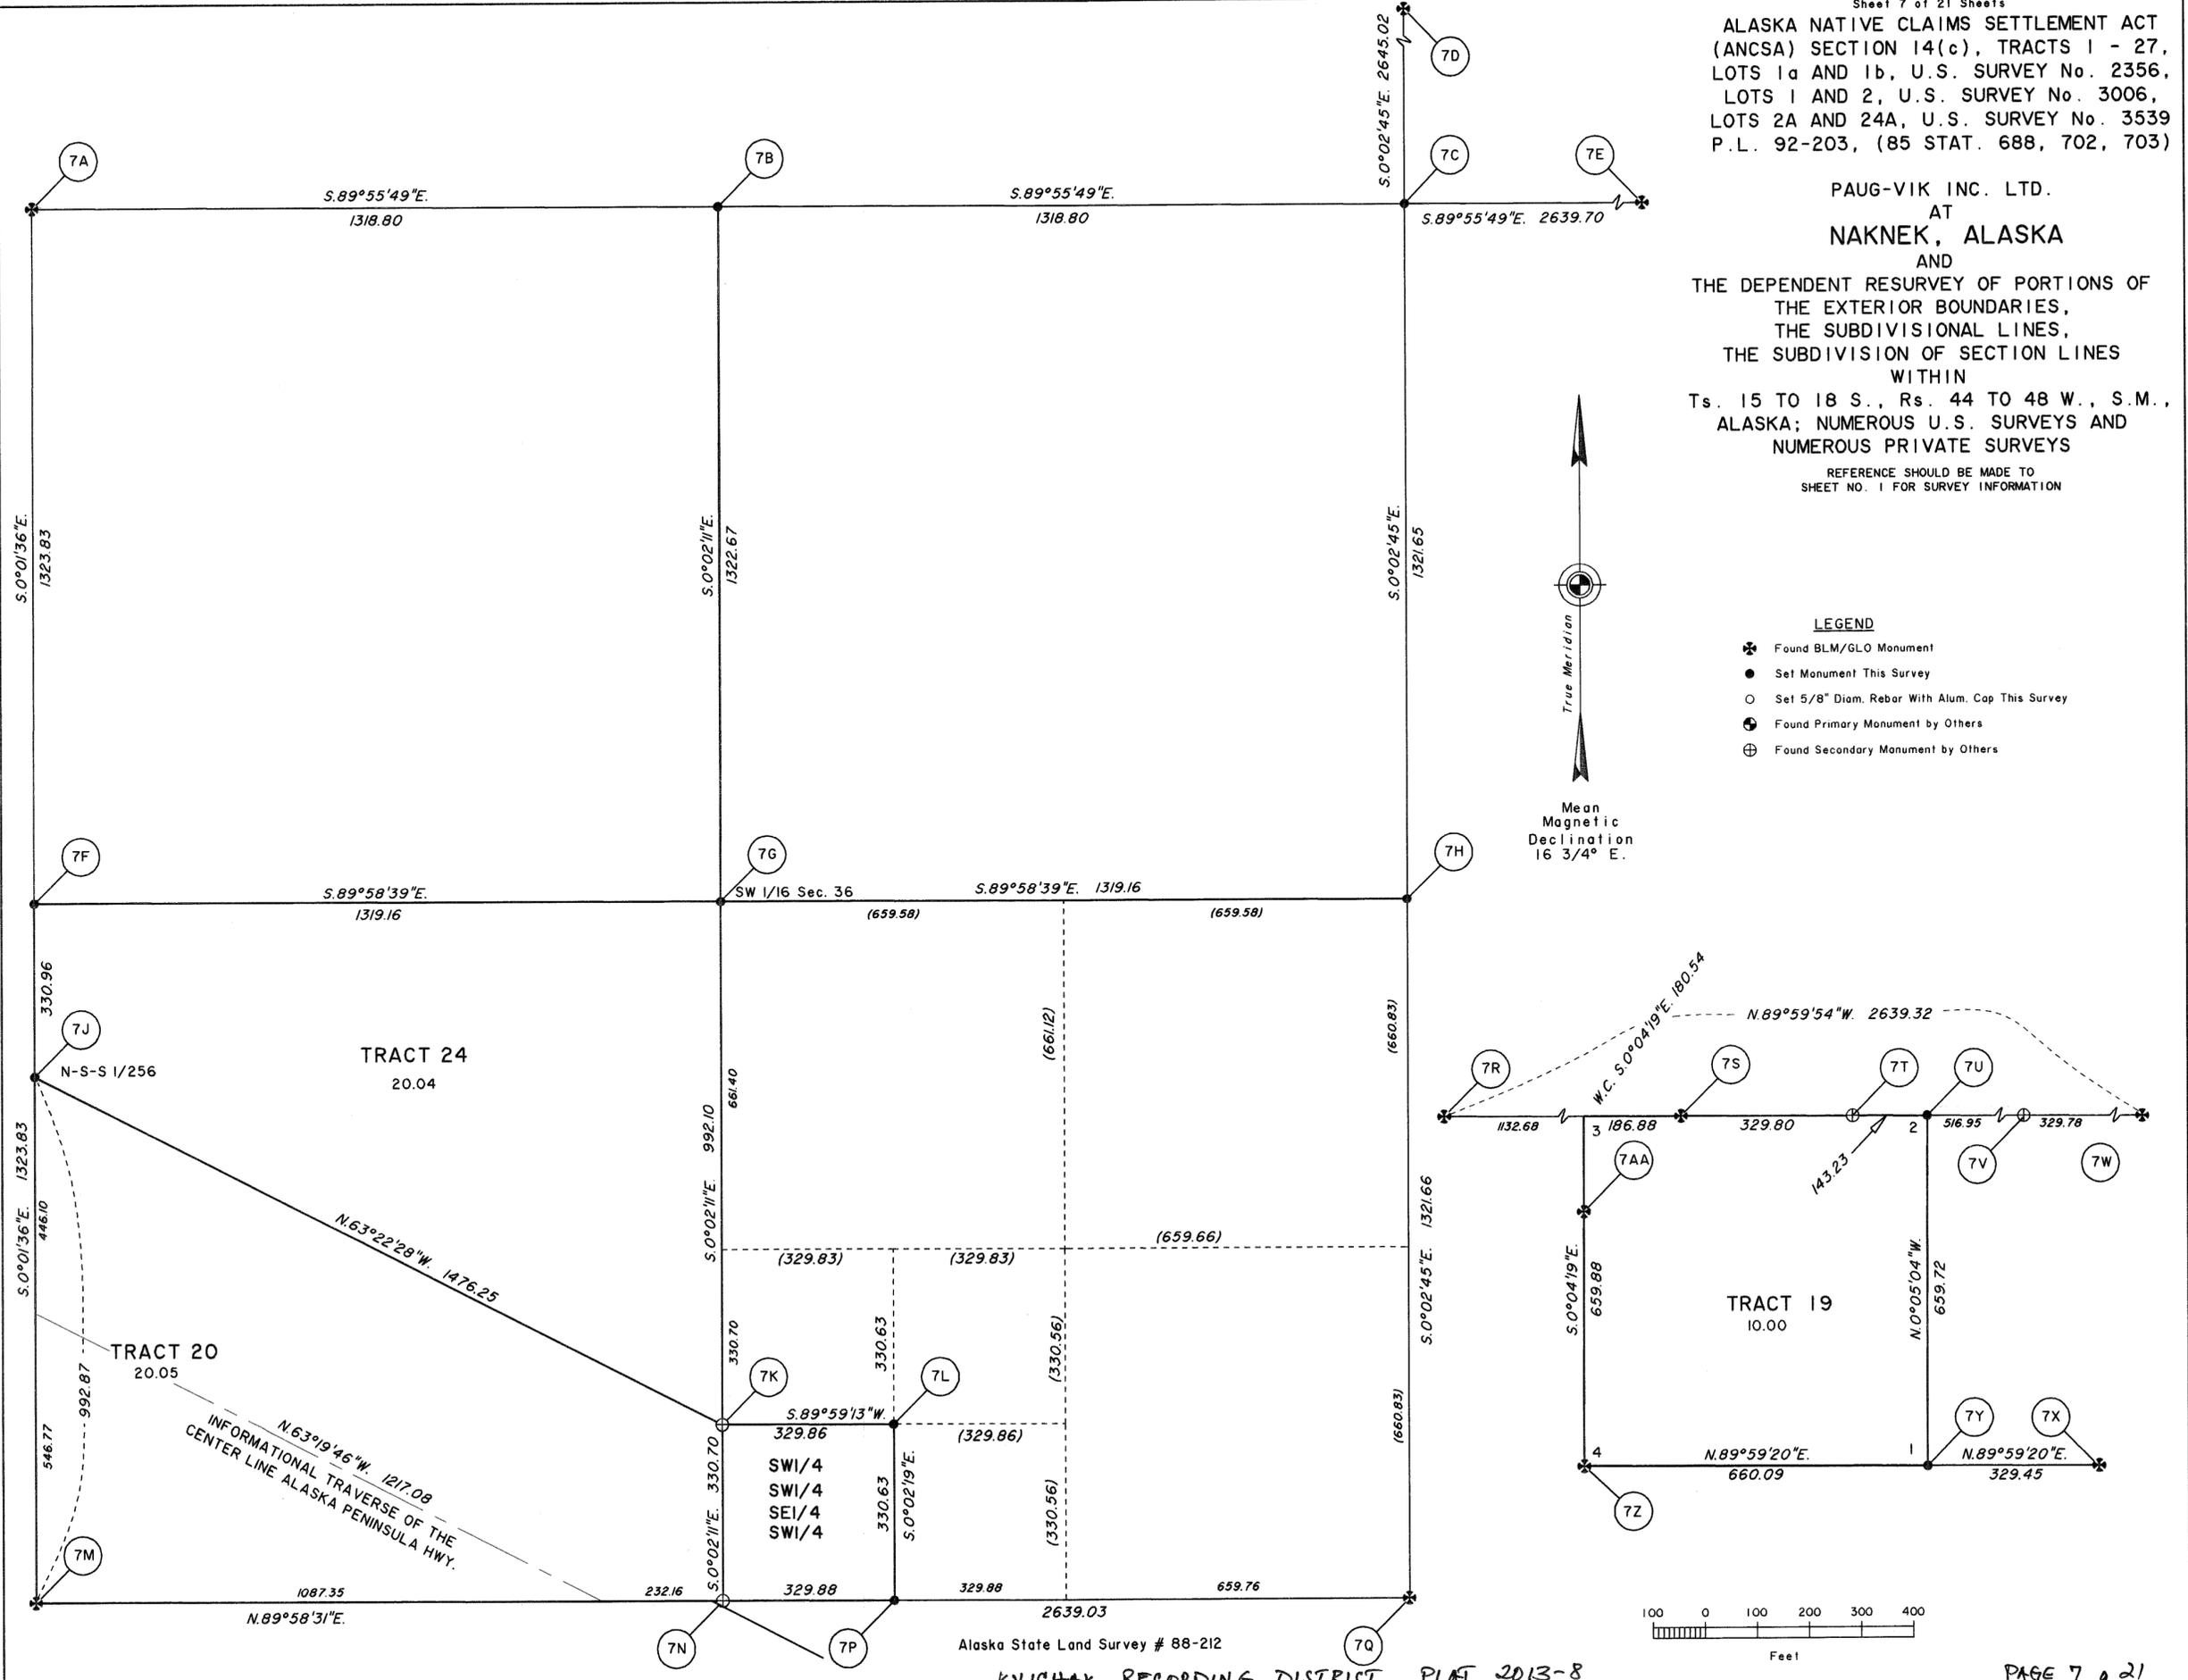

Alaska State Land Survey # 88-212


KNICHAK RECORDING DISTRICT PLAT 2013-8

ALASKA NATIVE CLAIMS SETTLEMENT ACT
 (ANCSA) SECTION 14(c), TRACTS 1 - 27,
 LOTS 1a AND 1b, U.S. SURVEY No. 2356,
 LOTS 1 AND 2, U.S. SURVEY No. 3006,
 LOTS 2A AND 24A, U.S. SURVEY No. 3539
 P.L. 92-203, (85 STAT. 688, 702, 703)



PAUG-VIK INC. LTD.
 AT
NAKNEK, ALASKA

AND
 THE DEPENDENT RESURVEY OF PORTIONS OF
 THE EXTERIOR BOUNDARIES,
 THE SUBDIVISIONAL LINES,
 THE SUBDIVISION OF SECTION LINES
 WITHIN
 T_s. 15 TO 18 S., R_s. 44 TO 48 W., S.M.,
 ALASKA; NUMEROUS U.S. SURVEYS AND
 NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO
 SHEET NO. 1 FOR SURVEY INFORMATION

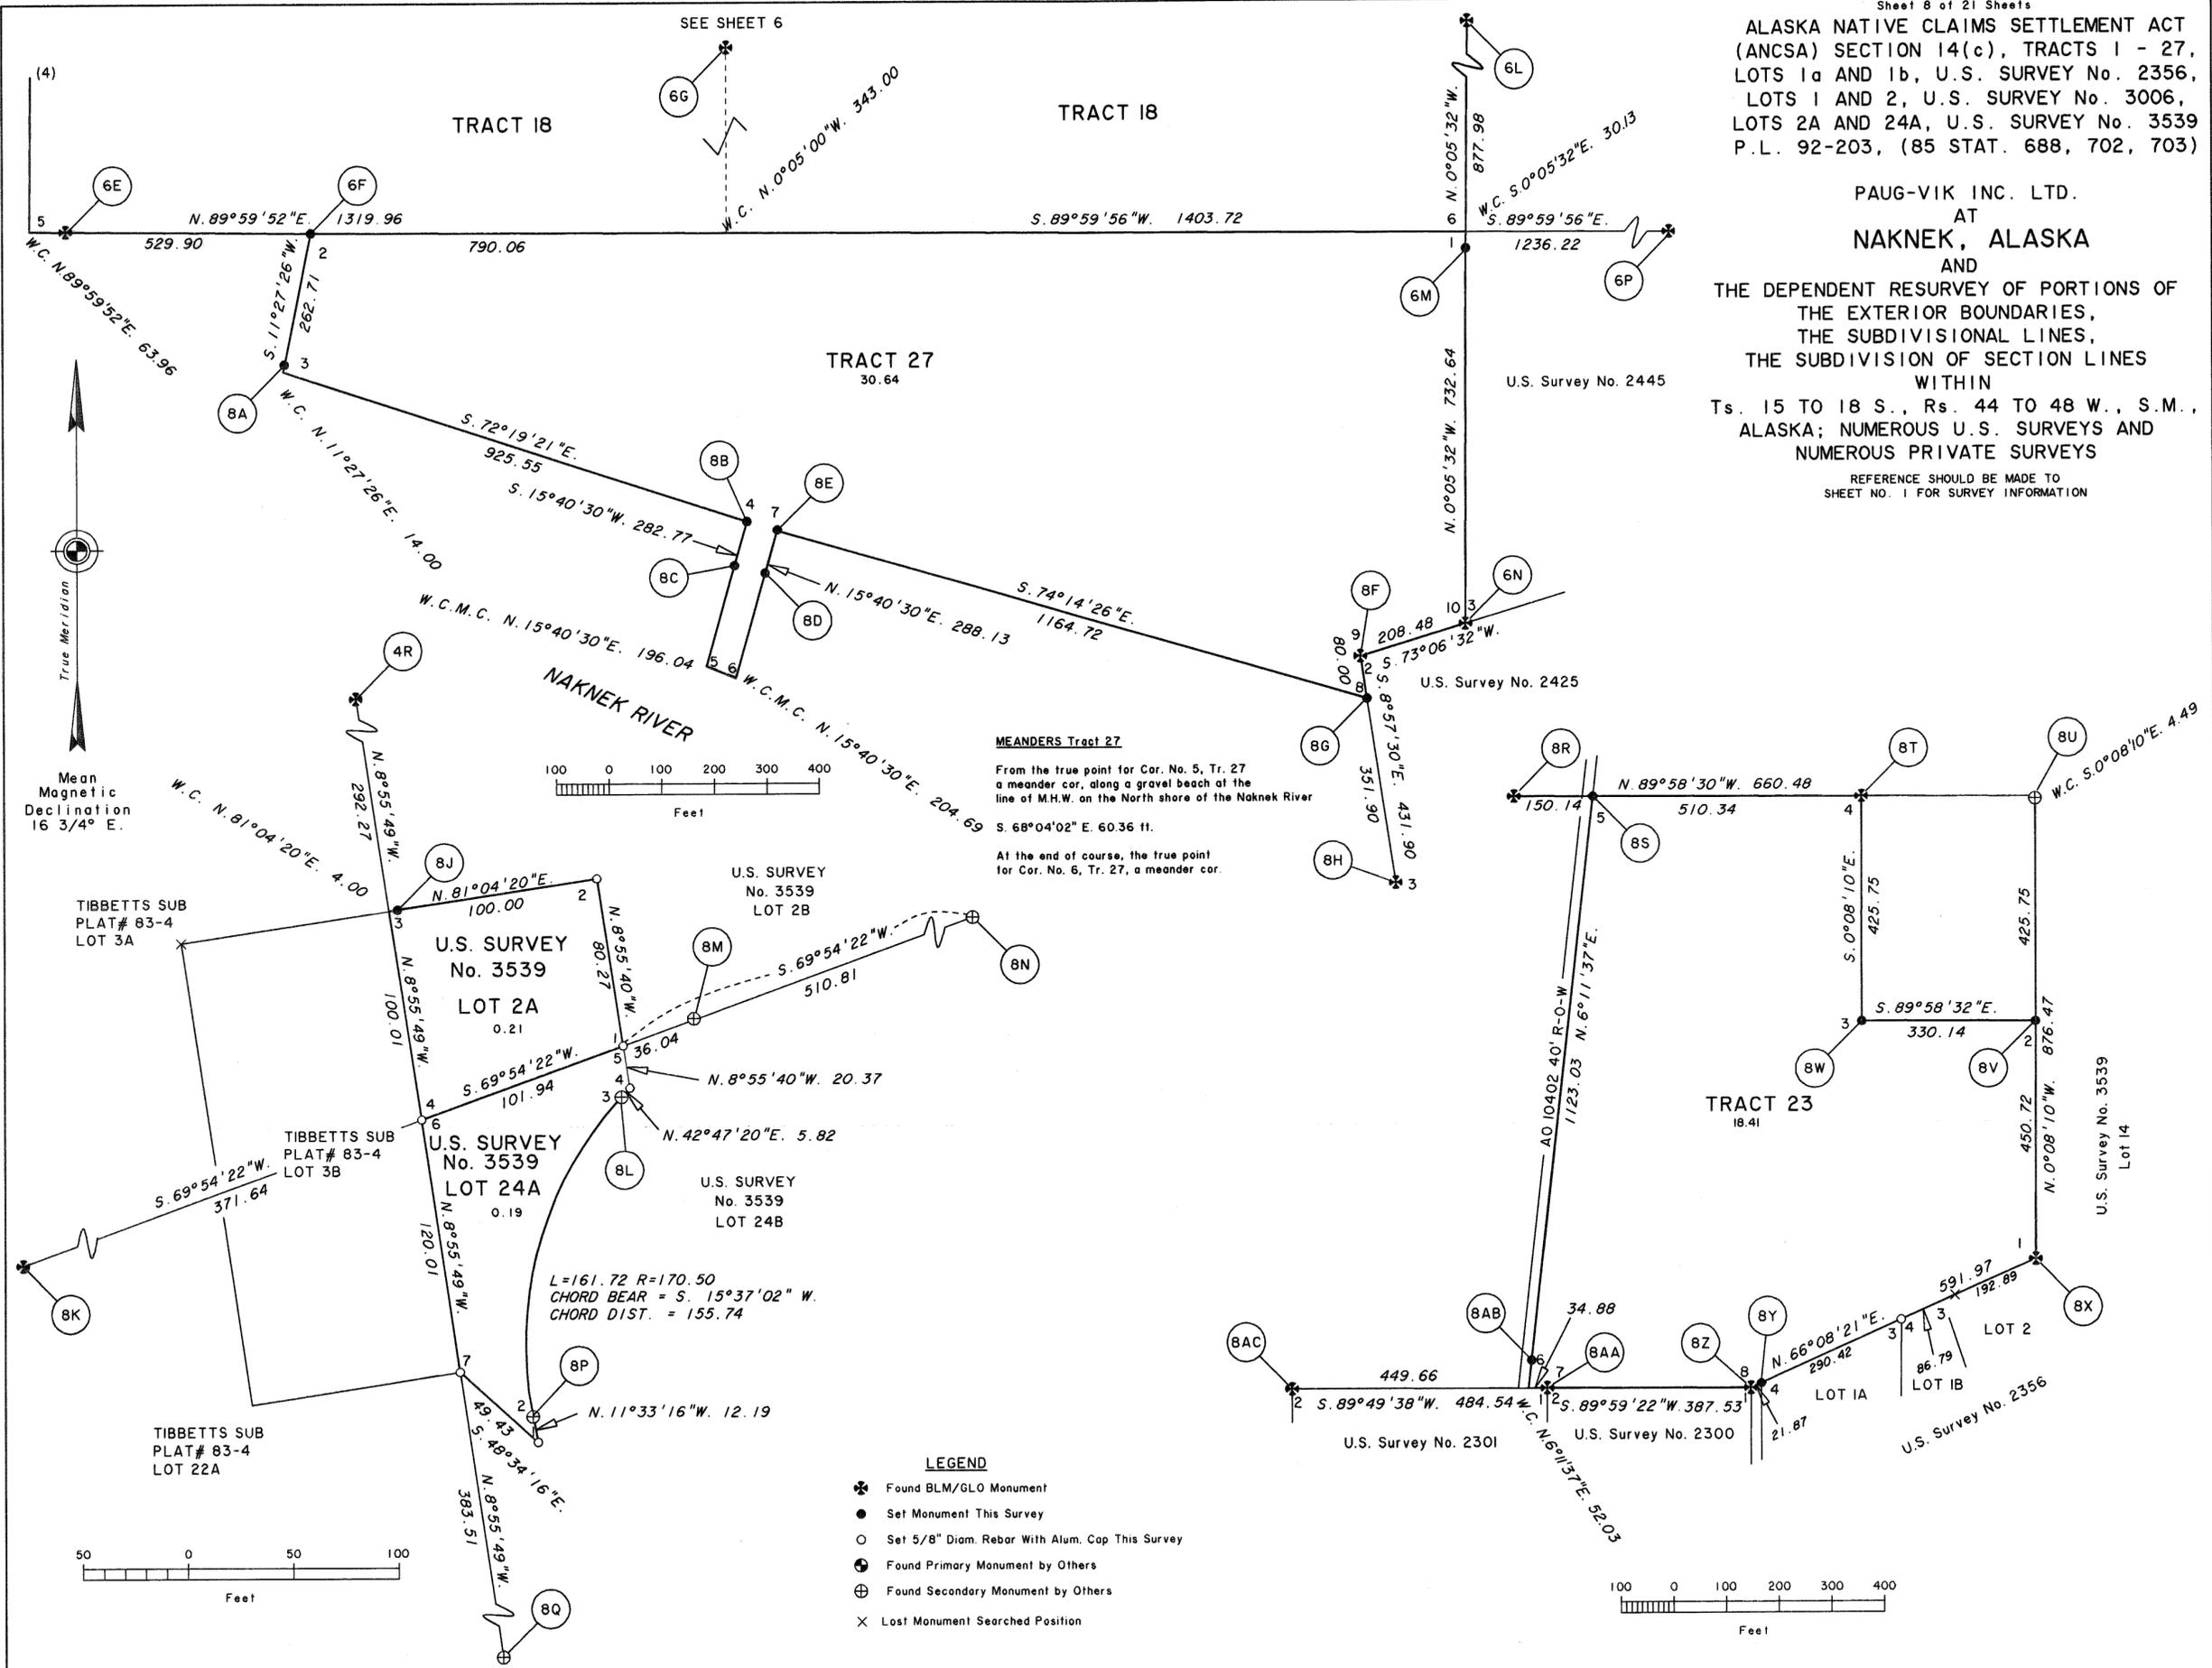

MEANDERS Tract 27
 From the true point for Cor. No. 5, Tr. 27
 a meander cor. along a gravel beach at the
 line of M.H.W. on the North shore of the Naknek River
 S. 68°04'02" E. 60.36 ft.
 At the end of course, the true point
 for Cor. No. 6, Tr. 27, a meander cor.



- LEGEND**
- ✱ Found BLM/GLO Monument
 - Set Monument This Survey
 - Set 5/8" Diam. Rebar With Alum. Cap This Survey
 - ⊕ Found Primary Monument by Others
 - ⊗ Found Secondary Monument by Others
 - × Lost Monument Searched Position

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)





PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN Ts. 15 TO 18 S., Rs. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

LEGEND

- ✱ Found BLM/GLO Monument
- Set Monument This Survey
- Set 5/8" Diam. Rebar With Alum. Cap This Survey
- ⊕ Found Primary Monument by Others
- ⊗ Found Secondary Monument by Others
- ✕ Lost Monument Searched Position

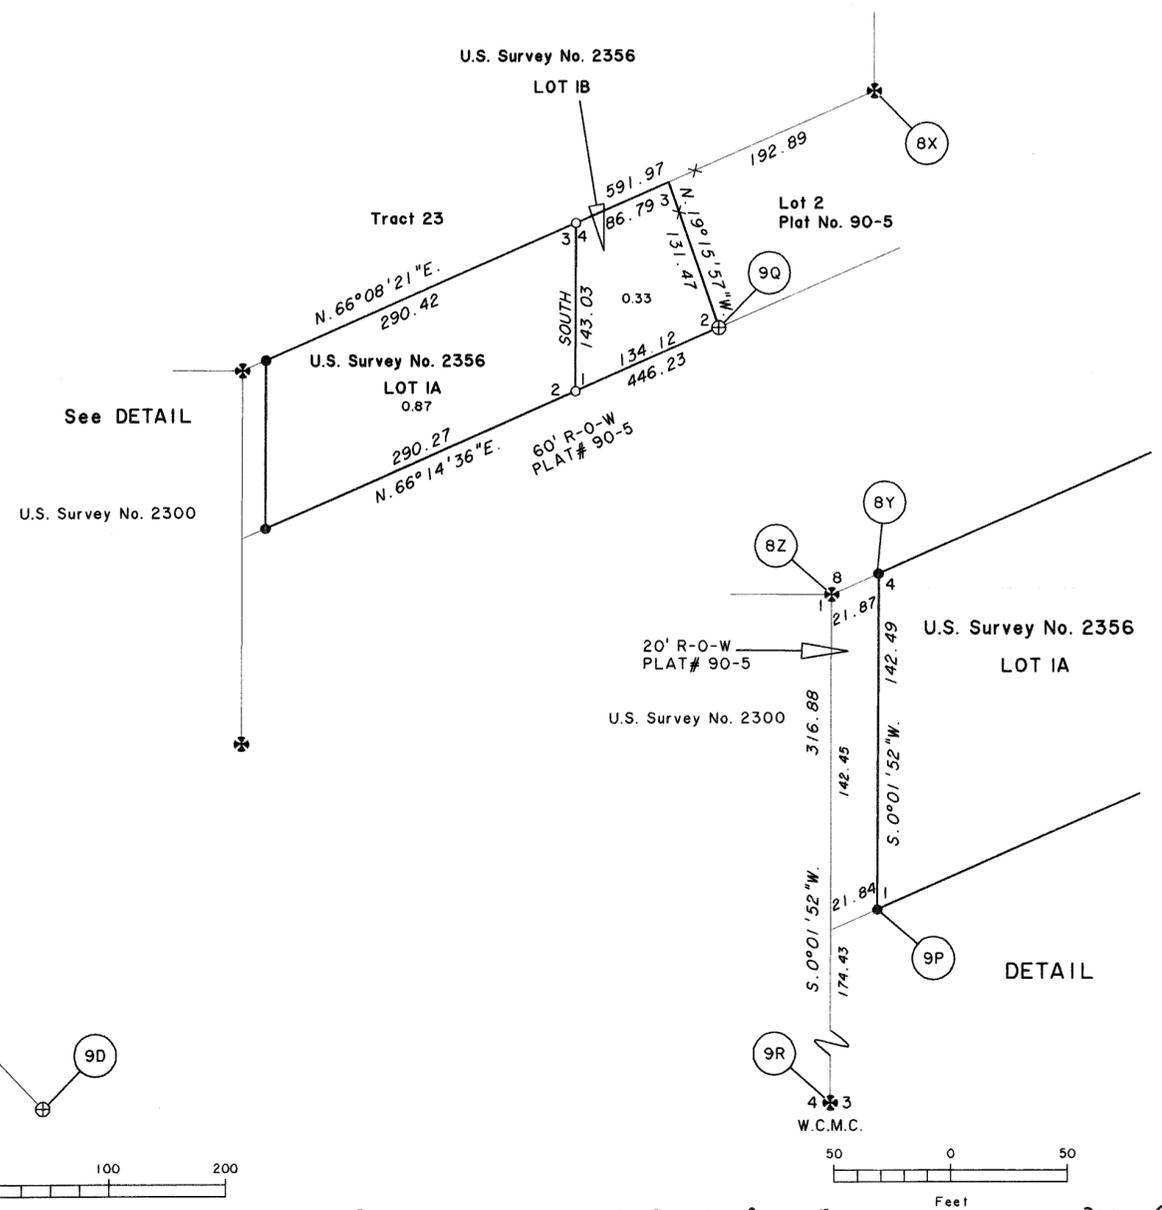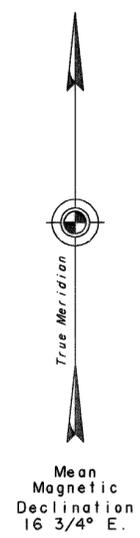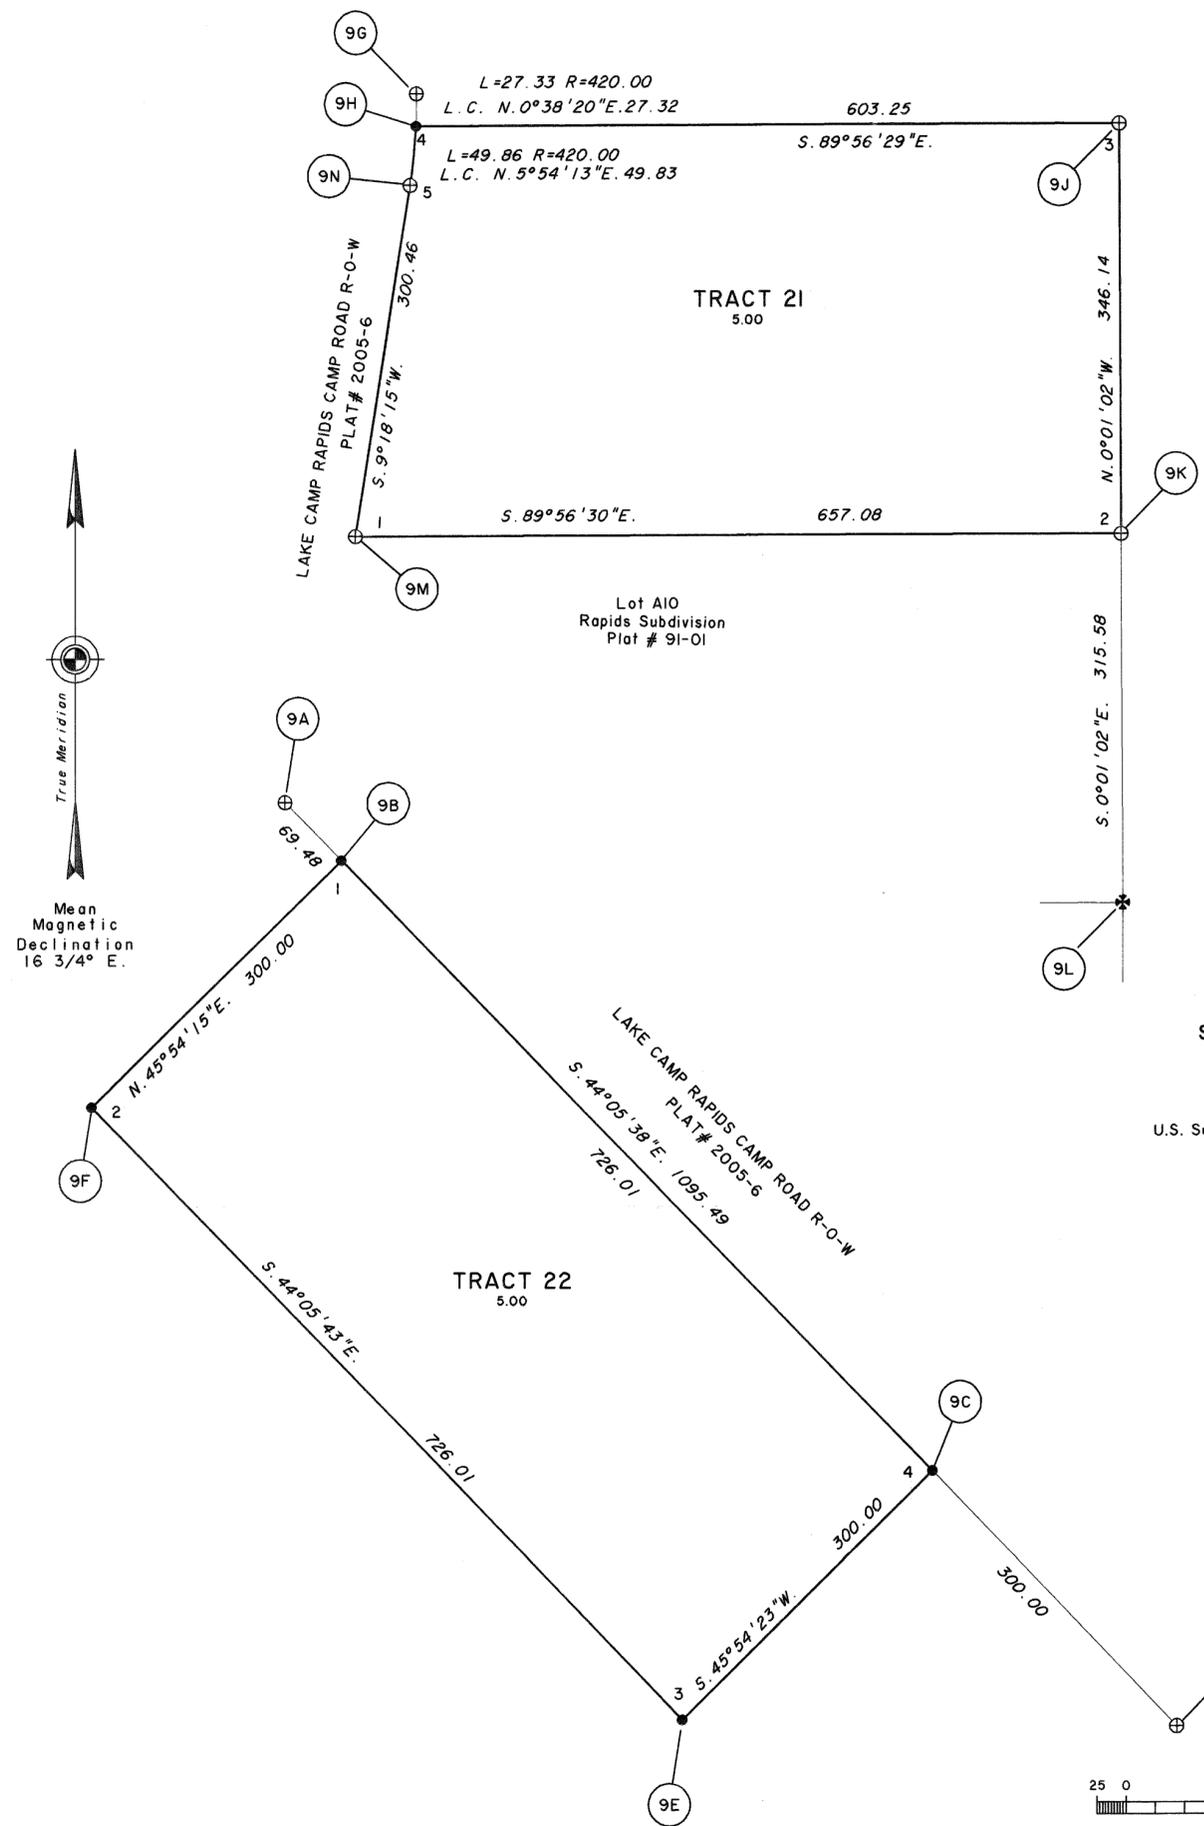


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN T_s. 15 TO 18 S., R_s. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS




REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

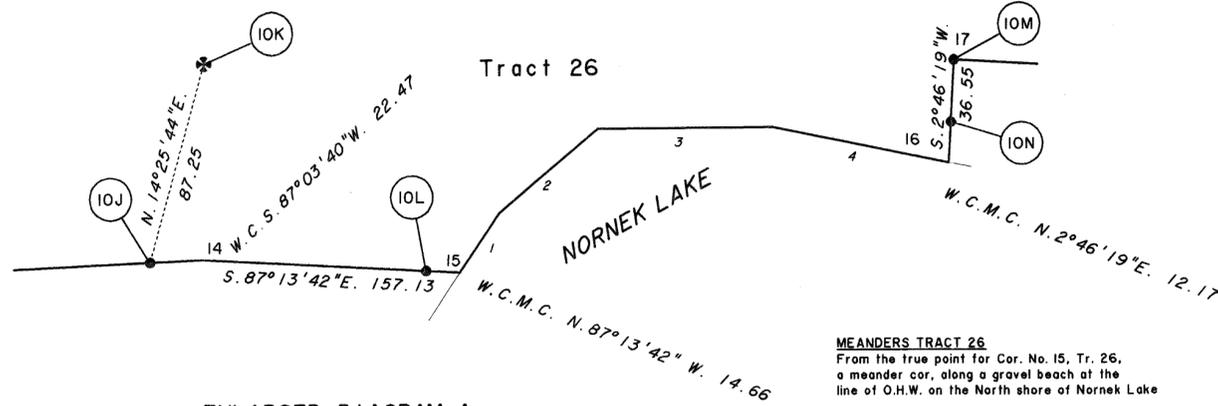



MEANDERS TRACT 26 From the true point for Cor. No. 15, Tr. 26, a meander cor. along a gravel beach at the line of O.H.W. on the North shore of Nornek Lake

N. 33°59'53" E. 30.47 ft. N. 49°46'50" E. 55.05 ft. N. 89°29'37" E. 75.21 ft. S. 76°40'09" E. 29.33 ft.


At the end of course, the true point for cor. No. 16, Tr. 26, a meander cor.

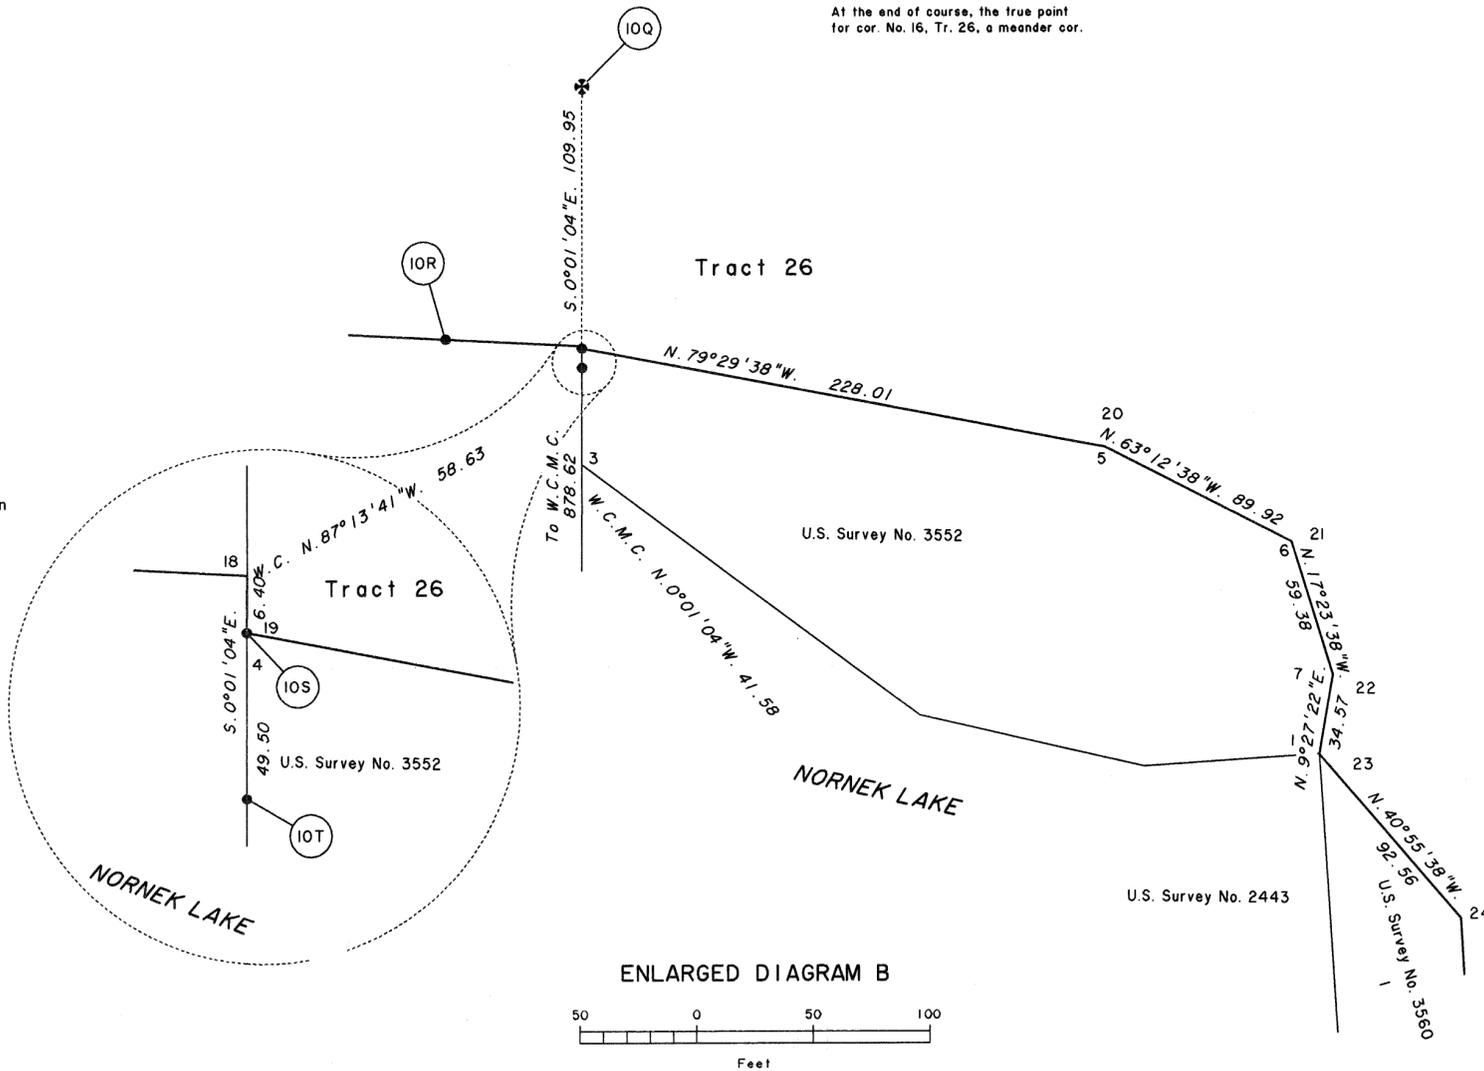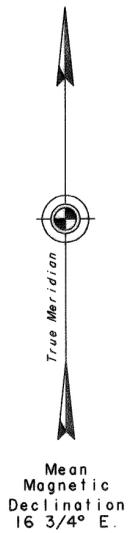

ENLARGED DIAGRAM B

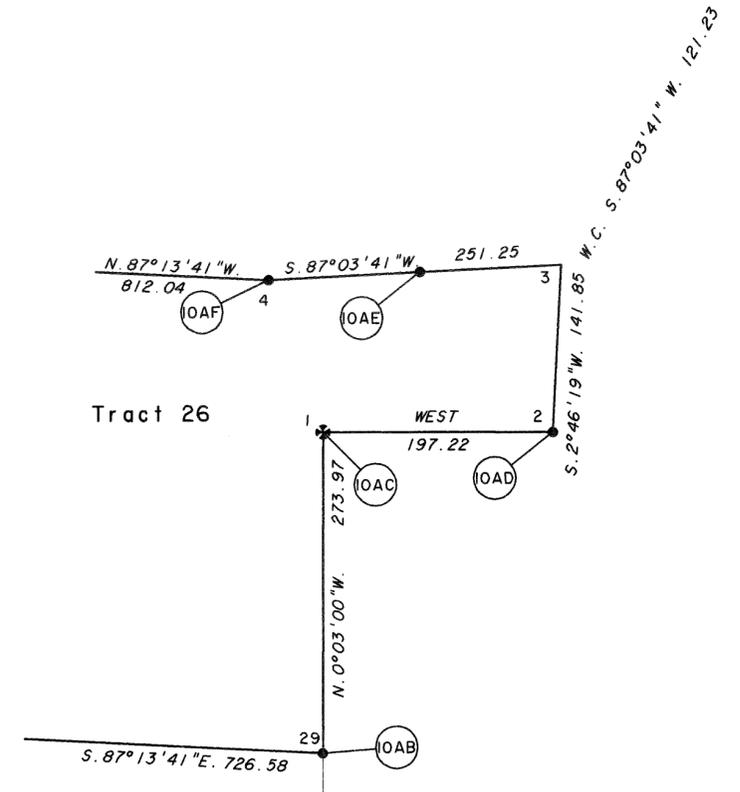

ENLARGED DIAGRAM C



LEGEND

- Found BLM/GLO Monument (star symbol)
- Set Monument This Survey (solid circle)
- Set 5/8" Diam. Rebar With Alum. Cap This Survey (circle with dot)
- Found Primary Monument by Others (circle with cross)
- Found Secondary Monument by Others (circle with plus)


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN Ts. 15 TO 18 S., Rs. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

2A

Found an iron post, 2 1/2 ins. diam., loosely set, straightened over base to project 6 ins. above ground, with brass cap mkd. as shown, no remaining evidence of original pits were found, from which new bearing objects



A magnet in a silver plastic case, bears N. 82° E., 10.0 ft. dist., buried 12 ins. below ground.


A magnet in a pink plastic case, bears S. 1° E., 10.0 ft. dist., buried 13 ins. below ground.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. East of the monument.

Add the marks 2006 to the brass cap.

2B

Found an iron post, 2 1/2 ins. diam., loosely set, straightened over base to be flush with ground, with brass cap mkd. as shown, no remaining evidence of original pits were found, from which new bearing objects



A magnet in a silver plastic case, bears N. 61° E., 10.0 ft. dist., buried 10 ins. below ground.

A magnet in a pink plastic case, bears S. 34° E., 10.0 ft. dist., buried 13 ins. below ground.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. S. of the monument.

Add the marks TR 1 and 2006 to the brass cap.

2C

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which



A magnet in a blue plastic case, bears S. 47° W., 10.0 ft. dist., buried 13 ins. below ground.

A magnet in an orange plastic case, bears N. 43° W., 10.0 ft. dist., buried 10 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. SW of the monument.

Monument is located in open tundra with scrub brush, grasses and lichen. The post is set in organic soil over clay.

2D

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which



A magnet in a blue plastic case, bears S. 41° W., 10.0 ft. dist., buried 11 ins. below ground.

A magnet in an orange plastic case, bears N. 43° W., 10.0 ft. dist., buried 10 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post 5 ft. long, driven 2 ft. in the ground, 1 ft. NW of the monument.

Monument is located on nearly level ground, with scrub brush and grasses. The post is set in organic soil over sand.

2E

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which



A magnet in a silver plastic case, bears N. 49° E., 10.0 ft. dist., buried 11 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 12 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, with scrub brush and grass. The post is set in organic soil. True corner falls on the shore of Kvichak Bay, not suitable for monumentation.

2F

Found an iron pipe 3 ins. diam, concrete filled, loosely set, straightened over base to project 17 ins. above ground, with punch marks S2399 COR4, S2429 COR 2 on the side and a nail cemented in in the top of the cor. point.

No remaining evidence of the original pits were found.

2G

Found an iron pipe, 3 ins. diam., concrete filled, projecting 12 ins. above ground, with punch marks S2429, WC COR 1, on N.W. side, with punch marks S2399, WC COR 1, on N.E. side, and a nail cemented in the top of the cor. point. No remaining evidence of the original pits were found, from which new bearing objects


A magnet in a silver plastic case, bears N. 41° E., 10 ft. dist., buried 12 ins. below ground.

A magnet in an orange plastic case, bears N. 48° W., 10.0 ft. dist., buried 12 ins. below ground.

No evidence of the original corner was found. True position falls in a bog, unsuitable for monumentation.

At the point selected for the witness corner,

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which



A magnet in a silver plastic case, bears N. 89° E., 10.0 ft. dist., buried 15 ins. below ground.

A magnet in an orange plastic case, bears N. 8° W., 7.5 ft. dist., buried 13 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. S. of the monument.

Monument is located in marshy tundra. The post is set in organic soil over clay.

2H

Found an iron pipe, 3 1/2 ins. diam., loosely set, straightened over base to project 14 ins. above ground encircled with a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which new bearing objects


A magnet in a silver plastic case, bears N. 1° E., 10.0 ft. dist., buried 10 ins. below ground.

A magnet in a pink plastic case, bears S. 48° E., 10.0 ft. dist., buried 12 ins. below ground.

This cor. now also serves as the witness cor. to cor. No. 4, Tract 2, a meander cor.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 2 ft. N. of the monument.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which



A magnet in a blue plastic case, bears S. 37° W., 10.0 ft. dist., buried 15 ins. below ground.

A magnet in an orange plastic case, bears N. 61° W., 10.0 ft. dist., buried 14 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.

Monument is located on nearly level terrain, in tundra, at top of a small ridge, 2 ft. high. An iron pipeline, 10 ins. diam., bears E., 59 ft. dist., pipeline bears N. 60° E. and S. 60° W. The post is set in organic soil over clay. True point falls on NW shore of an unnamed lake, unsuitable for monumentation.

2J


Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown, from which new bearing objects

A magnet in a blue plastic case, bears S. 36° W., 10.0 ft. dist., buried 12 ins. below ground.

A magnet in an orange plastic case, bears N. 36° W., 10.0 ft. dist., buried 12 ins. below ground.

Add the marks 2006 to the brass cap.

This cor. now also serves as the witness cor. to cor. No. 2, Tract 2, a meander cor.




2K

Found an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown

The record accessories were not recovered.

This cor. now also serves as the witness cor. to cor. No. 1, Tract 2, a meander cor.



2L



2N


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown, from which

A magnet in a silver plastic case, bears N. 45° E., 10.0 ft. dist., buried 12 ins. below ground.

A magnet in a pink plastic case, bears S. 50° E., 10.0 ft. dist., buried 12 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in tundra, at the top of a bluff, 25 ft. high, overlooking Kvichak Bay, bluff bears N. 20° W. and S. 10° W. The post is set in organic soil over clay. The true corner falls on gently sloped beach of sand and gravel, not monumented due to ice and water action.



2P

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which

A magnet in a pink plastic case, bears S. 14° E., 10.0 ft. dist., buried 15 ins. below ground.

A magnet in a blue plastic case, bears S. 77° W., 10.0 ft. dist., buried 14 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.

Monument is located on near level ground, in tundra. The post is set in organic soil over sand and clay.



2Q

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which

A magnet in a blue plastic case, bears S. 46° W., 10.0 ft. dist., buried 18 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 13 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.

Monument is located on nearly level ground, in tundra, with scrub brush, tundra cotton and blueberry bushes. The post is set in organic soil over clay.



2R


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which

A magnet in a silver plastic case, bears N. 43° E., 10.0 ft. dist., buried 15 ins. below ground.

A magnet in a pink plastic case, bears S. 44° E., 10.0 ft. dist., buried 14 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in tundra, with scrub brush, and blueberry bushes. The post is set in organic soil over clay. True corner falls on gently sloping sand and gravel beach. Not monumented due to ice and water action.



2S

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which

A magnet in a silver plastic case, bears N. 47° E., 10.0 ft. dist., buried 18 ins. below ground.

A magnet in a pink plastic case, bears S. 48° E., 10.0 ft. dist., buried 18 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in tundra, with scrub brush and tundra cotton. Top of bluff, 20 ft. high, bears W. 73 ft. dist., bluff bears N. 10° E. and S. 12° W. The post is set in organic soil over sand. The true corner falls on gently sloping beach, not monumented due to ice and water action.



2T

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which


A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 14 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 13 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.

Monument is located on nearly level ground, in tundra, with scrub brush and tundra cotton. The post is set in organic soil.



2U


Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which

A magnet in a silver plastic case, bears N. 44° E., 10.0 ft. dist., buried 14 ins. below ground.

A magnet in a pink plastic case, bears S. 46° E., 10.0 ft. dist., buried 14 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in tundra, with scrub brush and tundra cotton. Top of bluff, 20 ft. high, bears W., 74 ft. dist., bluff bears N. 15° E. and S. 5° W. A cabin, 12 ft. x 16 ft., bears N. 48° E., 34 ft. dist., long side bears S. 72° E. The post is set in organic soil over sand. The true corner falls on gently sloping beach, not monumented due to ice and water action.



2V

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 16 ins. diam., with brass cap mkd. as shown, from which

A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 18 ins. below ground.

A magnet in an orange plastic case, bears N. 43° W., 10.0 ft. dist., buried 14 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 3 ft. in the ground, 1 ft. N. of the monument.

Monument is located on nearly level ground, in tundra, with scrub brush and tundra cotton. The post is set in organic soil.



2W

Found an iron post, 3 ins. diam., concrete filled, loosely set, straightened over base to project 20 ins. above ground, supported by a rock mound, 18 ins. diam. x 8 ins. high, mkd. with a nail in top, with punch marks S1582 COR4 and WC scratched on the side of the post, no remaining evidence of the original pits were found, from which new bearing objects

A magnet in a pink plastic case, bears S. 46° E., 10.0 ft. dist., buried 11 ins. below ground.

A magnet in a blue plastic case, bears S. 50° W., 10.0 ft. dist., buried 10 ins. below ground.

Deposit a magnet in a white plastic case alongside of the iron post.

Add the marks 2006 to the side of the post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISION LINES, THE SUBDIVISION OF SECTION LINES WITHIN T_s. 15 TO 18 S., R_s. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

2X

Drive an alum. rod, 36 ins. long, 3/4 in. diam., 34 ins. in the ground, with alum. cap mkd. as shown, from which



A magnet in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 12 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 12 ins. below ground.

Deposit a magnet in a white plastic case alongside of the alum. rod.

Monument is located in open tundra, on level ground. Rod is set in silty loam.

2Y

Drive an alum. rod, 36 ins. long, 3/4 in. diam., 34 ins. in the ground, with alum. cap mkd. as shown, from which



A magnet in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 12 ins. below ground.

A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 12 ins. below ground.

Deposit a magnet in a white plastic case alongside of the alum. rod.

Monument is located in open tundra, on level ground. Rod is set in silty loam. Drive an alum. rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, N. 10 ft. dist., with an orange triangular marker.

2Z

Drive an alum. rod, 36 ins. long, 3/4 in. diam., 34 ins. in the ground, with alum. cap mkd. as shown, from which



A magnet in a silver plastic case, bears N. 45° E., 10.0 ft. dist., buried 12 ins. below ground.

A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 12 ins. below ground.

Deposit a magnet in a white plastic case alongside of the alum. rod.

Monument is set in open tundra, on level ground. Rod is set in silty loam.

2AA

Drive an alum. rod, 36 ins. long, 3/4 in. diam., 35 ins. in the ground, with alum. cap mkd. as shown, from which



A magnet in a silver plastic case, bears N. 45° E., 10.0 ft. dist., buried 12 ins. below ground.


A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 12 ins. below ground.

Deposit a magnet in a white plastic case alongside of the alum. rod.

Monument is located in open tundra, on level ground. Rod is set in silty loam. True cor. falls in pond. W.C. set S. 80° 46' 23" W. 20.00 ft. from true cor.

2AB


Found an alum. post, 2 1/2 ins. diam., loosely set, straightened over base to project 3 ins. above ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, no remaining evidence of the original pits were found, S. and E. of corner.



Drive an alum. rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, N. 6.60 ft. dist., with an orange triangular marker bolted to top.

2AC

Found an alum. rod, 5/8 in. diam., without cap, 6.60 ft. S. of a bent alum. rod for triangular marker. Detached cap found in foreground hole, badly corroded.




At the corner point, drive an alum. rod 6 ft. long, 3/4 in. diam., 62 ins. in the ground, with alum. cap mkd. as shown, set next to remaining alum. rod.

Drive an aluminum rod alongside the original rod, 36 ins. long, 3/4 in. diam., 30 ins. in the ground, with an orange triangular marker on top.

3A

Found an iron post, 2 1/2 ins. diam., loosely set, straightened over base to project 6 ins. above ground, with brass cap mkd. as shown, from which the remaining original bearing tree



A wind-fallen spruce, 4 ins. diam., bears N. 63° E., 29.1 ft. dist., with scribe marks 1/4 S10 BT.

And new bearing objects

A magnet in a blue plastic case, bears S. 9° W., 10.0 ft. dist., buried 13 ins. below ground.


A magnet in an orange plastic case, bears N. 66° W., 10.0 ft. dist., buried 10 ins. below ground.

A steel fence post 5 ft. long, driven 2 ft. in the ground, 1 ft. S. of the monument.

Add the marks 2006 to the brass cap.

3B


Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, from which the remaining bearing tree



A birch, 13 ins. diam., bears S. 89° W., 46.8 ft. dist., with scribe marks WC 17S R45W S10 BT.

3C

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown, from which



A magnet in a pink plastic case, bears S. 31° E., 10.0 ft. dist., buried 12 ins. below ground.


A magnet in a blue plastic case, bears S. 34° W., 10.0 ft. dist., buried 15 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in the flood plain of King Salmon Creek, among scattered birch and willow trees. The post is set in sand. True position falls in a bog.

3D

Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown



3E

Found an iron pipe, 1 in. diam., firmly set, projecting 1 in. above ground. No cap was found.

3F

Found an iron pipe, 1 in. diam., firmly set, projecting 13 ins. above ground. No cap was found.

3G

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 2.5 ft. E. of the monument.

Found an iron rebar, 1/2 in. diam., firmly set, flush with ground, with alum. cap mkd. as shown


A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.

This cor. is a careful and faithful perpetuation of the C-N-SW-NE 1/256 of Sec. 15, and is hereby accepted.

This cor. now also serves as cor. No. 1, Tract 8.


3H

Found an iron post, 2 1/2 ins. diam., firmly set in a concrete post 30 ins. diam., flush with ground, with brass cap mkd. as shown



3J

Found an iron pipe, 1 in. diam., loosely set, straightened over base to project 12 ins. above ground, with brass cap mkd. as shown, from which




An alum. rod, 3/4 in. diam., bears S. 88° W., 6.80 ft. dist., projecting 18 ins. above ground, with an alum. triangle marker bolted on top.

A rebar, 1/2 in. diam., adjacent to monument, projecting 10 ins. above ground.

3K


Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown



This cor. now also serves as cor. No. 1, Tract 6.


3L

Found an iron rebar, 1/2 in. diam., firmly set, projecting 5 ins. above ground, with alum. cap mkd. as shown



3M

Found an iron rebar, 1/2 in. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown



3N

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which



A spruce, 4 ins. diam., bears N. 37° E., 33.3 ft. dist., mkd. XBT.

A spruce, 4 ins. diam., bears S. 23° E., 30.6 ft. dist., mkd. XBT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. NE of the monument.

Monument is located on level ground, in tundra, among spruce, birch and willow. The post is set in organic loam soil.

3P

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which



A spruce, 7 ins. diam., bears N. 39° E., 20.4 ft. dist., mkd. XBT.

A spruce, 4 ins. diam., bears S. 83° W., 33.9 ft. dist., mkd. XBT.


Deposit a magnet in a white plastic case, at the base of the stainless steel post.

Monument is located on level ground, among birch, spruce and willow trees. A trail, 12 ft. wide, bears S. 40 ft. dist., trail bears N. 50° E. and S. 50° W.

The post is set in organic soil over clay.


3Q

Found an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown



3R

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which



A spruce, 4 ins. diam., bears N. 51° E., 33.7 ft. dist., mkd. XBT.


A spruce, 6 ins. diam., bears S. 18° W., 9.2 ft. dist., mkd. XBT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on level ground, among spruce, birch and willow trees, in tundra. The post is set in organic soil.


3S

Found an alum. post, 2 1/2 ins. diam., firmly set, flush with ground, with alum. cap mkd. as shown



3T

Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, from which the original bearing trees



A rotted birch stump, 7 ins. diam., bears N. 40° E., 13.2 ft. dist., with no visible marks.

A rotted birch stump, 6 ins. diam., bears S. 39° W., 12.6 ft. dist., with no visible marks.

And new bearing objects

A magnet, in a silver plastic case, bears N. 29 1/2° E., 9.9 ft. dist., buried 12 ins. below ground.

A magnet, in a pink plastic case, bears S. 46° E., 9.9 ft. dist., buried 12 ins. below ground.

A spruce, 7 ins. diam., bears S. 31° W., 26.1 ft. dist., mkd. T17S R45W S21 BT.

A spruce, 10 ins. diam., bears N. 49° W., 63.3 ft. dist., mkd. T17S R45W S16 BT.


This cor. now serves as cor. No. 1, Tract 7.

Add the marks 2006 to the brass cap.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN Ts. 15 TO 18 S., Rs. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd. as shown.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of monument.

Monument is located on level ground, among dwarf birch, willow and spruce, with labrador tea, lingonberries and lichen in the vicinity of scrap steel, barrels and tanks. The post is set in sand.



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown, from which the original bearing objects


A spruce, 8 ins. diam., bears S. 17 1/2° E., 94.8 ft. dist., with a completely healed blaze. (Record: S. 21 3/4° E.)

An iron pipe, 1 in. diam., bears West, 1 ft. dist., projecting 20 ins. above ground.


And a new bearing tree

A spruce, 9 ins. diam., bears N. 25° E., 35.6 ft. dist., mkd. W 1/16 S 15 BT.

Add the marks 2006 to the alum. cap.




Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 7 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees

A birch, 7 ins. diam., bears N. 30° E., 32.8 ft. dist., with scribe marks, NW 1/16 S 22 BT.

A birch, 5 ins. diam., bears S. 71° E., 33.7 ft. dist., with scribe marks, NW 1/16 S 22 BT.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, encircled by a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which the 2006 bearing objects

A magnet, bears S. 13° E., 9.9 ft. dist.


A magnet, bears S. 71° W., 9.9 ft. dist.

Monument is located on westerly slope, among scattered spruce. Pike Lake Road bears West, approximately 112 ft. dist.



Found an iron rebar, 5/8 in. diam., firmly set projecting 10 ins. above ground. No cap was found.

This cor. now also serves as cor. No. 4, Tract 10.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which

A magnet in a silver plastic case, bears N. 56° E., 10.0 ft. dist., buried 15 ins. below ground.


A magnet in an orange plastic case, bears N. 33° W., 10.0 ft. dist., buried 18 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on level ground at toe of rock berm, berm bears N. 76° E. and S. 76° W., on the N. edge of rock pit. The post is set in silty sand.



Found an alum. post, 2 1/2 ins. diam., firmly set, 6 ins. below ground, with alum. cap mkd. as shown




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, no remaining evidence of original pits were found.

From which the 2006 bearing objects

A spruce, 7 ins. diam., bears N. 89° E., 11.9 ft. dist., with the scribe marks XBT visible.


A magnet, bears N. 20° W., 9.9 ft. dist.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on level ground at S. edge of brush line, brush line bears E. and W. Right bank of King Salmon Creek, 3 ft. high, bears S., 51 ft. dist., bank bears N. 60° E. and S. 75° W. The post is set in sandy loam soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which

A magnet in a pink plastic case, bears S. 46° E., 10.0 ft. dist., buried 18 ins. below ground.

A magnet in a blue plastic case, bears S. 51° W., 10.0 ft. dist., buried 18 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on level ground. The post is set in sandy loam and gravel.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 42° E., 58.7 ft. dist., mkd. XBT.

A spruce, 3 ins. diam., bears S. 60 1/2° W., 19.8 ft. dist., mkd. XBT.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on gentle NE slope on rolling tundra, in spruce and willow, with occasional exposed boulders. The post is set in silty sand.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., buried 2 ins. below the ground, with brass cap mkd. as shown, from which

A magnet in a silver plastic case, bears N. 77° E., 10.0 ft. dist., buried 15 ins. below ground.

A magnet in a pink plastic case, bears S. 14° E., 10.0 ft. dist., buried 18 ins. below ground.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on E. side of Lake Camp Road, 20 ft. wide, centerline bears W., 29 ft. dist. centerline bears, N. 40° E. and S. 40° W. The post is set in sand.



Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown

This cor. now also serves as cor. No. 4 of Tract 7.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown, no remaining evidence of the original pits were found, from which the 2006 bearing objects


A magnet, bears N. 45° E., 9.9 ft. dist.

A magnet, bears S. 45° E., 9.9 ft. dist.


A spruce, 3 ins. diam., bears S. 40° W., 28.4 ft. dist., with scribe marks XBT visible.

A magnet, bears N. 45° W., 9.9 ft. dist.

This cor. now also serves as S.E. cor. of Tract 9.




Found an iron rebar, 5/8 in. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown



Found an iron rebar, 5/8 in. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown

This cor. now also serves as cor. No. 5, Tract 10.




Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown, from which the original bearing tree

A spruce, 6 ins. diam., bears S. 29 1/2° E., 66 ft. dist., with a completely healed blaze. and a new bearing tree


A spruce, 5 ins. diam., bears S. 51° W., 124.8 ft. dist., mkd. N 1/6 S 21 BT.

Add the marks 2006 to the brass cap.



Found an iron rebar, 1/2 in. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown

This cor. now also serves as cor. No. 4, Tract 9.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which

A magnet in a blue plastic case, bears S. 59° W., 10.0 ft. dist., buried 15 ins. below ground.

A magnet in an orange plastic case, bears N. 31° W., 10.0 ft. dist., buried 14 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on W. side of Lake Camp Road, 20 ft. wide, centerline bears E., 50 ft. dist. centerline bears N. 40° E. and S. 40° W. The post is set in sand.



Found an iron rebar, 5/8 in. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown

This cor. now also serves as cor. No. 3, Tract 9.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN Ts. 15 TO 18 S., Rs. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION


4Q

Found an iron post, 2 1/2 ins. diam., firmly set, projecting 1 in. above ground, with brass cap mkd. as shown, witnessed by remaining pits E. and W. of the corner, 3 ft. dist.




4R

Found a stainless steel post, 2 1/2 ins. diam., firmly set, 4 ins. above ground, with brass cap mkd. as shown, from which the 2006 bearing objects



4S

Found an alum. post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown, from which the original bearing trees



4T

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 19 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown, from which




4U

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which



4V

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which



4W

Found an aluminum rod, 5/8 in. diam., firmly set, projecting 8 ins. above ground. No cap was found.

4X

Found an iron rebar, 1/2 in. diam., firmly set, projecting 12 ins. above ground, no cap was found.

4Y


Found an alum. rod, 5/8 in. diam., loosely set 27 ins. out of ground. No cap was found.

4Z

Found an iron rebar, 1/2 in. diam., firmly set, projecting 4 ins. above ground. No cap was found.


4AA

Found an iron rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown




4AB

Original monument lost to road construction.



4AC

Found an iron rebar, 1/2 in. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown.




4AD

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which




4AE

Found an alum. rod, 5/8 in. diam., projecting 8 ins. above ground with a alum. cap mkd. as shown




5A

Found an iron rebar, 1/2 in. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.



5B

Drive an alum. rod, 36 ins. long, 3/4 in. diam., 33 ins. in the ground, encircled by a rock collar, 6 ins. diam., with an alum. cap mkd. as shown, from which



5C

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which



5D

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which




5E

Found an iron rebar, 1/2 in. diam., firmly set, 5 ins. below surface of standing water. Alum. cap found underwater not readable.


5F

Drive an alum. rod, 36 ins. long, 3/4 in. diam., 33 ins. in the ground, with an alum. cap mkd. as shown, from which




5G

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which



5H

Found an iron rebar, 1/2 in. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown



5J

Found an iron rebar, 1/2 in. diam., firmly set, 7 ins. below surface of standing water. Alum. cap found underwater not readable.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)


PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN T.S. 15 TO 18 S., R.S. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

5K

Found an iron rebar, 1/2 in. diam., firmly set projecting 11 ins. above ground with alum. cap mkd. as shown



Monument is located on open tundra.


5L

Found an iron rebar, 1/2 in. diam., firmly set, projecting 12 ins. above ground. No cap was found.

Monument is located on open tundra.

5M

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which



A magnet in a blue plastic case, bears S. 42° W., 10.0 ft. dist., buried 12 ins. below ground.

A magnet in an orange plastic case, bears N. 48° W., 10.0 ft. dist., buried 13 ins. below ground.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.

Monument is located on nearly level ground, in tundra, with tundra cotton and scrub brush. The post is set in organic soil.

5N

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which



A magnet in a pink plastic case, bears S. 41° E., 10.0 ft. dist., buried 18 ins. below ground.

A magnet in a blue plastic case, bears S. 49° W., 10.0 ft. dist., buried 13 ins. below ground.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.

Monument is located on nearly level ground, in tundra, with tundra cotton and scrub brush. The post is set in organic soil over sand.

5P

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 9 ins. diam., with brass cap mkd. as shown, from which



A magnet in a silver plastic case, bears N. 41° E., 10.0 ft. dist., buried 15 ins. below ground.

A magnet in an orange plastic case, bears N. 49° W., 10.0 ft. dist., buried 15 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.

Monument is located on nearly level ground, in tundra, with tundra cotton and scrub brush. The post is set in organic soil.

5Q

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 14 ins. diam., with brass cap mkd. as shown, from which



A magnet in a silver plastic case, bears N. 42° E., 10.0 ft. dist., buried 18 ins. below ground.


A magnet in a pink plastic case, bears S. 51° E., 10.0 ft. dist., buried 13 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in tundra, with scrub brush and tundra cotton. Beach Access Road, 25 ft. wide, bears W., 30 ft. dist., centerline bears N. 22° W. and S. 22° E. The post is set in organic soil.

5R

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which




A magnet in a silver plastic case, bears N. 46° E., 10.0 ft. dist., buried 15 ins. below ground.

A magnet in an orange plastic case, bears N. 46° W., 10.0 ft. dist., buried 17 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in open tundra with grasses and scrub brush. Beach Access Road, 25 ft. wide, bears W., 28 ft. dist., centerline bears N. 32° W. and S. 35° E. The post is set in organic soil over sand.

5S



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 16 ins. diam., with brass cap mkd. as shown, from which

A magnet in a silver plastic case, bears N. 55° E., 10.0 ft. dist., buried 14 ins. below ground.

A magnet in a pink plastic case bears S. 44° E., 10.0 ft. dist., buried 12 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level open tundra. The post is set in organic soil.

5T



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, encircled by a rock collar, 15 ins. diam., with brass cap mkd. as shown, from which

A magnet in a pink plastic case, bears S. 38° E., 10.0 ft. dist., buried 12 ins. below ground.


A magnet in a blue plastic case, bears S. 49° W., 10.0 ft. dist., buried 12 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 1 ft. in the ground, 1 ft. S. 45° W. of the monument.

Monument is located on nearly level ground, in open tundra. A foot trail, 2 ft. wide, bears S. 5° E., 15 ft. dist., trail bears N. 20° E. and S. 12° W. The post is set in organic soil and sand.

5U




Found an iron post, 2 1/2 ins. diam., loosely set, straightened over base to project 6 ins. above ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, witnessed by pits, S. 5° E. and S. 85° W. of the corner, 3 ft. dist. from which new bearing objects

A magnet in a pink plastic case, bears S. 51° E., 10.0 ft. dist., buried 12 ins. below ground.

A magnet in a blue plastic case, bears S. 35° W., 10.0 ft. dist., buried 13 ins. below ground.

Add the marks 2006 and C 4 L 2 to the brass cap.

5V



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which


A magnet in a silver plastic case, bears N. 18° E., 15.1 ft. dist., buried 12 ins. below ground.

A magnet in a pink plastic case, bears S. 68° E., 10.0 ft. dist., buried 12 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in open tundra. A bluff, 20 ft. high, bears W., 10 ft. dist., bluff bears N. 35° E. and S. 75° E. The SW corner of a shack, 14 ft. x 10 ft., bears N. 26 1/2° W., 14 ft. dist., longside bears N. 82° W. The post is set in organic soil. The true corner falls on beach, not monumented, due to ice and water action.

5W



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, supported by a rock mound, 24 in. base, 16 ins. high, with brass cap mkd. as shown, from which


A magnet in a silver plastic case, bears N. 42° E., 10.0 ft. dist., buried 12 ins. below ground.

A magnet in an orange plastic case, bears N. 62° W., 10.0 ft. dist., buried 12 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in tundra. A foot trail, 1 ft. wide, bears S. 85° W., 56 ft. dist., trail bears N. 10° E. and S. 10° W. The post is set in organic soil.

5X




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, witnessed by the remaining pit N. of cor., 3 ft. dist. from which new bearing objects

A magnet in a silver plastic case, bears N. 21° E., 10.0 ft. dist., buried 10 ins. below ground.

A magnet in an orange plastic case, bears N. 79° W., 10.0 ft. dist., buried 13 ins. below ground.

Add the marks 2006 and C 5 L 2 to the brass cap.


5Y



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown

A steel fence post, bears N. 1 ft. dist.

5Z



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, with brass cap mkd. as shown, from which

A magnet in a blue plastic case, bears S. 40° W., 10.0 ft. dist., buried 15 ins. below ground.


A magnet in an orange plastic case, bears N. 48° W., 10.0 ft. dist., buried 13 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.

Monument is located on rolling tundra, with scrub brush and grass. The post is set in organic soil.

5AA




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown

A galvanized steel fence post, bears N. 1 ft. dist.

This cor. now also serves as cor. No. 4, Tract 1B.

5AB




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown

A steel fence post, bears N. 1 ft. dist.

This cor. now also serves as the witness cor. to cor. No. 10, Tract 1B.


5AC



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown

No remaining evidence of the original pits were found.

6A



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which

A magnet in a pink plastic case, bears S. 44° E., 10.0 ft. dist., buried 10 ins. below ground.


A magnet in a blue plastic case, bears S. 54° W., 10.0 ft. dist., buried 11 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.


Monument is located on nearly level ground, in open tundra, with grasses and scrub brush. The post is set in organic soil.

6B



Found an iron rebar, 5/8 in. diam., firmly set, flush with ground, with alum. cap mkd. as shown


6C



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown

A steel fence post, bears NW, 1 ft. dist.

6D



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which

A magnet in a silver plastic case, bears N. 24° E., 10.0 ft. dist., buried 15 ins. below ground.

A magnet in an orange plastic case, bears N. 64° W., 10.0 ft. dist., buried 10 ins. below ground.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.

This monument serves as a witness point on the line.

Monument is located on nearly level ground, among older and scrub willow, with berry bushes and Labrador tea. The post is set in organic soil over clay.

6E




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown

A steel fence post, bears N. 1 ft. dist.

This cor. now also serves as the witness cor. to cor. No. 5, Tract 1B and the SE cor. of Lot 6, Sec. 4.

6F



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 4 ins. below road grade, with brass cap mkd. as shown, from which


A magnet in a silver plastic case, bears N. 51° E., 10.0 ft. dist., buried 6 ins. below ground in road bed.

A magnet in a pink plastic case, bears S. 46° E., 10.0 ft. dist., buried 6 ins. below ground in road bed.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located in the W. shoulder of gravel road, 21 ft. wide, locally known as Birdwatch Road, approximately 10.0 ft. W. of centerline, centerline bears N. 6° E. and S. 12° E. The post is set in 18 ins. compacted gravel fill over erosion cloth and sand.

6G



Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown

A steel fence post, bears N. 1 ft. dist.


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN Ts. 15 TO 18 S., Rs. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION


6H

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a blue plastic case, bears S. 15° W., 10.0 ft. dist., buried 15 ins. below ground.
A magnet in an orange plastic case, bears N. 79° W., 10.0 ft. dist., buried 13 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on nearly level ground, among willow and alder, with grasses. A gravel road, 25 ft. wide, bears N., 18 ft. dist., road bears S. 70° E. and S. 81° W. The post is set in organic soil over clay.




6J

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 43° E., 10.0 ft. dist., buried 10 ins. below ground.
A magnet in an orange plastic case, bears N. 49° W., 10.0 ft. dist., buried 10 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.
Monument is located on nearly level ground, in tundra, with scrub brush and grass. The post is set in organic soil over clay.



6K

Drive an alum. rod, 36 ins. long, 3/4 in. diam., 32 ins. in the ground, with an alum. cap mkd. as shown
A magnet in a pink plastic case, bears S. 51° E., 13.2 ft. dist., buried 12 ins. below ground.
A magnet in a blue plastic case, bears S. 25° W., 7.3 ft. dist., buried 13 ins. below ground.
Deposit a magnet in a white plastic case alongside the alum. rod.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.
Monument is located on nearly level ground, in tundra, with grass and scrub brush. The rod is set in organic soil, sand and clay.




6L

Found an iron pipe, 3 ins. diam., firmly set, projecting 14 ins. above ground, with the marks S2445 COR2 punched on SE side of the pipe. No remaining evidence of the original pits were found.


6M

Drive an alum. rod, 36 ins. long, 3/4 in. diam., 33 ins. in the ground, with alum. cap mkd. as shown, from which
A magnet in a pink plastic case, bears S. 45° E., 12.4 ft. dist., buried 10 in. below ground.
A magnet in a blue plastic case, bears S. 41° W., 7.1 ft. dist., buried 12 ins. below ground.
Deposit a magnet in a white plastic case alongside the alum. rod.
Monument falls in area with standing water. S. edge of Beach Access Rd. bears N. 45 ft. The centerline of the road to the sewer lagoon lies W. 90 ft. The road is 20 ft. wide and bears N. 40° E. and S. 30° W. The monument is located on level tundra. The rod is set in organic soil.
The true point falls in wet area at edge of road.




6N

Found an iron pipe, 3 ins. diam., firmly set, projecting 6 ins. above ground, encircled by a rock collar, 16 ins. diam., with a threaded plumbing pipe cap, mkd. as shown, no remaining evidence of the original pits were found, from which new bearing objects
A magnet in a silver plastic case, bears N. 44° E., 10.0 ft. dist., buried 12 ins. below ground.
A magnet in a pink plastic case, bears S. 49° E., 10.0 ft. dist., buried 12 ins. below ground.
Add the marks 2006 to the pipe cap.




6P

Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, witnessed by remaining pits E., S. and W. of the corner, at 3 ft. dist., from which new bearing objects
A magnet in a silver plastic case, bears N. 43° E., 10.0 ft. dist., buried 14 ins. below ground.
A magnet in a pink plastic case, bears S. 51° E., 10.0 ft. dist., buried 12 ins. below ground.
A magnet in a blue plastic case, bears S. 31° W., 10.0 ft. dist., buried 14 ins. below ground.
A magnet in an orange plastic case, bears N. 53° W., 10.0 ft. dist., buried 12 ins. below ground.
Add the marks 2006 to the brass cap.



7A

Found a brass tablet, 3 1/2 ins. diam., firmly set, flush in an 8 ins. x 8 ins. concrete form, with top mkd. as shown, witnessed by remnants of pits, N. and S. of the corner, 3 ft. dist.



7B

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 15 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 12 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located in open rolling tundra with marshes, mixed grass, berries, labrador tea and willows. The post is set in organic soil over sand.




7C

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 13 ins. below ground.
A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 13 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located in open rolling tundra, with mixed grasses, lichens, moss, labrador tea and berries. The post is set in organic soil over clay.




7D

Found an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. as shown, no remaining evidence of the original pits were found.
At the corner point,
Set original iron post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in the original hole, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which new bearing objects
A magnet in a pink plastic case, bears S. 42° E., 9.9 ft. dist., buried 13 ins. below ground.
A magnet in a blue plastic case, bears S. 71° W., 9.9 ft. dist., buried 16 ins. below ground.
Deposit a magnet in a white plastic case at the base of the iron post.
Add the marks 2006 to the brass cap.




7E

Found an iron post, 2 1/2 ins. diam., lying on the ground, from which no remaining evidence of original pits were found.
At the corner point,
Set original iron post, 28 ins. long, 2 1/2 ins. diam., 18 ins. in the ground, in the original hole, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which new bearing objects
A magnet in a pink plastic case, bears S. 42° E., 9.9 ft. dist., buried 13 ins. below ground.
A magnet in a blue plastic case, bears S. 71° W., 9.9 ft. dist., buried 16 ins. below ground.
Deposit a magnet in a white plastic case at the base of the iron post.
Add the marks 2006 to the brass cap.



7F

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 15 ins. below ground.
A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 13 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
This cor. now also serves as the N.W. cor. of Tract 24.
Monument is located in tundra with grass, moss, and lichens. The post is set in organic soil.




7G

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 13 ins. below ground.
A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 13 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
This cor. now also serves as the N.E. cor. of Tract 24.
Monument is located in open rolling tundra, among spruce and willow, with lichen, berries, moss and labrador tea. The post is set in organic soil over clay.



7H

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 45° E., 10.0 ft. dist., buried 15 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 13 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on nearly level ground, in tundra, with grasses, berries and moss. The post is set in organic soil over clay.




7J

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 13 ins. below ground.
A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 13 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
This cor. now also serves as the S.W. cor. of Tract 24, identical with the N.W. cor. of Tract 20.
Monument is located in lowland tundra with grass hummocks, labrador tea and lichens. The post is set in organic soil.



7K

Found an iron rebar, 1/2 in. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown
This cor. was established by Ralph J. Mancuso Alaska Registered Land Surveyor No. 7611, in 1989, the plot of which is un-recorded.
This cor. is now designated the C-S-S-SW 1/256 cor. of Sec 36, and serves as the S.E. cor. of Tract 24, identical with the N.E. cor. of Tract 20.




7L

Set a stainless steel post, 2 1/2 ins. diam., 28 ins. long, 24 ins. in the ground, with a brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 49° E., 10.0 ft. dist., buried 10 ins. below ground.
A magnet in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 12 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is set near a chain link fence, within the B.B.B. Landfill, surrounded by new growth alder and willows.
The post is set in gravel, and clay, with large rock throughout.




7M

Found an iron post, 2 1/2 ins. diam., loosely set, straightened over base to project 6 ins. above ground, with brass cap mkd. as shown, no remaining evidence of the original pits were found.
from which new bearing objects
A magnet in a silver plastic case, bears N. 80° E., 9.9 ft. dist., buried 12 ins. below ground.
A magnet in an orange plastic case, bears N. 22° W., 9.9 ft. dist., buried 13 ins. below ground.
Add the marks 2006 to the brass cap.
This cor. now also serves as the S.W. cor. of Tract 20.



7N

Found an iron rebar, 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with alum. cap mkd. as shown
From this point, an alum. post, 2 1/2 ins. diam. bears S. 87° W., 11.4 ft. dist., with alum. cap mkd. CS ASLS 88-212 ROW CI 7611-S 1990.
This cor. was established by Ralph J. Mancuso, Alaska Registered Land Surveyor No. 7611, in 1989, the plot of which is un-recorded.
This cor. is now designated the W 1/16 cor. of Sec 36, and serves as the S.E. cor. of Tract 20.




7P

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 47° E., 10.0 ft. dist., buried 13 ins. below ground.
A magnet in a pink plastic case, bears S. 48° E., 10.0 ft. dist., buried 12 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on nearly level ground, with alders and grasses. The post is set in organic soils over clay and rock.



7Q


Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown, no remaining evidence of the original pits were found, from which, accessories as set during the survey of Alaska State Land Survey No. 88-212, filed as Plat# 92-4 in the Kvichak Recording District.
A rebar, 5/8 in. diam., bears E., 49.7 ft. dist., with alum. cap mkd. 50 RP LS-7611 ASLS 88-212 C2 1991.
A rebar, 5/8 in. diam., bears W., 50.0 ft. dist., with alum. cap mkd. 50 RP LS-7611 ASLS 88-212 C2 1991.
And new bearing objects




ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN T.S. 15 TO 18 S., R.S. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS


REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, with brass cap mkd. as shown, witnessed by pits, N. 80° E. and S. 80° W. of cor., 4 ft. dist. from which new bearing objects
A magnet in a silver plastic case, bears N. 61° E., 10.0 ft. dist., buried 15 ins. below ground.
A magnet in an orange plastic case, bears N. 26° W., 10.0 ft. dist., buried 16 ins. below ground.
Add the marks 2006 to the brass cap.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, flush with ground, with brass cap mkd. as shown
A steel fence post, bears N. 1 ft. dist.




Drive an alum. rod, 36 in. long, 3/4 ins. diam., 35 ins. in the ground with alum. cap mkd. incorrectly as shown, from which
A magnet in a silver plastic case, bears N. 45° E., 10.0 ft. dist., buried 8 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 10 ins. below ground.
Deposit a magnet in a white plastic case alongside alum. rod.
True position falls on sandy beach, monument is N. to top of bluff.
Monument is located on nearly level ground, open tundra, among scattered berries and grasses. The rod is set in organic soil.
The marks MC were inadvertently omitted from the alum. cap.




Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown
A steel fence post, bears N. 1 ft. dist.
This cor. now also serves as the witness cor. to cor. No. 3 Tract 19.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 21 in. in the ground, with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 48° E., 10.0 ft. dist., buried 12 ins. below ground.
A magnet in an orange plastic case, bears N. 38° W., 10.0 ft. dist., buried 15 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.
Monument is located on rolling tundra, with scrub brush and blueberry bushes. Power lines bear E. 37 ft. dist., power line bears N. and S. The post is set in sand.




Drive an alum. rod, 36 ins. long, 3/4 in. diam., 35 ins. in the ground, with alum. cap incorrectly mkd. as shown, from which
A magnet in a silver plastic case, bears N. 45° E., 10.0 ft. dist., buried 7 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 8 ins. below ground.
Deposit a magnet in a white plastic case alongside of the alum. rod.
True position falls on sandy beach, monument is N. of top of bluff.
Monument is located on open tundra, among berries and grasses. The rod is set in organic soil.
The marks MC were inadvertently omitted from the alum. cap.




Found an iron rebar, 1/2 in. diam., firmly set, projecting 12 ins. above ground, with alum. cap mkd. as shown




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, with brass cap mkd. as shown, witnessed by pits N. and S. of corner, 3 ft. dist.
This cor. now also serves as cor. 4, Tract 19.




Drive an alum. rod, 36 ins. long, 3/4 in. diam., 35 ins. in the ground, with an alum. cap mkd. as shown, from which
A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 10 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 6 ins. below ground.
Deposit a magnet in a white plastic case alongside of the alum. rod.
Monument is located on open level tundra with grasses. The rod is set in organic soil.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a pink plastic case, bears S. 43° E., 10.0 ft. dist., buried 13 ins. below ground.
A magnet in a blue plastic case, bears S. 42° W., 10.0 ft. dist., buried 13 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.
Monument is located on rolling tundra, among scattered thickets of willow, with blueberry bushes. Power lines bear, E. 33 ft. dist., power line bears, N. and S. The post is set in sand and clay.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 12 ins. above ground, with brass cap mkd. as shown, no remaining evidence of the original pits were found, from which new bearing objects
A magnet in a pink plastic case, bears S. 41° E., 10.0 ft. dist., buried 13 ins. below ground.
A magnet in a blue plastic case, bears S. 31° W., 10.0 ft. dist., buried 13 ins. below ground.
Add the marks 2006 to the brass cap.
This cor. now also serves as the witness cor. to cor. No. 3, Tract 19.



Found an iron pipe, 3 ins. diam., loosely set, straightened over base to project 12 ins. above ground, encircled by a rock collar, 18 ins. diam., with a threaded plumbing pipe cap marked as shown, and S2225 COR2 punched on the E. side of pipe, no remaining evidence of the original pits were found, from which new bearing objects
A magnet in a silver plastic case, bears N. 47° E., 10.0 ft. dist., buried 12 ins. below ground.
A magnet in a pink plastic case, bears S. 42° E., 10.0 ft. dist., buried 12 ins. below ground.
Deposit a magnet in a white plastic case alongside of the iron post.
Add the marks 2006 to the pipe cap.
This cor. now also serves as cor. No. 9, Tract 27.




No evidence of original corner found, due to construction.
At the point selected for the witness corner,
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 2 ins. below the ground, with brass cap mkd. as shown, from which
SW corner of building, 14 ft. x 10 ft., bears S. 20° E., 48.9 ft. dist., long side bears N. 75° E.
A well casing, 6 ins. diam., 43 ins. above ground, bears S. 58° W., 49 ft. dist.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
The monument is located on developed lot. The post is set in organic soil.




Found an iron rebar, 1/2 in. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 81° E., 10.0 ft. dist., buried 12 ins. below ground.
A magnet in an orange plastic case, bears N. 6° W., 10.0 ft. dist., buried 15 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on nearly level ground, in tundra, among alder and willow. A gravel road 12 ft. wide, locally known as Birdwatch Road, bears S. 79° E., 42 ft. dist., centerline of road bears N. 35° E. and S. 35° W. The post is set in organic soil. The true corner falls on edge of pond, not monumented.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, with brass cap mkd. as shown, from which
A magnet in a blue plastic case, bears S. 42° W., 10.0 ft. dist., buried 15 ins. below ground.
A magnet in an orange plastic case, bears N. 53° W., 10.0 ft. dist., buried 12 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on nearly level ground, in open tundra. The post is set in organic soil.



Found an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown, no remaining evidence of the original pits were found, from which new bearing objects
A magnet in a silver plastic case, bears N. 22° E., 10.0 ft. dist., buried 12 ins. below ground.
A magnet in a pink plastic case, bears S. 62° E., 10.0 ft. dist., buried 10 ins. below ground.
Add the marks 2006 to the brass cap.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 8 ins. above ground, with brass cap mkd. as shown, witnessed by a pit N. of cor., 3 ft. dist., from which the original reference monuments
An iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above ground, bears N., 40.9 ft. dist., with a brass cap mkd. RM 1957 and an arrow pointing to the corner.
An iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, bears East, 101.6 ft. dist., with a brass cap mkd. RM 1540 CHS 1957 and an arrow pointing to the corner.



Drive an alum. rod, 3/4 in. diam., 36 ins. long, 35 ins. in the ground, with an alum. cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 60° E., 10.00 ft. dist.
A magnet in an orange plastic case, bears N. 30° W., 10.00 ft. dist.
Drive an alum. rod, 36 ins. long, 32 ins. in the ground, with alum. triangular marker bolted to top, 1 ft. N. of monument.
Deposit a magnet in a white plastic case alongside of the alum. rod.
Monument is located in open tundra with labrador tea and grasses. The rod is set in organic soil.



Found an iron pipe, 3 ins. diam., firmly set, projecting 12 ins. above ground, with threaded plumbing pipe cap, marked as shown, and MC S2425 WC COR3 punched on the S. and E. sides of pipe, no remaining evidence of the original pits were found, from which new bearing objects
A magnet in a silver plastic case, bears N. 42° E., 10.0 ft. dist., buried 15 ins. below ground.
A magnet in an orange plastic case, bears N. 51° W., 10.0 ft. dist., buried 15 ins. below ground.
Add the marks 2006 to the pipe cap.



Found an iron rebar, 1/2 in. diam., firmly set, projecting 3 ins. above ground, with alum. cap marked as shown.
This cor. was established by Ralph J. Mancuso Alaska Registered Land Surveyor No. 7611, in 1998, the plot of which is un-recorded.
This cor. is now designated as cor. No. 3, Lot 24A, U.S. Survey No. 3539.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND

THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN T.S. 15 TO 18 S., R.S. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

8M


Found an iron rebar, 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with alum. cap mkd. as shown



This cor. was established by Ralph J. Mancuso Alaska Registered Land Surveyor No. 7611, in 1998, the plat of which is un-recorded.

8N

Found an iron rebar, 5/8 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown, no evidence of the original wood post was found.



This cor. was established by Fred Walaika, Alaska Registered Land Surveyor No. 3255, in 1991, on Plat No. 91-5, Kvichak Recording District, AK.

Proper methods and procedures were used and this cor. is accepted as a true and faithful perpetuation of the original cor.

8P

Found an iron rebar, 1/2 in. diam., firmly set, flush with ground, with alum. cap mkd. as shown



This cor. was established by Ralph J. Mancuso Alaska Registered Land Surveyor No. 7611, in 1998, the plat of which is un-recorded.

This cor. is now designated as cor. No. 2, Lot 24A, U.S. Survey No. 3539

8Q

Found an iron rebar, 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with alum. cap mkd. as shown



This cor. was established by Ralph J. Mancuso Alaska Registered Land Surveyor No. 7611, in 1998, the plat of which is un-recorded.

8R

Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with brass cap mkd. as shown



A steel fence post, bears N. 1 ft. dist.

8S

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which



A magnet in a silver plastic case bears N. 78° E., 10.0 ft. dist., buried 13 ins. below ground.

A magnet in a pink plastic case bears S. 7° E., 10.0 ft. dist., buried 10 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Centerline of trail bears West, 45 ft. dist. Trail centerline bears N. 15° W. and S. 50° E.


Centerline of trail bears S. 6° W., 44 ft. dist. Trail centerline bears N. 50° W. and S. 25° E.

A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.

The post is set in organic soil.

8T

Found a stainless steel post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, with brass cap mkd. as shown



A steel fence post, bears N. 1 ft. dist. This cor. is now also serves as cor. No. 4, Tract 23.


8U

Found an iron rebar, 1/2 ins. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown. Monument accepted in 2006 as a W.C. for C4, L13, C4 L14, USS 3539, common to C-S 1/16 Sec 3.



8V

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 5 ins. below ground, with brass cap mkd. as shown, from which



A magnet in a pink plastic case bears S. 9 1/2° E., 20.0 ft. dist., buried 15 ins. below ground.

A magnet in a blue plastic case bears S. 80° W., 10.0 ft. dist., buried 13 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on SW side of a gravel driveway. The post is set in organic soil, sand and clay.

8W

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which



A magnet in a silver plastic case, bears N. 43° E., 10.0 ft. dist., buried 13 ins. below ground.


A magnet in an orange plastic case, bears N. 46° W., 10.0 ft. dist., buried 11 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on nearly level ground, in open tundra, with berry bushes, labrador tea and grasses. The post is set in organic soil over clay.

8X


Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, no remaining evidence of the original pits were found.



The marks C5 Lot 14 should be C3 Lot 14. This cor. is now also serves as cor. No. 1, Tract 23.

8Y

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below ground, with brass cap mkd. as shown, from which



A magnet in a silver plastic case, bears N. 85° E., 10.0 ft. dist., buried 12 ins. below ground.


A magnet in a pink plastic case, bears S. 10° E., 10.0 ft. dist., buried 12 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located in road shoulder, at curve. Centerline of Beach Access Road bears N., 31 ft. dist., centerline bears S. 88° W. and S. 86° E. Centerline of some road bears N. 66° E., 56 ft. dist., centerline bears S. 88° W. and S. 68° E. The post is set in sand over organic soil.

8Z

Found an iron pipe, 3 ins. diam., firmly set, 16 ins. below ground, with threaded pipe cap, mkd. with a punched "+", no remaining evidence of the original pits were found. Also found a rebar, 5/8 in. diam., 10 ins. long, with alum. cap mkd. 3255-S C2 USS 2356 1989, set by Fred Walaika, Alaska Registered Land Surveyor No. 3255 in the vicinity.




At the corner point.

Set a rebar, 30 ins. long, 5/8 in. diam., 6 ins. below ground, and over the top of the original iron pipe, with alum. cap marked as shown.

Deposit a magnet in a white plastic case and the Walaika rebar, inverted, alongside the rebar.

8AA

Found an iron pipe, 3 1/2 ins. diam., firmly set, projecting 18 ins. above ground, with reducing nipple and plug as cap, with the marks S2300 COR2 punched on the SE side of pipe, and the marks S2301 COR1 punched into the SW side of pipe, the original building accessories were not recovered, no remaining evidence of the original pits were found.



This cor. now also serves as cor. No. 7, Tract 23.

8AB

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 10 ins. below ground, with brass cap mkd. as shown, from which



A magnet in a silver plastic case, bears N. 45° E., 45 ft. dist., buried 13 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on the S. shoulder of Beach Access Road, 25 ft. wide, centerline of road bears N. 16 ft. dist., centerline bears N. 84° E. and S. 8° W. Intersection with a road locally known as Camp Ground Road, 12 ft. wide, bears N. 80° E., 96 ft. dist., centerline of said road bears N. 4° W. The post is set in gravel over organic soil and sand.

True corner falls in bog, edge indeterminate, not monumented.

8AC

Found an iron pipe, 3 ins. diam., firmly set, under 9 ins. of standing water, with threaded pipe cap, no punch marks visible due to standing water, no remaining evidence of the original pits were found.



A steel fence post, bears N. 1 ft. dist.

8A

Found an iron rebar, 5/8 in. diam., firmly set, projecting 4 ins. above ground, with alum. cap mkd. as shown



8B

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which



A magnet in a blue plastic case, bears S. 12° W., 10.0 ft. dist., buried 12 ins. below ground.

A magnet in an orange plastic case, bears N. 79° W., 10.0 ft. dist., buried 18 ins. below ground.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

A fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. S. of monument.

Monument is located on level ground in open tundra, with occasional black spruce and willow. The post is set in silt.

9C

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which



A spruce, 4 ins. diam., bears S. 4 1/2° E., 44.0 ft. dist., distance measured to 16d nail, 3 1/2 ins. long, driven 3 ins. into the W. side, with scribe marks XBT.

A magnet in a blue plastic case, bears S. 65° W., 20.0 ft. dist., buried 15 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located in open tundra, with patchy willows, on SW side of the crest of a small berm, 4 ft. high, berm bears N. 40° W. and S. 40° E., and S. of Lake Camp Road, centerline 50 ft. dist., centerline bears N. 45° W. and S. 45° E. The post is set in silt.


9D

Found an iron rebar, 5/8 in. diam., firmly set, projecting 3 ins. above ground, with alum. cap mkd. as shown



9E

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which



A magnet in a silver plastic case, bears N. 74° E., 10.0 ft. dist., buried 15 ins. below ground.


A magnet in an orange plastic case, bears N. 16° W., 10.0 ft. dist., buried 16 ins. below ground.

Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on level ground in open tundra. The post is set in silt.

9F

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap marked as shown, from which



A spruce, 3 ins. diam., bears N. 7° E., 60.1 ft. dist., with scribe marks XBT.

A magnet in a pink plastic case, bears S. 88° E., 18.0 ft. dist., buried 15 ins. below ground.


Deposit a magnet in a white plastic case at the base of the stainless steel post.

Monument is located on level ground in open tundra, with occasional black spruce. The post is set in saturated silt.


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)

PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN Ts. 15 TO 18 S., Rs. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS


REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION




96 Found an iron rebar, 5/8 in. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown.




9H Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which A magnet in a silver plastic case, bears N. 18° E., 10.0 ft. dist., buried 15 ins. below ground. A spruce, 9 ins. diam., bears S. 74 1/2° E., 79.2 ft. dist., with scribe marks XBT. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on nearly level ground, at edge of cleared ROW. Lake Camp Road, 20 ft. wide, bears W. 32 ft. dist., road bears N. 7° E. and S. 7° W. The post is set in organic soil over sand.




9J Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 23 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which A spruce, 5 ins. diam., bears S. 35° W., 19.0 ft. dist., with scribe marks XBT. A spruce, 4 ins. diam., bears N. 50 1/2° W., 61.8 ft. dist., with scribe marks XBT. Deposit a magnet in a white plastic case at the base of the stainless steel post. A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. S. 45° W. of the monument. Monument is located on nearly level ground, in tundra, among black spruce, willow and birch, and under a power line, line bears E. and W. The post is set in organic soil over sand.



9K Found an iron rebar, 1/2 in. diam., firmly set, projecting 8 ins. above ground, with alum. cap mkd. as shown. This cor. now also serves as cor. No. 2, Tract 21.




9L Found an alum. rod, 3/4 in. diam., firmly set, 4 ins. below ground, with alum. cap mkd. as shown. An alum. rod, 3/4 in. diam., projecting 24 ins. above ground, bears S., 6.6 ft. dist., with an orange triangular marker bolted on top.




9M Found an iron rebar, 5/8 in. diam., firmly set, projecting 1 in. above ground, with alum. cap mkd. as shown. This cor. now also serves as cor. No. 1, Tract 21.




9N Found an iron rebar, 5/8 in. diam., firmly set, projecting 2 ins. above ground, with alum. cap mkd. as shown. This cor. now also serves as cor. No. 5, Tract 21.



9P Found an iron rebar, 1/2 in. diam., firmly set, projecting 3 ins. above ground. No cap was found. At the corner point, Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which A magnet in a silver plastic case, bears N. 46° E., 10.0 ft. dist., buried 13 ins. below ground. A magnet in an orange plastic case, bears N. 44° W., 10.0 ft. dist., buried 13 ins. below ground. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located in small thicket of willow and alder, with grass. A road locally known as Baywatch Road, 25 ft. wide, bears S. 29 ft. dist., centerline bears N. 65° E. and S. 64° W., the same road bears S. 66° W., 35 ft. dist., centerline bears N. 6° W. and S. 6° E. The post is set in sand over organic soil.




10C Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A magnet in a silver plastic case, bears N. 41° E., 10.0 ft. dist., buried 15 ins. below ground. A magnet in an orange plastic case, bears N. 59° W., 10.0 ft. dist., buried 15 ins. below ground. Deposit a magnet in a white plastic case at the base of the stainless steel post. A steel fence post, 5 ft. long, driven 18 ins. in the ground, 1 ft. E. of the monument. Monument is located among alder, birch and willow with labrador tea, at the NE shore of a pond. The post is set in organic soil over sand.




10D Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 20 ins. in the ground, encircled by a rock collar, 12 ins. diam., with a brass cap mkd. as shown, from which A magnet in a blue plastic case, bears S. 43° W., 10.0 ft. dist., buried 12 ins. below ground. A magnet in an orange plastic case, bears N. 49° W., 10.0 ft. dist., buried 12 ins. below ground. Deposit a magnet in a white plastic case at the base of the stainless steel post. A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument. Monument is located on nearly level ground, in open tundra, among dwarf birch, with labrador tea and grasses. The post is set in organic soil over sand. The true corner falls in a bog, edge indeterminate, not monumented.




10E Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which A magnet in a blue plastic case, bears S. 34° W., 10.0 ft. dist., buried 12 ins. below ground. A magnet in an orange plastic case, bears N. 52° W., 10.0 ft. dist., buried 10 ins. below ground. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on nearly level ground, in tundra, among alders, with grass. The post is set in sand over clay.




10F Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 18 ins. diam., with brass cap mkd. as shown, from which A magnet in a silver plastic case, bears N. 31° E., 10.0 ft. dist., buried 10 ins. below ground. A magnet in a pink plastic case, bears S. 56° E., 10.0 ft. dist., buried 13 ins. below ground. Deposit a magnet in a white plastic case at the base of the stainless steel post. Monument is located on a berm, in tundra, among alder, at E. edge of a clearing. The post is set in organic soil over clay. True point falls in pond, not monumented.




10G Drive an alum. rod, 36 ins. long, 3/4 in. diam., 33 ins. in the ground, encircled with a rock collar, 10 ins. diam., with an alum. cap mkd. as shown, from which A magnet in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 15 ins. below ground. A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 12 ins. below ground. Deposit a magnet in a white plastic case alongside of the alum. rod. A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. E. of the monument. Monument is located on nearly level ground, in open tundra, at S. edge of alder fringe on SE side of a small pond. The rod is set in organic soil over clay and sand. True corner falls in pond, not monumented.




10H Drive an alum. rod, 36 ins. long, 3/4 in. diam., 32 ins. in the ground, encircled by a rock collar, 8 ins. diam., with an alum. cap mkd. as shown from which A magnet in a silver plastic case, bears N. 45° E., 10.0 ft. dist., buried 16 ins. below ground. A magnet in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 14 ins. below ground. Deposit a magnet in a white plastic case alongside of the alum. rod. A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument. Monument is located on nearly level ground, in tundra, among scattered alder and willows. The rod is set in organic soil over permafrost.



10J Drive an alum. rod, 36 in. long, 3/4 ins. diam., 30 ins. in the ground, encircled by a rock collar, 10 ins. in diam., with an alum. cap mkd. as shown, from which A magnet in a blue plastic case, bears S. 45° W., 10.0 ft. dist., buried 16 ins. below ground. A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 18 ins. below ground. Deposit a magnet in a white plastic case alongside of the alum. rod. A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument. Monument is located on nearly level ground, in open tundra. The rod is set in organic soil over clay. True corner falls in bog, not monumented.



10K Found an iron post, 2 1/2 ins. diam., firmly set, projecting 10 ins. above ground, with a brass cap mkd. as shown. Witnessed by pits, N. and S. of the corner, 3 ft. dist. from which new bearing objects A magnet in a pink plastic case, bears S. 44° E., 10.0 ft. dist., buried 16 ins. below ground. A magnet in a blue plastic case, bears S. 44° W., 10.0 ft. dist., buried 15 ins. below ground. Add the marks 2006 to the brass cap.




10L Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 13 ins. diam., with brass cap mkd. as shown, from which A magnet in a blue plastic case, bears S. 37° W., 10.0 ft. dist., buried 12 ins. below ground. A magnet in an orange plastic case, bears N. 42° W., 10.0 ft. dist., buried 12 ins. below ground. Deposit a magnet in a white plastic case at the base of the stainless steel post. A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument. Monument is located on nearly level ground, in tundra, at the W. side of a berm, near the W. end of Nornak Lake, among willow and alder, with grasses. The post is set in sandy loam. True corner falls in Nornak Lake, not monumented.

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS 1 - 27, LOTS 1a AND 1b, U.S. SURVEY No. 2356, LOTS 1 AND 2, U.S. SURVEY No. 3006, LOTS 2A AND 24A, U.S. SURVEY No. 3539 P.L. 92-203, (85 STAT. 688, 702, 703)


PAUG-VIK INC. LTD. AT NAKNEK, ALASKA AND THE DEPENDENT RESURVEY OF PORTIONS OF THE EXTERIOR BOUNDARIES, THE SUBDIVISIONAL LINES, THE SUBDIVISION OF SECTION LINES WITHIN T.S. 15 TO 18 S., R.S. 44 TO 48 W., S.M., ALASKA; NUMEROUS U.S. SURVEYS AND NUMEROUS PRIVATE SURVEYS

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION


2013-8
KNICHAH
DIST
8-15-2013
DATE
2:01 PM
TIME




10M Drive an alum. rod, 36 ins. long, 3/4 in. diam., 33 ins. in the ground, encircled by a rock collar, 10 ins. diam., with an alum. cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 45° E., 10.0 ft. dist., buried 18 ins. below ground.
A magnet in a pink plastic case, bears S. 45° E., 10.0 ft. dist., buried 15 ins. below ground.
Deposit a magnet in a white plastic case alongside the alum. rod.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.
Monument is located in dense alder thicket, 32 ft. N. of W. end of Nornak Lake. The rod is set in organic soil over clay.




10N Drive an alum. rod, 36 ins. long, 3/4 in. diam., 32 ins. in the ground, encircled by a rock collar, 12 ins. diam., with an alum. cap mkd. as shown,
Deposit a magnet in a white plastic case alongside the alum. rod.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.
Monument is located on nearly level ground, in tundra, among willow, alder and birch, with grass, near the N. shore at W. end of Nornak Lake. The rod is set in loam and sand. True corner falls on the shore of Nornak Lake, not monumented due to wave and ice action.




10P Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 6 ins. below ground, with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 47° E., 10.0 ft. dist., buried 15 ins. below ground.
A magnet in a pink plastic case, bears S. 52° E., 10.0 ft. dist., buried 12 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




10Q Found a stainless steel post, 2 1/2 ins. diam., firmly set, 10 ins. below road grade with a brass cap mkd. as shown




10R Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., flush with the ground, with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 33° E., 10.0 ft. dist., buried 10 ins. below ground.
SW corner of concrete slab, 10 ft. x 9 ft., bears S. 7° E., 40.8 ft. dist., alongside bears E.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. S. of the monument.
Monument is located on level ground, in tundra, with grass. The post is set in organic soil over sand. True corner conflicts with underground electric cable, not monumented.




10S No evidence remains of original monument due to construction of the Naknek Runway.
At the corner point,
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 2 ins. below ground, with brass cap mkd. as shown, from which
SE cor. of concrete slab of utility shed at the rotating beacon of the Naknek Airport, 10 ft. x 9 ft., bears S. 64° W., 10.9 ft. dist., alongside bears W.
NE cor. of same concrete slab, bears N. 65 1/2° W., 9.9 ft. dist.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located in developed area of the Naknek Airport. The post is set in organic soil over sand.




10T No evidence of original corner due to construction of the runway for Naknek Airport.
At the corner point,
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 2 ins. below ground, with brass cap mkd. as shown, from which
SE cor. of concrete slab, 10 ft. x 9 ft., bears N. 7° W., 10.4 ft. dist., alongside bears W.
NE cor. of same concrete slab, bears N. 36° W., 15.2 ft. dist.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. S. of the monument.
Monument is located in a developed area of the Naknek Airport.
The post is set in sand.




10U Found an alum. rod, 3/4 in. diam., firmly set, projecting 10 ins. out of ground, top 8 ins. of alum. rod bent to the ground level. No cap was found.




10V Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above ground, with brass cap mkd. as shown, from which the remaining bearing objects
The most W. cor. of a tin shed, 9 ft. x 8 ft., bears S. 28° E., 12.3 ft. dist., alongside bears N. 62° E. (Record: shed 12 ft. x 9 ft., S. 26° E., alongside bears N. 70° E.)
This cor. now also serves as cor. No. 25, Tract 26.




10W Found an iron post, 2 1/2 ins. diam., firmly set, projecting 3 ins. above ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, no remaining evidence of the original pits were found, from which new bearing objects
A magnet in a pink plastic case, bears S. 44° E., 16.0 ft. dist., buried 15 ins. below ground.
A power pole, 9 ins. diam., bears S. 20° W., 9.3 ft. dist., with metal tag mkd. N1081.




10X Found an iron post, 2 1/2 ins. diam., firmly set, 14 ins. below road grade, with damaged brass cap mkd. as shown, determined from record to be S3, Lot 7 Cl, Lot 6 C4, S3539, set in 1957.
No remaining evidence of the original pits were found.
This cor. now also serves as cor. No. 26, Tract 26.




10Y Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 10 ins. diam., with brass cap mkd. as shown, from which
A magnet in a blue plastic case, bears S. 41° W., 10.0 ft. dist., buried 13 ins. below ground.
A magnet in an orange plastic case, bears N. 26° W., 10.0 ft. dist., buried 13 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on nearly level ground, among alder, with grasses. The post is set in organic soil over sand.

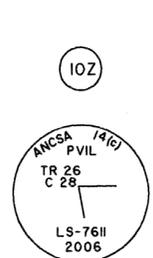


10Z Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 11 ins. diam., with brass cap mkd. as shown, from which
A magnet in a pink plastic case, bears S. 35° E., 10.0 ft. dist., buried 10 ins. below ground.
A magnet in a blue plastic case, bears S. 46° W., 10.0 ft. dist., buried 13 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on nearly level ground, among alder and willow, with grass. The post is set in organic soil, sand and clay.




10AA Found an iron post, 2 1/2 ins. diam., firmly set, 11 ins. above ground, with a brass cap mkd. as shown.
Witnessed by pits, E. and W. of the corner, 3 ft. dist.
Monument is located in tundra with alders.



10AB Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap incorrectly mkd. as shown from which
A magnet in a blue plastic case, bears S. 65° W., 10.0 ft. dist., buried 13 ins. below ground.
A magnet in an orange plastic case, bears N. 40° W., 10.0 ft. dist., buried 15 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.




10AC Monument is located on rolling ground, in open tundra, among willow and alder, with lichen, berry bushes, scrub brush. The post is set in organic soil over sand and clay.
Found a stainless steel post, 2 1/2 ins. diam., firmly set, 4 ins. above ground, encircled with a rock collar, 9 ins. diam., with a brass cap mkd. as shown, from which new bearing objects
A magnet in a silver plastic case, bears N. 46° E., 15.0 ft. dist., buried 15 ins. below ground.
A magnet in a pink plastic case, bears S. 52° E., 15 ft. dist., buried 15 ins. below ground.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.
This cor. now also serves as cor. No. 1, Tract 26.




10AD Monument is located on tundra with berry bushes, lichen and grasses. The post is set in organic soil.
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which
A magnet in a blue plastic case, bears S. 42° W., 10.0 ft. dist., buried 9 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 10 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.



10AE A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.
Monument is located on nearly level ground, among alder and birch. The edge of a pond bears N. 52° E., 38 ft. dist., edge bears N. 39° W. and S. 46° E. Centerline of gravel runway, 50 ft. wide, bears S. 30° W., 96 ft. dist., runway bears N. 18° W. and S. 18° E. The post is set in organic soil and sand.
Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 8 ins. diam., with brass cap mkd. as shown, from which
A magnet in a blue plastic case, bears S. 44° W., 10.0 ft. dist., buried 14 ins. below ground.
A magnet in an orange plastic case, bears N. 33° W., 10.0 ft. dist., buried 10 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.




10AF A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.
Monument is located on nearly level ground, with alder, moss and scrub brush. Edge of lake bears N. 87° E., 30 ft. dist., edge bears N. 10° W. and S. 50° E. The post is set in organic soil and sand. True corner falls in lake, not monumented.

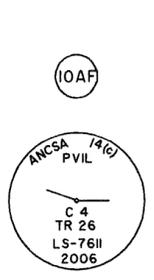


10AG Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, encircled by a rock collar, 11 ins. diam., with brass cap mkd. as shown, from which
A magnet in a blue plastic case, bears S. 50° W., 10.0 ft. dist., buried 11 ins. below ground.
A magnet in an orange plastic case, bears N. 46° W., 10.0 ft. dist., buried 14 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. N. of the monument.




10AH Monument is located on rolling ground, in tundra, among sparse willows, with berry bushes, lichen and grass. The edge of a pond bears W. 167 ft. dist., edge bears N. 50° W. and S. 30° W. The post is set in organic soil.




10AG Found a stainless steel post, 2 1/2 ins. diam., firmly set, 2 ins. above ground, with a brass cap mkd. as shown.
A steel fence post bears N. 1 ft. dist.
Monument is located near the top of a sparsely wooded hill.



10AH Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 41° E., 10.0 ft. dist., buried 14 ins. below ground.
A magnet in an orange plastic case, bears N. 45° W., 10.0 ft. dist., buried 13 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
A steel fence post, 5 ft. long, driven 2 ft. in the ground, 1 ft. W. of the monument.
Monument is located on nearly level ground, in tundra, among scattered dwarf spruce and willows, with Labrador tea. The post is set in organic soil over sand. True corner falls in pond, not monumented. Monument is N. 18° W. of pond, 122 ft. dist.



10AJ Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, encircled by a rock collar, 12 ins. diam., with brass cap mkd. as shown, from which
A magnet in a silver plastic case, bears N. 54° E., 10.0 ft. dist., buried 12 ins. below ground.
A magnet in an orange plastic case, bears N. 17° W., 10.0 ft. dist., buried 11 ins. below ground.
Deposit a magnet in a white plastic case at the base of the stainless steel post.
Monument is located on nearly level ground, among alder. Gravel road, 13 ft. wide, bears N. 55° W., 28 ft. dist., centerline bears N. 24° E. and S. 8° W. The post is set in sand and organic soil over gravel.



10AK Found an iron pipe, 3/4 in. diam. bent, flush with ground. No cap was found.
Monument is located at the apparent centerline of a N. / S. runway, at the northern end.



10AL Found an iron pipe, 3/4 in. diam. bent 80° at ground level. No cap was found.
Monument is located at the apparent centerline of a N. / S. runway, at the southern end.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Alaska State Office
222 West Seventh Avenue, #13
Anchorage, Alaska 99513-7504
<http://www.blm.gov/ak>



In Reply Refer To:
NAKNEK
ANCSA 14(c)
AK942100

August 14, 2013

KVICHAK RECORDING DISTRICT
3601 C Street, Suite 1140
Anchorage, Alaska 99503

Dear District Recorder:

The Alaska Native Claims Settlement Act (ANCSA) Section 14(c) plat for Paug-Vik Inc. Ltd. at Naknek, Alaska, *Tracts 1 – 27, Lots 1a and 1b, U.S. Survey No. 2356, Lots 1 and 2, U.S. Survey No. 3006, and Lots 2A and 24A, U.S. Survey No. 3539* consisting of twenty-one (21) original sheets and creating the following lots: **Tracts 1 – 11, 11A, 11B, 12 – 16, 17A, 17B, 18 – 25, 25A and 26 – 27; Lots 1A and 1B of U.S. Survey 2356; Lots 1 and 2 of U.S. Survey 3006; Lots 2A and 2B of U.S. Survey 3539; Lot 16 of Section 3, Township 17 South, Range 47 West, Seward Meridian, Alaska; and the Southwest Quarter of the Southwest Quarter of the Southeast Quarter of the southwest Quarter of Section 36, Township 16 South, Range 46 West, Seward Meridian, Alaska** (all lots are identified as to township and range on the index of sheet one and subsequent pages). This plat is transmitted to you by this letter of compliance, portraying a Cadastral Survey conducted to fulfill statutory requirements mandated by ANCSA, pursuant to Public Law 92-203 (Stat. 688, 702, 703), and satisfies the federal guidelines and requirements proclaimed for ANCSA 14(c) Surveys.

The plat represents surveyed parcels of land selected for ANCSA 14(c) reconveyances situated on portions of surface estate lands transferred from the United States of America by Interim Conveyance No's. 265 and 1142 and Patents No's. 50-80-0017, 50-82-0068, 50-85-0670, 50-86-0109 and 50-91-0600, all to Paug-Vik Inc. Ltd.

ANCSA 14(c) Surveys have been authorized as federally mandated surveys, under the provisions of Section 13 of ANCSA, 43 U.S.C. Stat. 1612. The authority to execute all federal land surveys in Alaska is delegated by the Secretary of the Interior to the Director, Bureau of Land Management (BLM) and subsequently redelegated to me as the Chief Cadastral Surveyor, Alaska State Office. Accordingly, BLM requests that this plat be filed with the KVICHAK RECORDING DISTRICT to comply with the federal platting regulations and the agreements set forth between the Bureau of Land Management and the State Recording Authority.

Sincerely,

Michael H. Schoder
Chief Cadastral Surveyor for Alaska